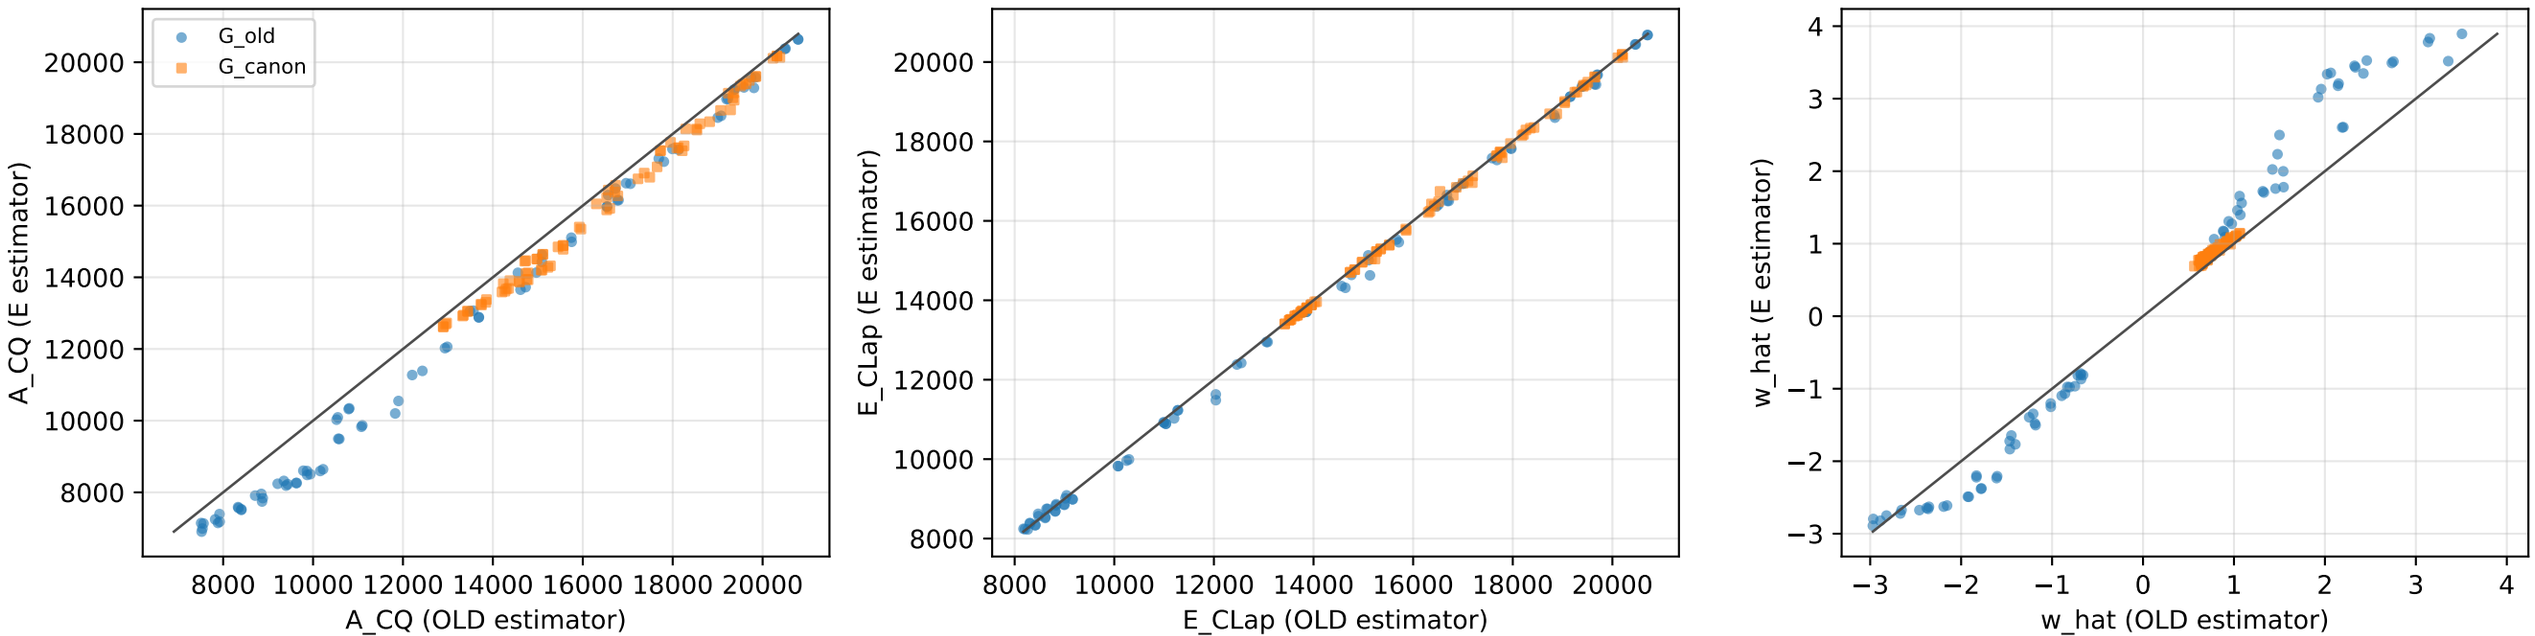
E1: same data, same initial state and seed; each point = one (dataset, K, start)
G_old
G_canon
A_CQ (E estimator)
A_CQ (OLD estimator)
E_CLap (E estimator)
E_CLap (OLD estimator)
w_hat (E estimator)
w_hat (OLD estimator)