

Capstone Project Report

James Cook University Cairns

Hunter Kruger-Ilingworth (14198489)

August 17, 2025

Contents

1 Introduction 2

2 Dataset 3

3 Model Structure 4

3.1 Hyperparameter Tuning with Hyperband 5

4 Model Deployment 7

5 Transfer Learning 8

6 Model Comparison And Evaluation 9

7 AWS Sagemaker Information and Discussion 10

8 Final Model Discussion and Conclusion 11

9 References 12

A Appendix 13

List of Figures

1 AI generated images [1] 2

2 Screenshot of S3 Bucket in AWS Console 3

3 Endpoint page screenshot in Sagemaker, as evidence of deployment 7

4 Confusion Matrix of main model and transfer learning model 9

5 Jupyter lab space configuration screenshot 10

6 Top level file structure screenshot 10

7 Files inside the `src` directory screenshot 10

8 Project AWS cost summary screenshot 10

List of Tables

1 Dataset features and their descriptions. 3

2 Counts of each class label in the training and testing sets 3

3 Tunable Hyperparameters and Final Chosen Values (see implementation snippets in listing 3) 5

4 Model Comparison 9

Introduction

"AI as a creative tool has improved leaps and bounds since its early incarnations. Generating still images that are interesting, sophisticated and photorealistic is now an easy process that can be done by anybody with an interest, some patience and determination" [2]. The prevalence of AI among the general public has led to extensive dialogue about their ethical implications in producing artwork, or for manufacturing misinformation. One such example of the use of AI is tools like *DALL-E* and *Stable Diffusion*, which generate images from text prompts. In the current digital age, we cannot rely on the transparency of the source of an image, so there exists a need to be able to identify whether an image has been generated by an AI, or a real artist. Figure 1 shows some examples of AI generated images, which are becoming increasingly difficult to distinguish from real images as the technology improves, underscoring the need for reliable detection methods.



Fig. 1. AI generated images [1]

[1] evaluates both human and AI capabilities in detecting fake images, showing that humans are often deceived by advanced image generation models, while AI-based detection algorithms outperform humans but still misclassify 13% of images. The study introduction of the Fake2M dataset and new benchmarks (HPBench and MPBench) aims to drive further research and improve the reliability of AI-generated content detection.

[3] presents a computer vision approach to distinguishing AI-generated images from real ones, utilising a synthetic dataset created with Latent Diffusion, classification via Convolutional Neural Networks, and interpretability through Grad-CAM. Achieving nearly 93% accuracy, the study also introduces the CIFAKE dataset, a large collection of real and synthetic images, to support further research on the detection of AI-generated imagery.

It is therefore evident that past research has shown that it is possible to classify images as AI-generated or not, with a high degree of accuracy. This report will explore the process of training a neural network to classify images as either AI-generated or not, and then deploying this model to AWS SageMaker for inference, and evaluating it against comparable models. This is done so that people can distinguish between AI-generated and real images, ultimately as a tool to identify the spread of misinformation and other harms.

Dataset

The dataset used for this project was a competition dataset from Hugging Face, held in 2023 [4]. The dataset consists of 62,060 images, and is 2.37GB in size, being pre-split into training and testing sets, as summarised in tables 1 and 2, where it can be seen that the testing set has the class labels withheld due to the competition setting, restricting this analysis to the 18,618 training images, which we can sub-divide and validate with known labels.

Feature	Description
id	Index filename 34.jpg
image	The Image (512x512)
label	Binary class label

Table 1: Dataset features and their descriptions.

Class Label	Train Count	Test Count
AI (1)	10,330 (55.5%)	NA
Not AI (0)	8,288 (45.5%)	NA
Total	18,618	43,442

Table 2: Counts of each class label in the training and testing sets

Listing 6 shows the code used to load the dataset, and split it into training, validation, and test sets. It can be seen that the splitting method for the data was to - holdout 500 images for final testing (only 500 was chosen due to a bandwidth issue on the AWS endpoint, further elaborated on in Section 4), - split the remaining training data into three sets, the small train, train and test set, being 10%, 70%, and 20% of the remaining data respectively. - to ensure class balance between these sets, random oversampling was employed. This was because table 2 shows that if a model were to guess AI all the time, it could get an accuracy of 55.5%

Listing 6, in the appendix shows the code used to load the dataset from HuggingFace. It can then be seen that the splitting scheme described above is done using hugging faces `train_test_split` method. The HuggingFace dataset object is converted to numpy arrays. Then Imblearn's `RandomUnderSampler` is used to ensure class balance, as to not bias the majority class.

This data was converted to npz files, due to their efficient storage and loading capabilities. After conversion, the data was uploaded to an S3 bucket for easy access during model training and evaluation. Uploading to S3 buckets was critical, as it meant that there was no longer a reliance on the RAM allocation of the sagemaker notebook environment - it could be loaded in from the S3 bucket in batches, which has the benefit of being a more scalable solution.

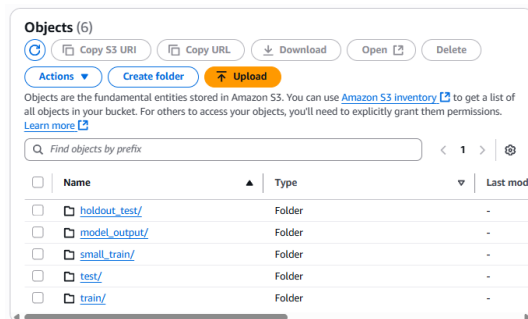


Fig. 2. Screenshot of S3 Bucket in AWS Console

Model Structure

With the data acquired from HuggingFace, the process of making a machine learning model could begin. The model that was developed was a convolutional neural network (CNN). It accepts full-size images of shape (512, 512, 3), with each image being an rgb image with values ranging from 0 to 255. Listing 1 shows the `src/model.py` file, which was called by the `main.ipynb` and `src/train.py` files to train and tune the model.

Listing 1. Model definition code extract

```

1 def build_model( # below are default values, but these are all tunable
2     input_shape=(512, 512, 3), conv1_filters=32, conv2_filters=64, dense_units=128, use_dropout=True, dropout_rate=0.2,
3     pooling="max",
4 ):
5     inputs = keras.Input(shape=input_shape)
6     x = keras.layers.Rescaling(1.0 / 255)(inputs)
7
8     # conv block 1
9     x = keras.layers.Conv2D(int(conv1_filters), 3, activation="relu", padding="same")(x)
10    x = keras.layers.MaxPooling2D()(x) if pooling == "max" else keras.layers.AveragePooling2D()(x)
11
12    # conv block 2
13    x = keras.layers.Conv2D(int(conv2_filters), 3, activation="relu", padding="same")(x)
14    x = keras.layers.MaxPooling2D()(x) if pooling == "max" else keras.layers.AveragePooling2D()(x)
15
16    if pooling == "max":
17        x = keras.layers.GlobalMaxPooling2D()(x)
18    else:
19        x = keras.layers.GlobalAveragePooling2D()(x)
20
21    # dense head
22    x = keras.layers.Flatten()(x)
23    x = keras.layers.Dense(int(dense_units), activation="relu")(x)
24    if use_dropout:
25        x = keras.layers.Dropout(float(dropout_rate))(x)
26
27    outputs = keras.layers.Dense(1, activation="sigmoid")(x)
28    return keras.Model(inputs, outputs)

```

For the first section, a `Conv2D` layer was applied with a kernel size of 3×3 and a tunable number of filters, f_1 . The stride was fixed at its default value of 1, with padding set to `same` which preserves the spatial dimensions of the input feature maps, at the cost of increased computational cost. A `ReLU` activation function was used due to its simplicity and its ability to address vanishing gradients.

This was followed by a pooling layer, where either max pooling or average pooling could be selected. By default, the pooling operation uses a window of size 2×2 with stride 2, reducing the spatial resolution of the feature maps by half while retaining the most salient information.

The second convolutional block repeated this process with a kernel size of 3×3 and a tunable number of filters, f_2 , again followed by either max or average pooling with window size 2×2 and stride 2.

After the two convolutional blocks, a global pooling layer was applied to remove the spatial dimensions, with a max or average pooling being optional. The dense head consisted of a flattening step, followed by a fully connected layer with d units and ReLU activation. An optional dropout layer with rate p was included for regularisation. The final output layer was a single neuron with sigmoid activation, producing a probability for binary classification.

Adam was chosen as one of the considered optimisers, as it is known to converge rapidly, and rectifies vanishing learning rate and high variance, therefore being the most popular optimiser [5]. Adagrad was chosen as the second potential optimiser, as the learning rate would not need manual tuning, and is known to perform better than alternatives like SGD, MBGD, and primitive momentum based optimisers. Though it should be noted that it has the weakness of a constantly decreasing learning rate, resulting in slower convergence [5]

The loss function that was used for this model was binary cross-entropy, as it is the most suitable loss function for binary classification tasks. Each model training instance was trained for 3 epochs. **cuts off abruptly**

Hyperparameter Tuning with Hyperband

Hyperparameter tuning was performed to maximise the models performance through iteration of most of its parameters. The hyperparamter tuning process was performed on the small train set, for faster iteration.

Table 3, summarises the code snippets seen in listing 3, depicting a list of the parameters being tuned in the above model, as well as the final value that the tuner settled on. It is evident that this was a very large parameter space, and it is therefore not feasible to find the best possible hyperparameter using a simple grid search. Instead, the Hyperband algorithm was used to tune the hyperparameters, as it is a bandit-based algorithm that uses early stopping to focus on the most promising hyperparameter combinations [6].

Following the initial tuning on the smaller dataset, the best hyperparameters were selected and used to train the model on the larger training set, the start of this can be seen in listing 2

Table 3: Tunable Hyperparameters and Final Chosen Values (see implementation snippets in listing 3)

Hyperparameter	Range/Choices	Final Value
learning rate	1×10^{-4} to 1×10^{-2} (log scale)	0.00149
dropout-rate	0.0 to 0.5 (used if use-dropout=true)	0.284
conv1-filters (f_1)	16 to 128	24
conv2-filters (f_2)	32 to 256	107
dense-units (d)	64 to 512	254
pooling	max, avg	max
use-dropout	true, false	true
optimizer	adam, adagrad	adam

Listing 2. Hyperparameter extraction code snippet

```

1 sm = boto3.client("sagemaker")
2 training_job_name = "ph-17-250815-1154-018-22526da0"
3 tj = sm.describe_training_job(TrainingJobName=training_job_name)
4 raw_hps = dict(tj["HyperParameters"]) # strings
5 raw_hps
6
7 # further cleaning the result is also required
8
9 train_input = TrainingInput(train_npz, input_mode="File", content_type="application/x-npz")
10 test_input = TrainingInput(test_npz, input_mode="File", content_type="application/x-npz")
11
12 estimator = tf(
13     entry_point="train.py",
14     source_dir="src",
15     role=role,
16     instance_type="ml.c5.2xlarge",
17     instance_count=1,
18     framework_version="2.14",
19     py_version="py310",
20     output_path=f"s3://{bucket}/aiornot/model_output",
21     # keep the static shape/run params you use + inject the tuned ones
22     hyperparameters={
23         "epochs": 5, "height": 512, "width": 512, "channels": 3,
24         **typed_hps, # tuned values win if keys overlap
25     },
26     metric_definitions=[
27         {"Name": "val_auc", "Regex": r"val_auc: ([0-9\.]+"},
28         {"Name": "val_f1", "Regex": r"val_f1: ([0-9\.]+"},
29         {"Name": "val_precision", "Regex": r"val_precision: ([0-9\.]+"},
30         {"Name": "val_recall", "Regex": r"val_recall: ([0-9\.]+"},
31         {"Name": "val_accuracy", "Regex": r"val_accuracy: ([0-9\.]+"},
32     ],
33 )
34 # Creating training-job with name like bestparams-refit-20250815-091227
35 job_name = "bestparams-refit-" + time.strftime("%Y%m%d-%H%M%S")
36 estimator.fit(
37     {"train": train_input, "test": test_input},
38     job_name=job_name
39 )

```

Listing 3. Hyperparameter tuning code extracts from `main.ipynb` and `src/train.py`; used to call `src/model.py` (listing 1)

```

1 # main.ipynb
2
3 estimator = tf(
4     entry_point="train.py",
5     source_dir="src",
6     role=role,
7     use_spot_instances=True, # save money
8     instance_type="ml.c5.2xlarge",
9     instance_count=1,
10    framework_version="2.14",
11    py_version="py310",
12    hyperparameters={
13        "epochs": 3,
14        "height": 512,
15        "width": 512,
16        "channels": 3
17    },
18    output_path=s3_output_location
19 )
20
21 hyperparameter_ranges = {
22     "learning-rate": ContinuousParameter(1e-4, 1e-2, scaling_type="Logarithmic"),
23     "dropout-rate": ContinuousParameter(0.0, 0.5),
24     "batch-size": IntegerParameter(4, 8),
25     "conv1-filters": IntegerParameter(16, 128),
26     "conv2-filters": IntegerParameter(32, 256),
27     "dense-units": IntegerParameter(64, 512),
28     "pooling": CategoricalParameter(["max", "avg"]),
29     "use-dropout": CategoricalParameter(["true", "false"]),
30     "optimizer": CategoricalParameter(["adam", "adagrad"]),
31 }
32
33 metric_definitions = [
34     {"Name": "val_auc", "Regex": "val_auc: ([0-9\\.]+)"},
35     {"Name": "val_f1", "Regex": "val_f1: ([0-9\\.]+)"},
36     {"Name": "val_precision", "Regex": "val_precision: ([0-9\\.]+)"},
37     {"Name": "val_recall", "Regex": "val_recall: ([0-9\\.]+)"},
38     {"Name": "val_accuracy", "Regex": "val_accuracy: ([0-9\\.]+)"},
39 ]
40
41 tuner = HyperparameterTuner(
42     estimator=estimator,
43     objective_metric_name="val_f1",
44     strategy='Hyperband',
45     hyperparameter_ranges=hyperparameter_ranges,
46     metric_definitions=metric_definitions,
47     max_parallel_jobs=5,
48     objective_type="Maximize",
49     # early_stopping_type="Auto", # not supported for hyperband strategy, since it gets rid of unpromising trials itself
50     max_jobs=20,
51     base_tuning_job_name="ph-17",
52 )
53
54 tuner.fit({
55     "train": small_train_input,
56     "test": test_input,
57 })
58
59
60 # src/train.py
61 model = build_model(
62     input_shape=(args.height, args.width, args.channels),
63     conv1_filters=args.conv1_filters,
64     conv2_filters=args.conv2_filters,
65     dense_units=args.dense_units,
66     use_dropout=args.use_dropout,
67     dropout_rate=args.dropout_rate,
68     pooling=args.pooling,
69 )
70 if args.optimizer == "adagrad":
71     optimizer_choice = tf.keras.optimizers.Adagrad(learning_rate=args.learning_rate)
72 else:
73     optimizer_choice = tf.keras.optimizers.Adam(learning_rate=args.learning_rate)
74
75 model.compile(
76     optimizer=optimizer_choice,
77     loss="binary_crossentropy",
78     metrics=[
79         tf.keras.metrics.BinaryAccuracy(name="binary_accuracy"),
80         tf.keras.metrics.AUC(name="auc"),
81         tf.keras.metrics.Precision(name="precision"),
82         tf.keras.metrics.Recall(name="recall")
83     ]
84 )

```

Model Deployment

This model, as well as the transfer learning model (to be detailed in section 5), was deployed using Amazon SageMaker.

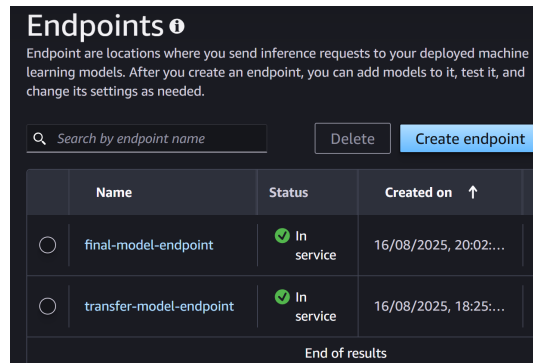


Fig. 3. Endpoint page screenshot in Sagemaker, as evidence of deployment

Listing 4. Model Deployment and inference code snippet

```

1 main_model_s3_path = "s3://sagemaker-ap-southeast-2-838084669510/aiornot/model_output/bestparams-refit-20250816-094717/output/
  model.tar.gz"
2 main_model = TensorFlowModel(
3     model_data=main_model_s3_path,
4     role=role,
5     framework_version="2.14"
6 )
7 try: # has not yet been deployed
8     main_model_predictor = main_model.deploy(
9         initial_instance_count=1,
10        instance_type="ml.m5.large",
11        endpoint_name="final-model-endpoint"
12    )
13 except Exception: # has already been deployed, so just call the existing endpoint
14     main_model_predictor = TensorFlowPredictor(
15         endpoint_name="final-model-endpoint",
16         sagemaker_session=sess
17     )
18
19 # similarly, the transfer model endpoint is also invoked
20
21 test_path = f"s3://{bucket}/{prefix}/holdout_test/holdout_test.npz"
22
23 with fs.open(test_path, "rb") as f:
24     d = np.load(f)
25     X = d["image"].astype("float32")
26     y_true = np.asarray(d["label"], dtype=int).ravel()
27     print("data loaded")
28
29 def predict_batches(pred, X, bs=4):
30     probs = []
31     for i in range(0, len(X), bs):
32         out = pred.predict(X[i:i+bs].tolist())
33         p = np.array(out.get("predictions", out)).reshape(-1) # shape (bs,)
34         probs.append(p)
35         print(f"{i}/{len(X)}")
36     probs = np.concatenate(probs)
37     predictions = (probs >= 0.5).astype(int)
38     return predictions
39
40
41 y_test_main_model = predict_batches(main_model_predictor, X)
42 y_test_transfer_model = predict_batches(transfer_model_predictor, X)

```


Transfer Learning

The list of the possible CNN structures available for use for transfer learning can be seen in [7]. Of these, EfficientNetV2 was selected as the most suitable architecture due to its demonstrated balance between accuracy and computational efficiency on general image classification tasks. This makes it well-suited for the diverse and varied images present in the aiornot dataset [7,8].

The model used EfficientNetB0, pre-trained on ImageNet, as a feature extractor with its classification head removed and average pooling applied. It was decided to unfreeze the last 10% of the layers. A dropout layer with rate p was added for regularisation, followed by a final dense layer with sigmoid activation for binary classification. Snippets for the `src/transfer_learning.py` file, which was called by the `transfer_learning.ipynb` file to train the model can be seen in listing 5.

Listing 5. Transfer Learning Code Snippet

```

1 # transfer_learning.ipynb
2
3 metric_definitions = [
4     {"Name": "val_auc", "Regex": "val_auc: ([0-9\\.]+)"},
5     {"Name": "val_f1", "Regex": "val_f1: ([0-9\\.]+)"},
6     {"Name": "val_precision", "Regex": "val_precision: ([0-9\\.]+)"},
7     {"Name": "val_recall", "Regex": "val_recall: ([0-9\\.]+)"},
8     {"Name": "val_accuracy", "Regex": "val_accuracy: ([0-9\\.]+)"},
9 ]
10
11 estimator = tf(
12     entry_point="train_transfer.py",
13     source_dir="src",
14     role=role,
15     instance_type="ml.c5.2xlarge",
16     instance_count=1,
17     framework_version="2.14",
18     py_version="py310",
19     output_path=f"s3://{bucket}/model_output",
20     hyperparameters={
21         "epochs": 3,
22         "height": 224, "width": 224, "channels": 3,
23         "batch-size": 1,
24         "learning-rate": 5e-5,
25         "dropout-rate": 0.2,
26         "unfreeze-fraction": 0.10,
27     },
28     metric_definitions=metric_definitions,
29 )
30
31 job_name = f"transfer-learning-{time.strftime('%Y%m%d-%H%M%S')}"
32 estimator.fit({"train": train_input, "test": test_input}, job_name=job_name)
33
34 # src/transfer_model.py
35
36 def build_transfer_model(input_shape=(224, 224, 3), dropout_rate=0.2, unfreeze_fraction=0.0):
37     base = keras.applications.EfficientNetB0(
38         include_top=False, weights="imagenet", input_shape=input_shape, pooling="avg"
39     )
40     base.trainable = False
41     if unfreeze_fraction > 0:
42         n = len(base.layers)
43         k = max(1, int(round(n * float(unfreeze_fraction))))
44         for layer in base.layers[-k:]:
45             if isinstance(layer, layers.BatchNormalization):
46                 layer.trainable = False
47             else:
48                 layer.trainable = True
49
50     inputs = keras.Input(shape=input_shape)
51     x = inputs # keep values in [0,255] float
52     x = base(x) # EfficientNet applies its own Rescaling inside
53     x = layers.Dropout(dropout_rate)(x)
54     outputs = layers.Dense(1, activation="sigmoid")(x)
55     return models.Model(inputs, outputs)

```

Using an endpoint (using the same deployment strategy as seen previously in listing 4), the model was then evaluated on its precision, recall, f1 score, and accuracy. Figure 3 shows the endpoint configuration in Sagemaker. This allowed for evaluation of the models performance, whilst not being limited by the RAM limitations of the notebook environment in Sagemaker studio.

Deploying the transfer learning model, again using a sagemaker endpoint allowed a comparison between both models on the holdout set.

Model Comparison And Evaluation

In this section, we compare the performance of the different models trained on the dataset. Evaluation metrics were calculated by invoking the model endpoints on the holdout set, which was not used during training or validation. This ensures that the models' performance is on unseen data, better modelling a general use case.

The endpoints were deployed as real time endpoints, operating on a server and interacting through the user with a HTTP request. While this does mean they can be accessed at any time by any user who has the appropriate permissions, it also means that the network requests are limited to **X Mb**, which equates to only 4 500x500 rgb images at a time, making the evaluation process slower. It was for this reason that the holdout set was limited to only 500 images.

Table 4: Model Comparison

Model	Accuracy	Precision	Recall	F1 Score
Main Model	0.854	0.833	0.906	0.868
Transfer Model	0.856	0.875	0.849	0.862
abs(Difference)	0.002	0.042	0.057	0.006

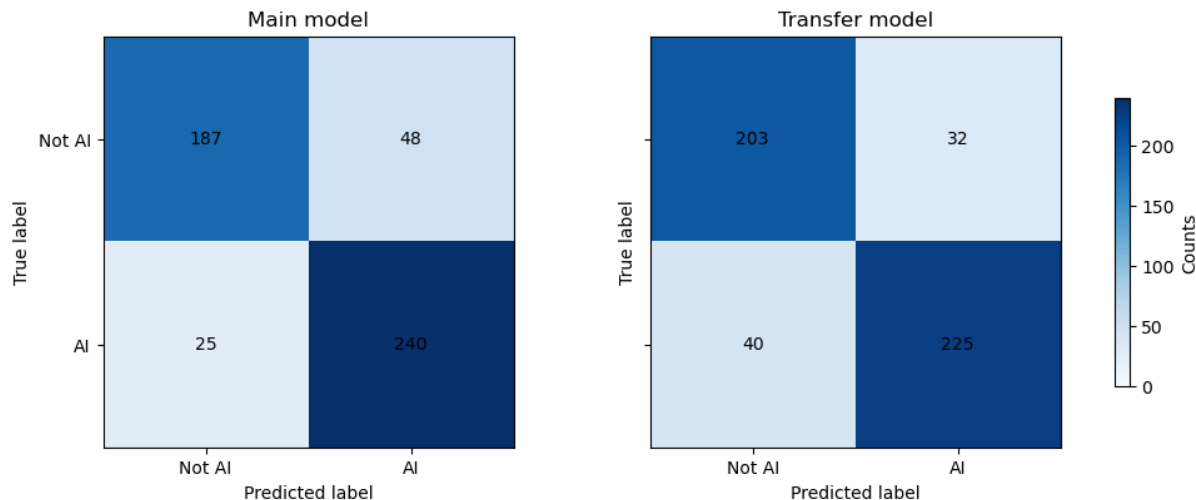


Fig. 4. Confusion Matrix of main model and transfer learning model

The results of the model evaluation are summarized in Table 4. The table highlights the key performance indicators for each model. It can be seen that the EfficientNet transfer learning model and the main model have very comparable performance - with the EfficientNet model and main model achieving an accuracy of 85.6% and 85.4% respectively - a difference of only 0.2%. Furthermore the EfficientNet and main model achieved F1 scores of 0.862 and 0.868 respectively, a difference of only 0.006.

Where these models differ is their precision and recall. The EfficientNet model achieved a precision of 87.5% (4.2% higher than the main models' 83.3%.) The main model achieved a recall of 90.6% (5.7% higher than the EfficientNet models' 84.9%.) This means that the EfficientNet model is better at minimising false positive AI detection, whereas the main model is better at detecting AI cases without missing them (i.e. reducing false negatives).

This is evident in fig. 4, where the EfficientNet model has 32 false positives compared to the main models' 48. Similarly, the main model has only 25 false negatives, compared to the EfficientNet models' 40.

AWS Sagemaker Information and Discussion

This project was developed using AWS Sagemaker. Figure 5 shows the Jupyter lab space configuration used for the project. It can be seen that the smallest option, `ml.t3.medium` was used, as model training is done through training jobs, where the compute resources can be chosen to be seperate, allocated to the training job.

Figures 6 and 7 shows the file structure used in the project, run inside the Jupyter lab environment. It can be seen that the model declaration code (`src/model_def.py` & `transfer_model.py`) **check i say model def everywhere not just model** and the training code (`src/train.py` & `train_transfer.py`) were kept seperate from the main notebooks

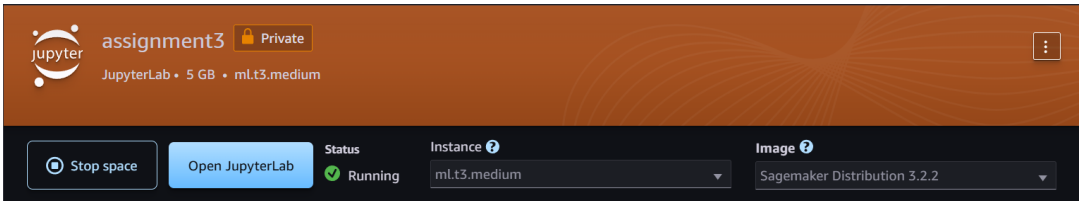


Fig. 5. Jupyter lab space configuration screenshot

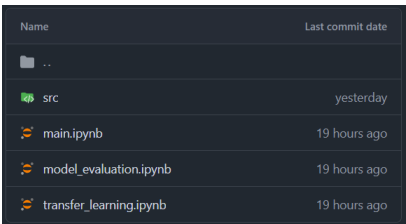


Fig. 6. Top level file structure screenshot

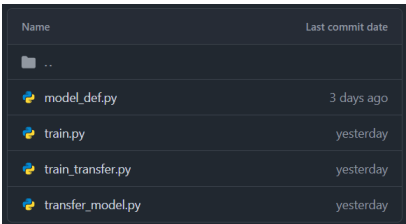


Fig. 7. Files inside the `src` directory screenshot

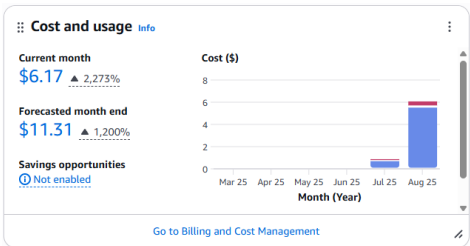


Fig. 8. Project AWS cost summary screenshot

Figure 8 depicts the overall cost summary of the project, which overall was less than \$15. This was achieved due to careful management of resources with a known budget of \$50 leading to selection of smaller instance types (using general purpose `ml.c5.2xlarge` instances for training and inference rather than larger, more expensive GPU instances). This of course, came at the cost of longer training times, but was deemed acceptable given the budget constraints, and the fact that the workflow would be very easily extensible to a more expensive configuration in a real world deployment scenario.

mention the drawbacks of the deployment here, though have the code chunk (with the creation of the endpoint and the prediction extraction, (and in the appendix have the code snippets for the table and the confusion matrix))

mention that due to inexperience with sagemaker i ran into memory problems when training the transfer learning model, and therefore had to compromise in having a smaller batch size, and downsampling the images to a resolution of 224x224.

Final Model Discussion and Conclusion

This report proposed two models to detect if an image is generated using ai - one model developed through hyperparameter tuning, and the other through transfer learning from EfficientNet. The results indicate that both models perform comparably, with slight differences in precision and recall.

The original research objective was to make a tool to distinguish between AI-generated and real images, ultimately as a means to identify the spread of misinformation and other harms in online discourse. Were this model to be deployed as a 'first step' with the intention of more thorough investigation, it would be more beneficial to be relaxed on false positives, and minimise false negatives, given the false positives would be vindicated with further analysis or research.

It is for this reason that, assuming this approach, the main model would be the preferred model, as it has a higher recall (90.6% vs 84.9%) and therefore is slightly better at detecting AI-generated images without missing them. talk about the paper at the start and that we didnt achieve research level performance, nor the experience to use the dataset they made

talk about how with more resources, a transfer learning model would be great, as this one was the B0 model, and more beefy models could certainly continue this pattern of good generalisability to this classification task

mention the limitation of fixed resolutions/aspect ratio of 1:1

Overall it can be concluded that the models developed in this investigation are effective at distinguishing AI-generated images from other images, successfully training and deploying 2 models to make this prediction.

References

- [1] Z. Lu, D. Huang, L. Bai, J. Qu, C. Wu, X. Liu, and W. Ouyang, “Seeing is not always believing: Benchmarking human and model perception of ai-generated images,” 2023. [Online]. Available: <https://arxiv.org/abs/2304.13023>
- [2] C. Scott *et al.* (2024) Exploring the ethics of artificial intelligence in art. Accessed: 22 July 2025. [Online]. Available: <https://www.artshub.com.au/news/opinions-analysis/exploring-the-ethics-of-artificial-intelligence-in-art-2694121/>
- [3] J. J. Bird and A. Lotfi, “Cifake: Image classification and explainable identification of ai-generated synthetic images,” 2023. [Online]. Available: <https://arxiv.org/abs/2303.14126>
- [4] Hugging Face Datasets, “competitions/aiornot,” <https://huggingface.co/datasets/competitions/aiornot>, 2023, accessed: 22 July 2025.
- [5] M. A. K. Raiaan, S. Sakib, N. M. Fahad, A. A. Mamun, M. A. Rahman, S. Shatabda, and M. S. H. Mukta, “A systematic review of hyperparameter optimization techniques in convolutional neural networks,” *Decision Analytics Journal*, vol. 11, p. 100470, 2024. [Online]. Available: <https://www.sciencedirect.com/science/article/pii/S2772662224000742>
- [6] L. Li, K. Jamieson, G. DeSalvo, A. Rostamizadeh, and A. Talwalkar, “Hyperband: A novel bandit-based approach to hyperparameter optimization,” *Journal of Machine Learning Research*, vol. 18, no. 185, pp. 1–52, 2018. [Online]. Available: <http://jmlr.org/papers/v18/16-558.html>
- [7] K. Team. (2024) Keras applications. Accessed: 22 July 2025. [Online]. Available: <https://keras.io/api/applications/>
- [8] M. Tan and Q. V. Le, “Efficientnetv2: Smaller models and faster training,” in *International Conference on Machine Learning*, 2021, iCML 2021. [Online]. Available: <https://arxiv.org/abs/2104.00298>

Appendix

Listing 6. Data Wrangling Code Extract

```

1
2 with open("token.txt", "r") as file:
3     hugging_face_token = file.read().strip() # must have credentials to access the dataset
4
5 raw_dataset = load_dataset('competitions/aiornot')
6 raw_dataset = raw_dataset['train'] # remove the unused 'test' set with no labels
7 dataset_length = len(raw_dataset)
8
9 # first holdout 500 images for final model evaluation
10 holdout_test = raw_dataset.select(range(500))
11 dataset = raw_dataset.select(range(500, len(raw_dataset)))
12
13 # split dataset into:
14 # - small_train (10% of original)
15 # - train (70% of original)
16 # - test (20% of original)
17
18 # first split: small_train (10%) and remainder (90%)
19 split_1 = dataset.train_test_split(train_size=0.1, seed=RANDOM_SEED)
20 small_train = split_1["train"]
21 remainder = split_1["test"]
22
23 # second split: train (70%) and test (20%)
24 split_2 = remainder.train_test_split(train_size=0.7 / 0.9, seed=RANDOM_SEED)
25 train = split_2["train"]
26 test = split_2["test"]
27
28 is_any_data_unused = not(holdout_test.num_rows + small_train.num_rows + train.num_rows + test.num_rows == dataset.num_rows)
29 assert not is_any_data_unused, "Some data is unused in the splits."
30
31 def to_numpy(dataset):
32     images = np.stack([np.asarray(img) for img in dataset["image"]])
33     labels = np.array(dataset["label"])
34     return images, labels
35
36 x_small, y_small = to_numpy(small_train)
37 x_train, y_train = to_numpy(train)
38 x_test, y_test = to_numpy(test)
39 x_holdout, y_holdout = to_numpy(holdout_test)
40
41 sampler = RandomUnderSampler(random_state=RANDOM_SEED)
42
43 def resample_images_and_labels(images, labels, sampler):
44     flat_images = images.reshape((images.shape[0], -1))
45     resampled_flat, resampled_labels = sampler.fit_resample(flat_images, labels)
46     resampled_images = resampled_flat.reshape((-1,) + images.shape[1:])
47     return resampled_images, resampled_labels
48
49 x_small_resampled, y_small_resampled = resample_images_and_labels(x_small, y_small, sampler)
50 x_train_resampled, y_train_resampled = resample_images_and_labels(x_train, y_train, sampler)
51 x_test_resampled, y_test_resampled = resample_images_and_labels(x_test, y_test, sampler)
52
53 # save to npz file and upload to s3 bucket

```