

DAT151 – Oblig6

LDAP, Kerberos and Samba

Adrian Mortensen

Contents

Task 1: LDAP	2
Installation.....	2
Commands.....	5
Adding users and Organizational Units	6
Testing	7
Task 2: Kerberos	8
Task 3: SAMBA.....	9
Installation.....	9
Testing	9

Task 1: LDAP

This assignment will be done with my raspberry pi devices. ‘


Installation

Running the usual for installing

sudo apt-get update


sudo apt-get install slapd ldap-utils

Asked for password. Giving it a long password.

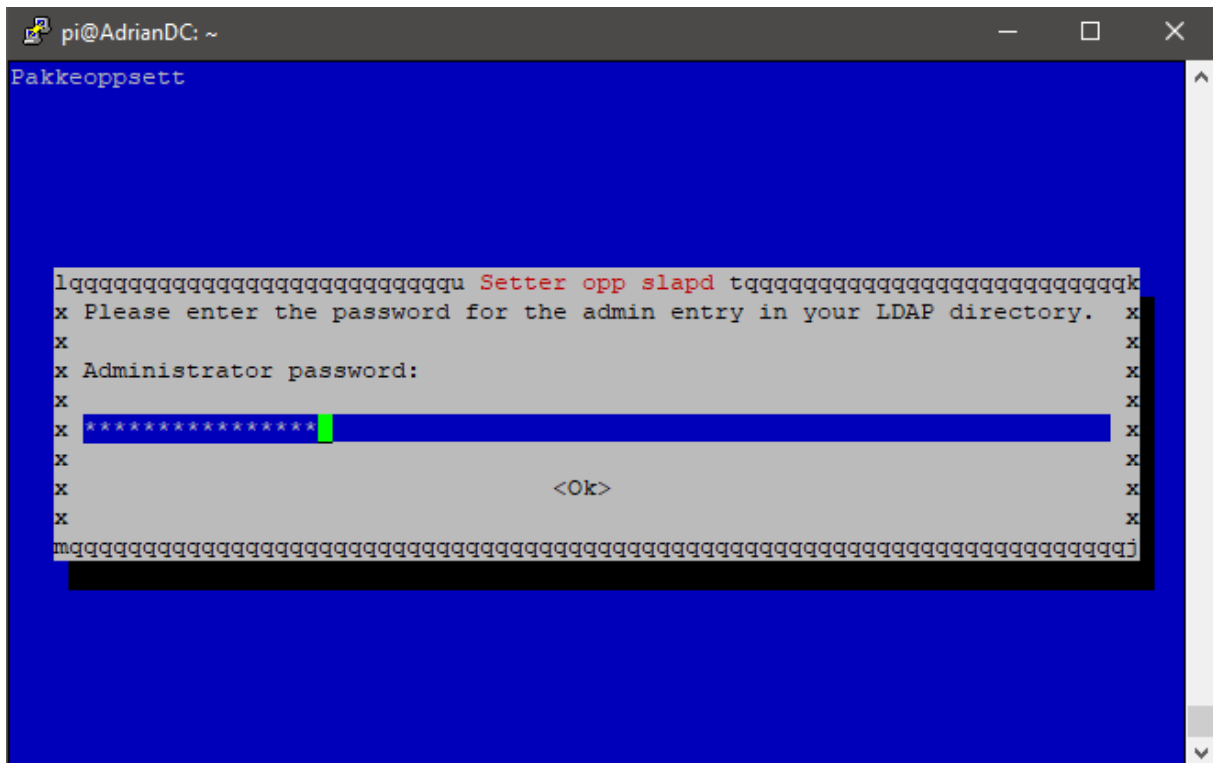

Starting configuration

sudo dpkg-reconfigure slapd

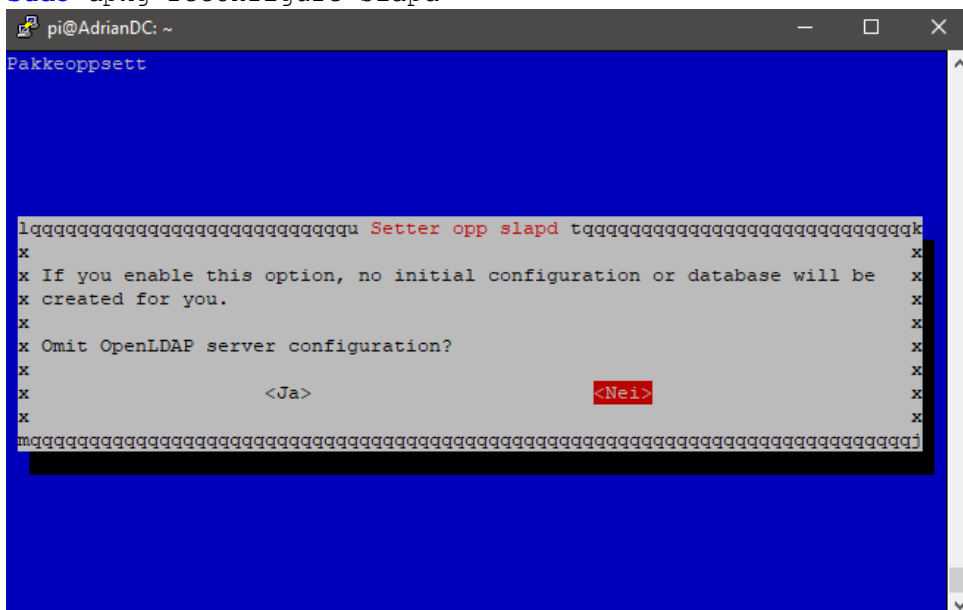

```
pi@AdrianDC: ~
Pakkeoppsett


lqqqqqqqqqqqqqqqqqqqqqqqqqqqqqq Setter opp slapd tqqqqqqqqqqqqqqqqqqqqqqqqqqqqk
x The DNS domain name is used to construct the base DN of the LDAP x
x directory. For example, 'foo.example.org' will create the directory with x
x 'dc=foo, dc=example, dc=org' as base DN. x
x x
x DNS domain name: x
x x
x adrian.local x
x x
x <Ok> x
x x
mqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqj
```

```
pi@AdrianDC: ~
Pakkeoppsett

lqqqqqqqqqqqqqqqqqqqqqqqqqqqqqq Setter opp slapd tqqqqqqqqqqqqqqqqqqqqqqqqqqqqk
x Please enter the name of the organization to use in the base DN of your x
x LDAP directory. x
x x
x Organization name: x
x x
x adrian x
x x
x <Ok> x
x x
mqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqj
```

[illegible]

```
pi@AdrianDC: ~  
Pakkeoppsett  
  
lqqqqqqqqqqqqqqqqqqqqqq Setter opp slapd tqqqqqqqqqqqqqqqqqqqqqk  
x x  
x x  
x x  
x Do you want the database to be removed when slapd is purged? x  
x x  
x <Ja> <Nei> x  
x x  
mqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqqj
```

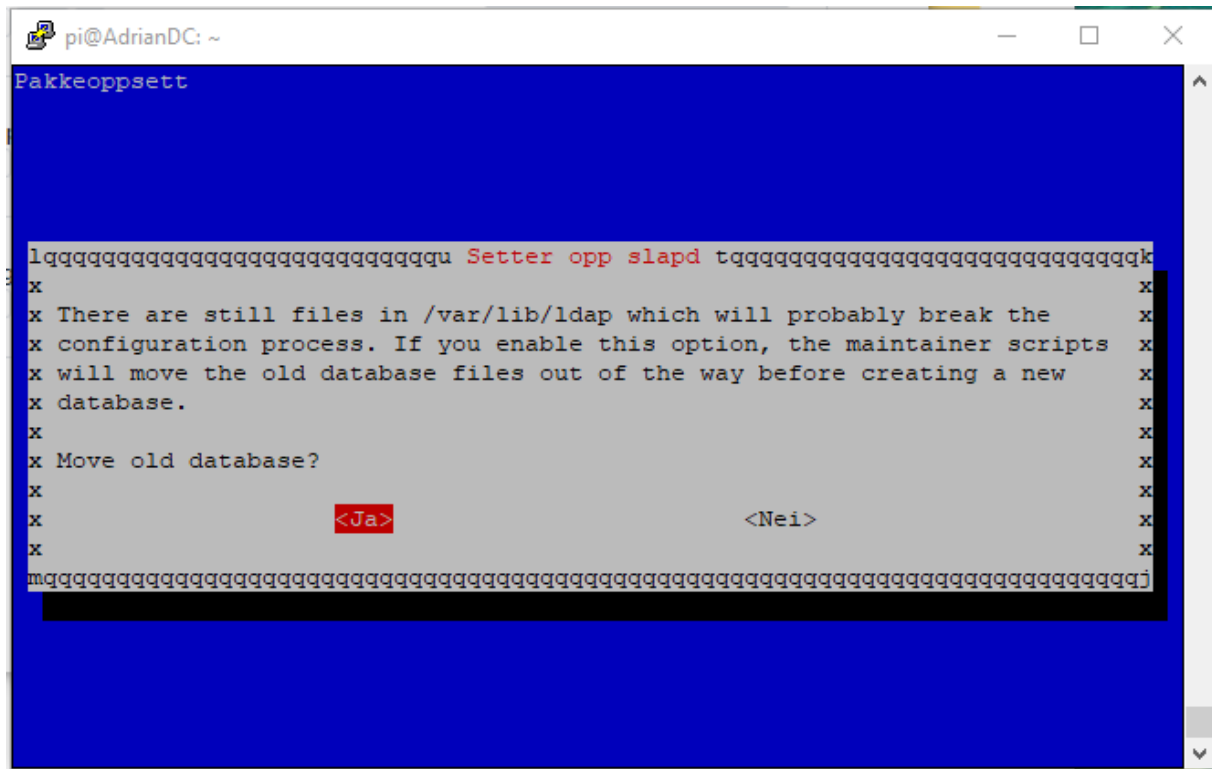

Commands

```
# Assignment 1
# This assignment will be configured on my Raspberry pi network. AdrianDC
will be the domain controller (server) and AdrianPi will be the client.
```

```
# Installing a web user interface for ldap administration
```

```
sudo apt-get install phpldapadmin
```

```
# Checking the installation
```

```
ldapsearch -x -LLL -H ldap:/// -b dc=adrian,dc=local
```

```
dn: dc=adrian,dc=local
```

```
objectClass: top
```

```
objectClass: dcObject
```

```
objectClass: organization
```

```
o: adrian
```

```
dc: adrian
```

```
dn: cn=admin,dc=adrian,dc=local
```

```
objectClass: simpleSecurityObject
```

```
objectClass: organizationalRole
```

```
cn: admin
```

```
description: LDAP administrator
```

Adding users and Organizational Units

```
$ nano makingou.ldif
```

```
dn: ou=people,dc=adrian,dc=local
objectClass: organizationalUnit
ou: people
```

```
$ nano addAdrian.ldif
```

```
#addAdrian.ldif
dn: uid=adrian,ou=people,dc=adrian,dc=local
objectClass: top
objectClass: account
objectClass: posixAccount
objectClass: shadowAccount
cn: adrian
uid: adrian
uidNumber: 16859
gidNumber: 100
homeDirectory: /home/adrian
loginShell: /bin/bash
gecos: adrian
userPassword: {crypt}x
shadowLastChange: 0
shadowMax: 0
shadowWarning: 0
```

```
#same was done for OU first.
```

```
$ ldapadd -x -W -D "cn=admin,dc=adrian,dc=local" -f addAdrian.ldif
```

```
Enter LDAP Password:
```

```
adding new entry "uid=adrian,ou=people,dc=adrian,dc=local"
```

```
#Setting a default password
```

```
$ ldappasswd -s password123 -W -D "cn=admin,dc=adrian,dc=local" -x
```

```
"uid=adrian,ou=people,dc=adrian,dc=local"
```

```
Enter LDAP Password:
```

Checking that the web interface shows what is expected after adding a OU and a user:



Testing

```
#Client
#(all of this is ran on a client device)
$ sudo nano /etc/hostname #Changed into the domain
$ sudo nano /etc/nsswitch.conf #Checked that ldap was enabled
$ sudo pam-auth-update
$ sudo pam-auth-update
$ sudo service nslcd stop
$ sudo service nslcd start
$ sudo service nscd stop
$ sudo service nscd start
$ su - adrian
Passord:
Du må straks endre passordet ditt (ordre fra rot)
Nytt passord:
Bekreft nytt -passord:
Ingen hjemmemappe, logger inn med HOME=/
adrian@adrian:/$

#Now we have successfully logged in from a client computer with a ldap user
```


Task 2: Kerberos

```
# kerberos server
yum install krb5-server krb5-workstation

sudo nano /etc/krb5.conf

sudo nano /var/kerberos/krb5kdc/kdc.conf

sudo kdb5_util create -s

Loading random data
Initializing database '/var/kerberos/krb5kdc/principal' for realm
'EXAMPLE.COM',
master key name 'K/M@EXAMPLE.COM'
You will be prompted for the database Master Password.
It is important that you NOT FORGET this password.
Enter KDC database master key:
Re-enter KDC database master key to verify:

sudo systemctl enable kadmin krb5kdc
sudo systemctl start kadmin krb5kdc

sudo firewall-cmd --permanent --add-service=kerberos
sudo firewall-cmd --reload

# Made a user
su user
kinit
# Got the ticket.
```

Task 3: SAMBA

Installation


```
sudo apt-get install samba samba-common-bin
```

```
sudo mkdir -m 1777 /winShare
```

```
sudo nano /etc/samba/smb.conf
```

```
[share]
Comment = Pi shared folder
Path = /winShare
Browseable = yes
Writeable = Yes
only guest = no
create mask = 0777
directory mask = 0777
Public = yes
Guest ok = yes
```

Testing

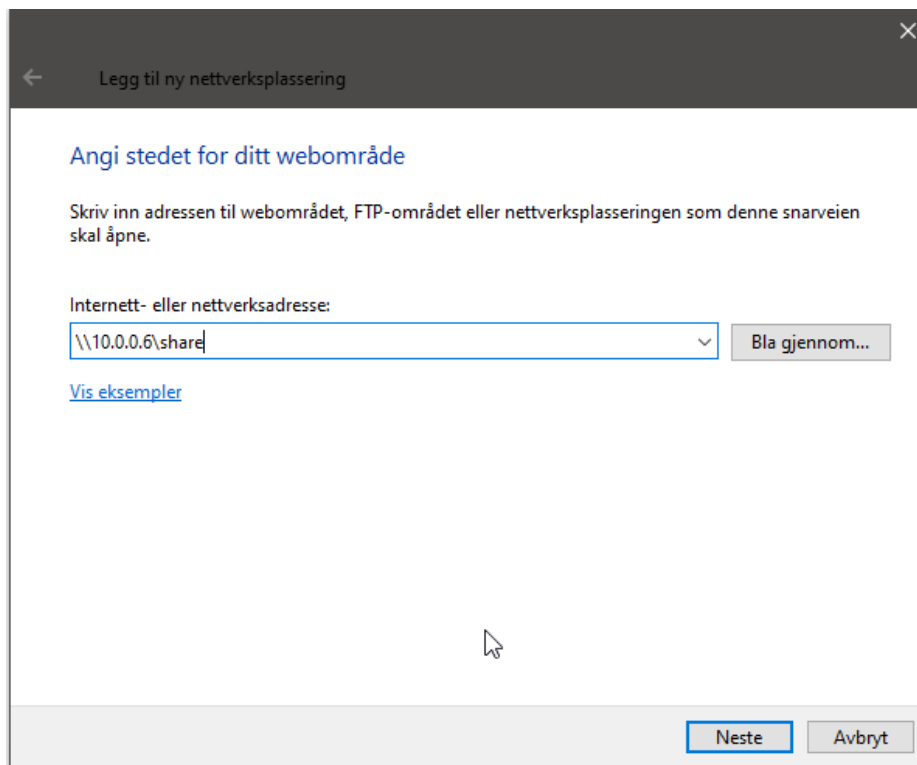

✓ Nettverksplasseringer (1)





adrianDCFil

Adding a file «Tester.txt» in windows

```
/ $ cd /winShare/  
/winShare $ ls -al  
totalt 8  
drwxrwxrwt  2 root root 4096 feb. 21 18:15 .  
drwxr-xr-x 22 root root 4096 feb. 21 18:02 ..  
-rwxrw-rw-  1 pi  pi    0 feb. 21 18:15 Tester.txt
```

Adding a file «Fungerer.txt» on server

```
$ touch fungerer.txt
```

enne PCen > adrianDCFil			▼	↻
Navn	Endringsdato	Type		
 Tester.txt	21.02.2020 18:15	Tekstdokument		
 fungerer.txt	21.02.2020 18:20	Tekstdokument		