

# Lecture #1. 파이썬 기초 (1)

2D 게임 프로그래밍

이대현 교수



한국공학대학교  
TECH UNIVERSITY OF KOREA

# 파이썬

---

- 1991년, Guido van Rossum 이 개발
- VM 기반 인터프리터 언어



# 특징

---

- **다양한 프로그래밍 패러다임 제공**

- 구조적 프로그래밍
- 절차지향 프로그래밍
- 객체지향 프로그래밍
- 함수형 프로그래밍

- **동적 자료형**

- **풍부한 기본 라이브러리 함수**

# 장점

---

- 쉽다.
- 간결하다.
- 빠르게 개발할 수 있다.

# 파이썬의 인기

- 지난 30년간 지속적으로 순위가 상승하면서, 드디어 2022년 1위로 등극 !

Programming Language	2022	2017	2012	2007	2002	1997	1992	1987
Python	1	5	8	7	12	28	-	-
C	2	2	1	2	2	1	1	1
Java	3	1	2	1	1	16	-	-
C++	4	3	3	3	3	2	2	6
C#	5	4	4	8	14	-	-	-
Visual Basic	6	14	-	-	-	-	-	-
JavaScript	7	8	10	9	8	24	-	-
Assembly language	8	10	-	-	-	-	-	-
SQL	9	-	-	-	7	-	-	-
PHP	10	7	6	5	6	-	-	-
Prolog	24	32	33	27	17	21	12	3
Lisp	33	31	13	16	13	10	4	2
Pascal	270	114	16	22	99	9	3	5
(Visual) Basic	-	-	7	4	4	3	6	4

프로그래밍 언어 순위 변화 ( Source : <https://www.tiobe.com/tiobe-index/> )

# 단점

---


- 느리다.
- 너무 유연하다.
- 진입 장벽이 낮다.

## Python Key Words

<b>False</b>	<b>class</b>	<b>return</b>	<b>is</b>	<b>finally</b>
<b>None</b>	<b>if</b>	<b>for</b>	<b>lambda</b>	<b>continue</b>
<b>True</b>	<b>def</b>	<b>from</b>	<b>while</b>	<b>nonlocal</b>
<b>and</b>	<b>del</b>	<b>global</b>	<b>not</b>	<b>with</b>
<b>as</b>	<b>elif</b>	<b>try</b>	<b>or</b>	<b>yield</b>
<b>assert</b>	<b>else</b>	<b>import</b>	<b>pass</b>	
<b>break</b>	<b>except</b>	<b>in</b>	<b>raise</b>	

# IDLE 실행 화면

- Python 언어로 지시하면, 이를 해석해서 일을 함.

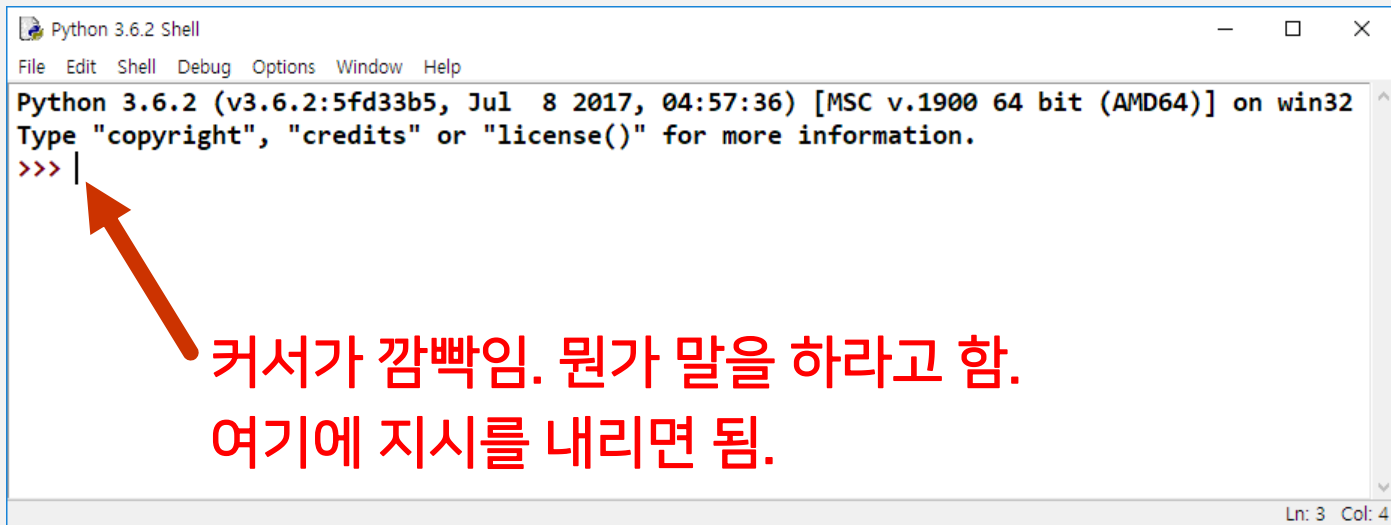


```
Python 3.6.2 (v3.6.2:5fd33b5, Jul 8 2017, 04:57:36) [MSC v.1900 64 bit (AMD64)] on win32
Type "copyright", "credits" or "license()" for more information.
>>> |
```

커서가 깜빡임. 뭔가 말을 하라고 함.  
여기에 지시를 내리면 됨.




# 계산을 시켜보자.

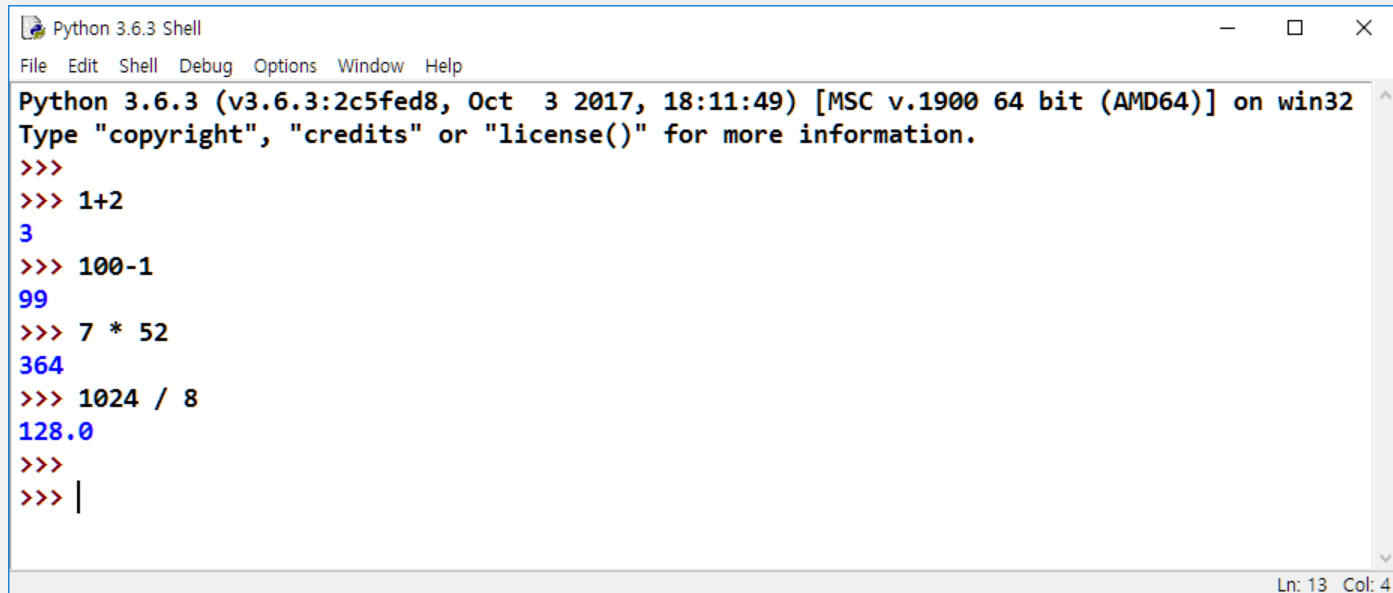

```
Python 3.6.3 Shell
File Edit Shell Debug Options Window Help
Python 3.6.3 (v3.6.3:2c5fed8, Oct 3 2017, 18:11:49) [MSC v.1900 64 bit (AMD64)] on win32
Type "copyright", "credits" or "license()" for more information.
>>>
>>> 1+2
3
>>> 100-1
99
>>> 7 * 52
364
>>> 1024 / 8
128.0
>>>
>>> |
```

Ln: 13 Col: 4

# 나누기와 나머지 연산

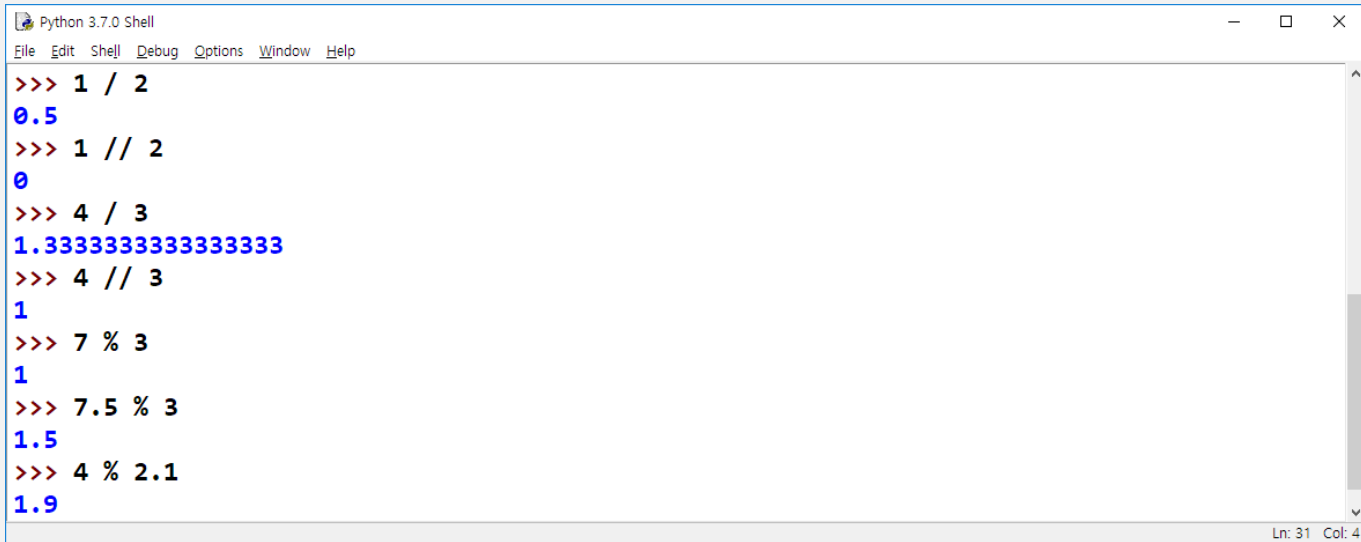

A screenshot of a Python 3.7.0 Shell window. The window has a title bar with the text 'Python 3.7.0 Shell' and standard window controls (minimize, maximize, close). Below the title bar is a menu bar with the following items: File, Edit, Shell, Debug, Options, Window, and Help. The main area of the window contains a series of Python commands and their outputs, each on a new line. The commands are: 1 / 2, 1 // 2, 4 / 3, 4 // 3, 7 % 3, 7.5 % 3, and 4 % 2.1. The outputs are: 0.5, 0, 1.3333333333333333, 1, 1, 1.5, and 1.9. The status bar at the bottom right of the window shows 'Ln: 31 Col: 4'.

```
Python 3.7.0 Shell
File Edit Shell Debug Options Window Help
>>> 1 / 2
0.5
>>> 1 // 2
0
>>> 4 / 3
1.3333333333333333
>>> 4 // 3
1
>>> 7 % 3
1
>>> 7.5 % 3
1.5
>>> 4 % 2.1
1.9
Ln: 31 Col: 4
```

# 원의 넓이를 구해보자. 반지름이 3미터 이면?


Circle

Solve for area ▾

$$A = \pi r^2$$

$r$  Radius

Enter value



```
Python 3.6.3 Shell
File Edit Shell Debug Options Window Help
>>>
>>>
>>>
>>>
>>>
>>> 3.141592653589793 * (3 * 3)
28.274333882308138
>>>
>>> 3.141592653589793 * 3 ** 2
28.274333882308138
>>>
>>> |
```

28.274328 평방미터

Ln: 77 Col: 4

# IDLE 에디팅 팁

---


- 라인 단위로의 입력이 기본
- 이미 입력한 라인은 편집이 불가능
- 입력한 라인들은 내부 버퍼에 저장되어 있음.
- Alt + p 와 Alt + n 을 이용해서, 앞서 입력했던 라인들을 꺼내올 수 있음.

# 연산 기호

---

연산자	연산
+	덧셈
-	뺄셈
*	곱셈
/ 과 //	나눗셈
**	제곱
%	나머지

# 반지름이 9미터이면? 20 미터면? 1.5미터면?

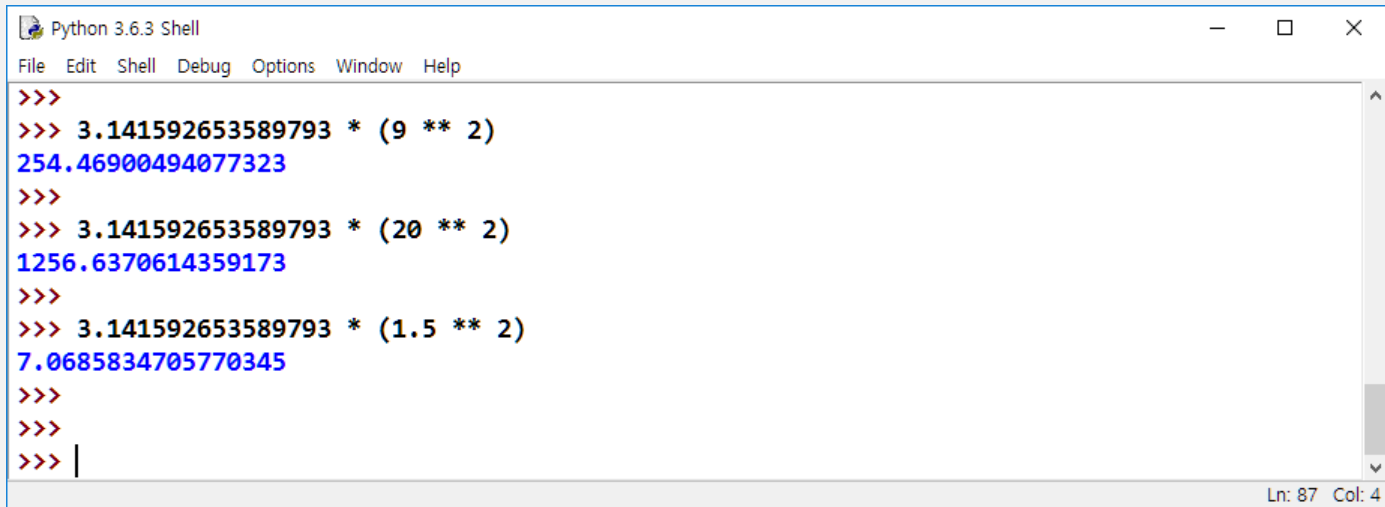

```
Python 3.6.3 Shell
File Edit Shell Debug Options Window Help
>>>
>>> 3.141592653589793 * (9 ** 2)
254.46900494077323
>>>
>>> 3.141592653589793 * (20 ** 2)
1256.6370614359173
>>>
>>> 3.141592653589793 * (1.5 ** 2)
7.0685834705770345
>>>
>>>
>>> |
```


Ln: 87 Col: 4

슬슬 귀찮아지기 시작한다.

3.141592... 를 어디엔가 기록해놓고, 이걸 재사용하면 좋을 것 같은데...

# 변수(variable)


- 변수: 값을 저장해놓는 컴퓨터 메모리 안의 공간
- 변수는 해당되는 이름이 있다. 프로그래머가 이름을 지어야 함.
- 이름은 영문자와 숫자를 조합해서 씀. 단, 파이썬의 기본 단어는 쓰면 안됨.
- 사실, 변수의 값은 맘대로 언제든지 바꿀 수 있다.

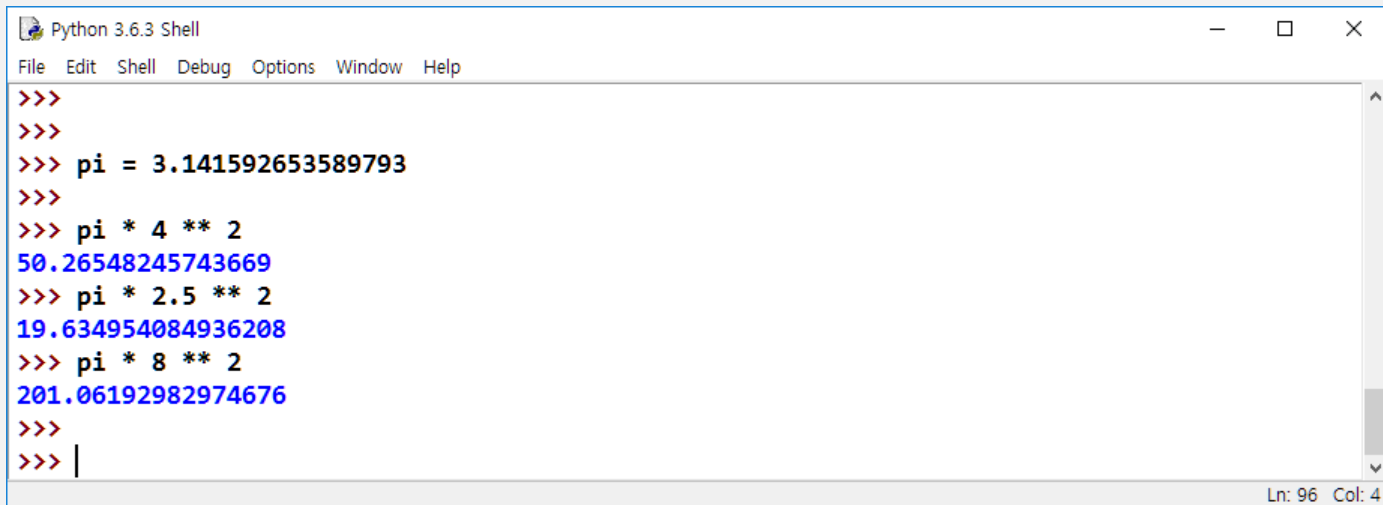

A screenshot of a Python 3.6.3 Shell window. The window has a title bar with the text 'Python 3.6.3 Shell' and standard window controls (minimize, maximize, close). Below the title bar is a menu bar with 'File', 'Edit', 'Shell', 'Debug', 'Options', 'Window', and 'Help'. The main area of the window is a text editor showing a Python script. The script consists of several lines of code: three empty lines, followed by 'pi = 3.141592653589793', another empty line, and then three lines of calculations: 'pi \* 4 \*\* 2', 'pi \* 2.5 \*\* 2', and 'pi \* 8 \*\* 2'. Each calculation line is followed by a blank line. The output of these calculations is displayed in blue text: '50.26548245743669', '19.634954084936208', and '201.06192982974676'. The window ends with two more empty lines and a cursor. At the bottom right of the window, the status bar shows 'Ln: 96 Col: 4'.

```
>>>
>>>
>>> pi = 3.141592653589793
>>>
>>> pi * 4 ** 2
50.26548245743669
>>> pi * 2.5 ** 2
19.634954084936208
>>> pi * 8 ** 2
201.06192982974676
>>>
>>> |
```

# print 함수를 이용하면, 변수의 값을 볼 수 있다.

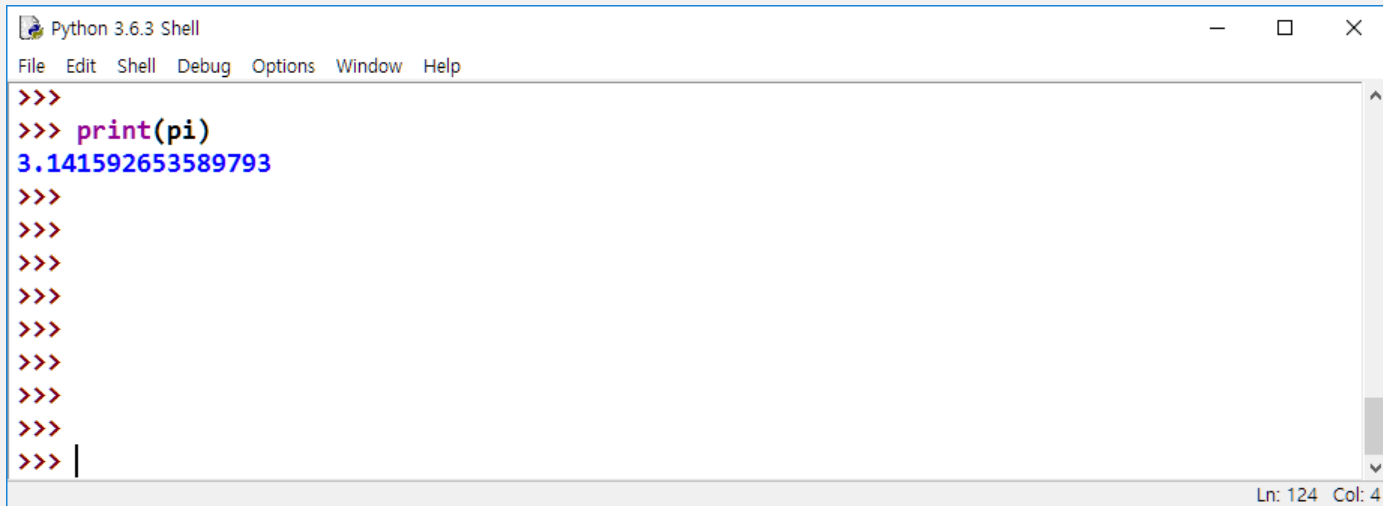

```
Python 3.6.3 Shell
File Edit Shell Debug Options Window Help
>>>
>>> print(pi)
3.141592653589793
>>>
>>>
>>>
>>>
>>>
>>>
>>>
>>>
>>>
>>> |
Ln: 124 Col: 4
```




# 반지름 변수 r과 면적 변수 area 를 사용한 면적 계산




```
Python 3.6.3 Shell
File Edit Shell Debug Options Window Help
>>>
>>>
>>>
>>> r = 7
>>>
>>> area = pi * r ** 2
>>>
>>> print(area)
153.93804002589985
>>>
>>>
>>>
Ln: 133 Col: 4
```


# 변수값을 바꿔서 사용 : r 에 11을 대입

A screenshot of a Python 3.6.3 Shell window. The window has a menu bar with 'File', 'Edit', 'Shell', 'Debug', 'Options', 'Window', and 'Help'. The main area shows a series of commands entered at the prompt '>>>'. The commands are: '>>> r = 11', '>>>', '>>> area = pi \* r \*\* 2', '>>>', and '>>> print(area)'. The output of the last command is '380.132711084365' in blue text. The status bar at the bottom right shows 'Ln: 139 Col: 4'.

```
>>>
>>> r = 11
>>>
>>> area = pi * r ** 2
>>>
>>> print(area)
380.132711084365
>>>
>>>
>>>
>>>
>>>
```

 + p

# 변수에는 문자열(string)을 담을 수 있다.

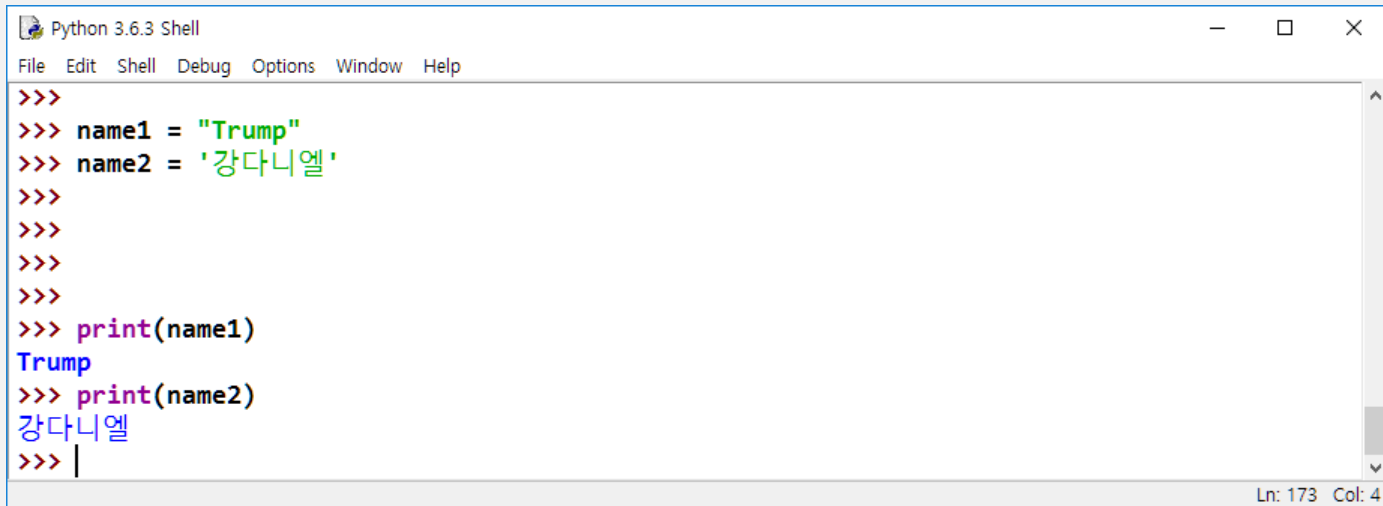A screenshot of a Python 3.6.3 Shell window. The window has a title bar with the text 'Python 3.6.3 Shell' and standard window controls (minimize, maximize, close). Below the title bar is a menu bar with 'File', 'Edit', 'Shell', 'Debug', 'Options', 'Window', and 'Help'. The main area of the window contains a Python interpreter prompt '>>>' followed by several lines of code. The code assigns 'Trump' to 'name1' and '강다니엘' to 'name2', then prints both. The output shows 'Trump' and '강다니엘' on separate lines. The status bar at the bottom right indicates 'Ln: 173 Col: 4'.

```
>>>
>>> name1 = "Trump"
>>> name2 = '강다니엘'
>>>
>>>
>>>
>>>
>>> print(name1)
Trump
>>> print(name2)
강다니엘
>>> |
```

문자열은 문자들의 집합임. 여러 개의 문자들을 나열한 것. 큰따옴표 또는 작은 따옴표로 감쌌. 한글, 영어 상관없음.

# 기본 자료형(Type)

---

- 변수에는 다양한 종류의 정보를 담을 수 있음.


order = 4    정수형 int

pi = 3.141592    실수형 float

name1 = "Trump"    문자열형 str  
name2 = 'Daehyun'

result = True    참거짓형 bool

# 자료형 파악 type

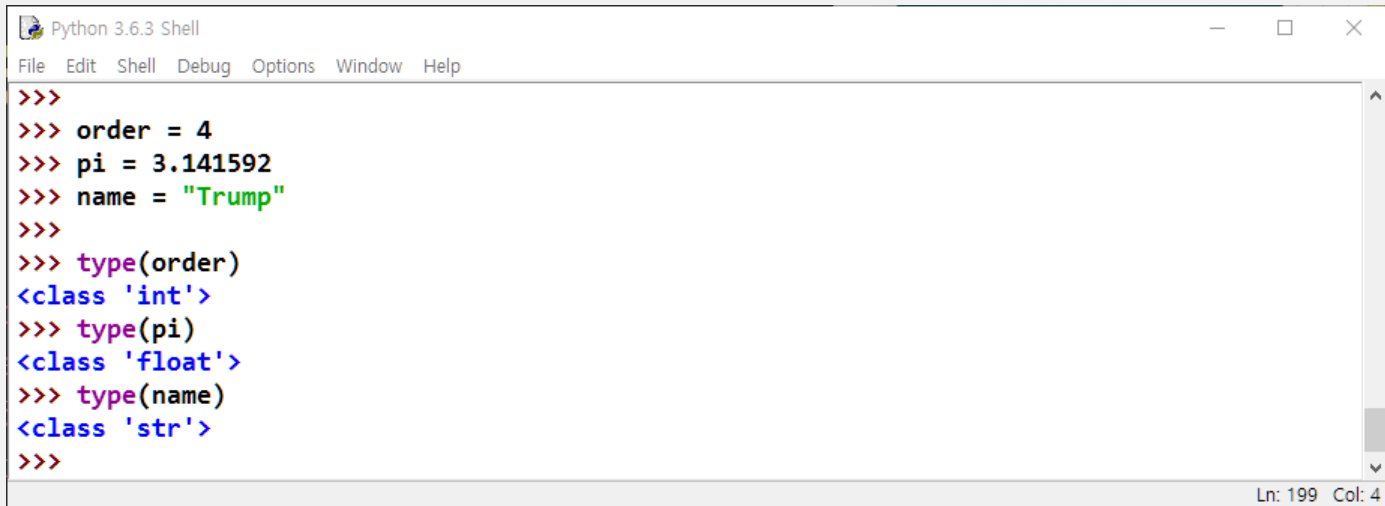

```
Python 3.6.3 Shell
File Edit Shell Debug Options Window Help
>>>
>>> order = 4
>>> pi = 3.141592
>>> name = "Trump"
>>>
>>> type(order)
<class 'int'>
>>> type(pi)
<class 'float'>
>>> type(name)
<class 'str'>
>>>
```

Ln: 199 Col: 4


## 사용자로부터 입력 받기

- input 함수를 이용함.
- 사용자가 입력한 정보가 "문자열"로 되어 넘어옴.

[illegible]

# 자료형 변환

- mins의 값은 4가 아니고, '4'임. 즉, 정수가 아니고 문자열임.
- 이것을 정수로 바꾸기 위해서는 int() 라는 함수를 사용함.

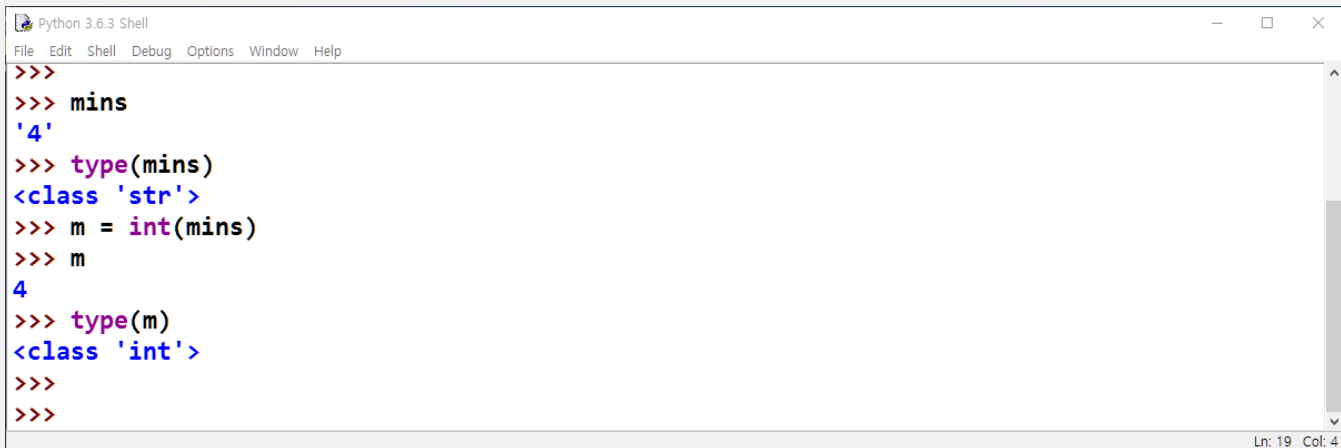A screenshot of a Python 3.6.3 Shell window. The window has a title bar with the Python logo and text 'Python 3.6.3 Shell', and a menu bar with 'File', 'Edit', 'Shell', 'Debug', 'Options', 'Window', and 'Help'. The main area shows a series of commands and their outputs. The status bar at the bottom right indicates 'Ln: 19 Col: 4'.

```
>>>
>>> mins
'4'
>>> type(mins)
<class 'str'>
>>> m = int(mins)
>>> m
4
>>> type(m)
<class 'int'>
>>>
>>>
```

# 자료형 변환


---

```
>>> str(0)
'0'
>>> str(-3.14)
'-3.14'
>>> int('42')
42
>>> int(1.25)
1
>>> float('3.14')
3.14
>>> float(10)
10.0
```



# 자료형: bool

- 참(True), 또는 거짓(False)을 나타내는데 사용되는 자료형

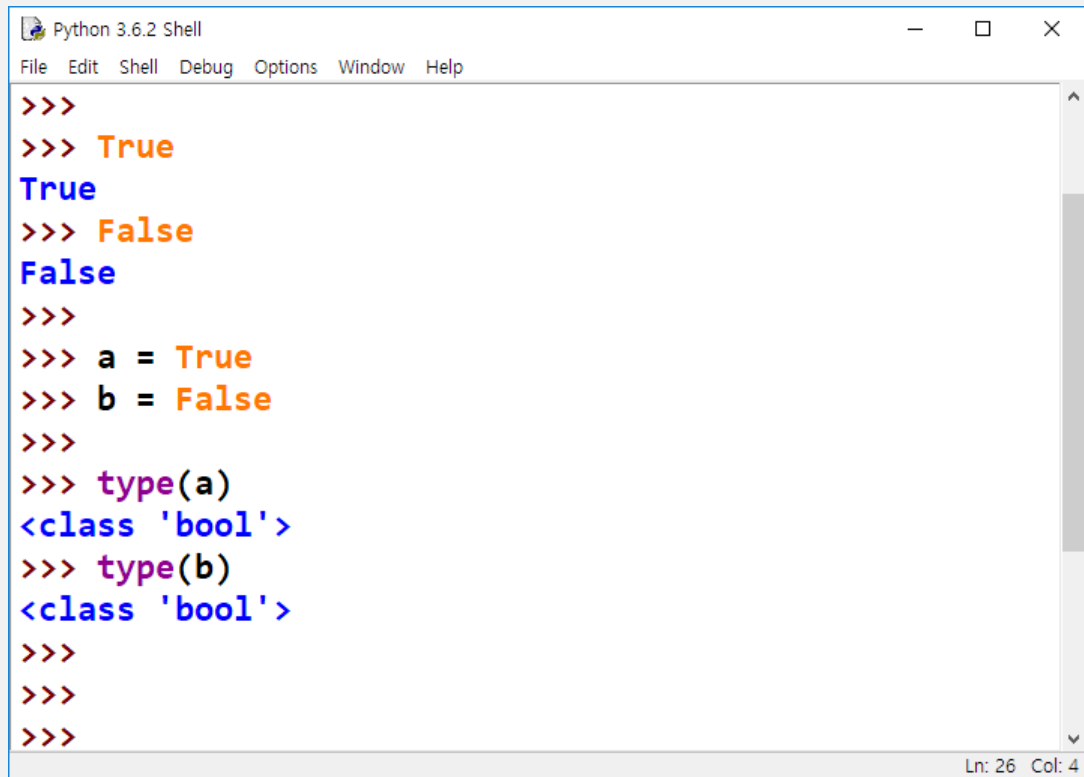


```
Python 3.6.2 Shell
File Edit Shell Debug Options Window Help
>>>
>>> True
True
>>> False
False
>>>
>>> a = True
>>> b = False
>>>
>>> type(a)
<class 'bool'>
>>> type(b)
<class 'bool'>
>>>
>>>
>>>
```

Ln: 26 Col: 4

# 비교 연산(Comparison Operation)

- 두개의 값의 대소, 동일 등을 확인하는 계산.
- 결과는 참(True) 또는 거짓(False)임.

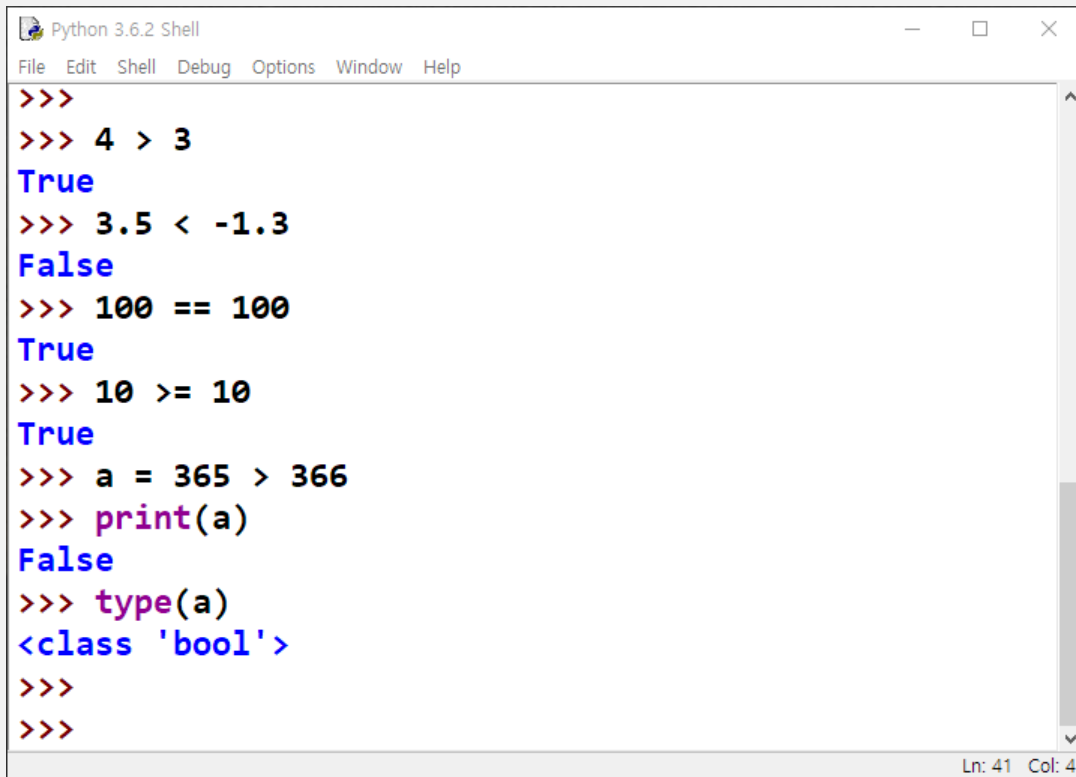A screenshot of a Python 3.6.2 Shell window. The window has a title bar with the text 'Python 3.6.2 Shell' and standard window controls (minimize, maximize, close). Below the title bar is a menu bar with 'File', 'Edit', 'Shell', 'Debug', 'Options', 'Window', and 'Help'. The main area of the window contains a series of Python commands and their outputs. The commands are: '>>>', '>>> 4 > 3', '>>> 3.5 < -1.3', '>>> 100 == 100', '>>> 10 >= 10', '>>> a = 365 > 366', '>>> print(a)', and '>>> type(a)'. The outputs are: 'True', 'False', 'True', 'True', 'False', and '<class \'bool\'>'. The window also has a status bar at the bottom right showing 'Ln: 41 Col: 4'.


```
Python 3.6.2 Shell
File Edit Shell Debug Options Window Help
>>>
>>> 4 > 3
True
>>> 3.5 < -1.3
False
>>> 100 == 100
True
>>> 10 >= 10
True
>>> a = 365 > 366
>>> print(a)
False
>>> type(a)
<class 'bool'>
>>>
>>>
Ln: 41 Col: 4
```

# 비교 연산 기호

---

기호	뜻
<	작다
<=	작거나 같다
==	같다
>=	크거나 같다
>	크다
!=	다르다

# 문자열의 비교

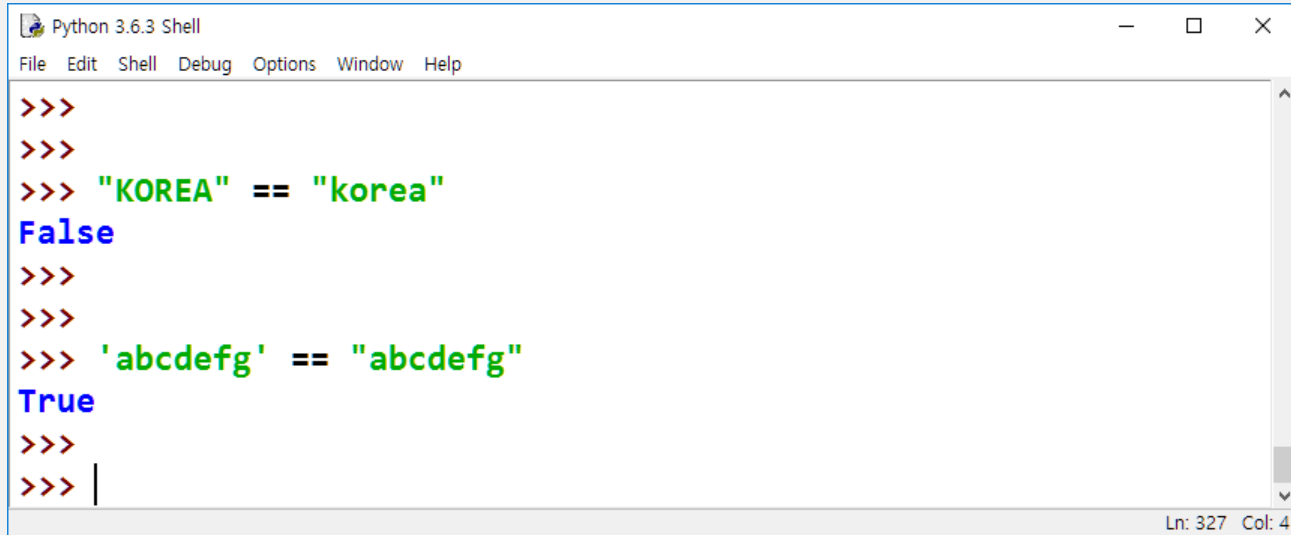

```
Python 3.6.3 Shell
File Edit Shell Debug Options Window Help
>>>
>>>
>>> "KOREA" == "korea"
False
>>>
>>>
>>> 'abcdefg' == "abcdefg"
True
>>>
>>> |
```

Ln: 327 Col: 4

# 문자열 str 의 다양한 연산

```
Python 3.7.0 Shell - C:/Users/dustinlee/Desktop/test.py (3.7.0)
File Edit Shell Debug Options Window Help
>>>
>>> first = "Daehyun"
>>> last = "Lee"
>>> name = first + " " + last
>>> name
'Daehyun Lee'
>>> print(name)
Daehyun Lee
>>>
>>> name * 2
'Daehyun LeeDaehyun Lee'
>>> name * 3
'Daehyun LeeDaehyun LeeDaehyun Lee'
>>>
>>> name[0]
'D'
>>> name[2]
'e'
>>> name[-1]
'e'
>>> name[-2]
'e'
```

Ln: 157 Col: 4

# Slice(슬라이스)

- 문자열의 일부분을 잘라내는 기법

- `name[ start : stop : step ]`

```
>>> title = "Python 2D Game Programming"
>>> title[0:6]
'Python'
>>> title[7:9]
'2D'
>>> title[10:14]
'Game'
>>> title[:6]
'Python'
>>> title[-11:]
'Programming'
>>> title[::2]
'Pto DGm rgamn'
>>> title[::-1]
'gnimmargorP emaG D2 nohtyP'
```