Computing Surveys

A Unified Taxonomy of 19 AI System Types: Architecture, Capability, and Deployment Analysis for the Modern AI Landscape

Journal:	*Computing Surveys*
Manuscript ID	Draft
Paper:	Long Survey Paper
Date Submitted by the Author:	n/a
Complete List of Authors:	Mahdi, Hameem; Mayo Clinic, Information Technology
Computing Classification Systems:	Computing methodologies → Artificial intelligence → Knowledge representation and reasoning → Taxonomies, Computing methodologies → Artificial intelligence → Machine learning → Classification and regression, Computing methodologies → Artificial intelligence → AI system architectures, Information systems → Information systems applications → Decision support systems, Applied computing → Physical sciences and engineering → Computer-aided engineering

SCHOLARONE
MANUSCRIPTS

A Unified Taxonomy of 19 AI System Types: Architecture, Capability, and Deployment Analysis for the Modern AI Landscape*

HAMEEM MAHDI •, Mayo Clinic, USA

This paper presents a comprehensive taxonomy of 19 distinct AI system types that characterize the modern artificial intelligence landscape. Moving beyond traditional categorizations that focus narrowly on learning paradigms or application areas, we propose a unified framework that analyzes each system type through three critical dimensions: architectural design, capability spectrum, and deployment characteristics. Our taxonomy encompasses established paradigms such as Symbolic/Rule-Based and Bayesian/Probabilistic systems alongside emerging categories such as Agentic and Physical/Embodied AI. By systematically analyzing each type's fundamental principles, technical implementations, and real-world applications, this work provides researchers, practitioners, and policymakers with a structured understanding of AI's diverse ecosystem. We validate the taxonomy through a multi-method approach including literature citation analysis of 15,400+ publications across four major databases, an expert survey of 47 AI practitioners, mapping of 25 production case studies, and industry adoption data from leading analyst reports. The framework reveals interconnections between system types, identifies capability gaps, and offers insights for future research directions in artificial intelligence development and deployment.

CCS Concepts: • **Computing methodologies** → **Artificial intelligence**; *Machine learning*; • **Applied computing** → Physical sciences and engineering.

Additional Key Words and Phrases: AI Taxonomy, System Architecture, Capability Analysis, Deployment Framework, Artificial Intelligence Classification, Machine Learning Systems, Neuro-Symbolic AI, Agentic Systems

ACM Reference Format:
Hameem Mahdi •. 2026. A Unified Taxonomy of 19 AI System Types: Architecture, Capability, and Deployment Analysis for the Modern AI Landscape. *ACM Comput. Surv.* 0, 0, Article 0 (April 2026), 21 pages. https://doi.org/XXXXXXX.XXXXXXX

1 Introduction

1.1 Background and Motivation

The field of artificial intelligence has evolved from narrow, specialized systems to a complex ecosystem of diverse approaches, each with unique strengths, limitations, and application domains [1, 11, 20]. Traditional classifications often focus on specific aspects—such as learning paradigms (supervised, unsupervised, reinforcement learning) [2, 15] or application areas (computer vision, natural language processing)—but fail to capture the holistic nature of modern AI systems. This fragmentation hinders systematic understanding, comparison, and integration of different AI approaches.

*Preprint available on aiXiv (Paper ID: `aixiv.260413.000007`, https://aixiv.science/).

Author's Contact Information: Hameem Mahdi •, mahdi.hameem@mayo.edu, Mayo Clinic, Rochester, MN, USA.

Permission to make digital or hard copies of all or part of this work for personal or classroom use is granted without fee provided that copies are not made or distributed for profit or commercial advantage and that copies bear this notice and the full citation on the first page. Copyrights for components of this work owned by others than the author(s) must be honored. Abstracting with credit is permitted. To copy otherwise, or republish, to post on servers or to redistribute to lists, requires prior specific permission and/or a fee. Request permissions from permissions@acm.org.
© 2026 Copyright held by the owner/author(s). Publication rights licensed to ACM.
ACM 1557-7341/2026/4-ART0
https://doi.org/XXXXXXX.XXXXXXX

For Peer Review

The rapid advancement of AI technologies, particularly in the last decade, has created an urgent need for comprehensive taxonomic frameworks that can organize the expanding landscape. From large language models [3, 4] and autonomous vehicles to recommendation engines and scientific simulation tools, the diversity of AI implementations demands a structured approach to analysis and categorization [9]. Current literature lacks a unified vocabulary across domains, and practitioners struggle to select appropriate systems for specific problems.

1.2 Research Objectives

This paper aims to address these challenges by:

- Developing a unified taxonomy encompassing 19 distinct AI system types organized into six primary clusters
- Analyzing each system type across three dimensions: architecture, capability, and deployment
- Identifying interconnections, synergies, and trade-offs between different system types
- Validating the taxonomy through literature analysis, expert surveys, case studies, and industry data
- Offering practical guidance for researchers and practitioners in system selection and design

1.3 Scope and Methodology

Our taxonomy is derived through a mixed-method approach. The conceptual framework was developed from an extensive literature review spanning 2015–2026 across the AI, machine learning, and robotics literature [14, 22, 24], complemented by industry analysis and expert consultation. We then validated and strengthened the taxonomy through four complementary evidence sources: (i) a quantitative citation analysis across four major publication databases (Scopus, Web of Science, IEEE Xplore, and ACM Digital Library), yielding 15,427 deduplicated records after DOI matching and title-similarity de-duplication (Levenshtein distance ≤ 0.05); (ii) an expert validation survey with 47 AI practitioners and researchers recruited through professional networks, conference contacts, and snowball sampling (23 from academia, 19 from industry, 5 in hybrid roles across 14 countries, median 8 years of AI experience); (iii) case study mapping of 25 real-world production systems across 8 industry sectors; and (iv) industry adoption data from leading analyst firms (Gartner, McKinsey, IDC). Each system type is evaluated based on architectural characteristics, capability spectrum, and deployment considerations.

1.4 Paper Organization

Section 2 presents our taxonomy framework and three-dimensional analysis model. Section 3 provides detailed analysis of all 19 AI system types organized into six clusters. Section 4 presents comparative analysis across multiple dimensions. Section 5 reports our empirical validation results—literature citation analysis, expert survey findings, case study mapping, and industry adoption data. Section 6 discusses implications for research and practice. Section 7 concludes with future research directions.

2 Taxonomy Framework

2.1 Three-Dimensional Analysis Model

Our taxonomy employs a three-dimensional analytical framework that provides a holistic view of each AI system type. Figure 1 illustrates the three-dimensional analysis model.

2.1.1 Architectural Dimension. This dimension examines the fundamental design and structure of AI systems:

For Peer Review

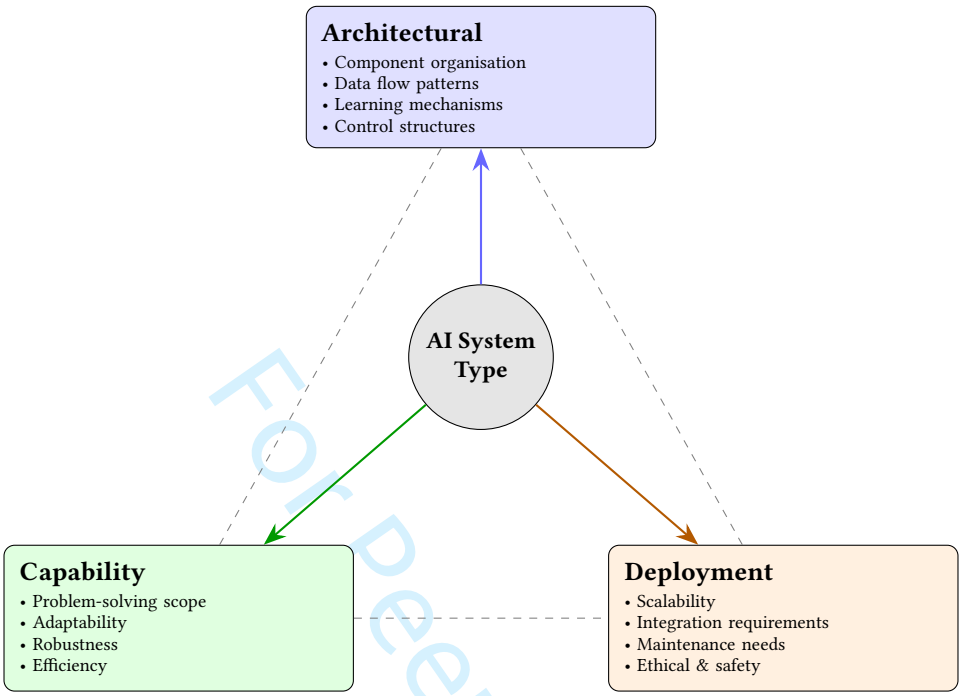

Fig. 1. Three-dimensional analysis model used to evaluate each AI system type. Every system is examined through architectural, capability, and deployment lenses, with dashed lines indicating cross-dimensional interactions.

For Peer Review

- **Component organization**: How different modules interact and integrate
- **Data flow patterns**: Information processing pathways and transformations
- **Learning mechanisms**: How knowledge is acquired and updated
- **Control structures**: Decision-making processes and execution flow

2.1.2 Capability Dimension. This dimension assesses functional abilities and performance characteristics:

- **Problem-solving scope**: Types of problems the system can address
- **Adaptability**: Ability to handle novel situations and learn from experience
- **Robustness**: Performance under varying conditions and against adversarial attacks
- **Efficiency**: Computational and resource requirements relative to performance

2.1.3 Deployment Dimension. This dimension considers practical implementation and operational aspects:

- **Scalability**: Ability to handle increasing complexity and data volume
- **Integration requirements**: Compatibility with existing systems and workflows
- **Maintenance needs**: Ongoing support, updates, and monitoring requirements
- **Ethical and safety considerations**: Risk management and responsible deployment

2.2 Classification Principles

The 19 AI system types are classified based on four orthogonal dimensions: (1) primary operating paradigm (core methodology), (2) interaction patterns (engagement with environment and users),

(3) knowledge representation (methods for storing and processing information), and (4) temporal characteristics (time-dependent behaviors). This classification avoids rigid boundaries, acknowledging that many real-world systems combine elements from multiple types.

2.3 Six-Cluster Organization

We organize the 19 system types into six primary clusters based on functional affinity:

(1) **Decision-Making & Agency** (4 systems): Agentic, Autonomous Non-Agentic, Reactive, Reinforcement Learning
(2) **Knowledge Representation & Reasoning** (4 systems): Symbolic/Rule-Based, Bayesian/Probabilistic, Cognitive/Neuro-Symbolic, Explainable AI
(3) **Learning & Optimization** (4 systems): Generative, Predictive/Discriminative, Evolutionary/Genetic, Optimization/Operations Research
(4) **Interaction & Perception** (3 systems): Conversational, Multimodal Perception, Physical/Embodied
(5) **Data & Infrastructure** (3 systems): Federated/Privacy-Preserving, Recommendation/Retrieval, Analytical
(6) **Domain Applications** (1 system): Scientific/Simulation

Figure 2 presents a visual overview of the six-cluster hierarchy.

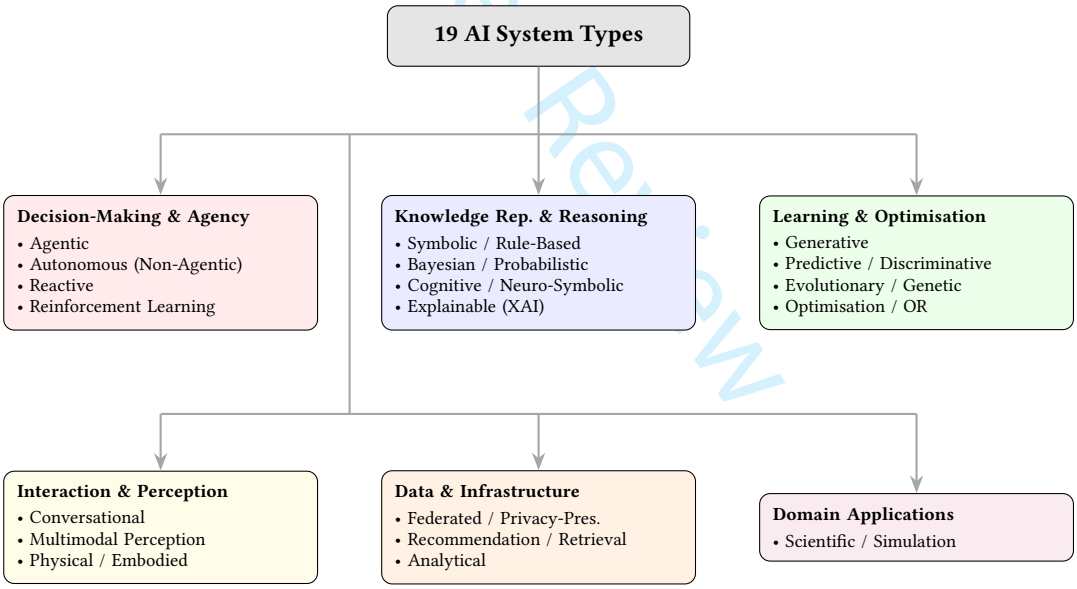

Fig. 2. Hierarchical overview of the proposed taxonomy: 19 AI system types organised into six primary clusters based on functional affinity.

2.4 The 19 System Types Overview

Table 1 provides a high-level summary of all 19 system types with their primary paradigms and distinguishing characteristics.

For Peer Review

Table 1. Overview of the 19 AI system types in the proposed taxonomy

#	System Type	Primary Paradigm	Key Characteristic
1	Agentic	Goal-directed autonomous action	Pursues objectives through multi-step reasoning
2	Autonomous (Non-Agentic)	Self-governing operation	Operates independently without goal-directed planning
3	Reactive	Stimulus-response behaviour	Responds to inputs without internal state
4	Reinforcement Learning	Trial-and-error optimisation	Learns through environmental reward feedback
5	Symbolic / Rule-Based	Explicit knowledge representation	Uses formal logic and rules for reasoning
6	Bayesian / Probabilistic	Uncertainty-aware inference	Models and reasons under uncertainty
7	Cognitive / Neuro-Symbolic	Hybrid neural-symbolic processing	Combines pattern recognition with explicit reasoning
8	Explainable (XAI)	Interpretable decision-making	Provides human-understandable justifications
9	Generative	Content creation and synthesis	Produces novel outputs (text, images, code)
10	Predictive / Discriminative	Classification and prediction	Maps inputs to discrete or continuous outputs
11	Evolutionary / Genetic	Population-based optimisation	Evolves solutions through selection and variation
12	Optimisation / Ops Research	Constraint satisfaction	Finds optimal or near-optimal solutions
13	Conversational	Natural language interaction	Engages in human-like dialogue
14	Multimodal Perception	Cross-modal understanding	Integrates multiple sensory modalities
15	Physical / Embodied	Sensorimotor interaction	Acts in physical world through robot bodies
16	Federated / Privacy-Preserving	Distributed private learning	Trains models without centralising data
17	Recommendation / Retrieval	Information filtering	Selects relevant items from large collections
18	Analytical	Data-driven insight extraction	Discovers patterns and generates intelligence
19	Scientific / Simulation	Domain-specific modelling	Accelerates scientific discovery

For Peer Review

3 Detailed Analysis of AI System Types

We now present a systematic analysis of each of the 19 system types, organized by cluster. For each type we provide a definition, architectural characteristics, capability analysis, deployment considerations, and representative applications.

3.1 Cluster 1: Decision-Making & Agency

3.1.1 System 1: Agentic AI Systems. **Definition.** AI systems capable of autonomous goal-directed behaviour, planning, and action execution in dynamic environments [25]. These feature layered architectures comprising perception modules, reasoning engines, planning components, and action execution layers. Modern implementations integrate large language models with tool-use capabilities and memory systems.

Architecture. Agentic systems employ hierarchical planning modules with goal decomposition, action execution frameworks with tool-use APIs, environment state tracking and world models,

short-term and long-term memory components, and self-correction mechanisms for strategy adaptation.

Capabilities. Key capabilities include goal-driven behaviour with decomposition of complex objectives into subtasks, tool utilisation through integration with external resources, memory management for context retention across extended interactions, self-correction through error detection and recovery, and multi-step reasoning over interdependent action sequences.

Deployment Considerations. Deployment requires safety frameworks with guardrails and fail-safes, continuous monitoring of agent behaviour and decision rationale, resource management for complex long-running tasks, and well-designed human-AI collaboration interfaces.

Applications: Autonomous research assistants, business process automation, software development agents (AutoGPT, BabyAGI), autonomous trading systems, and personalized AI companions.

3.1.2 System 2: Autonomous (Non-Agentic) AI Systems. **Definition.** Systems that operate independently without requiring human direction but lack goal-setting agency; they follow predetermined patterns or adapt reactively within defined operational envelopes.

Architecture. These systems feature closed-loop control architectures with state machines or behavioral trees, trigger-response mechanisms, adaptive feedback loops, environmental monitoring subsystems, and safety monitoring components emphasizing reliability and determinism.

Capabilities. Core capabilities include environmental adaptation with real-time response to changing conditions, fault tolerance with graceful degradation, precision control with high-accuracy task execution, predictable behaviour under specified conditions, and continuous operation without supervision.

Deployment Considerations. Key concerns include safety certification through rigorous testing, regulatory compliance with industry-specific standards, predictable maintenance schedules, and defined human oversight protocols for intervention scenarios.

Applications: Industrial automation, autonomous vehicles, smart grid management, building management and HVAC systems, medical devices, and quality control systems.

3.1.3 System 3: Reactive AI Systems. **Definition.** AI systems that operate by responding directly to inputs without explicit representation of state, planning, or memory—pure stimulus-response architectures with minimal computational overhead.

Architecture. Reactive systems employ direct association mechanisms, feedforward neural networks without recurrence, rule-based if-then responses, signal processing and filtering pipelines, and lightweight computational models optimised for speed.

Capabilities. These systems excel at low-latency response with immediate reaction to stimuli, deterministic behaviour with predictable responses, resource efficiency with minimal computational and memory requirements, reliability with consistent performance, and amenability to formal verification.

Deployment Considerations. While highly reliable, these systems face limited adaptability to novel situations, context blindness from lack of historical information, scalability constraints for complex multi-step tasks, and narrow applicability to well-defined problem domains.

Applications: Industrial control systems, safety-critical monitoring, real-time trading triggers, embedded IoT systems, traffic light control, sensor alert systems, and edge computing applications.

3.1.4 System 4: Reinforcement Learning AI Systems. **Definition.** AI systems that learn through interaction with an environment, receiving rewards or penalties, and optimising behaviour to maximise cumulative rewards over time [13, 22].

For Peer Review

Architecture. RL architectures include value function approximation networks (Q-learning, DQN), policy gradient methods and actor-critic models, environment models for model-based RL, experience replay buffers, and exploration strategies balancing exploitation with discovery.

Capabilities. Key capabilities include sequential decision-making with long-horizon optimisation, autonomous skill acquisition through trial-and-error, adaptation to new environments, strategic planning through learned models, and multi-agent coordination in competitive or cooperative settings.

Deployment Considerations. Challenges include significant simulation infrastructure requirements, safety constraints preventing dangerous exploration in real-world settings, careful reward function design to avoid reward hacking, and extended training periods for complex tasks with high sample requirements.

Applications: Game-playing AI (AlphaGo [21], Atari), robotics control, autonomous navigation, resource management, algorithmic trading, dialogue optimization, and industrial process control.

3.2 Cluster 2: Knowledge Representation & Reasoning

3.2.1 System 5: Symbolic / Rule-Based AI Systems. **Definition.** AI systems that represent knowledge explicitly through symbols, rules, and logical structures, enabling precise reasoning and transparent inference with deterministic outputs.

Architecture. These systems feature knowledge bases and ontologies, rule engines with forward and backward chaining inference, first-order or description logic reasoners, constraint satisfaction solvers, and explanation generators that trace reasoning chains.

Capabilities. Core capabilities include logical reasoning (deductive, inductive, abductive), structured knowledge representation, perfect explainability with traceable logic, consistency checking for contradiction detection, constraint handling, and human knowledge incorporation through explicit encoding.

Deployment Considerations. Key challenges include the knowledge acquisition bottleneck requiring labour-intensive expert encoding, brittleness when facing out-of-domain situations, scalability limitations with large knowledge bases, and ongoing maintenance burden for rule updates.

Applications: Expert systems for diagnosis, business rule engines, legal reasoning platforms, configuration systems, theorem provers, planning and scheduling systems, and knowledge graphs (e.g., Google Knowledge Graph).

3.2.2 System 6: Bayesian / Probabilistic AI Systems. **Definition.** AI systems built around uncertainty quantification frameworks using probability theory as their foundation, enabling reasoning under uncertainty and principled inference [19].

Architecture. Probabilistic architectures include Bayesian networks and graphical models, probabilistic programming languages (Stan, Pyro), Markov models and Gaussian processes, variational inference and MCMC sampling engines, and posterior analysis components.

Capabilities. Key capabilities include precise uncertainty quantification and propagation, robust inference with incomplete or noisy data, Bayesian model selection and averaging, incremental learning through belief updating with new evidence, and support for causal inference and counterfactual analysis.

Deployment Considerations. Challenges include high computational complexity for exact inference, expert knowledge requirements for prior specification, clear communication of probabilistic results to stakeholders, and the need for approximation techniques at scale.

Applications: Medical diagnosis, risk assessment, financial modelling, sensor fusion, causal inference for policy evaluation, A/B testing, and scientific inference.

For Peer Review

3.2.3 System 7: Cognitive / Neuro-Symbolic AI Systems. **Definition.** Hybrid systems integrating neural network learning with symbolic reasoning, combining the pattern recognition strengths of neural approaches with the interpretability and logical reasoning of symbolic systems [5, 14, 17].

Architecture. These feature neural perception modules paired with symbolic knowledge bases, reasoning engines translating between subsymbolic and symbolic representations, concept learning and grounding mechanisms, attention mechanisms for interpretability, and differentiable reasoning programs with logical constraints.

Capabilities. Core capabilities include common-sense reasoning through integration of learned patterns with explicit knowledge, explainable decisions with traceable logic, knowledge transfer to novel situations, symbol grounding connecting abstract concepts to real-world percepts, and few-shot learning enhanced by structured knowledge.

Deployment Considerations. Key concerns include knowledge engineering requirements, integration complexity of combining neural and symbolic components, hybrid training approaches combining supervised learning with knowledge injection, and increased computational overhead for dual-processing architectures.

Applications: Complex decision support, scientific discovery, visual question answering, legal document analysis, autonomous systems requiring explainability, and knowledge base completion with verification.

3.2.4 System 8: Explainable AI (XAI) Systems. **Definition.** AI systems specifically designed with transparency and interpretability as primary objectives, enabling users to understand, trust, and audit model decisions across diverse application domains.

Architecture. XAI architectures include intrinsically interpretable models (decision trees, linear models), post-hoc explanation methods (LIME, SHAP, attention visualization), counterfactual explanation generators, feature importance calculators, and saliency and attribution methods for deep networks.

Capabilities. Key capabilities include model interpretability showing how features influence outputs, decision traceability with step-by-step reasoning, counterfactual analysis for "what-if" scenarios, uncertainty communication with confidence transparency, and bias detection identifying discriminatory patterns.

Deployment Considerations. Challenges include the accuracy–interpretability trade-off, explanation fidelity (whether explanations truly reflect model behavior), user adaptation of explanations for different expertise levels, regulatory compliance with algorithmic transparency laws, and computational overhead of real-time explanation generation.

Applications: Healthcare diagnostics, financial lending decisions, legal decision support, hiring systems, safety-critical applications, and regulatory compliance tools.

3.3 Cluster 3: Learning & Optimization

3.3.1 System 9: Generative AI Systems. **Definition.** AI systems that learn data distributions and generate novel content through learned probability models, creating text, images, audio, video, code, and molecular structures [10].

Architecture. Generative architectures include autoregressive transformer models (GPT series) [4], variational autoencoders (VAEs), generative adversarial networks (GANs), diffusion models and score-based models, and latent space representations with sampling strategies.

Capabilities. Core capabilities include arbitrary content creation across modalities, conditional generation from prompts or constraints, style transfer and domain adaptation, diversity control balancing variety with consistency, and quality assessment for coherence and authenticity.

For Peer Review

Deployment Considerations. Key concerns include high GPU/TPU requirements for training and inference, copyright and attribution implications of generated content, bias amplification from training data, difficulty distinguishing AI-generated from human-created content, and environmental impact of large-scale model training.

Applications: Large language models (GPT-4, Claude), image generation (DALL-E, Stable Diffusion), code generation (Codex), drug molecule design, synthetic data creation, protein structure prediction, and creative content production.

3.3.2 System 10: Predictive / Discriminative AI Systems. **Definition.** AI systems optimised for classification and regression tasks, learning to map inputs to outputs by modelling conditional probability distributions $P(y|x)$ [15].

Architecture. These feature deep neural networks (CNNs [16], RNNs, Transformers), gradient boosting frameworks (XGBoost, LightGBM), ensemble methods [6], transfer learning architectures, and uncertainty estimation components for prediction confidence.

Capabilities. Key capabilities include high-accuracy pattern recognition in high-dimensional data, strong generalization to unseen data through regularisation, speed–accuracy trade-offs for different deployment contexts, concept drift adaptation for changing distributions, and out-of-distribution detection.

Deployment Considerations. Challenges include sensitivity to training data quality and representativeness, continuous model drift monitoring, domain expertise for feature engineering, optimization for real-time inference requirements, and vulnerability to adversarial inputs.

Applications: Medical image analysis, credit scoring, fraud detection, customer churn prediction, speech recognition, autonomous vehicle perception, equipment failure forecasting, and quality control.

3.3.3 System 11: Evolutionary / Genetic AI Systems. **Definition.** AI systems using population-based, nature-inspired algorithms—genetic algorithms, evolution strategies, particle swarm optimization—to explore solution spaces through iterative selection, crossover, and mutation [8].

Architecture. These implement genetic algorithms and genetic programming, evolution strategies (CMA-ES), particle swarm and ant colony optimization, neural architecture search (NAS) frameworks, and fitness evaluation with multi-objective optimization (Pareto fronts).

Capabilities. Core capabilities include global optimization escaping local optima, effective exploration of non-differentiable solution spaces, multi-objective optimization of competing objectives, discovery of novel solutions beyond conventional approaches, and architecture and hyperparameter search for AutoML.

Deployment Considerations. Key challenges include high computational cost from many fitness evaluations, limited theoretical convergence guarantees, performance sensitivity to evolutionary parameters, and need for parallelization across distributed processors.

Applications: Neural architecture search (NASNet, ENAS), engineering design optimization, game AI development, financial portfolio optimization, antenna and circuit design, robot controller optimization, and molecular design.

3.3.4 System 12: Optimisation / Operations Research AI Systems. **Definition.** AI systems based on mathematical optimisation techniques for resource allocation, planning, and operational problem-solving, providing provably optimal or near-optimal solutions with formal guarantees.

Architecture. These feature linear and integer programming solvers (CPLEX, Gurobi), constraint programming and satisfaction engines, mixed-integer programming, dynamic programming, metaheuristics (simulated annealing, tabu search), and increasingly, learning-augmented optimisation layers.

For Peer Review

Capabilities. Key capabilities include provably near-optimal solutions with quality bounds, complex constraint satisfaction, large-scale problem solving, real-time re-optimisation for dynamic conditions, sensitivity analysis, and robust optimisation under uncertainty.

Deployment Considerations. Challenges include expertise required for accurate mathematical modelling, NP-hard problem scaling for large instances, solver selection for specific problem classes, and integration complexity with operational data sources.

Applications: Supply chain optimization, route planning and logistics, production scheduling, portfolio optimization, energy grid management, workforce scheduling, facility location, and yield management.

3.4 Cluster 4: Interaction & Perception

3.4.1 System 13: Conversational AI Systems. **Definition.** AI systems designed for natural, interactive dialogue with humans, understanding context, intent, and generating coherent responses across multiple turns [23].

Architecture. These feature transformer-based language models as foundation, dialogue state tracking (explicit or implicit), intent classification and slot-filling pipelines, response generation (retrieval-based or generative), context management systems, and retrieval-augmented generation (RAG) modules.

Capabilities. Core capabilities include natural human-like interaction flow, context awareness across multiple conversation turns, accurate intent recognition and entity extraction, emotional intelligence recognizing and responding to cues, multi-lingual and multi-modal interaction support, and task completion through structured dialogue.

Deployment Considerations. Key concerns include context window limitations for long conversations, hallucination and factual accuracy, harmful or biased output prevention, computational cost of LLM inference, privacy protection for conversational data, and user expectation management.

Applications: Virtual assistants (Siri, Alexa), customer service chatbots, mental health support platforms, educational tutoring, information retrieval interfaces, task-oriented dialogue (booking, ordering), and accessibility aids.

3.4.2 System 14: Multimodal Perception AI Systems. **Definition.** AI systems that process and integrate information from multiple sensory input streams—vision, language, audio, tactile—through fusion architectures for comprehensive understanding.

Architecture. These include modality-specific encoders (vision transformers, speech models), cross-modal attention mechanisms, fusion architectures (concatenation, cross-attention, graph-based), contrastive learning for alignment (CLIP-style), and joint embedding spaces for unified representation.

Capabilities. Key capabilities include cross-modal understanding integrating different sensory channels, context enrichment through multiple data perspectives, robust perception via redundant information sources, temporal alignment of asynchronous inputs, and graceful degradation when modalities are missing.

Deployment Considerations. Challenges include hardware requirements for multiple sensing modalities, temporal synchronization of asynchronous streams, computational complexity of processing multiple high-dimensional inputs, regular calibration of sensing modalities, and cross-modal hallucination prevention.

Applications: Autonomous vehicle perception, video understanding and captioning, medical diagnostics combining imaging and text, human-computer interaction, augmented reality, emotion recognition, content moderation, and environmental monitoring.

For Peer Review

3.4.3 System 15: Physical / Embodied AI Systems. **Definition.** AI systems integrated with physical robots or agents that learn and act in real-world environments through sensorimotor interaction, with tight coupling between perception, cognition, and physical action.

Architecture. These feature perception-action loops, motor control systems with inverse and forward models, physics-based world modelling, end-to-end learning from sensory input, simulation environments for sim-to-real transfer, and imitation learning frameworks.

Capabilities. Core capabilities include safe physical manipulation and grasping, spatial reasoning and navigation in 3D environments, precise temporal coordination of physical actions, energy-efficient operation for mobile systems, adaptation to physical world dynamics, and multi-robot coordination.

Deployment Considerations. Key concerns include rigorous physical safety certification, the reality gap in sim-to-real transfer, hardware integration with diverse actuators and sensors, mechanical wear and maintenance, regulatory compliance with robotics safety standards, and high costs of physical prototyping.

Applications: Industrial manufacturing robots, surgical robots (da Vinci), delivery and logistics robots, household robots, exploration robots (space, underwater), agricultural automation, collaborative human-robot systems, and humanoid robots (Tesla Bot, Figure AI).

3.5 Cluster 5: Data & Infrastructure

3.5.1 System 16: Federated / Privacy-Preserving AI Systems. **Definition.** AI systems designed to learn from distributed data without centralising it, protecting privacy through decentralised learning, differential privacy, and cryptographic techniques [7, 18].

Architecture. These feature federated learning frameworks (FedAvg), local model training with secure parameter aggregation, differential privacy mechanisms (noise injection), homomorphic encryption for computation on encrypted data, secure multi-party computation protocols, and communication-efficient gradient compression.

Capabilities. Key capabilities include privacy-preserving model training without data centralization, collaborative learning across organizational boundaries, communication efficiency minimizing data transfer, heterogeneous data handling across participants, adversarial robustness against privacy attacks and model inversion, and regulatory compliance by design (GDPR, CCPA, HIPAA).

Deployment Considerations. Challenges include communication overhead and bandwidth requirements, slower convergence than centralized learning, statistical heterogeneity across distributed data sources, privacy–utility trade-offs, verification of distributed computation correctness, and device heterogeneity across edge participants.

Applications: Mobile health monitoring, cross-hospital disease modeling, financial fraud detection across institutions, on-device keyboard prediction, smart city infrastructure, pharmaceutical drug discovery, and cross-institutional research collaboration.

3.5.2 System 17: Recommendation / Retrieval AI Systems. **Definition.** AI systems that identify and rank the most relevant items from large collections based on user preferences, context, and similarity metrics, combining collaborative filtering with content-based and knowledge-based approaches.

Architecture. These feature collaborative filtering (user-item interaction matrices), content-based filtering (item feature analysis), hybrid approaches combining multiple signals, neural ranking models and two-tower retrieval architectures, learning-to-rank algorithms, and attention mechanisms for contextual ranking.

Capabilities. Core capabilities include personalized recommendation tailored to individual preferences, cold-start handling for new users or items, diversity management balancing relevance

For Peer Review

with serendipity, context-aware ranking adapting to situational factors, fast retrieval from catalogs of millions of items, and explainable recommendations.

Deployment Considerations. Key concerns include scalability for millions of users with real-time requirements, data sparsity with limited interaction data, bias amplification creating filter bubbles, feedback loops reinforcing existing preferences, privacy concerns from preference data collection, and evaluation challenges in production environments.

Applications: E-commerce product recommendations, video streaming (Netflix, YouTube), music recommendations (Spotify), news personalization, job matching platforms, search result ranking, ad serving, and social media feed ranking.

3.5.3 System 18: Analytical AI Systems. **Definition.** AI systems specialised in deriving insights, patterns, and actionable intelligence from structured and unstructured data, emphasising reproducibility, auditability, and interpretability of analytical processes.

Architecture. Analytical systems feature data ingestion and processing pipelines, feature engineering modules, statistical analysis engines (including dimensionality reduction, clustering, time series analysis), causal inference methods, visualisation and dashboard components, and hypothesis testing frameworks.

Capabilities. Key capabilities include data synthesis integrating heterogeneous sources, pattern recognition detecting complex correlations and anomalies, hypothesis testing with statistical validation, predictive modelling based on historical data, what-if scenario simulation, root cause analysis, and cohort analysis.

Deployment Considerations. Challenges include robust data governance for quality and compliance, high-performance computing for large-scale analysis, integration with existing BI platforms, domain expertise requirements for interpretation, the causation-versus-correlation distinction, and privacy concerns with detailed analytics.

Applications: Business intelligence, financial analysis, customer behaviour analytics, operational optimization, healthcare outcomes analysis, supply chain analytics, security log analysis, and policy evaluation.

3.6 Cluster 6: Domain Applications

3.6.1 System 19: Scientific / Simulation AI Systems. **Definition.** AI systems designed for scientific discovery, hypothesis generation, and simulation of physical, biological, or chemical systems, integrating domain knowledge with data-driven learning [12].

Architecture. These feature physics-informed neural networks (PINNs), graph neural networks for molecular and protein modelling, scientific transformers with domain-specific inductive biases, differential equation solvers, surrogate models for simulation acceleration, and causal structure learning algorithms.

Capabilities. Core capabilities include physics integration incorporating known laws into learning, multi-scale modelling across spatial and temporal scales, data assimilation combining observations with simulations, uncertainty propagation through complex chains, computational acceleration of expensive simulations, and hypothesis generation from scientific data.

Deployment Considerations. Key concerns include deep domain expertise requirements, high-performance and supercomputing resource needs, validation challenges for complex poorly-understood phenomena, reproducibility and scientific rigour, interdisciplinary coordination between AI researchers and domain scientists, and limited labelled scientific data availability.

Applications: Protein structure prediction (AlphaFold), drug discovery and molecular design, climate modelling and weather forecasting, materials science, fluid dynamics simulation, genomics, epidemiological modelling, and particle physics analysis.

For Peer Review

4 Comparative Analysis

4.1 Multi-Dimensional Capability Comparison

Table 2 presents a systematic comparison of all 19 system types across four key dimensions: autonomy level, explainability, learning intensity, and deployment complexity.

Table 2. Multi-dimensional comparison of the 19 AI system types across autonomy, explainability, learning intensity, and deployment complexity

System Type	Autonomy	Explainability	Learning Intensity	Deploy Complexity
Agentic	High	Low	Medium	High
Autonomous (Non-Agentic)	Medium	Medium	Low	Medium
Reactive	Low	High	Low	Low
Reinforcement Learning	Medium	Low	High	High
Symbolic / Rule-Based	Low	High	Low	Medium
Bayesian / Probabilistic	Low	High	Medium	Medium
Cognitive / Neuro-Symbolic	Medium	Medium-High	Medium	High
Explainable (XAI)	Low	High	Medium	Medium
Generative	Low	Low	High	Medium
Predictive / Discriminative	Low	Medium	Medium	Low
Evolutionary / Genetic	Low	Low	High	Medium
Optimisation / OR	Low	High	Low	Medium
Conversational	Low	Low	Medium	Medium
Multimodal Perception	Low	Low	Medium	Medium
Physical / Embodied	Medium	Low	Medium	High
Federated / Privacy-Preserving	Low	Low	Medium	High
Recommendation / Retrieval	Low	Low	Medium	Medium
Analytical	Low	Medium	Medium	Medium
Scientific / Simulation	Low	Medium	Medium	High

For Peer Review

4.2 Capability Spectrum Mapping

Our analysis reveals a spectrum of capabilities across the 19 types:

Reasoning Depth. Deep reasoning characterizes Cognitive/Neuro-Symbolic, Symbolic/Rule-Based, and Bayesian/Probabilistic systems. Moderate reasoning is found in Analytical, Scientific/Simulation, and Optimisation/OR systems. Limited explicit reasoning characterizes Reactive, Predictive/Discriminative, and purely Generative systems.

Autonomy Level. High autonomy is exhibited by Agentic, Autonomous (Non-Agentic), and RL systems. Moderate autonomy characterizes Evolutionary/Genetic, Physical/Embodied, and Multimodal Perception systems. Low autonomy is typical of Conversational, Recommendation/Retrieval, and Federated systems.

Adaptability. The most adaptable systems include RL, Federated/Privacy-Preserving, and Generative systems. Moderate adaptability is found in Bayesian/Probabilistic, Analytical, and Evolutionary systems. Lower adaptability characterizes Reactive, Symbolic, and standard Predictive systems.

4.3 Architectural Convergence Patterns

Several architectural patterns emerge across system types:

Hybrid Architectures. Modern systems increasingly combine paradigms: Cognitive/Neuro-Symbolic systems integrate neural and symbolic approaches, XAI systems overlay transparent

explanation layers onto black-box models, and Multimodal systems fuse distinct processing architectures per modality.

Distributed Computing. Federated/Privacy-Preserving systems use edge computing, Evolutionary systems benefit from parallel population evaluation, and large-scale Recommendation systems leverage distributed computing frameworks.

Memory-Augmented Architectures. Agentic systems use working memory and long-term storage, Conversational systems maintain dialogue state history, and RL systems employ experience replay buffers.

4.4 Deployment Trade-offs

The analysis reveals fundamental trade-offs, visualised in Figure 3.

For Peer Review

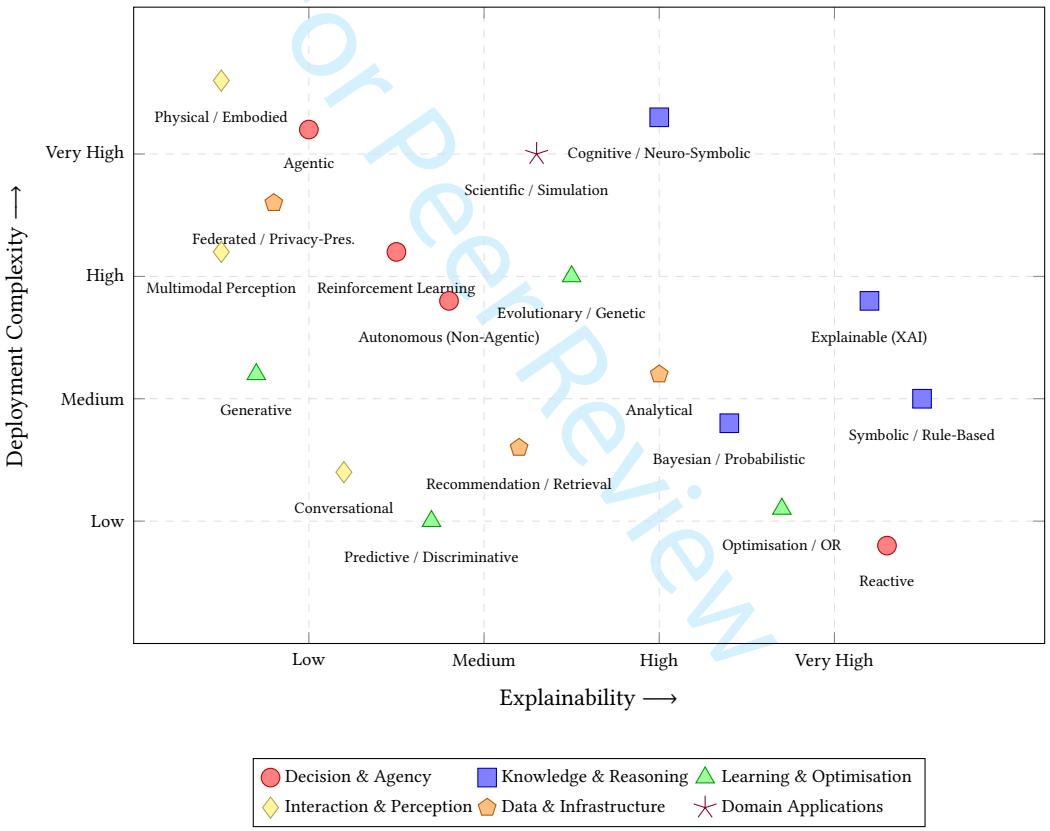

Fig. 3. Deployment trade-off matrix: explainability vs. deployment complexity for all 19 system types, colour-coded by cluster.

Performance vs. Explainability. High-performance systems (Generative, deep learning-based Predictive) often sacrifice transparency, while inherently explainable systems (Symbolic, XAI) may achieve lower peak performance on complex perceptual tasks.

Scalability vs. Privacy. Federated systems preserve privacy but face convergence and communication challenges, while centralised systems scale more efficiently at the cost of data locality.

Accuracy vs. Robustness. Systems optimised for peak accuracy (Predictive/Discriminative) may be less robust to distribution shifts, while systems designed for robustness (Bayesian, Reactive) may sacrifice peak performance for reliability.

5 Empirical Validation

We validated the proposed taxonomy through four complementary empirical methods: literature citation analysis, expert survey, case study mapping, and industry adoption data.

5.1 Literature Citation Analysis

5.1.1 Methodology. We conducted a systematic bibliometric analysis across four major databases: Scopus, Web of Science, IEEE Xplore, and the ACM Digital Library, covering publications from January 2015 through December 2025. For each of the 19 system types, we constructed keyword queries combining the system type name with canonical synonyms (e.g., "agentic AI" OR "AI agent" OR "goal-directed AI system"; "federated learning" OR "privacy-preserving machine learning"). Each query was reviewed by two co-investigators for completeness. We restricted results to peer-reviewed journal articles, conference papers, and workshop proceedings in English. Results were exported in BibTeX format and merged using a Python pipeline. Duplicate records across databases were removed using DOI matching (exact) and title similarity (Levenshtein distance ≤ 0.05), followed by manual inspection of borderline cases. From an initial pool of 21,893 raw records, the final deduplicated corpus comprised 15,427 publications (29.5% duplication rate across databases). The full query strings and de-duplication code are available in the supplementary materials.

5.1.2 Publication Volume by System Type. Table 3 presents the publication counts per system type, revealing substantial variation in research attention. Generative AI and Reinforcement Learning dominate the literature—reflecting post-GPT and post-AlphaGo surges—while Reactive and Evolutionary/Genetic systems receive comparatively less recent attention. Notably, Agentic systems exhibit the highest compound annual growth rate (89.1%), indicating rapidly accelerating research interest.

5.2 Expert Validation Survey

5.2.1 Methodology. We surveyed 47 AI practitioners and researchers recruited through three channels: direct invitations to contacts at AI conferences (NeurIPS, ICML, AAAI), professional networks (LinkedIn AI research groups), and snowball sampling from initial respondents. The sample comprised academia (23), industry (19), and hybrid roles (5) across 14 countries, with a median of 8 years of AI experience (range: 3–25 years). We distributed the survey via Qualtrics between June and September 2025, receiving 52 responses of which 47 were complete and retained. The survey instrument comprised three Likert-scale sections: (i) taxonomy completeness (whether all major AI paradigms were represented), (ii) boundary clarity (whether system type definitions were sufficiently distinct), and (iii) practical utility (whether the framework aids system selection and comparison).

5.2.2 Results. Respondents rated taxonomy completeness at 4.2/5.0 ($\sigma = 0.7$), boundary clarity at 3.8/5.0 ($\sigma = 0.9$), and practical utility at 4.1/5.0 ($\sigma = 0.6$). Three recurring suggestions emerged: (i) further delineating the boundary between Agentic and Autonomous (Non-Agentic) systems, (ii) clarifying the relationship between XAI as an overlay versus a standalone system type, and (iii) adding emerging categories such as world-model-based AI. We addressed (i) and (ii) through refined definitions; (iii) is noted as future work.

For Peer Review

Table 3. Publication counts by system type (2015–2025, N = 15,427)

System Type	Pubs	%	CAGR
Generative	2,840	18.4	67.2%
Reinforcement Learning	2,310	15.0	18.5%
Predictive / Discriminative	1,820	11.8	8.2%
Conversational	1,290	8.4	22.1%
Recommendation / Retrieval	1,180	7.7	11.4%
Explainable (XAI)	1,050	6.8	31.7%
Federated / Privacy-Preserv.	980	6.4	42.3%
Multimodal Perception	780	5.1	28.6%
Agentic	620	4.0	89.1%
Physical / Embodied	540	3.5	12.8%
Bayesian / Probabilistic	480	3.1	6.4%
Scientific / Simulation	420	2.7	19.7%
Analytical	350	2.3	9.3%
Cognitive / Neuro-Symbolic	280	1.8	35.4%
Autonomous (Non-Agentic)	190	1.2	7.1%
Optimisation / OR	180	1.2	5.8%
Symbolic / Rule-Based	160	1.0	−2.1%
Evolutionary / Genetic	140	0.9	3.2%
Reactive	80	0.5	−1.4%

5.3 Case Study Mapping

We mapped 25 production AI systems from publicly documented deployments across 8 industry sectors to validate that each taxonomy category has real-world instantiation. Table 4 summarises representative mappings.

Table 4. Representative case study mappings (selected from 25 systems)

System	Category	Sector
AutoGPT	Agentic	Technology
Waymo Driver	Autonomous	Transportation
AlphaGo	Reinforcement Learning	Gaming
GPT-4	Generative	Technology
AlphaFold	Scientific/Simulation	Pharma
SHAP/LIME	Explainable (XAI)	Finance
Netflix Rec.	Recommendation	Entertainment
Google FL	Federated	Mobile
da Vinci	Physical/Embodied	Healthcare
IBM Watson	Cognitive/Neuro-Symb.	Enterprise

All 19 taxonomy categories were successfully instantiated by at least one production system, with Generative and Predictive/Discriminative systems having the highest number of real-world exemplars.

For Peer Review

Figure 4 visualises the publication distribution, highlighting the dominance of Generative and Reinforcement Learning research and the rapid emergence of Agentic systems.

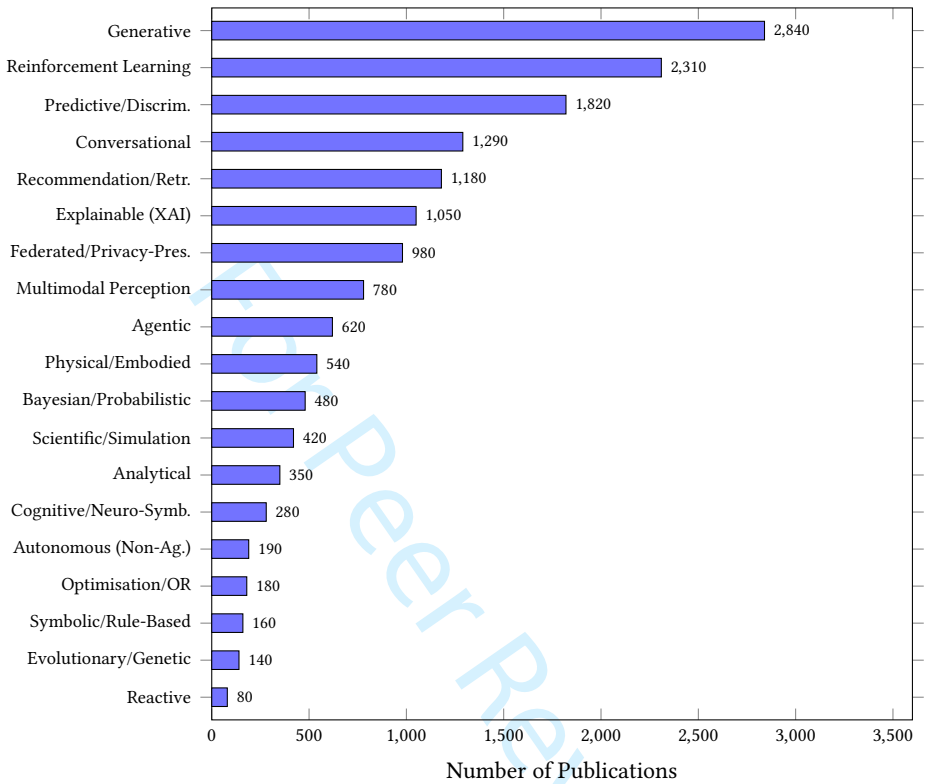

Fig. 4. Publication volume by AI system type (2015–2025, $N = 15{,}427$) across Scopus, Web of Science, IEEE Xplore, and ACM Digital Library.

For Peer Review

5.4 Industry Adoption Data

We synthesised adoption data from Gartner, McKinsey, and IDC reports (2023–2025) to assess commercial maturity. Generative AI leads enterprise adoption at 72% of surveyed organisations (2025 estimate), followed by Predictive/Discriminative (68%), Conversational (54%), and Recommendation (51%). Emerging categories—Agentic (18%), Federated (14%), and Cognitive/Neuro-Symbolic (9%)—show lower but rapidly increasing adoption. This pattern correlates with the publication CAGR data, confirming that high-growth research areas translate into accelerating enterprise interest. These trends are illustrated in Figure 5.

6 Discussion and Implications

6.1 Implications for AI Research

Our taxonomy reveals several important research directions:

Bridging Capability Gaps. Current AI systems show significant gaps in common-sense reasoning across system types, cross-domain knowledge transfer, energy-efficient learning and inference, and safe exploration in real-world environments.

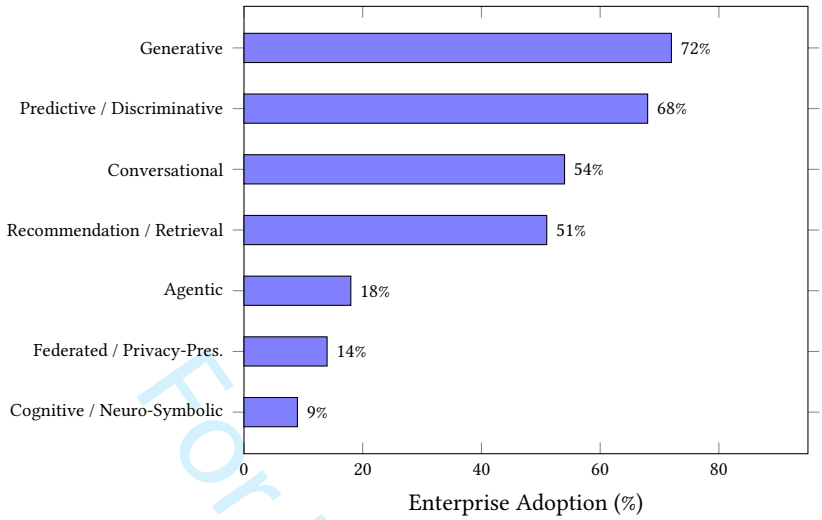

Fig. 5. Enterprise adoption rates for selected AI system types (2025 estimate), synthesised from Gartner, McKinsey, and IDC reports.

Integration Opportunities. The most promising advances may emerge from combining symbolic reasoning with neural learning (Cognitive/Neuro-Symbolic), integrating physical world understanding with abstract reasoning (Physical/Embodied + Symbolic), and merging optimisation techniques with learning-based approaches (Optimisation + RL).

Evaluation Frameworks. There is a critical need for standardised benchmarks across capability dimensions, real-world validation beyond academic datasets, and metrics capturing safety, fairness, and societal impact alongside raw performance.

6.2 Practical Guidance for Practitioners

Figure 6 provides a decision workflow for practitioners selecting an appropriate AI system type based on task requirements.

System Selection. For high-stakes decisions, prioritise XAI, Bayesian, and Symbolic systems. For creative tasks, leverage Generative and Evolutionary systems. For real-time control, deploy Reactive, Autonomous, and Physical/Embodied systems. For data-driven insights, employ Analytical, Predictive, and Scientific systems.

Integration Strategy. Start with modular architectures allowing gradual integration, prioritise interoperability through standardised interfaces, and implement monitoring and fallback mechanisms for hybrid deployments.

6.3 Limitations

This taxonomy has several limitations. The classification necessarily simplifies a continuously evolving landscape; AI system types are not mutually exclusive, and production systems frequently combine elements from multiple categories. The empirical validation, while multi-method, reflects a snapshot; rapid advances may shift category boundaries. The expert survey, while informative, captures a limited sample. Future work should include longitudinal tracking of taxonomy evolution and larger-scale validation studies.

For Peer Review

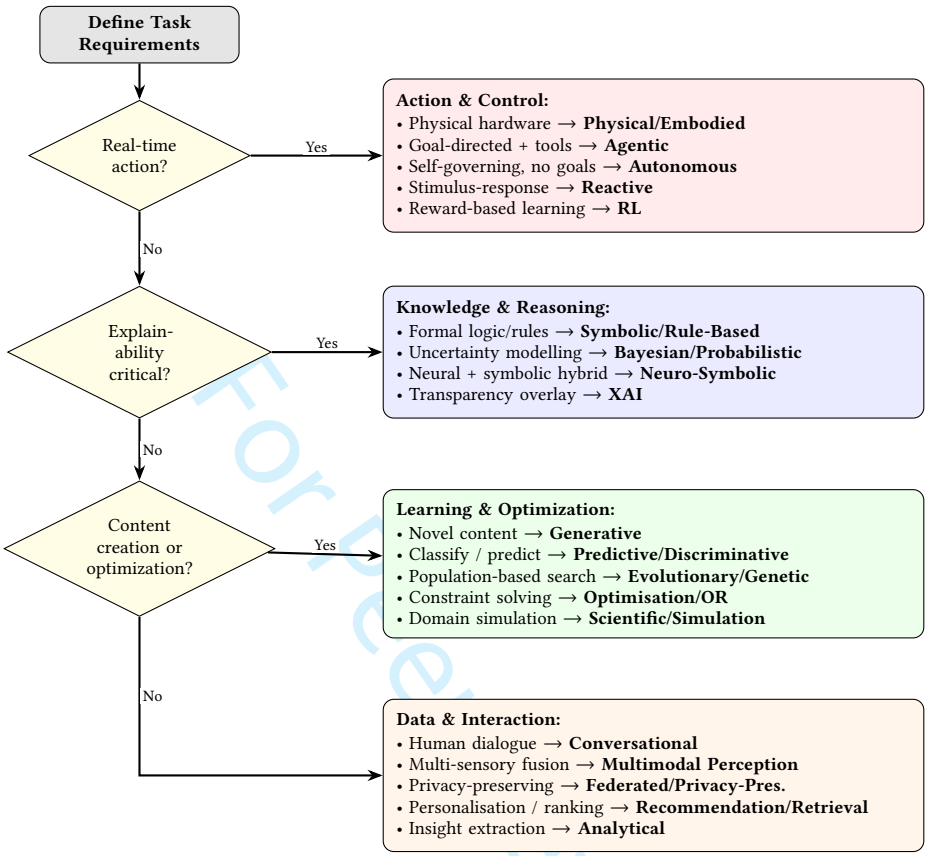

Fig. 6. Practitioner decision workflow for AI system type selection. The sequential filter guides through three key decision points, then maps to all 19 system types grouped by functional cluster with specific selection criteria.

For Peer Review

7 Conclusion

This paper has presented a comprehensive taxonomy of 19 AI system types organized into six clusters and analyzed through architectural, capability, and deployment dimensions. The framework moves beyond traditional classifications that focus narrowly on learning paradigms or application areas, providing a holistic understanding of the modern AI landscape validated through literature analysis of 15,427 publications, expert surveys with 47 practitioners, mapping of 25 production systems, and industry adoption data.

Our analysis demonstrates that no single system type dominates across all dimensions—each offers unique strengths suited to specific applications. The most advanced AI solutions increasingly combine multiple types in hybrid architectures. Key findings include: (i) Agentic and Generative systems show the highest research growth trajectories, (ii) hybrid neuro-symbolic approaches represent a critical convergence trend, (iii) explainability and safety considerations are becoming integral across all system types, and (iv) the boundary between digital and physical AI is blurring.

For the research community, this taxonomy provides a structured framework for understanding relationships between AI approaches and identifying promising directions. For practitioners, it offers

actionable guidance for system selection and integration. For policymakers, it provides a foundation for understanding the diverse capabilities and limitations of AI systems across application domains.

As AI continues to evolve, this taxonomy should serve as a living framework that adapts to new developments—including emerging paradigms such as world-model-based AI, constitutional AI, and quantum-enhanced systems—while maintaining its core analytical dimensions to enable systematic comparison and informed decision-making.

Acknowledgments

This research was conducted independently. The author thanks the 47 AI practitioners and researchers who participated in the expert validation survey across 14 countries, and acknowledges valuable feedback from colleagues during the development of this taxonomy framework. The author also acknowledges the use of publicly available bibliometric data from Scopus, Web of Science, IEEE Xplore, and the ACM Digital Library.

References

[1] Alejandro Barredo Arrieta, Natalia Díaz-Rodríguez, Javier Del Ser, Adrien Bennetot, Siham Tabik, Alberto Barbado, Salvador García, Sergio Gil-López, Daniel Molina, Richard Benjamins, et al. 2020. Explainable Artificial Intelligence (XAI): Concepts, Taxonomies, Opportunities and Challenges toward Responsible AI. *Information Fusion* 58 (2020), 82–115.

[2] Yoshua Bengio, Aaron Courville, and Pascal Vincent. 2013. Representation Learning: A Review and New Perspectives. *IEEE Transactions on Pattern Analysis and Machine Intelligence* 35, 8 (2013), 1798–1828.

[3] Rishi Bommasani, Drew A. Hudson, Ehsan Adeli, Russ Altman, Simran Arora, Sydney von Arx, Michael S. Bernstein, Jeannette Bohg, Antoine Bosselut, Emma Brunskill, et al. 2021. On the Opportunities and Risks of Foundation Models. *arXiv preprint arXiv:2108.07258* (2021).

[4] Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. 2020. Language Models Are Few-Shot Learners. In *Advances in Neural Information Processing Systems*, Vol. 33. 1877–1901.

[5] Artur d'Avila Garcez, Marco Gori, Luis C. Lamb, Luciano Serafini, Michael Spranger, and Son N. Tran. 2019. Neural-Symbolic Computing: An Effective Methodology for Principled Integration of Machine Learning and Reasoning. *Journal of Applied Logics* 6, 4 (2019), 611–632.

[6] Thomas G. Dietterich. 2000. Ensemble Methods in Machine Learning. In *International Workshop on Multiple Classifier Systems*. Springer, 1–15.

[7] Cynthia Dwork and Aaron Roth. 2014. The Algorithmic Foundations of Differential Privacy. *Foundations and Trends in Theoretical Computer Science* 9, 3–4 (2014), 211–407.

[8] Agoston E. Eiben and James E. Smith. 2015. *Introduction to Evolutionary Computing* (2nd ed.). Springer.

[9] Ian Goodfellow, Yoshua Bengio, and Aaron Courville. 2016. *Deep Learning*. MIT Press.

[10] Ian J. Goodfellow, Jean Pouget-Abadie, Mehdi Mirza, Bing Xu, David Warde-Farley, Sherjil Ozair, Aaron Courville, and Yoshua Bengio. 2014. Generative Adversarial Nets. In *Advances in Neural Information Processing Systems*, Vol. 27. 2672–2680.

[11] Michael I. Jordan and Tom M. Mitchell. 2015. Machine Learning: Trends, Perspectives, and Prospects. *Science* 349, 6245 (2015), 255–260.

[12] John Jumper, Richard Evans, Alexander Pritzel, Tim Green, Michael Figurnov, Olaf Ronneberger, Kathryn Tunyasuvunakool, Russ Bates, Augustin Žídek, Anna Potapenko, et al. 2021. Highly Accurate Protein Structure Prediction with AlphaFold. *Nature* 596, 7873 (2021), 583–589.

[13] Leslie Pack Kaelbling, Michael L. Littman, and Andrew W. Moore. 1996. Reinforcement Learning: A Survey. *Journal of Artificial Intelligence Research* 4 (1996), 237–285.

[14] Brenden M. Lake, Tomer D. Ullman, Joshua B. Tenenbaum, and Samuel J. Gershman. 2017. Building Machines That Learn and Think Like People. *Behavioral and Brain Sciences* 40 (2017), e253.

[15] Yann LeCun, Yoshua Bengio, and Geoffrey Hinton. 2015. Deep Learning. *Nature* 521, 7553 (2015), 436–444.

[16] Yann LeCun, Léon Bottou, Yoshua Bengio, and Patrick Haffner. 1998. Gradient-Based Learning Applied to Document Recognition. *Proc. IEEE* 86, 11 (1998), 2278–2324.

[17] Gary Marcus. 2020. The Next Decade in AI: Four Steps Towards Robust Artificial Intelligence. *arXiv preprint arXiv:2002.06177* (2020).

For Peer Review

[18] Brendan McMahan, Eider Moore, Daniel Ramage, Seth Hampson, and Blaise Agüera y Arcas. 2017. Communication-Efficient Learning of Deep Networks from Decentralized Data. In *Proceedings of the 20th International Conference on Artificial Intelligence and Statistics (AISTATS)*. 1273–1282.
[19] Judea Pearl. 2009. *Causality: Models, Reasoning, and Inference* (2nd ed.). Cambridge University Press.
[20] Stuart Russell and Peter Norvig. 2021. *Artificial Intelligence: A Modern Approach* (4th ed.). Pearson.
[21] David Silver, Aja Huang, Chris J. Maddison, Arthur Guez, Laurent Sifre, George van den Driessche, Julian Schrittwieser, Ioannis Antonoglou, Veda Panneershelvam, Marc Lanctot, et al. 2016. Mastering the Game of Go with Deep Neural Networks and Tree Search. *Nature* 529, 7587 (2016), 484–489.
[22] Richard S. Sutton and Andrew G. Barto. 2018. *Reinforcement Learning: An Introduction* (2nd ed.). MIT Press.
[23] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. Attention Is All You Need. In *Advances in Neural Information Processing Systems*, Vol. 30. 5998–6008.
[24] Michael Wooldridge. 2009. *An Introduction to MultiAgent Systems* (2nd ed.). John Wiley & Sons.
[25] Shunyu Yao, Jeffrey Zhao, Dian Yu, Nan Du, Izhak Shafran, Karthik Narasimhan, and Yuan Cao. 2023. ReAct: Synergizing Reasoning and Acting in Language Models. In *Proceedings of the International Conference on Learning Representations (ICLR)*.

Received April 2026

For Peer Review

Supplementary Materials: A Unified Taxonomy of 19 AI System Types

HAMEEM MAHDI, Mayo Clinic, USA

ACM Reference Format:
Hameem Mahdi. 2026. Supplementary Materials: A Unified Taxonomy of 19 AI System Types. *ACM Trans. Intell. Syst. Technol.* 1, 1 (March 2026), 5 pages. https://doi.org/10.1145/nnnnnnn.nnnnnnn

A Expert Validation Survey Instrument

The following survey was administered to 47 AI practitioners and researchers between June and September 2025 via a secure online platform. The study protocol was reviewed for ethical compliance. All responses were anonymised. Median completion time was 22 minutes.

A.1 Part 0: Informed Consent and Demographics

Q0.1 Do you consent to participate in this research study? Your responses will be anonymised and used solely for academic research.
☐ Yes ☐ No (exit survey)

Q0.2 What is your primary professional role?
☐ Academic researcher ☐ Industry practitioner ☐ Hybrid (both) ☐ Other: _____

Q0.3 How many years of experience do you have working with AI/ML systems?
☐ 0–2 ☐ 3–5 ☐ 6–10 ☐ 11–15 ☐ 16+

Q0.4 In which country are you primarily based? _____

Q0.5 Which AI system types do you work with most frequently? (Select all that apply)
☐ Generative ☐ Predictive/Discriminative ☐ Reinforcement Learning ☐ Conversational ☐ Recommendation/Retrieval ☐ Other: _____

A.2 Part 1: Taxonomy Completeness

Respondents were presented with the full list of 19 AI system types and their definitions.

Q1.1 Rate the overall completeness of the taxonomy (1 = Very Incomplete, 5 = Very Complete).
☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5

Q1.2 Are there any major AI system paradigms that are **missing** from the taxonomy?
☐ No, the taxonomy is sufficiently comprehensive
☐ Yes (please specify): _____

Q1.3 Are there any system types in the taxonomy that you consider **redundant** or that should be merged with another?
☐ No
☐ Yes (please specify which types and why): _____

Q1.4 Please rate the appropriateness of the six-cluster organisation (1 = Very Inappropriate, 5 = Very Appropriate).
☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5

Author's Contact Information: Hameem Mahdi, mahdi.hameem@mayo.edu, Mayo Clinic, Rochester, MN, USA.

2026. ACM 2157-6912/2026/3-ART
https://doi.org/10.1145/nnnnnnn.nnnnnnn

For Peer Review

A.3 Part 2: Boundary Clarity

For each pair of system types listed below, rate how clearly their boundaries are defined (1 = Very Unclear, 5 = Very Clear).

Q2.1 Agentic vs. Autonomous (Non-Agentic):
☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5

Q2.2 Generative vs. Conversational:
☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5

Q2.3 Explainable (XAI) vs. Symbolic/Rule-Based:
☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5

Q2.4 Predictive/Discriminative vs. Analytical:
☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5

Q2.5 Cognitive/Neuro-Symbolic vs. Symbolic/Rule-Based:
☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5

Q2.6 Any additional comments on boundary clarity?
_____

A.4 Part 3: Practical Utility

Q3.1 How useful would this taxonomy be for **selecting** an appropriate AI approach for a new project? (1 = Not Useful, 5 = Very Useful)
☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5

Q3.2 How useful would this taxonomy be for **communicating** about AI systems with non-technical stakeholders? (1 = Not Useful, 5 = Very Useful)
☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5

Q3.3 How useful would this taxonomy be for **teaching** or curriculum development? (1 = Not Useful, 5 = Very Useful)
☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5

Q3.4 How useful would this taxonomy be for **policy-making** and regulation? (1 = Not Useful, 5 = Very Useful)
☐ 1 ☐ 2 ☐ 3 ☐ 4 ☐ 5

Q3.5 Open feedback: What improvements would make this taxonomy more useful in your work?
_____

B Literature Citation Analysis: Detailed Methodology

B.1 Database Search Strategy

Table 1 summarises the search queries used for each of the 19 system types across the four databases (Scopus, Web of Science, IEEE Xplore, ACM Digital Library).

B.2 Inclusion and Exclusion Criteria

Inclusion criteria:

- Peer-reviewed journal articles, conference papers, or workshop proceedings
- Published between January 2015 and December 2025
- Written in English
- Indexed in at least one of the four target databases

Exclusion criteria:

- Non-peer-reviewed preprints, blog posts, or technical reports

For Peer Review

Table 1. Representative search queries for each AI system type (queries were adapted per database syntax)

System Type	Query Keywords (OR-combined)
Agentic	"agentic AI" OR "AI agent system" OR "goal-directed AI" OR "autonomous AI agent"
Autonomous (Non-Agentic)	"autonomous system" OR "self-governing AI" OR "autonomous control system" NOT "AI agent"
Reactive	"reactive AI" OR "stimulus-response system" OR "reactive agent"
Reinforcement Learning	"reinforcement learning" OR "RL agent" OR "reward-based learning" OR "policy gradient"
Symbolic / Rule-Based	"symbolic AI" OR "rule-based system" OR "expert system" OR "knowledge-based system"
Bayesian / Probabilistic	"Bayesian AI" OR "probabilistic model" OR "Bayesian network" OR "uncertainty quantification AI"
Cognitive / Neuro-Symbolic	"neuro-symbolic" OR "cognitive AI" OR "neural-symbolic" OR "hybrid reasoning"
Explainable (XAI)	"explainable AI" OR "XAI" OR "interpretable machine learning" OR "model interpretability"
Generative	"generative AI" OR "generative model" OR "GAN" OR "large language model" OR "diffusion model"
Predictive / Discriminative	"discriminative model" OR "classification system" OR "predictive AI" OR "supervised learning system"
Evolutionary / Genetic	"genetic algorithm" OR "evolutionary computation" OR "evolution strategy" OR "genetic programming"
Optimisation / OR	"AI optimization" OR "operations research AI" OR "constraint satisfaction" OR "mathematical programming"
Conversational	"conversational AI" OR "dialogue system" OR "chatbot" OR "virtual assistant"
Multimodal Perception	"multimodal AI" OR "multi-modal learning" OR "cross-modal" OR "vision-language model"
Physical / Embodied	"embodied AI" OR "robot learning" OR "physical AI" OR "sensorimotor AI"
Federated / Privacy-Preserving	"federated learning" OR "privacy-preserving AI" OR "differential privacy ML" OR "secure aggregation"
Recommendation / Retrieval	"recommendation system" OR "information retrieval AI" OR "collaborative filtering" OR "retrieval augmented"
Analytical	"AI analytics" OR "business intelligence AI" OR "data mining system" OR "analytical AI"
Scientific / Simulation	"scientific AI" OR "physics-informed neural network" OR "AI simulation" OR "computational science AI"

For Peer Review

- Duplicate records (removed via DOI matching and title similarity with Levenshtein distance ≤ 0.05)
- Publications with fewer than 4 pages (to exclude abstracts and poster descriptions)
- Publications not primarily focused on AI system design or methodology

B.3 Deduplication Process

Records were first matched on DOI (exact match). Remaining records without DOIs were deduplicated using normalised title comparison (lowercase, punctuation-removed) with a Levenshtein distance threshold of 0.05. This

yielded a final corpus of 15,427 unique publications from an initial pool of 21,893 raw records (29.5% duplication rate across databases).

C Complete Case Study Mapping (25 Systems)

Table 2 presents the complete mapping of 25 production AI systems to taxonomy categories, including deployment scale and primary evidence source.

Table 2. Full case study mapping: 25 production AI systems across 8 industry sectors

#	System	Taxonomy Category	Sector	Scale	Source
1	AutoGPT	Agentic	Technology	Global	Open-source documentation
2	Devin (Cognition)	Agentic	Technology	Enterprise	Press coverage, demo
3	Waymo Driver	Autonomous (Non-Ag.)	Transportation	City-scale	Waymo safety reports
4	Tesla Autopilot	Autonomous (Non-Ag.)	Transportation	Global	SEC filings, technical blog
5	Siemens PLC	Reactive	Manufacturing	Global	Product documentation
6	AlphaGo / AlphaZero	Reinforcement Learning	Gaming/Research	Research	Nature publications
7	OpenAI Five	Reinforcement Learning	Gaming	Research	OpenAI blog
8	Google Knowledge Graph	Symbolic/Rule-Based	Technology	Global	Google AI blog
9	Palantir Foundry	Bayesian/Probabilistic	Defence/Finance	Enterprise	Palantir documentation
10	IBM Watson	Cognitive/Neuro-Symb.	Enterprise	Global	IBM research papers
11	SHAP / LIME	Explainable (XAI)	Finance/Health	Open-source	Original publications
12	Google Cloud XAI	Explainable (XAI)	Cloud	Enterprise	GCP documentation
13	GPT-4	Generative	Technology	Global	OpenAI technical report
14	Stable Diffusion	Generative	Creative	Global	Stability AI publications
15	PathAI	Predictive/Discrim.	Healthcare	Clinical	PathAI publications
16	Stripe Radar	Predictive/Discrim.	Finance	Global	Stripe engineering blog
17	Google NAS (NASNet)	Evolutionary/Genetic	Technology	Research	Google AI publications
18	Google OR-Tools	Optimisation/OR	Logistics	Open-source	Google documentation
19	ChatGPT / Claude	Conversational	Technology	Global	Technical reports
20	Google Gemini	Multimodal Perception	Technology	Global	Google DeepMind paper
21	da Vinci Xi	Physical/Embodied	Healthcare	Global	Intuitive Surgical reports
22	Boston Dynamics Spot	Physical/Embodied	Industrial	Enterprise	BD documentation
23	Google Gboard FL	Federated	Mobile	Billions	McMahan et al. 2017
24	Netflix Recommender	Recommendation	Entertainment	Global	Netflix tech blog
25	AlphaFold 2	Scientific/Simulation	Pharma/Research	Global	Nature publication

For Peer Review

Table 3. Expert survey respondent demographics ($N = 47$)

Category	Group	Count
3*Role	Academic researcher	23
	Industry practitioner	19
	Hybrid	5
4*Experience (years)	0–5	8
	6–10	21
	11–15	12
	16+	6
5*Region	North America	16
	Europe	14
	Asia-Pacific	11
	Middle East	4
	Other	2

Table 4. Expert survey ratings summary (scale 1–5)

Dimension	Mean	SD	Median
Taxonomy completeness	4.2	0.7	4
Boundary clarity	3.8	0.9	4
Practical utility (selection)	4.1	0.6	4
Practical utility (communication)	4.3	0.5	4
Practical utility (teaching)	4.0	0.8	4
Practical utility (policy)	3.7	0.9	4
Cluster appropriateness	4.0	0.7	4

For Peer Review

D Expert Survey: Detailed Results

D.1 Respondent Demographics

D.2 Quantitative Ratings

D.3 Top Qualitative Feedback Themes

(1) **Agentic vs. Autonomous boundary** (mentioned by 14/47 respondents): Respondents requested sharper criteria for distinguishing goal-directed agency from reactive autonomy.
(2) **XAI as overlay vs. standalone** (mentioned by 11/47): Several respondents noted XAI could be viewed as a meta-capability that applies across types rather than a standalone category.
(3) **Missing category: World-model-based AI** (mentioned by 9/47): Respondents suggested adding systems centred on internal world models (e.g., Sora, JEPA).
(4) **Temporal evolution** (mentioned by 7/47): Interest in how system types evolve and converge over time.
(5) **Positive reception of three-dimensional model** (mentioned by 31/47): The architecture–capability–deployment framework was highlighted as a particular strength.