Summary in Graph

Exam Summary (GO Classes CS Test Series 2026 | C programming | Subject Wise Test 2)

Qs. Attempted:	0 (0 + 0)	Correct Marks:	0 (0 + 0)
Correct Attempts:	0 (0 + 0)	Penalty Marks:	0 (0 + 0)
Incorrect Attempts:	0 (0 + 0)	Resultant Marks:	0 (0 + 0)

Total Questions:	30 (15 + 15)
Total Marks:	45 (15 + 30)
Exam Duration:	90 Minutes
Time Taken:	0 Minutes

Individual Question Statistics

Select Metric: Marks Obtained

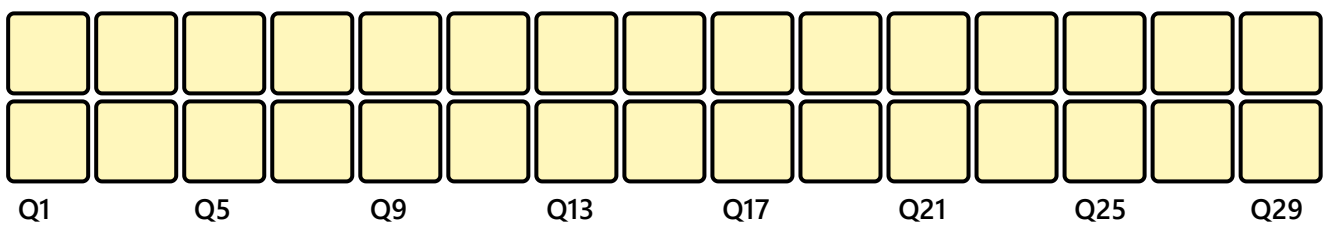

* Average Stats based on first-attempt stats of Top 10% (68) out of 677 users

EXAM RESPONSE | EXAM STATS | FEEDBACK

Technical

Q #1 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

Consider the following C function:

```
char mystery(char n) {
    int p = 1;
    while (p * 2 <= n) {
        p *= 2;
    }
    return p;
}
```

What will be printed when the following line is executed?

```
printf("\%d\n", mystery(17));
```

A. 16

B. 17

C. 32

D. 8

Your Answer: | Correct Answer: A | Not Attempted | Time taken: 00min 03sec | Discuss

Q #2 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

Consider the following C code:

```
typedef struct { int x, y; } Point;
typedef struct { Point* p; } Box;
int rotate(int a, Box* b) {
    int t = a;
    a = b->p->x;
    b->p->x = b->p->y;
    b->p->y = t;
    return a;
}
int main() {
    int a = 3;
    Point* p = malloc(sizeof(Point));
    p->x = 10; p->y = 5;
    Box b1 = {p};
    a = rotate(a, &b1);
    printf("%d\n", a);
    free(p);
    return 0;
}
```

What is the value printed by printf?

A. 3

B. 5

C. 10

D. Garbage value

Your Answer: | Correct Answer: C | Not Attempted | Time taken: 00min 00sec | Discuss

Q #3 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

Which figure correctly diagrams the related contents of memory after this code fragment executes?

```
int main() {
    int a[] = {4, 5, 6, 7, 8, 9};
    int i = 1;
    if (i < sizeof(a)/sizeof(a[0]) && a[i] % 3 != 0) {
        a[i + 1] = 3;
        i+= 2;
    }
    // Print values of array a and variable i
    return 0;
}
```

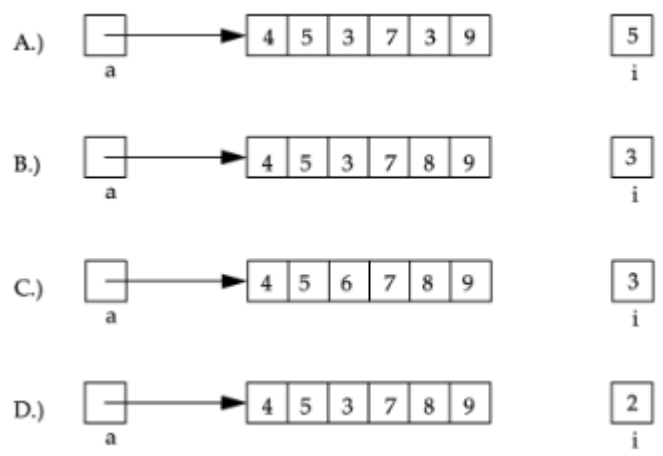

Your Answer: | Correct Answer: B | Not Attempted | Time taken: 00min 00sec | Discuss

Q #4 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

How many times will the body of this loop repeat if all expressions and statements concerning i are shown in the fragment?

```
int i=5;
do {
        // loop body
        i++;
} while ( i < 3);
```

How many times will the body of this loop execute?

A. 0

B. 1

C. 2

D. 3

Your Answer: | Correct Answer: B | Not Attempted | Time taken: 00min 00sec | Discuss

Q #5 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

Consider the following flow diagram:

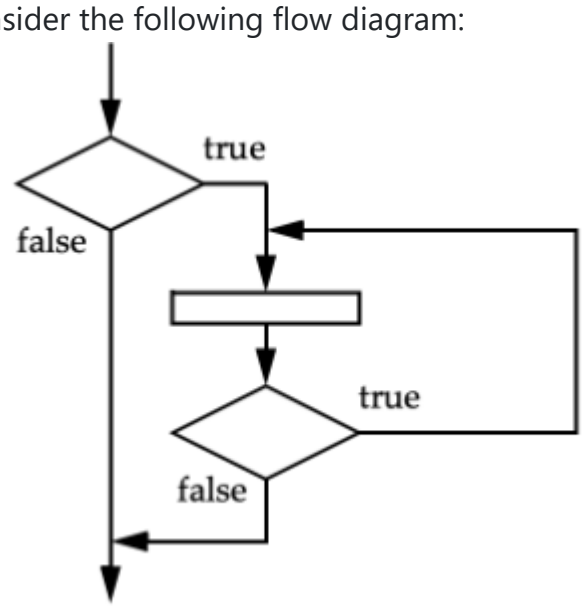

This flow diagram represents which one of the following?

A. a while loop with an if statement nested inside

B. a while loop with an do-while loop nested inside

C. an if statement with an if statement nested inside

D. an if statement with a do-while loop nested inside

Your Answer: | Correct Answer: D | Not Attempted | Time taken: 00min 00sec | Discuss

Q #6 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

```
int messUp(int a, int b) {
    int c = 4;
    a++;
    b--;
    return a + c;
}
int main() {
    int a = 1, b = 2, c = 3;
    a = messUp(b, a);
    printf("%d\n", a + b + c);
    return 0;
}
```

Which one of the following shows what the program displays when executed?

A. 11

B. 12

C. 13

D. 123

Your Answer: | Correct Answer: B | Not Attempted | Time taken: 00min 00sec | Discuss

Q #7 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

Which of the following will evaluate to true only if boolean expressions A, B, and C are all false?

A. !A && !(B && !C)

B. !A || !B || !C

C. !(A ||B||C)

D. !(A && B && C)

Your Answer: | Correct Answer: C | Not Attempted | Time taken: 00min 00sec | Discuss

Q #8 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

Consider this C program segment:

```
for (int i = 2; i <= k; i++)
    if (arr[i] < someValue)
        printf("SMALL");
```

What is the maximum number of times that SMALL can be printed?

A. 0

B. 1

C. $k-1$

D. k

Your Answer: | Correct Answer: C | Not Attempted | Time taken: 00min 00sec | Discuss

Q #9 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

Consider the following structure definition.
What does the following C statement declare?
struct node *s[10];

A. An array of size 10, each element of which is pointer to a structure of type node
B. A structure of 2 fields, each field being a pointer to an array of 10 elements
C. An array of size 10, each element of which is a structure of type node
D. None of these

Your Answer: | Correct Answer: A | Not Attempted | Time taken: 00min 00sec | Discuss

Q #10 | Numerical Type | Award: 1 | Penalty: 0 | Programming in C

Consider the following recursive function in C :

```
int recursionMystery1(int a, int b) {
    if (a < b) return a;
    return recursionMystery1(a - b, b);
}
```

What is the return value of the following function call **recursionMystery1** $(10, 4)$?

Your Answer: | Correct Answer: 2 | Not Attempted | Time taken: 00min 00sec | Discuss

Q #11 | Multiple Select Type | Award: 1 | Penalty: 0 | Programming in C

Which of the following statements about memory leaks is/are correct?
Select ALL valid options.

A. A program will not be able to access memory that has been leaked.
B. Leaked memory is no longer part of the heap segment.
C. Leaked memory cannot be freed, which may cause the program's memory usage to grow over time.
D. Every instance of memory leak always results in undefined program behaviour.

Your Answer: | Correct Answer: A;C | Not Attempted | Time taken: 00min 00sec | Discuss

Q #12 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

Given the following program:

```
#include<stdio.h>
#include<string.h>
int main()
{
    char p[20]; char *s = "nwen241";
    int length = strlen(s); int i;
    for (i = 0; i < length; i++)
        p[i] = s[length - i];
        printf("%s",p);
}
```

What does the program print?

A. 142new

B. 142newn

C. No output is printed

D. nwen241

Your Answer: | Correct Answer: C | Not Attempted | Time taken: 00min 00sec | Discuss

Q #13 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

Consider the following 2D array declaration.

```
char m[4][6] = {"ABCDE", "FGHIJ", "KLMNO", "PQRST"};
```

What is the value of * $(\& \, m[0][0] + 21)$?

A. R
B. T
C. S
D. None of the above

Your Answer: | Correct Answer: C | Not Attempted | Time taken: 00min 00sec | Discuss

Q #14 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

What will be the output of the following C program?

```c
#include <stdio.h>
int fun(int *a, int i) {
    return a[i] + i;
}
int main() {
    int arr[] = {10, 20, 30, 40};
    int i = 1;
    printf("%d\n", fun(arr, i++) + fun(arr, ++i));
    return 0;
}
```

A. 6

B. 63

C. Undefined Behavior

D. 60

Your Answer: | Correct Answer: C | Not Attempted | Time taken: 00min 00sec | Discuss

Q #15 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

Consider the following C program.

```c
#include <stdio.h>

int main() {
    int a = 12, b = 5;

    if (a & b == 4)
        printf("Yes");
    else
        printf("No");
    return 0;
}
```

A. Yes

B. No

C. Compilation Error

D. Runtime Error

Your Answer: | Correct Answer: B | Not Attempted | Time taken: 00min 00sec | Discuss

Q #16 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

For which values of an integer named `choice` do these two code fragments produce the same results?

```
//Code1

if (choice == 1) duel();
else if (choice == 2) train();
else forfeit();
```

```
//Code2

switch (choice) {
  case 1: duel(); break;
  case 2: train();
  default: forfeit();
}
```

i. choice less than or equal to 1
ii. choice equal to 2
iii. choice greater than or equal to 3

A. i, ii, and iii
B. i and iii only
C. i and ii only
D. ii and iii only

Your Answer: | Correct Answer: B | Not Attempted | Time taken: 00min 00sec | Discuss

Q #17 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

Consider the following condition where `n` is an integer variable:

```
n < -2 || n >= 2 && n!= 6 ||  n == -2
```

Which one of the following number lines correctly shows in bold the range of `n` where the condition evaluates to *TRUE* ?

Note: Filled circles represent points that are included in the range, and hollow circles represent points that are not included.

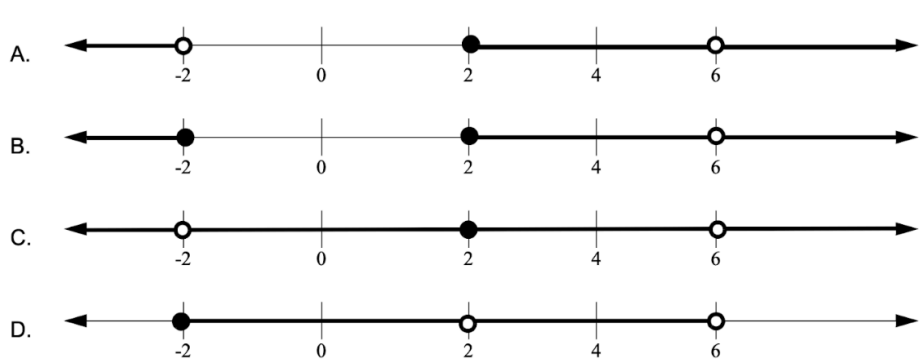

Your Answer: | Correct Answer: B | Not Attempted | Time taken: 00min 00sec | Discuss

Q #18 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

Which choice best represents the call stack at the point of execution when the stack has the greatest number of active function calls (deepest call stack)?

```
int main() {
    methodA();
    methodC();
    return 0;
}
void methodA() {
    printf("A");
    methodB();
}
void methodB() {
    methodC();
    printf("B");
    methodD();
}
void methodC() {
    methodD();
    printf("C");
}
void methodD() {
    printf("D");
}
```

A. main → methodA → methodB → methodC → methodD → methodD

B. main → methodA → methodD → methodC → methodB → methodD → methodA

C. main → methodA → methodD → methodC → methodB → methodD

D. main → methodA → methodB → methodC → methodD

Your Answer: | Correct Answer: D | Not Attempted | Time taken: 00min 00sec | Discuss

Q #19 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

Consider the following C function:

```
bool findSomething(int a[], int b[], int length) {
    for (int i = 0; i < length; i++) {
        bool found = false;
        for (int j = 0; j < length; j++) {
            if (a[i] == b[j]) {
                found = true;
                break;

            }
        }
        if (!found)
            return false;
    }
    return true;
}
```

Precondition: Arrays a and b have equal length.

Which best describes what the function findSomething does? It returns true only if:

A. Arrays a and b contain identical elements in the same order.

B. Arrays a and b contain identical elements in reverse order.

C. Arrays a and b are permutations of each other.

D. Every element of array a is also in b, and every element of array b is also in a

Your Answer: | Correct Answer: D | Not Attempted | Time taken: 00min 00sec | Discuss

Q #20 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

What does the following program print? (assume 32 bit machine)

```
#include <stdio.h>
int main() {
int x;
char a = 0xaa, b = 0x11;
a = b+a;
x = a;
printf ("%x", x);
}
```

A. 00000067

B. 000000bb

C. ffffffbb

D. 100000bb

Your Answer: | Correct Answer: C | Not Attempted | Time taken: 00min 00sec | Discuss

Q #21 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

What will be the output of the following C program?

```
void count(int n)
{
    static int d = 1;
    printf("%d", n);
    printf("%d", d);
    d++;
    if (n>1)
        count(n-1);
    printf("\n");
}
void main()
{
    count (3);
}
```

A. 312213

B. 312111

C. 312213

D. 312111

Your Answer: | Correct Answer: A | Not Attempted | Time taken: 00min 00sec | Discuss

Q #22 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

What will be the output of the following C program?

```
#include<stdio.h>
#include<string.h>
void main()
{
    char p[20];
    char *s = "string";
    int length = strlen(s);
    int i;
    for (i = 0; i < length; i++)
    p[i] = s[length - i];
    printf("%s",p);
}
```

A. gnirts

B. gnirt

C. string

D. no output is printed

Your Answer: | Correct Answer: D | Not Attempted | Time taken: 00min 00sec | Discuss

Q #23 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

You are given the following structure for a singly linked list where each node contains a dynamically allocated string using malloc:

```
struct node {
    char *s;
    struct node *next;
};
```

You are to implement the function **free_linked_list**, which deallocates the entire linked list - including each node and the string stored in it - without causing memory leaks or undefined behavior.

```
void free_linked_list(struct node *lst) {
    if (lst = NULL) return;

    Line 1:_____________________
    Line 2:_____________________
    Line 3:_____________________

}
```

Which of the following options correctly fills Line 1, Line 2, and Line 3?

A. free(lst ->s);
free_linked_list(lst ->next);
free(last);

B. free_linked_list(lst ->next);
free(lst->s);
free(last);

C. free(lst);
free_linked_list(lst ->next);

free(lst−>s);

D. free(lst);
free(lst−>s);
free_linked_list(lst −>next);

Your Answer: | Correct Answer: A | Not Attempted | Time taken: 00min 00sec | Discuss

Q #24 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

Consider the following C code snippet:

```
char str1[] = "String 1";
char *str2 = "String 2";
```

Select ALL valid statements from the following:

```
i.str1[0] = 's';
ii.str2[0] = 's';
iii.strcpy(str1, str2);
iv.strcpy(str2, str1);
v.str2 = str1;
```

A. i and iii

B. ii and iv

C. i, iii and v

D. ii, iv and v

Your Answer: | Correct Answer: C | Not Attempted | Time taken: 00min 00sec | Discuss

Q #25 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

Consider the following recursive C function:

```
void recursionMystery2(int a, char c) {
    if (a != 0) {
        printf("%c", c);
        if (a % 2 == 0) {
            printf("O");
            recursionMystery2(a - 1, c - 1);
        } else {
            recursionMystery2(a - 1, c + 1);
            printf("R");
        }
    }
}
```

What will be the output of the following function call?

```
recursionMystery2(3, 'd');
```

A. deOdRR

B. dOeOdRR

C. dOeRdR

D. deOdRr

Your Answer: | Correct Answer: A | Not Attempted | Time taken: 00min 00sec | Discuss

Q #26 | Numerical Type | Award: 2 | Penalty: 0 | Programming in C

What will be the final value of i after executing the following C code?

```
int main() {
    int i = 0;
    if (i++ && i == 1 || i++)
        printf("Yes\n");
    else
        printf("No\n");
    return 0;
}
```

Your Answer: | Correct Answer: 2 | Not Attempted | Time taken: 00min 00sec | Discuss

Q #27 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

What will be the output of the following C program?

```
#include <stdio.h>
struct Block {
    int mat[2][2];
};
int main() {
    struct Block b[] = {
        {{{1, 2}, {3, 4} }},
        {{{5,6}, {7, 8} }}
    };
    struct Block *ptr = b;

    printf("%d", (*((ptr + 1))->mat)[0]);
    return 0;
}
```

A. 5

B. 6

C. 7

D. Compilation Error

Your Answer: | Correct Answer: A | Not Attempted | Time taken: 00min 00sec | Discuss

Q #28 | Numerical Type | Award: 2 | Penalty: 0 | Programming in C

What will be the output of the following C program?

```c
#include <stdio.h>
int mystery(int n) {
    static int x = 1;
    if (n <= 0)
        return 0;
    x++;
    return mystery(n-1) + x;
}
int main() {
    printf("%d\n", mystery(3));
    return 0;
}
```

Your Answer: | Correct Answer: 12 | Not Attempted | Time taken: 00min 00sec | Discuss

Q #29 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

What will be the output of the following C program?

```c
void update(int **q) {
    *q = (int *)malloc(sizeof(int));
    **q = 50;
}
int main() {
    int *p = (int *)malloc(sizeof(int));
    *p = 10;
    update(&p);
    printf("%d\n", *p);
    return 0;
}
```

A. 10
B. 50
C. The value depends on system architecture (32-bit vs 64-bit)
D. Program compiles but prints a garbage value

Your Answer: | Correct Answer: B | Not Attempted | Time taken: 00min 00sec | Discuss

Q #30 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

How many distinct outputs are possible when the following C program is executed?

```c
#include <stdio.h>
int f1() { printf("1"); return 1; }
int f2() { printf("2"); return 2; }
int f3() { printf("3"); return 3; }
int main() {
    int x = printf("%d", f1() + f2() + f3());
    return 0;
}
```

A. 1

B. 3

C. 6

D. 9

Your Answer: | **Correct Answer: C** | Not Attempted | Time taken: 00min 00sec | Discuss

Copyright & Stuff