Summary in Graph

Exam Summary (GO Classes CS Test Series 2026 | C programming | Subject Wise Test 3)

Qs. Attempted:	0 0 + 0	Correct Marks:	0 0 + 0
Correct Attempts:	0 0 + 0	Penalty Marks:	0 0 + 0
Incorrect Attempts:	0 0 + 0	Resultant Marks:	0 0 + 0

Total Questions:	30 15 + 15
Total Marks:	45 15 + 30
Exam Duration:	90 Minutes
Time Taken:	0 Minutes

Individual Question Statistics

Select Metric: Marks Obtained

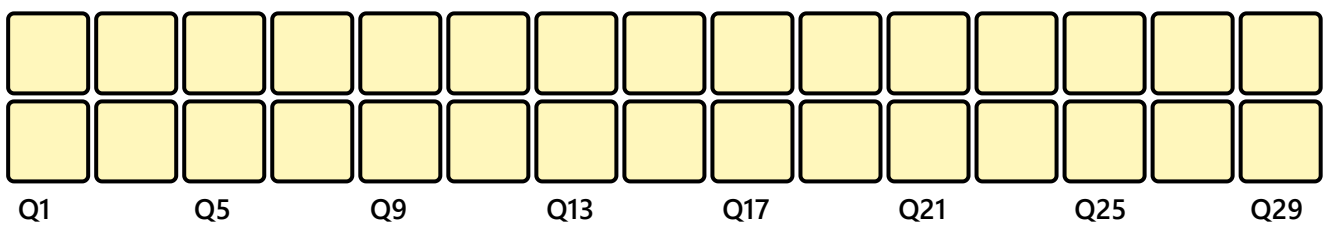

* Average Stats based on first-attempt stats of Top 10% (50) out of 496 users

EXAM RESPONSE EXAM STATS FEEDBACK

Technical

Q #1 Multiple Choice Type Award: 1 Penalty: 0.33 Programming in C

Consider the following C program:

```
    struct Data {
        int x;
        int y;
    };
 5. int main() {
        struct Data d = {10, 20};
        struct Data *p = &d;
        printf("%d\n", *((int *)p + 1));
        return 0;
10. }
```

What will be the output of the program?

A. 10

B. 20

C. Garbage value

D. Compilation error

Your Answer: | Correct Answer: B | Not Attempted | Time taken: 00min 04sec | Discuss

Q #2 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

Consider the following C program:

Code

```
    void recurse(int n) {
        if (n != 0)
            recurse(n--);
        printf("%d ", n);
 5. }
```

What will be the output or behaviour of the function if called as such `recurse(5);`?

A. It prints the numbers from 5 to 1 in reverse order

B. It prints nothing and causes a stack overflow

C. It prints the numbers from 1 to 5 in same order

D. It will lead to infinite recursion but no stack overflow

Your Answer: | Correct Answer: B | Not Attempted | Time taken: 00min 00sec | Discuss

Q #3 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

Code

```
    int main() {
        int *p;
        for (int i = 0; i < 1000; i++) {
            p = malloc(sizeof(int) * 10);
 5.         p[0] = i;
        }
        free(p);
        return 0;
    }
```

Which of the following best describes the behaviour of the above program?

A. No memory leak; `p` is freed properly

B. Only the last allocated block is freed; the rest are leaked

C. `p` becomes a dangling pointer before `free()`

D. All 1000 allocations are freed correctly

Your Answer: | **Correct Answer: B** | Not Attempted | Time taken: 00min 00sec | Discuss

Q #4 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

Consider the following C code:

```c
int x[2][3] = { {10, 20, 30}, {40, 50, 60} };
int *p = *(x + 1);
printf("%d", *(p + 2));
```

What will be the output of the above program?

A. 30

B. 50

C. 60

D. Segmentation fault

Your Answer: | **Correct Answer: C** | Not Attempted | Time taken: 00min 00sec | Discuss

Q #5 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

Consider the following function `foo`:

```c
int foo(int a, int b) {
    if (a < b) {
        return b;
    }
    int diff = a - b;
    return foo(diff, b - 1) + foo(diff, b + 1);
}
```

Which one of the following statements best describes the function `foo` in the above code?

A. Causes a runtime error because functions in C cannot be recursive.

B. The function `foo` is an example of an iterative method.

C. The value of `diff` is shared across all recursive calls.

D. Each recursive call to `foo` has its own local, temporary variable `diff`.

Your Answer: | **Correct Answer: D** | Not Attempted | Time taken: 00min 00sec | Discuss

Q #6 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

Consider the following C code snippet:

```
    char *p = malloc(10);
    if (x >= 10)
        free(p);
    if (x < 11)
5.      free(p);
```

Which of the following combinations of `x` value and bug name correctly describes the dangerous behavior in this code?

A. `x = 9`, Bug: Memory Leak

B. `x = 10`, Bug: Double Free (i.e., the pointer `p` is freed twice)

C. `x = 11`, Bug: Dangling Pointer

D. `x = 5`, Bug: Invalid Allocation

Your Answer: | Correct Answer: B | Not Attempted | Time taken: 00min 00sec | Discuss

Q #7 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

The following `c`program compiles and runs without errors. What is the output the program produces?

```
    #include <stdio.h>
    int main(void)
    {
        char test_str[50] = "1010_fighting";
5.      char *str_ptr = &test_str[2];
        while (*str_ptr != '\0')
        {
            printf("%c", *(str_ptr++));
        }
10. }
```

A. 0_fighting

B. 10_fighting

C. 1

D. 1010_fighting

Your Answer: | Correct Answer: B | Not Attempted | Time taken: 00min 00sec | Discuss

Q #8 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

The following `c` program compiles and runs without errors. What is the output the program produces?

```c
#include <stdio.h>
int main(void)
{
    int x = 7;
    switch(x / 2)
    {
        case 1: printf("hangman\n");
                break;
        case 3: printf("pacman\n");
                break;
        case 7: printf("dave\n");
                break;
        default: printf("mario\n");
    }
}
```

A. hangman

B. pacman

C. dave

D. mario

Your Answer: | Correct Answer: B | Not Attempted | Time taken: 00min 00sec | Discuss

Q #9 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

The following C program compiles and runs without errors. What is the output?

```c
#include <stdio.h>
int main(void)
{
    int i = 3, j = 2;
    int x = (i++) * (--j);
    int y = -(--j);
    int z = (++i) * 5;
    printf("%d %d %d\n", x, y, z);
}
```

A. $3 \quad 0 \quad 25$

B. $3 \quad -1 \quad 20$

C. $6 \quad -2 \quad 15$

D. $4 \quad -1 \quad 20$

Your Answer: | Correct Answer: A | Not Attempted | Time taken: 00min 00sec | Discuss

Q #10 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

You compile and run the following C program. What is the output?

```c
#include <stdio.h>
int i; /* global variable */
void plusplus(int i)
{
    i++;
}
int main(void)
{
    for (i = 0; i < 10; plusplus(i))
    {
    }
    printf("i = %d\n", i);
    return 0;
}
```

A. i = 9

B. i = 10

C. i = 11

D. There will be an infinite loop.

Your Answer: | Correct Answer: D | Not Attempted | Time taken: 00min 00sec | Discuss

Q #11 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

Given an incomplete C program shown below, which one of the following answer choices can NOT be a valid prototype for myfunc?

```c
#include<stdio.h>
/* missing prototype */
int main(void)
{
    int result;
    int a[5][5] = {{1}};
    result = myfunc(a);
    printf("result = %i \n", result);
}
/* code for myfunc goes here */
```

A. $int \quad myfunc(int \quad a[][5]);$

B. $int \quad myfunc(int \quad a[5][]);$

C. $int \quad myfunc(int \quad b[5][5]);$

D. $int \quad myfunc(int \quad [5][5]);$

Your Answer: | Correct Answer: B | Not Attempted | Time taken: 00min 00sec | Discuss

Q #12 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

The following c program compiles and runs without errors. What is the output?

```c
#include <stdio.h>
int i = -12; /* global variable */
void myfunc(void)
{
    int i = -10;
    printf("%d\n", i);
}
void myfunc2(void)
{
    i = -10;
}
int main(void)
{
    printf("%d\n", i);
    myfunc();
    printf("%d\n", i);
    myfunc2();
    printf("%d\n", i);
}
```

A. -12,
-10,
-10,
-10

B. -12,
-10,
-12,
-10

C. -12,
-12,
-12,
-10

D. -12,
-12,
-12,
-12

Your Answer: | Correct Answer: B | Not Attempted | Time taken: 00min 00sec | Discuss

Q #13 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

Assume that the code fragment shown below is put in a complete C program that compiles and runs without errors. Further assume that when the program is running, the address of the variable named ptr is 1000 and the address of the variable named $\mathbf{x}[\mathbf{0}]$ is 1008. After the code fragment executes, what is the value of *ptr?

```c
int *ptr;
int x[3] = {1016, 1024, 1032};
ptr = x;
```

A. 1000

B. 1008

C. 1016

D. 1024

Your Answer: | Correct Answer: C | Not Attempted | Time taken: 00min 00sec | Discuss

Q #14 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

The following C program compiles and runs without errors. What is the output produced by this program?

```c
int x = 0;
void swap(int x, int *y) {
    int temp = x;
    x = *y;
    * y = temp;
}
int main(void) {
    int x = 1;
    int y = 2;
    swap(x, &y);
    printf("x = %d y = %d \n", x, y);
    return 0;
}
```

A. $x = 1 \quad y = 1$

B. $x = 1 \quad y = 2$

C. $x = 2 \quad y = 1$

D. $x = 2 \quad y = 2$

Your Answer: | Correct Answer: A | Not Attempted | Time taken: 00min 00sec | Discuss

Q #15 | Multiple Choice Type | Award: 1 | Penalty: 0.33 | Programming in C

The following program compiles and runs without errors. What is the output of the program?

```c
#include<stdio.h>
int main(void)
{
    int arr[5] = {2, 4, 6, 8, 10};
    int *ptr = arr;
    printf("%d ", *ptr + 1);
    printf("%d\n", *(ptr + 1));
}
```

A. 44

B. 35

C. 34

D. 46

Your Answer: | Correct Answer: C | Not Attempted | Time taken: 00min 00sec | Discuss

Q #16 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

What will be the output of this program?

```c
#include <stdio.h>
int main() {
    char string[10] = "abcdefgh", *p = string, ch;
    while (*p != '\0') {
        ch = *p++;
        *p++ = ch;
    }
    printf("%s\n", string);
    return 0;
}
```

A. abcdefgh

B. aacceegg

C. bbcddffh

D. None of the above

Your Answer: | Correct Answer: B | Not Attempted | Time taken: 00min 00sec | Discuss

Q #17 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

Consider the following number line showing a specific range where the line is bold. Filled circles represent points that are included in the range, and hollow circles represent points that are not included.



Which one of the following conditions results in true if n is in the range shown and false otherwise?

A. $n > -7 || n < 3 \&\& n == 5 \&\& n == 7$

B. $n > -7 || n < 3 || n == 5 || n == 7$

C. $n > -7 \&\& n < 3 \&\& n == 5 || n == 7$

D. $n > -7 \&\& n < 3 \,||\, n == 5 \,||\, n == 7$

Your Answer: | Correct Answer: D | Not Attempted | Time taken: 00min 00sec | Discuss

Q #18 | Multiple Select Type | Award: 2 | Penalty: 0 | Programming in C

Consider the following C function:

```c
char* func(char* str) {
    char* ret = (char*) ((long*) ((int*) str + 2) + 1) + 3;
    return ret;
}
```

Assume the following:

```c
sizeof(char) = 1 byte
sizeof(int) = 4 bytes
sizeof(long) = 8 bytes
```

Which of the following expressions is/are equivalent to the "ret" variable?

A. str + 6

B. str + 19

C. &(str[19])

D. str[19]

Your Answer: | Correct Answer: B;C | Not Attempted | Time taken: 00min 00sec | Discuss

Q #19 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

Consider the following two blocks of code, which are contained in separate files:

main.c

```
void foo();

int i = 0;
int main() {
    foo();
    return 0;
}
```

foo.c

```
int i = 1;
void foo() {
    printf("%d", i);
}
```

What will happen when you attempt to compile, link, and run this code?

A. It will fail to compile.

B. It will fail to link.

C. It will print "0".

D. It will print "1".

Your Answer: | Correct Answer: D | Not Attempted | Time taken: 00min 00sec | Discuss

Q #20 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

Code

```
int main() {
    int i = 0, j, count = 0;
    for (j = -2; j <= 4; j++) {
        if ((j > 1) || (i++ && j == 0))
            count += j;
    }
    count += i;
    printf("%d\n", count);
    return 0;
}
```

What is the output of the program?

A. 10

B. 12

C. 13

D. 15

Your Answer: | Correct Answer: C | Not Attempted | Time taken: 00min 00sec | Discuss

Q #21 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

Consider the following C program:

```c
int mystery(int a[]) {
    a[1] = -3;
    a = malloc(4 * sizeof(int));
    a[3] = -2;
    return a[2];
}
int main() {
    int array[] = {9, 8, 7, 6};
    array[2] = mystery(array);
    for (int i = 0; i < 4; i++)
        printf("%d ", array[i]);
}
```

What will be the output of the above program?

A. 9 −3 0 6

B. 9 −3 7 −2

C. 9 −3 7 6

D. 9 8 0 6

Your Answer: | Correct Answer: A | Not Attempted | Time taken: 00min 00sec | Discuss

Q #22 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

What will be the output of the following program?

```c
void g(int **x, int *y, int *z) {
    **x = 10;
    *x = z;
    printf("%d %d %d", **x, *y, *z);
}
void f(int *q, int n, int *p) {
    n = n + 2;
    *p = *p * *q;
    g(&q, &n, p);
}
int main() {
    int a = 7, b = 2;
    f(&a, b, &b);
}
```

A. 14 4 14

B. 10 4 14

C. 14 2 14

D. 10 2 14

Your Answer: | Correct Answer: A | Not Attempted | Time taken: 00min 00sec | Discuss

Q #23 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

You are given the following variable declarations of `p` and `q`:

```
/* Declaration */

double p = 25.50, q = 10.00;
```

Which of the following `if` statements will **NOT** print `Yes`?

Hint: Look carefully at the semicolons (;)

A.
```
if (p >= 30 && q < 30);
    printf("Yes");
```

B.
```
if (q == 25.00 || 10.00)
    printf("Yes");
```

C.
```
if (!p && q < 30)
    printf("Yes");
```

D.
```
if (p == 10.00 || q != 25.50)
    printf("Yes");
```

Your Answer: | Correct Answer: C | Not Attempted | Time taken: 00min 00sec | Discuss

Q #24 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

The following C program compiles and runs without errors. What is the output the program produces?

```
#include <stdio.h>
int main(void)
{
    int test[3][2] = {{2, 3}, {4, 5}, {6, 7}};
    int i = 0, j = 0;
    printf("%d ", test[++i][j++]);
    printf("%d", test[i++][--j]);
}
```

A. 3 0

B. 4 0

C. 4 3

D. 4 4

Your Answer: | Correct Answer: D | Not Attempted | Time taken: 00min 00sec | Discuss

Q #25 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

The following cprogram compiles and runs without error. What is the output?

```c
#include <stdio.h>
int main(void)
{
    int x = 10, y = 5;
    switch(x + y)
    {
        case 10: x += 5;
                 y += 5;
        case 15: x -= 5;
                 y += 5;
        case 5:  x += 5;
                 y += 5;
        default: x = 5;
                 y = 10;
    }
    printf("%d %d", x, y);
}
```

A. 10 15

B. 10 5

C. 5 10

D. 15 20

Your Answer: | Correct Answer: C | Not Attempted | Time taken: 00min 00sec | Discuss

Q #26 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

The following c program compiles and runs without errors. What is the output?

```c
#include <stdio.h>
void swap(int* a, int* b, int* c)
{
    int* temp = c;
    * c = *b;
    * b = *a;
    * a = *temp;
}
int main(void)
{
    int x, y, z;
    x = 1;
    y = 2;
    z = 3;
    swap(&x, &y, &z);
    printf("x = %d y = %d z = %d\n", x, y, z);
}
```

A. $x = 3 \quad y = 2 \quad z = 1$

B. $x = 3 \quad y = 2 \quad z = 2$

C. $x = 1 \quad y = 2 \quad z = 3$

D. $x = 2 \quad y = 1 \quad z = 2$

Your Answer: | Correct Answer: D | Not Attempted | Time taken: 00min 00sec | Discuss

Q #27 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

The following C program compiles and runs without errors. What is the output?

```c
#include<stdio.h>
void swap(int count, int A[], int B[])
{
    int i, temp;
    for (i = 0; i < count; ++i)
    {
        temp = A[i];
        A[i] = B[i];
        B[i] = temp;
    }
}
int main(void)
{
    int A[5] = {1, 6, 4, 5, 9};
    int B[5] = {2, 7, 11, 14, 3};
    int C[7] = {1, 8, 15, 22, 29, 2, 9};
    swap(3, A, B);
    swap(4, B, C);
    swap(5, A, C);
    printf("%d %d %d\n", A[3], B[4], C[5]);
    return;
}
```

A. 4 22 9

B. 14 3 2

C. 5 3 2

D. 14 29 2

Your Answer: | Correct Answer: B | Not Attempted | Time taken: 00min 00sec | Discuss

Q #28 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

Which of the following loops produces the same value for the variable x as the loop shown below?

```c
int i, x = 0;
for(i = 0; i <= 100; ++i)
    x += i;
printf("x = %d \n", x); /* prints x = 5050 */
```

A.

```c
int i = 0, x = 0;
while (i <= 100)
    x += i;
printf("x = %d\n", x);
```

B.

```c
int i = 0, x = 0;
do {
    x += i;
} while (i <= 100);
++i;
printf("x = %d\n", x);
```

C.
```c
int i = 0, x = 0;
while (i <= 100) {
    x += i++;
}
printf("x = %d\n", x);
```

D.
```c
int i = 0, x = 0;
while (i <= 100) {
    x += ++i;
}
printf("x = %d\n", x);
```

Your Answer: | Correct Answer: C | Not Attempted | Time taken: 00min 00sec | Discuss

Q #29 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

The following program compiles and runs without errors. What is the output of the program?

```c
#include<stdio.h>
void rec(char str[], int n)
{
    if(n < 1)
        return;
    printf("%c", str[n - 1]);
    rec(str, n - 1);
}
int main(void)
{
    char str[] = "0123456789";
    rec(str, 5);
}
```

A. 01234

B. 56789

C. 98765

D. 43210

Your Answer: | Correct Answer: D | Not Attempted | Time taken: 00min 00sec | Discuss

Q #30 | Multiple Choice Type | Award: 2 | Penalty: 0.67 | Programming in C

The following cprogram compiles and runs without errors. What is the output produced by this program?

```c
#include<stdio.h>
int main(void)
{
    int a[] = {10, 20, 30, 40, 50};
    int *c;
    int *b = a;
    printf("%d ", *(b++));
    c = b;
    printf("%d ", ++(*c));
}
```

A. 10 21

B. 20 21

C. 10 20

D. 11 20

Your Answer: | Correct Answer: A | Not Attempted | Time taken: 00min 00sec | Discuss

Copyright & Stuff