HTML

Hyper Text Markup Language (HTML)

- Text formatting language used to develop Web Pages
- Used to **create** web pages
- Standard html-**static web pages**
- Contains Hyper Text (**text, image or link**)
- Markup language (**tags**) defines how web page will be displayed

How To Create HTML File

❑ **Step 1: Open Notepad (PC)**

- **Windows 8 or later:**
- Open the Start Screen (the window symbol at the bottom left on your screen).

  Type Notepad.
- **Windows 7 or earlier:**
- Open Start > Programs > Accessories > Notepad

How To Create HTML File

❑ Step 2: Write Some HTML

- <!DOCTYPE html>

  <html>


  <body>

  <h1>My First Heading</h1>

  My first paragraph.

  </body>

  </html>

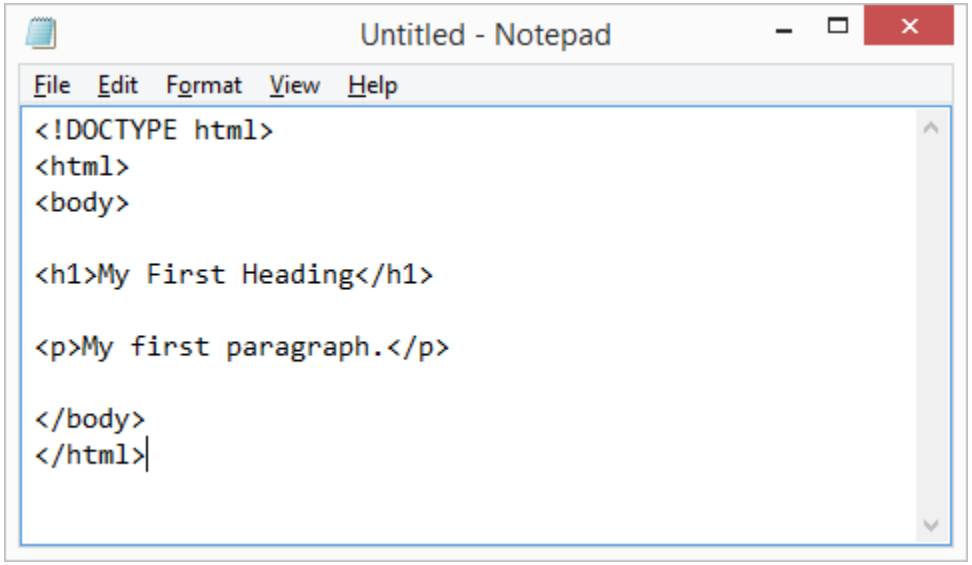


- Anything written in <> is known as a Tag.

How To Create HTML File

❑ **Step 3: Save the HTML Page**


- Save the file on your computer. Select File > Save as in the Notepad menu.
- Name the file "index.html or index.htm" (which is the preferred encoding for HTML files).

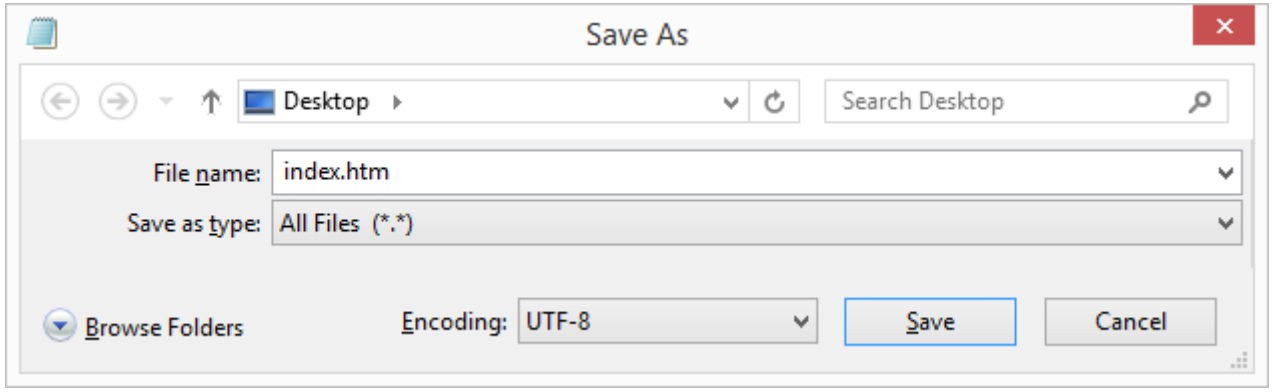

How To Create HTML File

❑ **Step 4: View the HTML Page in Your Browser**

- Open the saved HTML file in your favorite browser (double click on the file, or right-click - and choose "Open with").
- The result will look much like this:

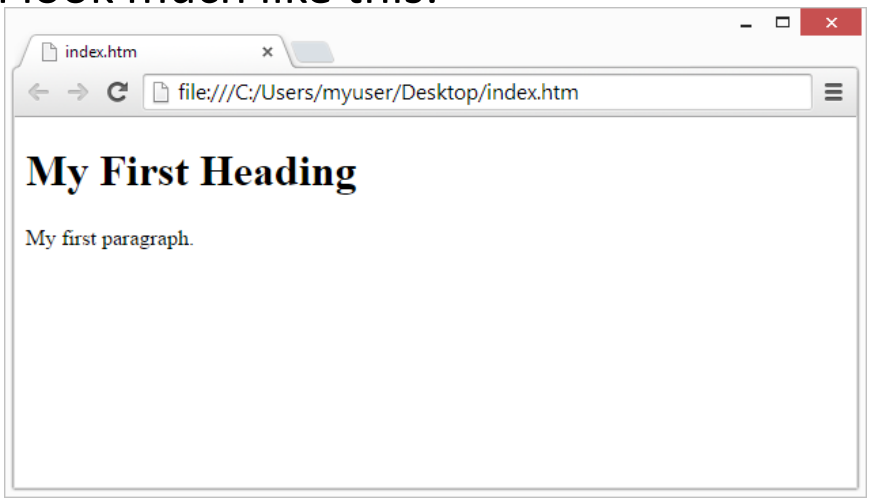

STRUCTURE OF HTML

```
<html>
<head>
    <title>give any title</title>
</head>
<body>
    web page code
</body>
</html>
```

Define start & end of document

Header section of HTML page (JavaScript, styles, meta etc.)

Title of HTML document

Main part which defines what should be displayed on the browser

HTML TAGs

- TAGs are instructions that tell the browser to format a text instead of just showing it on the screen.
- Begin with an open angle bracket (<) and
- End with a close angle bracket (>) i.e., <TAG>
- **Types of TAGs :**
  - **Paired Tags :** Consists of a companion tag
  - e.g. <HTML> </HTML>, <B> </B>
  - **Singular Tags :** Does not have a companion tag
  - e.g.
, <HR>
- **Attributes of a TAG :**
- Additional information supplied to a tag
- e.g. <IMG SRC="Earth.jpg" ALIGN=TOP HEIGHT=30>

HTML TAGs

- Entire Webpage is enclosed within **<HTML> </HTML>** tags.
- <HTML> is divided into two parts :
  - **Head portion :** Denoted by <HEAD> </HEAD>
  - **Body portion :** Denoted by <BODY> </BODY>
- HEAD : Contains the header information for a document
  - **<TITLE> :** Shows title of webpage in title bar of browser
  - **<SCRIPT> :** Scripting language that can be used
- EXAMPLE

HTML TAGs

- BODY : <BODY> … </BODY>
- Contains contents (text, images, audio files, video files) to be displayed in a browser window.
- EXAMPLE

HTML TAGs

- **Attributes of <BODY> tag :**
  - BGCOLOR
  - BACKGROUND
  - TEXT
  - LINK, ALINK, VLINK

- BGCOLOR :
  - Specifies the background color
  - Color name / equivalent hexadecimal number
  - Default color : White
  - e.g. < BODY BGCOLOR = yellow >

HTML TAGs

- BACKGROUD :
  - Specifies the name of the image file that is used as the background
  - e.g. < BODY BACKGROUND = “Earth.jpg” >

- EXAMPLE

HTML TAGs

- TEXT :
  - Sets the Text color
  - Default color : Black
  - e.g. < BODY TEXT = red >

- LINK, ALINK, VLINK :
  - LINK : Specifies color of hyperlink.
    - Default color : Blue
  - ALINK : Specifies color of hyperlink that we are activating.
  - VLINK : Specifies color of hyperlink that are visited.
    - Default color : Red
- EXAMPLE

HTML Document Structure

```
<html>
        <head>
                <title>
                        The amazing art of Web Programming
                </title>
        </head>
<body>
        A little bit of Hypertext
</body>
</html>
```

EXAMPLE

Formatting and Fonts

-
 Break Tag :
  - Break the line
  - e.g. <body> hypertext
 makes the world
 go round </body>

- … Italic Tag :
  - Format the text in Italic format
- … Bold Tag :
  - Format the text in Bold format

Formatting and Fonts

- <tt> … </tt> Typewriter effect Tag :
  - Format the text in typewriter effect

- … emphasis Tag :
  - emphasis the text

- <blink> .. </blink> Blink Tag :
  - Makes the text blink
  - does not work in all browsers

Formatting and Fonts

- […] Superscript Tag :
  - Format the text in Superscript format

- _… Subscript Tag :
  - Format the text in Subscript format

- EXAMPLE

Aligning the Text

- **Align attribute**

- Ex: centered Text
- Ex: <h1 align="right"> right aligned text </h1>

Commenting Codes

Comments : <!-- … -->

Ex: <!-- This is a complex part of the web page, it adds a border and several types of font -->

Color

- <body bgcolor= value>
- <font color= value>
- Values are based on RGB scheme, usually entered as hexadecimal numbers.
- Ex: <body bgcolor="#800000">
- Ex: <body text="#FFFF00">
- Ex: <font color="yellow">

Color

R	G	B	Color produced
00	00	00	Black
FF	00	00	Bright Red
00	FF	00	Bright Green
00	00	FF	Bright Blue
80	00	00	Dark Red
00	80	00	Dark Green
00	00	80	Dark Blue
FF	FF	00	Bright Yellow
80	80	00	Brown
FF	00	FF	Magenta
80	00	80	Indigo
00	80	80	Turquoise
80	80	80	Grey
FF	FF	FF	White

Hyperlinks

- The text link
- To open selected link in a new window
  - The text link
- Links within already loaded page

  <html>

   Intro

  This is a long document
 <hr>

   Back to the Top

  </html>

Lists

- **Types of Lists :**
  - Unordered List (Bullets)
  - Ordered List (Numbering)
  - Definition List

Lists

- **Unordered List :**
  - Starts with <ul> and ends with
  - Each list item starts with
  - Attribute : TYPE: Specifies the type of the bullet.
    - TYPE: fillround – solid round black bullet
    - TYPE: square – solid square black bullet
    - EXAMPLE

Lists

- **Ordered List :**
  - Starts with <ol> and ends with
  - Each list item starts with
  - Attributes :
    - TYPE – Controls numbering scheme
      - TYPE = “1” – numbers (1, 2, ….)
      - TYPE = “A” – uppercase letters (A, B, ….)
      - TYPE = “a” – lowercase letters (a, b, ….)
      - TYPE = “I” – uppercase roman numerals (I, II, ….)
      - TYPE = “i” – lowercase roman numerals (i, ii, ….)
  - START – Alters the numbering sequence
  - VALUE – Changes numbering sequence in middle of ordered list
- EXAMPLE

Lists

- **Definition List :**
  - Starts with <dl> and ends with </dl>
  - Consists of two parts:
    - Definition Term : appears after tag <DT>
    - Definition Description : appears after tag <DD>
    - EXAMPLE

Tables

<table> : used to display table on web page. Show data in a tabular form.

<tr>: table row

<th> : table header

<td> : table data

•Main Attributes:

- **Width:** width of the table
- **Border:** border of the table
- **Bgcolor:** background color of the table
- **Rowspan:** merge rows
- **Colspan:** merge columns

```html
<!DOCTYPE html>
<html>
<body>

<h2>A basic HTML table</h2>

<table border>
  <tr>
    <th>Company</th>
    <th>Contact</th>
    <th>Country</th>
  </tr>
  <tr>
    <td>Alfreds Futterkiste</td>
    <td>Maria Anders</td>
    <td>Germany</td>
  </tr>
  <tr>
    <td>Centro comercial Moctezuma</td>
    <td>Francisco Chang</td>
    <td>Mexico</td>
  </tr>
</table>
</body>
</html>
```

A basic HTML table

Company	Contact	Country
Alfreds Futterkiste	Maria Anders	Germany
Centro comercial Moctezuma	Francisco Chang	Mexico

```html
<!DOCTYPE html>
<html>
<head>
</head>
<body>

<h2>Cell that spans two rows</h2>
<p>To make a cell span more than one row, use the rowspan attribute.</p>

<table border>
  <tr>
    <th>Name</th>
    <td>Jill</td>
  </tr>
  <tr>
    <th rowspan="2">Phone</th>
    <td>555-1234</td>
  </tr>
  <tr>
    <td>555-8745</td>
  </tr>
</table>
</body>
</html>
```

Cell that spans two rows

To make a cell span more than one row, use the rowspan attribute.

Name	Jill
Phone	555-1234
	555-8745

```
<!DOCTYPE html>
<html>
<head>

</head>
<body>

<h2>Cell that spans two columns</h2>
<p>To make a cell span more than one column, use the colspan attribute.</p>

<table border>
  <tr>
    <th colspan="2">Name</th>
    <th>Age</th>
  </tr>
  <tr>
    <td>Jill</td>
    <td>Smith</td>
    <td>43</td>
  </tr>
  <tr>
    <td>Eve</td>
    <td>Jackson</td>
    <td>57</td>
  </tr>
</table>
</body>
</html>
```

Cell that spans two columns

To make a cell span more than one column, use the colspan attribute.

Name		Age
Jill	Smith	43
Eve	Jackson	57

Tables

Table structure

```
<html>
        <table>
                <tr>
                    <th> heading 1 </th>
                    <th> heading 2 </th>
                </tr>
                <tr>
                    <td> table item </td>
                    <td> and another </td>
                </tr>
        </table>
</html>
```

Tables

- Table with properly defined headers: Example

```
<html>
    <table border>
        <tr>
                <th></th>
                <th> Green Park </th>
                <th> Oxford Circus
                </th>
                <th> Euston </th>
        </tr>
<tr>
<th> Tube </th>
<td> 5 mins </td>
<td> 8 mins </td>
<td> 10 mins </td>
</tr>
<tr>
<th> Bus </th>
<td> 12 mins </td>
<td> 14 mins </td>
<td> 20 mins </td>
</tr>
</table>
</html>
```

Irregular Tables

- Example

```
<html>
  <table border>
    <tr>
      <th rowspan=2></th>
      <th colspan=3> Tube
      Station </th>
    </tr>
    <tr>
      <th> Green Park </th>
      <th> Oxford Circus</th>
      <th> Euston </th>
    </tr>
< tr>
        <th> Tube </th>
        <td align=center> 5 mins </td>
        <td align=center> 8 mins </td>
        <td align=center> 10 mins
</td>
</tr>
<tr>
        <th> Bus </th>
        <td> 12 mins </td>
        <td> 14 mins </td>
        <td> 20 mins </td>
</tr>
</table>
</html>
```

IMAGE IN HTML

- **<img>** tag is used to display image on web page.

- Example:

```
<img
   src="source of  the image"
   height="20px"
   width="20px"
   alt="alternative text"/>
```

- **align attribute:** makes any accompanying text wrap around the image at various positions (bottom/middle/top)
- ** ** tag places the image to the middle of the page

IMAGE IN HTML

- **Resizing an Image**
  - <img src="img1.gif" height=100 width=100>
  - <img src="img1.gif" height=50% width=25%>
- **If failed to load image, we can display message using alt**
  - <img src="img1.gif" alt="Image Mypicture is not available">
- **Background images**
  - <body background="mypattern.jpg">
- **Image may also be used as a link rather than a text**
  - <img src="mypic.gif">

HTML FORMS

- Collect information from the user

- **Making a form**
  - <form action="page2.php" method="post">
  - **action:** tells HTML where to send the collected information
  - **method:** describes the way to send the information

HTML FORMS

- **Types of input**
  - <input> tag: takes input from the user
    - Ex: Enter your id <input name="id" size=35>
    - name: refers to name of the input
    - size: entry box in characters

- <input type="text" />
  - default input type

- <input type="password" />
  - Asterisk is printed instead of text

HTML FORMS

- **Types of input**

- <input type="checkbox" />
  - Toggled between checked or unchecked
- <input type="radio" />
  - From a group of radio buttons, only one can be selected
- <input type="file" />
  - Give a box to choose a file
- <input type="submit" />
  - Allows a form to be submitted
- <input type="image">
  - Submits the form when selected
  - Requires src attribute to specify an associated image

HTML FORMS

- **Types of input**

- <input type="button" />
  - Makes a button available

- <input type="reset" />
  - Resets the form to its initial state when selected

- <input type="hidden" />
  - Allows hidden data to be passed along with the form

HTML FORMS

- **Types of input**

- Text Areas
  - Large text to write comments or a long message
- Ex: Leave your comments here :
  - <textarea rows=“10” cols=“70”> Message: </textarea>

<field set> tag

- The <fieldset> tag is used to group related elements in a form.

- The <fieldset> tag draws a box around the related elements.

```html
<!DOCTYPE html>
<html>
<body>

<h1>The fieldset element</h1>

<form action="/action_page.php">
 <fieldset>
  <legend>Personalia:</legend>
  <label for="fname">First name:</label>
  <input type="text" id="fname" name="fname"><br><br>
  <label for="lname">Last name:</label>
  <input type="text" id="lname" name="lname"><br><br>
  <label for="email">Email:</label>
  <input type="email" id="email" name="email"><br><br>
  <label for="birthday">Birthday:</label>
  <input type="date" id="birthday" name="birthday"><br><br>
  <input type="submit" value="Submit">
 </fieldset>
</form>

</body>
</html>
```

The fieldset element

Personalia:

First name:

Last name:

Email:

Birthday: dd-mm-yyyy

Submit

<embed> Tag

- The <embed> tag defines a container for an external resource, such as a web page, a picture, a media player, or a plug-in application.

An embedded image

```
<!DOCTYPE html>
<html>
<body>

<h1>The embed element</h1>

<embed type="image/jpg" src="pic_trulli.jpg" width="300" height="200">

</body>
</html>
```

The embed element



An embedded HTML page

```
<!DOCTYPE html>
<html>
<body>

<h1>The embed element</h1>

<embed type="text/html" src="snippet.html"  width="500" height="200">

</body>
</html>
```




HTML <frame> tag (Not supported in HTML5)

- HTML <frame> tag define the particular area within an HTML file where another HTML web page can be displayed.
- A <frame> tag is used with <frameset>, and it divides a webpage into multiple sections or frames, and each frame can contain different web pages.

- Create Vertical frames

```
<!DOCTYPE html>
<html>
<head>
   <title>Frame tag</title>
</head>
 <frameset cols="25%,50%,25%">
   <frame src="frame1.html" >
   <frame src="frame2.html">
   <frame src="frame3.html">
 </frameset>
</html>
```

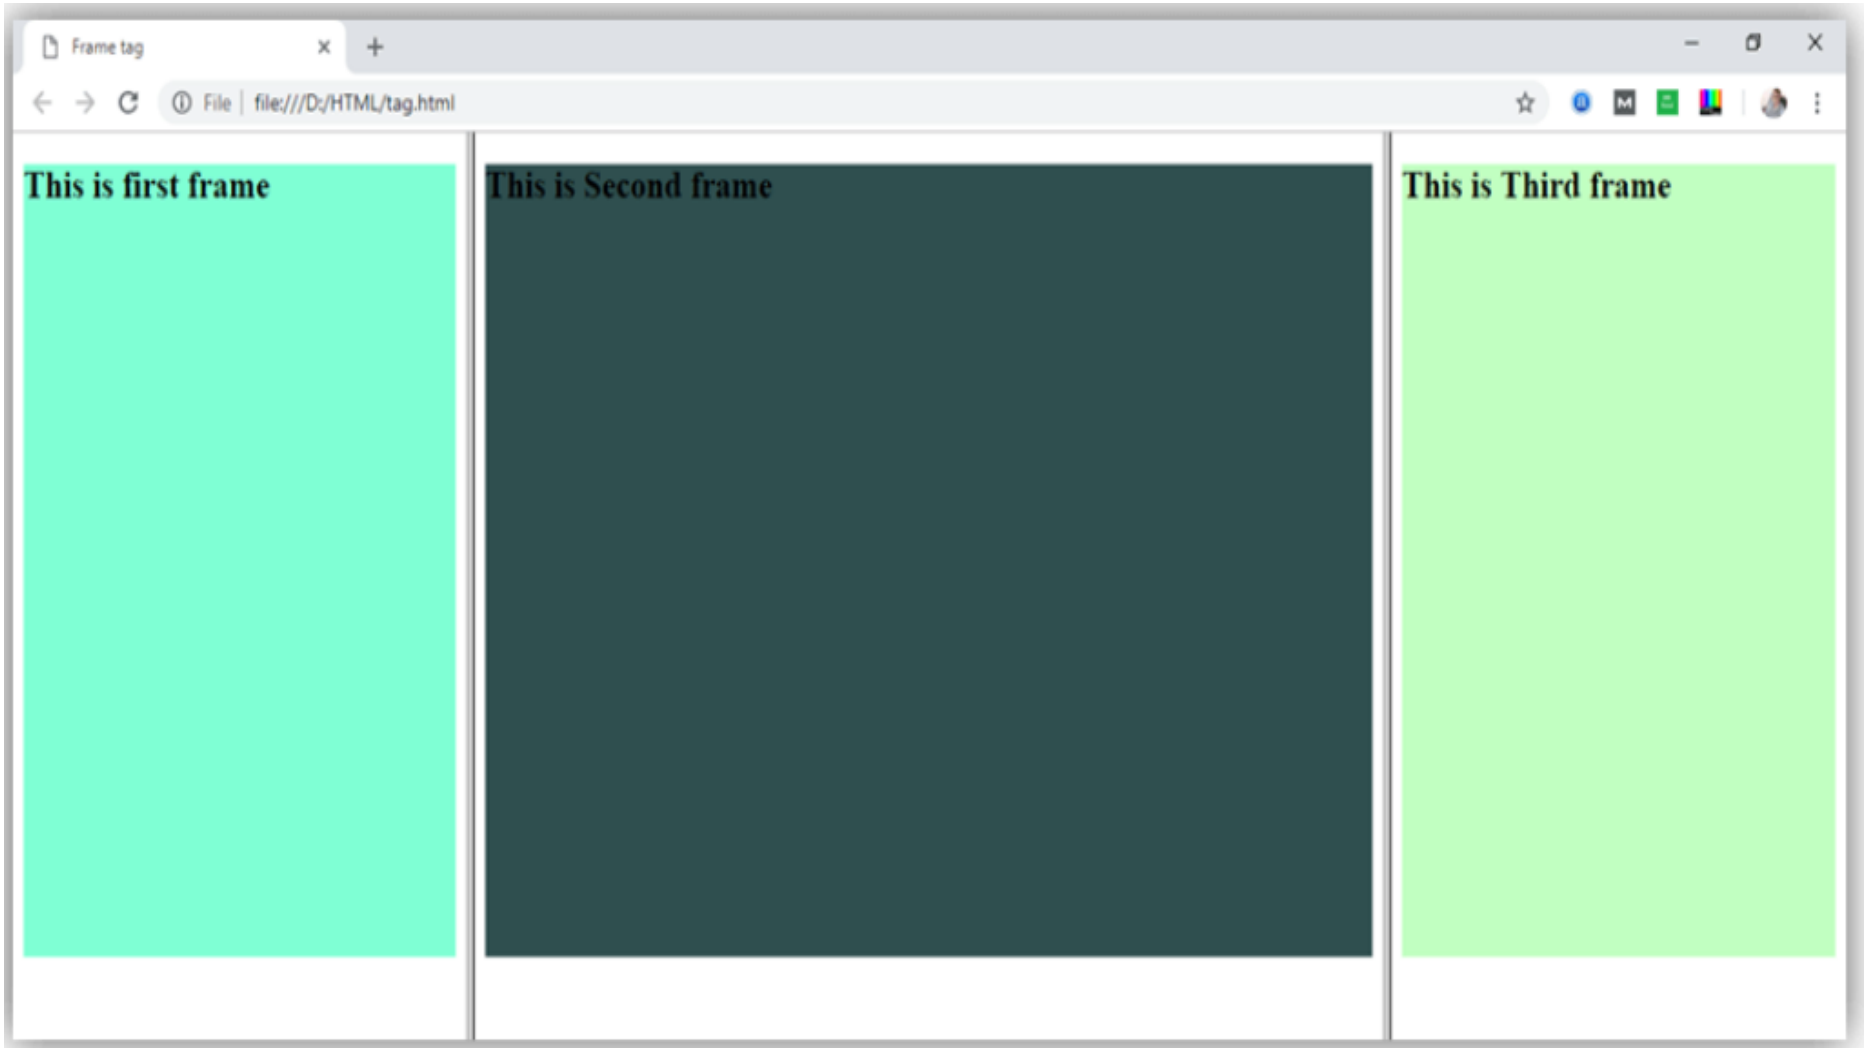
Frame tag
File | file:///D:/HTML/tag.html
This is first frame
This is Second frame
This is Third frame

- Create Horizontal frames

```
<!DOCTYPE html>
<html>
<head>
   <title>Frame tag</title>
</head>
 <frameset rows="30%, 40%, 30%">
   <frame name="top" src="frame1.html" >
   <frame name="main" src="frame2.html">
   <frame name="bottom" src="frame3.html">
 </frameset>
</html>
```

Output:


Frame tag
File | file:///D:/HTML/tag.html
This is first frame
This is Second frame
This is Third frame

- Create Vertical and Horizontal frames

```
<head> <title> Rows and columns of frames </title> </head>

<frameset frameborder="3" ROWS="*,*,*" COLS="*,*">

    <frame name="topleft" src="banner.html"/>
    <frame name="topright" src="mainpage.html"/>

    <frame name="middleleft" src="options.html"/>
    <frame name="middleright" src="mainpage.html"/>

    <frame name="bottomleft" src="banner.html"/>
    <frame name="bottomright" src="options.html"/>

</frameset>
</html>
```



This holds the main content.

This holds the options contents.

Button 1 Button 2 Button 3

This holds the main content.



This holds the options contents.

Button 1 Button 2 Button 3

HTML iframes

- HTML Iframe is used to display a **nested webpage (a webpage within a webpage)**. The HTML <iframe> tag defines an inline frame, hence it is also called as an Inline frame.

- An HTML iframe **embeds another document within the current HTML document in the rectangular region**.


- **Syntax**
- `<iframe src="url" title="description">`
- `</iframe>`

```
<!DOCTYPE html>
<html>
<body>


<h2>HTML Iframes</h2>
<p>Iframes</p>

<iframe src="demo_iframe.htm" height="200" width="300" title="Iframe Example"></iframe>

</body>
</html>
```

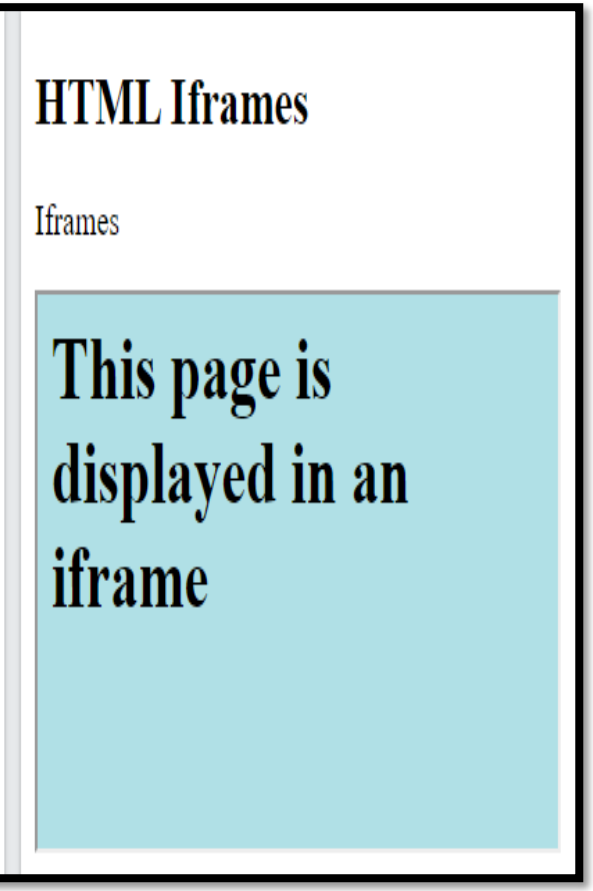

HTML5 is more complete and easier than **HTML4**, it has lots of new tags like **<header>**, **<footer>**, **<navy>**, **<Audio>**, **<video>**, **<main>** etc. It also supports graphics. In the following image, we have described all the essential terms related to HTML and HTML5.

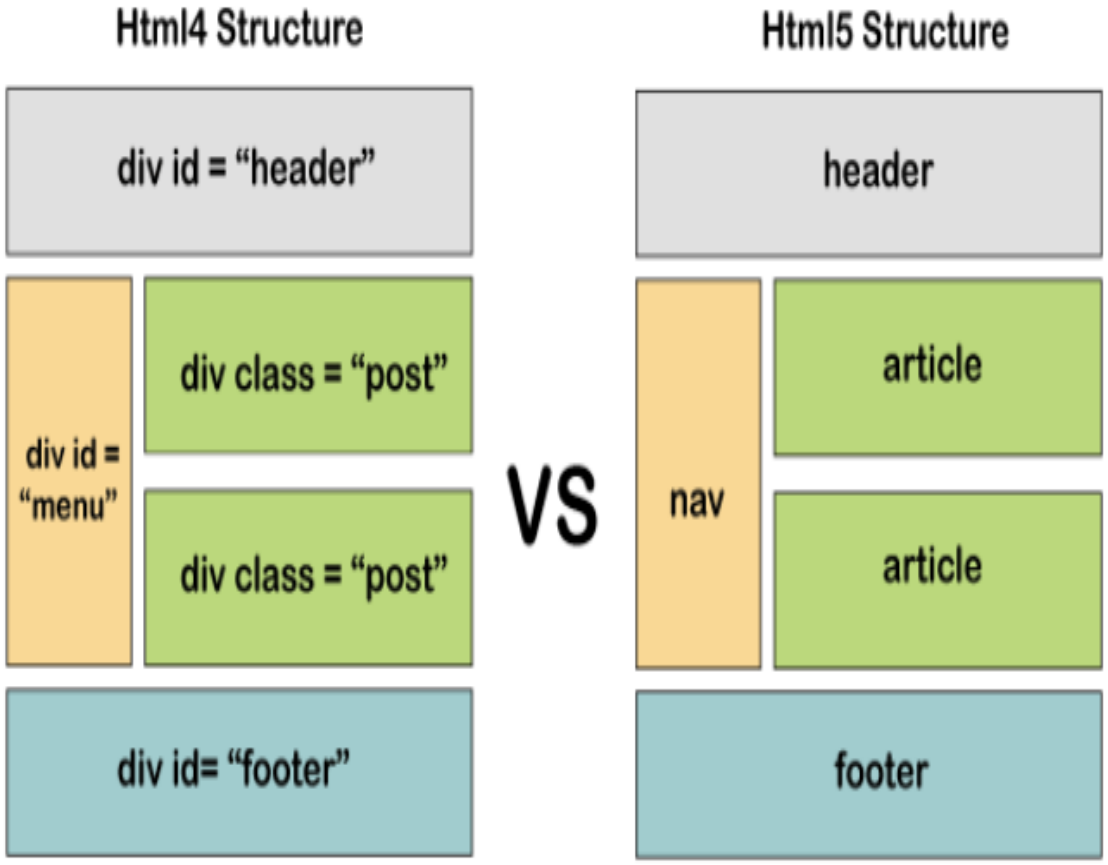

HTML is referred to as the **primary** language of the **World Wide Web. HTML** has many updates over time, and the latest **HTML** version is **HTML5**. There are some differences between the two versions:

HTML <!DOCTYPE> Declaration

- On the HTML document you have often seen that there is a <!DOCTYPE html> declaration before the <html> tag. **HTML <!DOCTYPE> tag is used to inform the browser about the version of HTML used in the document. It is called as the document type declaration (DTD).**

- Technically **<!DOCTYPE > is not a tag/element, it just an instruction to the browser about the document type. It is a null element which does not contain the closing tag, and must not include any content within it.**

HTML <!DOCTYPE> Declaration

All HTML documents must start with a `<!DOCTYPE>` declaration.

The declaration is not an HTML tag. It is an "information" to the browser about what document type to expect.

In HTML 5, the declaration is simple:

```
<!DOCTYPE html>
```

HTML5 <article> Tag

- The HTML <article> tag defines an **independent self-contained content in a document, page, application or a site**.

- The article tag content makes sense on its own. It is independent and complete from other content shown on the page. This tag is generally used on **Forum post, Blog post, News story, comment etc**.

```
<!DOCTYPE>
<html>
<body>
<article>
 <h2>Narendra Modi</h2>
  <i>(Naam to suna hi hoga) </i>
  <p>Narendra DamodarDas Modi is the 15th and current Prime Minister of India,
  Modi, a leader of the Bharatiya Janata Party (BJP), previously served as the Chief Minister
  of Gujarat state from 2001 to 2014. He is currently the Member of Parliament (MP) from Varanasi.
</p>
</article>
</body>
</html>
```

Output

Narendra Modi

(Naam to suna hi hoga)

Narendra DamodarDas Modi is the 15th and current Prime Minister of India, Modi, a leader of the Bharatiya Janata Party (BJP), previously served as the Chief Minister of Gujarat state from 2001 to 2014. He is currently the Member of Parliament (MP) from Varanasi.

<header> Tag

- The <header> element represents a container for introductory content or a set of navigational links.

- A <header> element typically contains:

  - one or more heading elements (<h1> - <h6>)
  - logo or icon
  - authorship information

- You can have several <header> elements in one HTML document. However, **<header> cannot be placed within a <footer>, <address> or another <header> element.**

```
<!DOCTYPE>
<html>
<body>
<header>
<h2>ABCOnline.com</h2>
<p> World's no.1 shopping website</p>
</header>
</body>
</html>
```

Output

ABCOnline.com

World's no.1 shopping website

HTML5 <footer> Tag

- The <footer> tag defines a footer for a document or section.

- A <footer> element typically contains:

  - authorship information
  - copyright information
  - contact information
  - sitemap
  - back to top links
  - related documents

```html
<!DOCTYPE html>
<html>
<body>

<h1>The footer element</h1>

<footer>
  <p>Author: Twisha Patel<br>
  <a href="mailto:hege@example.com">twisha@example.com</a></p>
</footer>

</body>
</html>
```

Output

The footer element

Author: Twisha Patel
twisha@example.com

HTML5 <nav> tag

- HTML <nav> tag is used to represent a section which contains **navigation links, either within current document or to another document**.
-
- Examples of some navigation links are **menu, table of contents, indexes, etc**.

```
<!DOCTYPE html>
<html>
<head>

</head>
<body>
  <h1>Example of Nav tag</h1>
<nav>
        <a href="#">Home</a> |
        <a href="#">Courses</a> |
        <a href="#">About-us</a> |
        <a href="#">Contact-us</a> |
  </nav>
</body>
</html>
```

Output

Example of Nav tag

Home | Courses | About-us | Contact-us |

HTML5 <figure> tag

- HTML <figure> tag is used to mark up a photo in the document on a web page.

- **As we know image tag is already available in HTML to display the pictures on web pages. But HTML 5 <figure> tag is used to handle the group of diagrams, photos, code listing etc. with some embedded content.** You can also add a caption for the photo with the help of <figcaption> tag.

- HTML figure is new a new tag introduced in HTML5.

```
<!DOCTYPE html>
<html>
<body>

<h1>The figure and figcaption element</h1>

<figure>
  <img src="pic_trulli.jpg" alt="Trulli" style="width:50%">
   <img src="pic_trulli.jpg" alt="Trulli" style="width:50%">
</figure>

</body>
</html>
```

The figure and figcaption element





<figcaption> HTML5 Tag

- The <figcaption> tag defines a caption for a <figure> element.

```
<!DOCTYPE html>
<html>
<body>

<h1>The figure and figcaption element</h1>

<figure>
  <img src="pic_trulli.jpg" alt="Trulli" style="width:100%">
  <figcaption>Fig.1 - Trulli, Puglia, Italy.</figcaption>
</figure>

</body>
</html>
```

<figcaption> Tag

- The <figcaption> tag defines a caption for a <figure> element.

The figure and figcaption element



Fig.1 - Trulli, Puglia, Italy.

```
<!DOCTYPE html>
<html>
<head>
<style>
figure {
  border: 1px #cccccc solid;
  margin: auto;
}

figcaption {
  background-color: black;
  color: white;
  font-style: italic;
  text-align: center;
}
</style>
</head>
<body>

<h1>The figure and figcaption elements with CSS</h1>

<figure>
  <img src="pic_trulli.jpg" alt="Trulli" style="width:100%">
  <figcaption>Fig.1 - Trulli, Puglia, Italy</figcaption>
</figure>

</body>
</html>
```

The figure and figcaption elements with CSS



Fig.1 - Trulli, Puglia, Italy

HTML5 <audio> Tag

- The <audio> tag is used to embed sound content in a document, such as music or other audio streams.
- The **<audio> tag contains one or more <source> tags with different audio sources.** The browser will choose the first source it supports.
- **The text between the <audio> and </audio> tags will only be displayed in browsers that do not support the <audio> element.**
- There are three supported audio formats in HTML: **MP3, WAV, and OGG.**

```
<!DOCTYPE html>
<html>
<body>


<h1>The audio element</h1>

<p>Click on the play button to play a sound:</p>

<audio controls>
  <source src="horse.ogg" type="audio/ogg">
  <source src="horse.mp3" type="audio/mpeg">
  Your browser does not support the audio element.
</audio>

</body>
</html>
```

Output

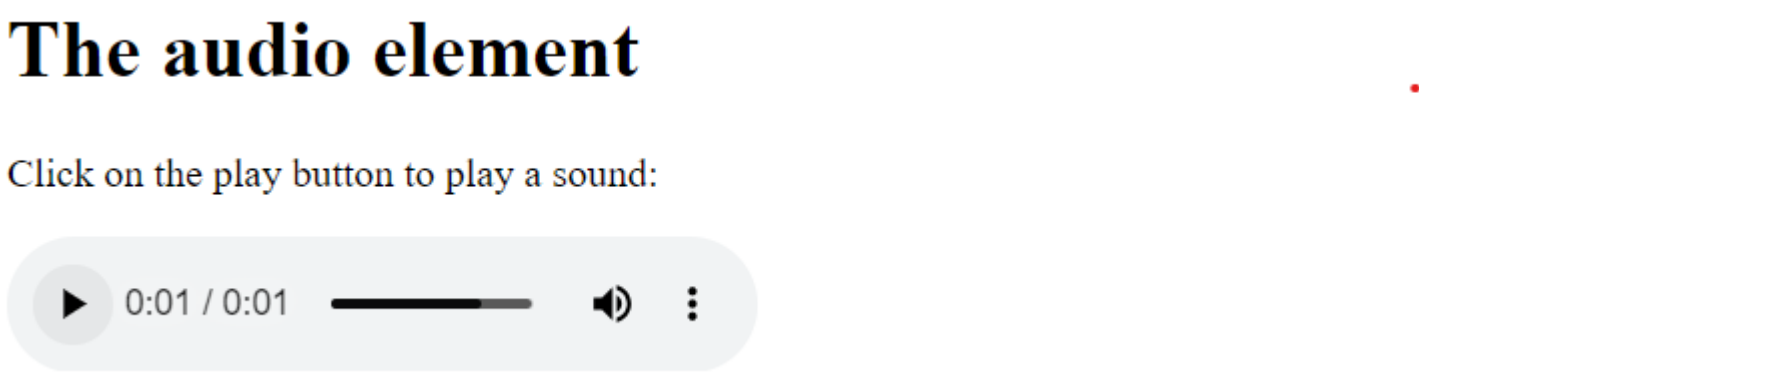

HTML5 <video> Tag

- The <video> tag is used to embed video content in a document, such as a movie clip or other video streams.
- **The <video> tag contains one or more <source> tags with different video sources.** The browser will choose the first source it supports.
- The text between the **<video> and </video> tags will only be displayed** in browsers that do not support the <video> element.
- There are three supported video formats in HTML: **MP4, WebM, and OGG.**

```
<!DOCTYPE html>
<html>
<body>

<h1>The video element</h1>

<video width="320" height="240" controls>
  <source src="movie.mp4" type="video/mp4">
  <source src="movie.ogg" type="video/ogg">
  Your browser does not support the video tag.
</video>

</body>
</html>
```

Output

The video element



<mark> HTML5 tag

- The <mark> tag defines text that should be marked or highlighted.

```
<!DOCTYPE html>
<html>
<body>

<h1>The mark element</h1>

<p>Do not forget to buy <mark>milk</mark> today.</p>

</body>
</html>
```

The mark element

Do not forget to buy milk today.

```html
<!DOCTYPE html>
<html>
<head>
<style>
mark {
  background-color: yellow;
  color: blue;
}
</style>
</head>
<body>

<p>A mark element is displayed like this:</p>

<mark>Highlighted text!!</mark>

<p>Change the default CSS settings to see the effect.</p>

</body>
</html>
```

A mark element is displayed like this:

Highlighted text!!

Change the default CSS settings to see the effect.

Datalist HTML5 tag

- The <datalist> tag specifies a list of pre-defined options for an <input> element.

```html
<!DOCTYPE html>
<html>
<body>

<h1>The datalist element</h1>

<form action="/action_page.php" method="get">
  <label for="browser">Choose your browser from the list:</label>
  <input list="browsers" name="browser" id="browser">
  <datalist id="browsers">
    <option value="Edge">
    <option value="Firefox">
    <option value="Chrome">
    <option value="Opera">
    <option value="Safari">
  </datalist>
  <input type="submit">
</form>


</body>
</html>
```

The datalist element

Choose your browser from the list: Submit

Edge

Firefox

Chrome

Opera

Safari

<dialog> HTML5 Tag

- The <dialog> tag defines a dialog box or subwindow.

- The <dialog> element makes it **easy to create popup dialogs and modals on a web page**.

- **Open:** Specifies that the dialog element is active and that the user can interact with it

```html
<!DOCTYPE html>
<html>
<body>

<h1>The dialog element</h1>

<p>This is some text.</p>


<p>This is some text.</p>

<dialog open>This is an open dialog window</dialog>

<p>This is some text.</p>

<p>This is some text.</p>

</body>
</html>
```

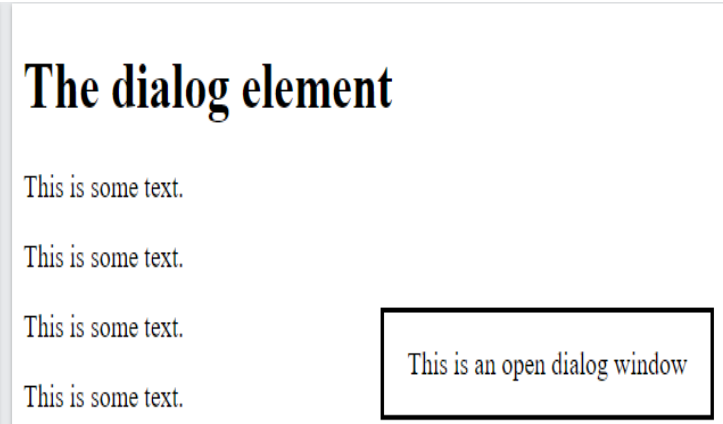

```html
<!DOCTYPE html>
<html>
<body>

<h1>The dialog element</h1>

<p>This is some text.</p>


<p>This is some text.</p>

<dialog>This is an open dialog window</dialog>

<p>This is some text.</p>

<p>This is some text.</p>

</body>
</html>
```

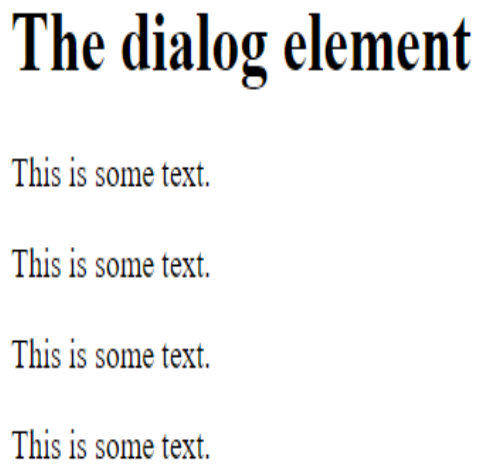

HTML4	HTML5
It is the fourth iteration of HTML.	It is the fifth iteration of HTML – an update over HTML4.
Lengthy Doctype declaration: <!DOCTYPE HTML PUBLIC “-//W3C//DTD HTML 4.01//EN” “http://www.w3.org/TR/html4/strict.dtd”>	Simple Doctype déclaration: <!DOCTYPE html>
These tags are not available in HTML4.	Comes with new HTML tags, including <audio>, <video>, <header>, <footer>, <canvas>, <article>, and more.
Multimedia supporting tags are not available.	Multimedia supporting tags are available.
Difficult for developers to handle inaccurate syntax errors.	It can handle inaccurate syntax errors.
To store important data on the client-side, the browser’s cache is used.	HTML5 uses the web SQL database, web storage, and application cache to store offline data that can be accessed through HTML5’s JavaScript interface.
tag is used for separating two parts.	Does not require tag.
Adding a figure with a caption to a document is not possible.	Adding a figure with a caption to a document is semantically possible.

HTML5 Structure

