Get and Post Methods in PHP

- HTTP protocol enables the communication between the client and the server where a **browser can be the client**, and an **application running on a computer system that hosts your website can be the server.**

- When data is sent from a browser to a server, it is sent using HTTP methods.

- PHP provides two methods through which a **client (browser) can send information to the server**. These methods are given below, and discussed in detail:

1.GET method

2.POST method

- Get and Post methods are the **HTTP request methods used inside the <form> tag to send form data to the server**.

GET method

- The **GET method** sends data to the server **through the URL**.
- Data is collected by the predefined **$_GET variable** for processing.
- The information sent from an **HTML form using the GET method is visible to everyone in the browser's address bar, which means that all the variable names and their values will be displayed in the URL**.
- It has a limited amount of data (usually around 2000 characters) because URLs have length restrictions.
- Therefore, the get method is **not secured to send sensitive information**.

For Example

```
localhost/gettest.php?username=Harry&bloodgroup=AB+
```


Example

- *file: test1.html*

```
<html>
  <body>

    <form action = "gettest.php" method = "GET">
      Username: <input type = "text" name = "username" /> <br>
      Blood Group: <input type = "text" name = "bloodgroup" /> <br>
      <input type = "submit" />
    </form>

  </body>
</html>
```

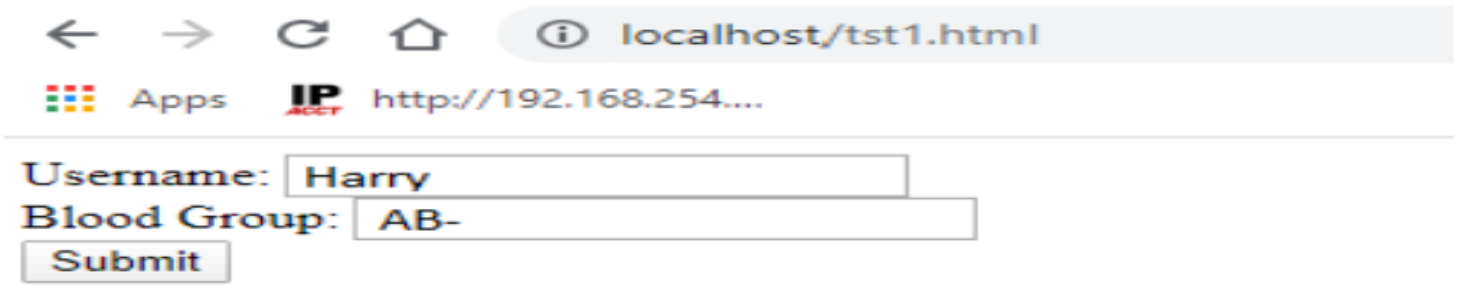

gettest.php

```
<html>
  <body>

    Welcome <?php echo $_GET["username"]; ?> </br>
    Your blood group is: <?php echo $_GET["bloodgroup"]; ?>

  </body>
</html>
```

When the user will click on **Submit** button after filling the form, the URL sent to the server could look something like this:

localhost/gettest.php?username=Harry&bloodgroup=AB-

The output will look like the below output:

```
Welcome Harry
Your blood group is: AB-
```

POST method

- Similar to the GET method, the POST method is also used to **submit the HTML form data**.
- The **POST method** sends data **inside the HTTP request body**, not in the URL.
- But the data submitted by this method is collected by the predefined superglobal variable **$_POST** instead of $_GET.
- Unlike the GET method, **it does not have a limit on the amount of information to be sent**.
- The information sent from an HTML form using the POST method is **not visible to anyone**.

For Example


```
localhost/posttest.php
```

file: test2.html

```
<html>
  <body>

    <form action = "posttest.php" method = "post">
      Username: <input type = "text" name = "username" /> <br>
      Blood Group: <input type = "text" name = "bloodgroup" /> <br>
      <input type = "submit" />
    </form>

  </body>
</html>
```

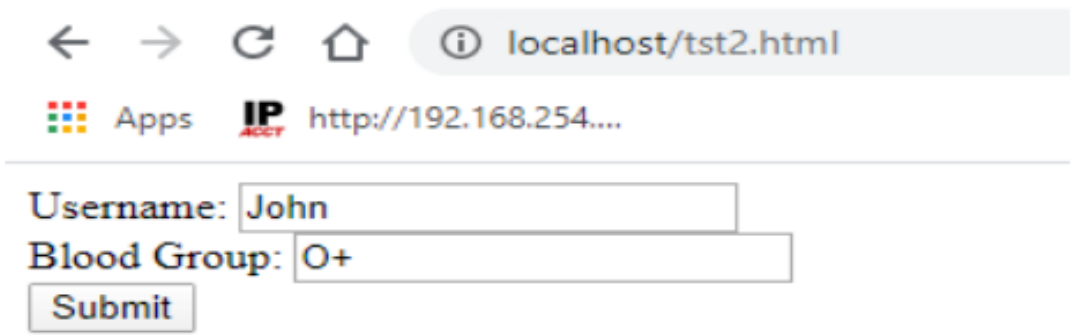

file: posttest.php

```
<html>
  <body>

    Welcome <?php echo $_POST["username"]; ?> </br>
    Your blood group is: <?php echo $_POST["bloodgroup"]; ?>

  </body>
</html>
```


When the user will click on **Submit** button after filling the form, the URL sent to the server could look something like this:

localhost/posttest.php

The output will look like the below output:

```
Welcome Harry
Your blood group is: O+
```

- Open XAMPP and start running Apache, MySQL and FileZilla

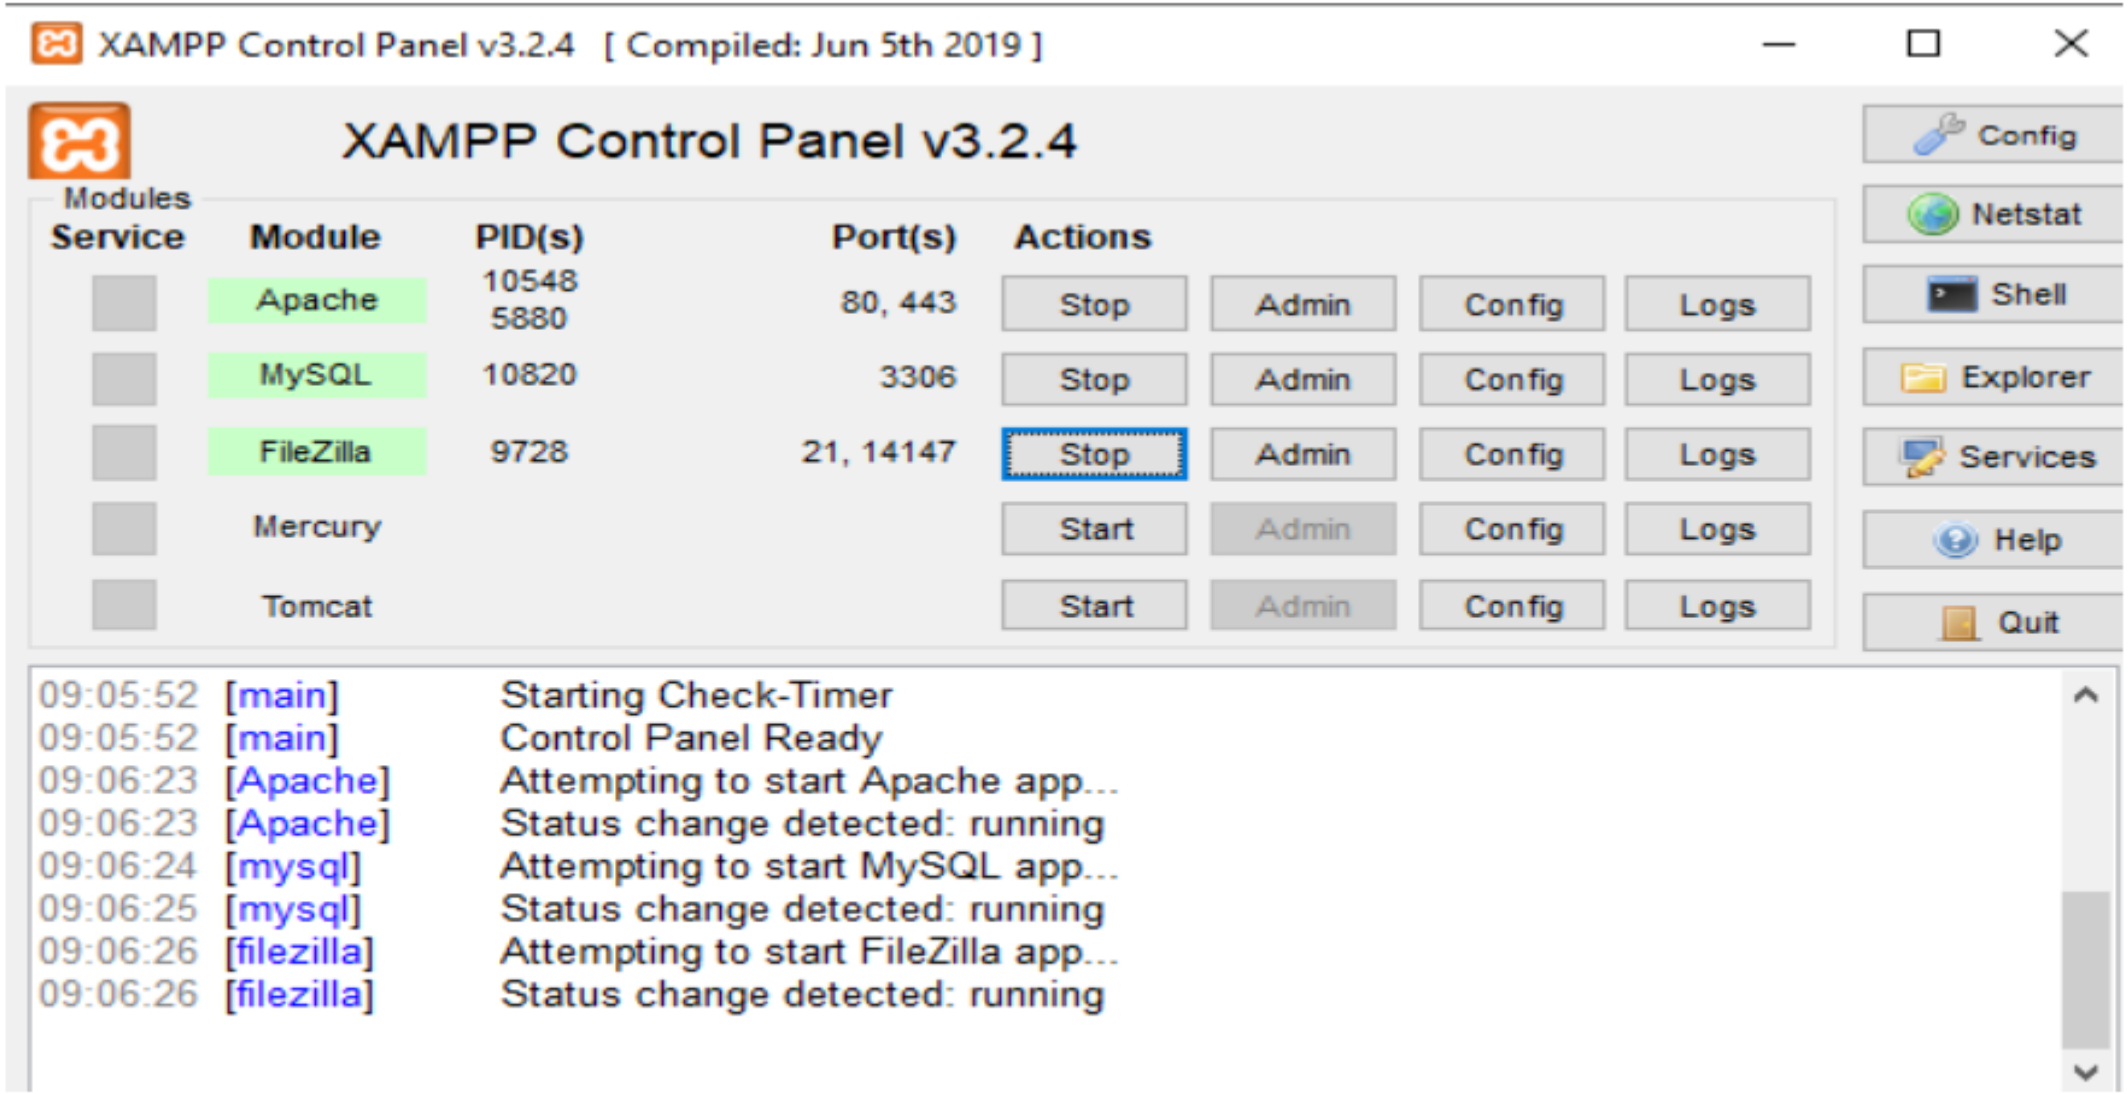

- Now open your PHP file and write your PHP code to create database and a table in your database.

PHP code to create a database:

PHP

```php
<?php

// Server name must be localhost
$servername = "localhost";

// In my case, user name will be root
$username = "root";

// Password is empty
$password = "";


// Creating a connection
$conn = new mysqli($servername,
              $username, $password);

// Check connection
if ($conn->connect_error) {
     die("Connection failure: "
          . $conn->connect_error);
}


// Creating a database named geekdata
$sql = "CREATE DATABASE geekdata";
if ($conn->query($sql) === TRUE) {
     echo "Database with name geekdata";
} else {
     echo "Error: " . $conn->error;
}

// Closing connection
$conn->close();
?>
```

- Save the file as “data.php” in *htdocs* folder under XAMPP folder.

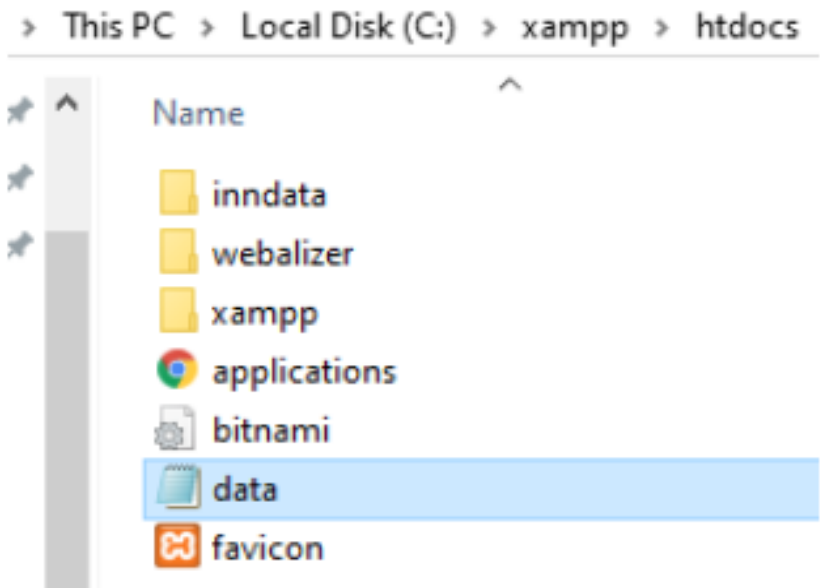


- Then open your web browser and type *localhost/data.php*

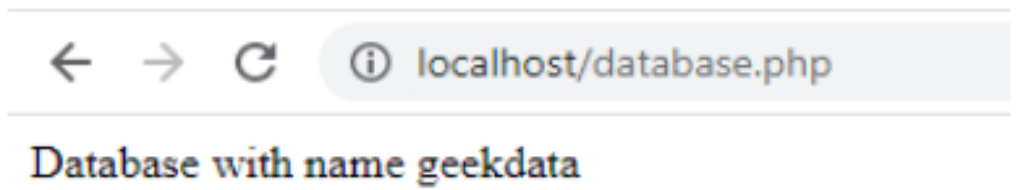

Finally the database is created and connected to PHP.

If you want to see your database, just type *localhost/phpmyadmin* in the web browser and the database can be found.

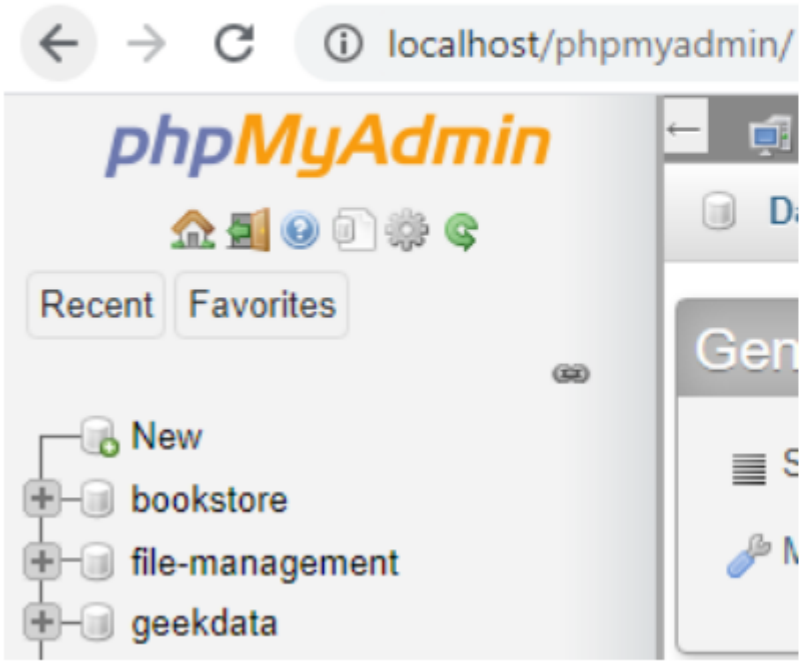

How to insert form value into Database

```
<!doctype html>
<html>
<head>
    <title>Insert form value into database</title>
</head>
<body>
    <form action="insert.php" method="post">
        <label>Name:</label><input type="text" name="name"><br><br>

        <label>Email:</label><input type="email" name="email"><br><br>


        <label>Age:</label><input type="text" name="age"><br><br>


        <label>Address:</label><input type="text" name="address"><br><br>


        <button type="submit" name="submit">Submit</button>

    </form>
</body>
</html>
```

Create Database

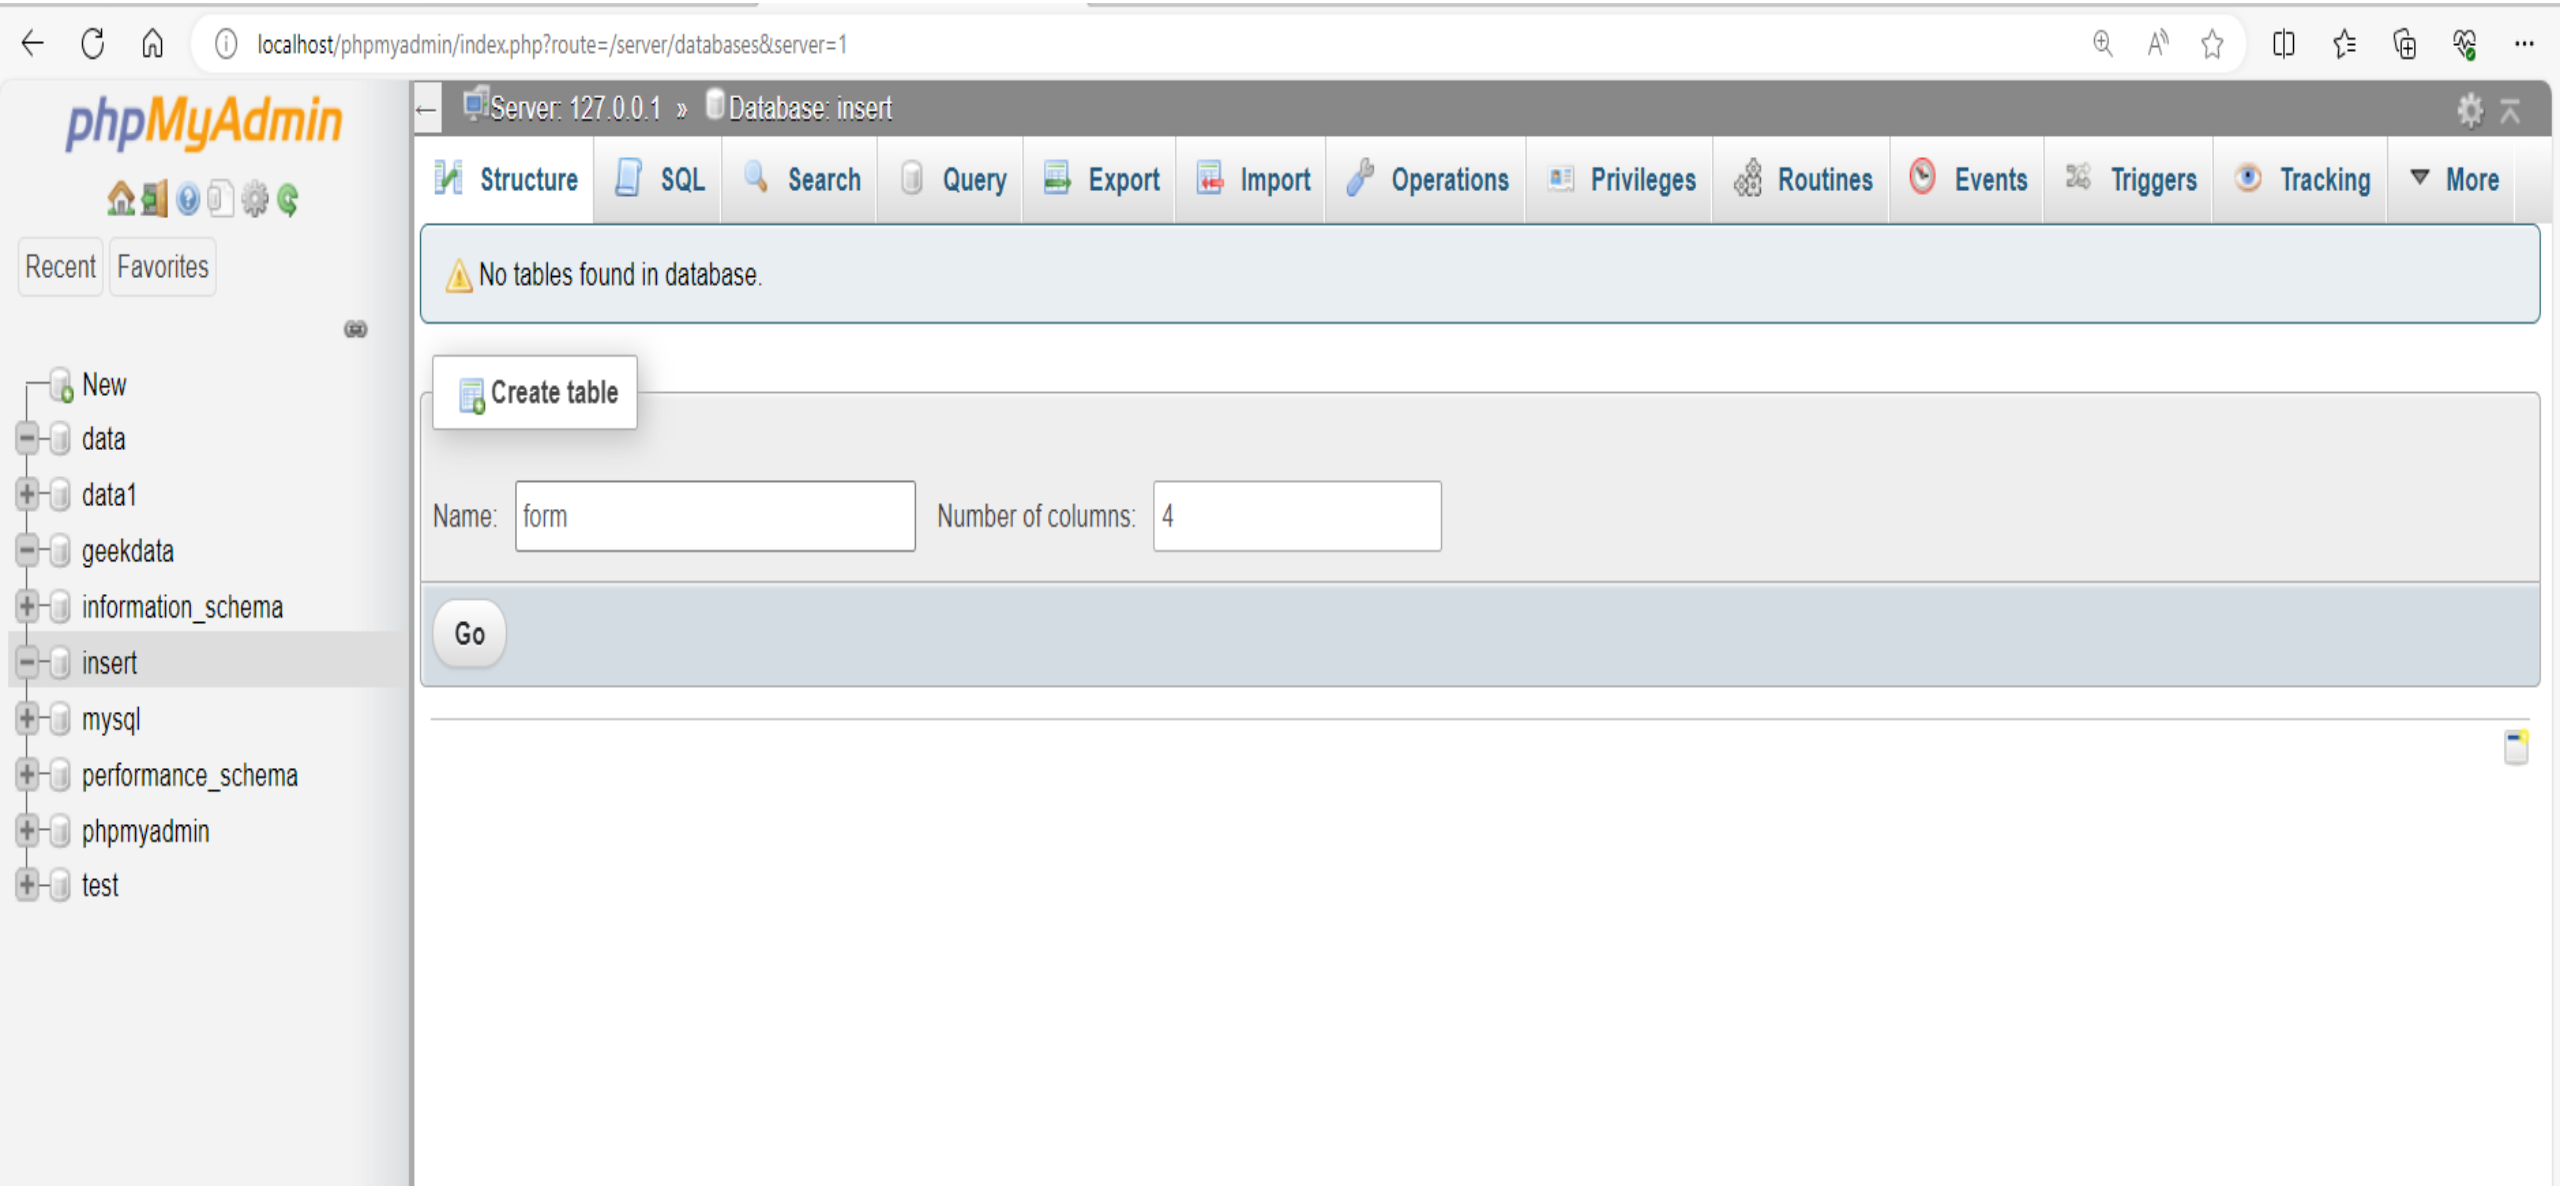

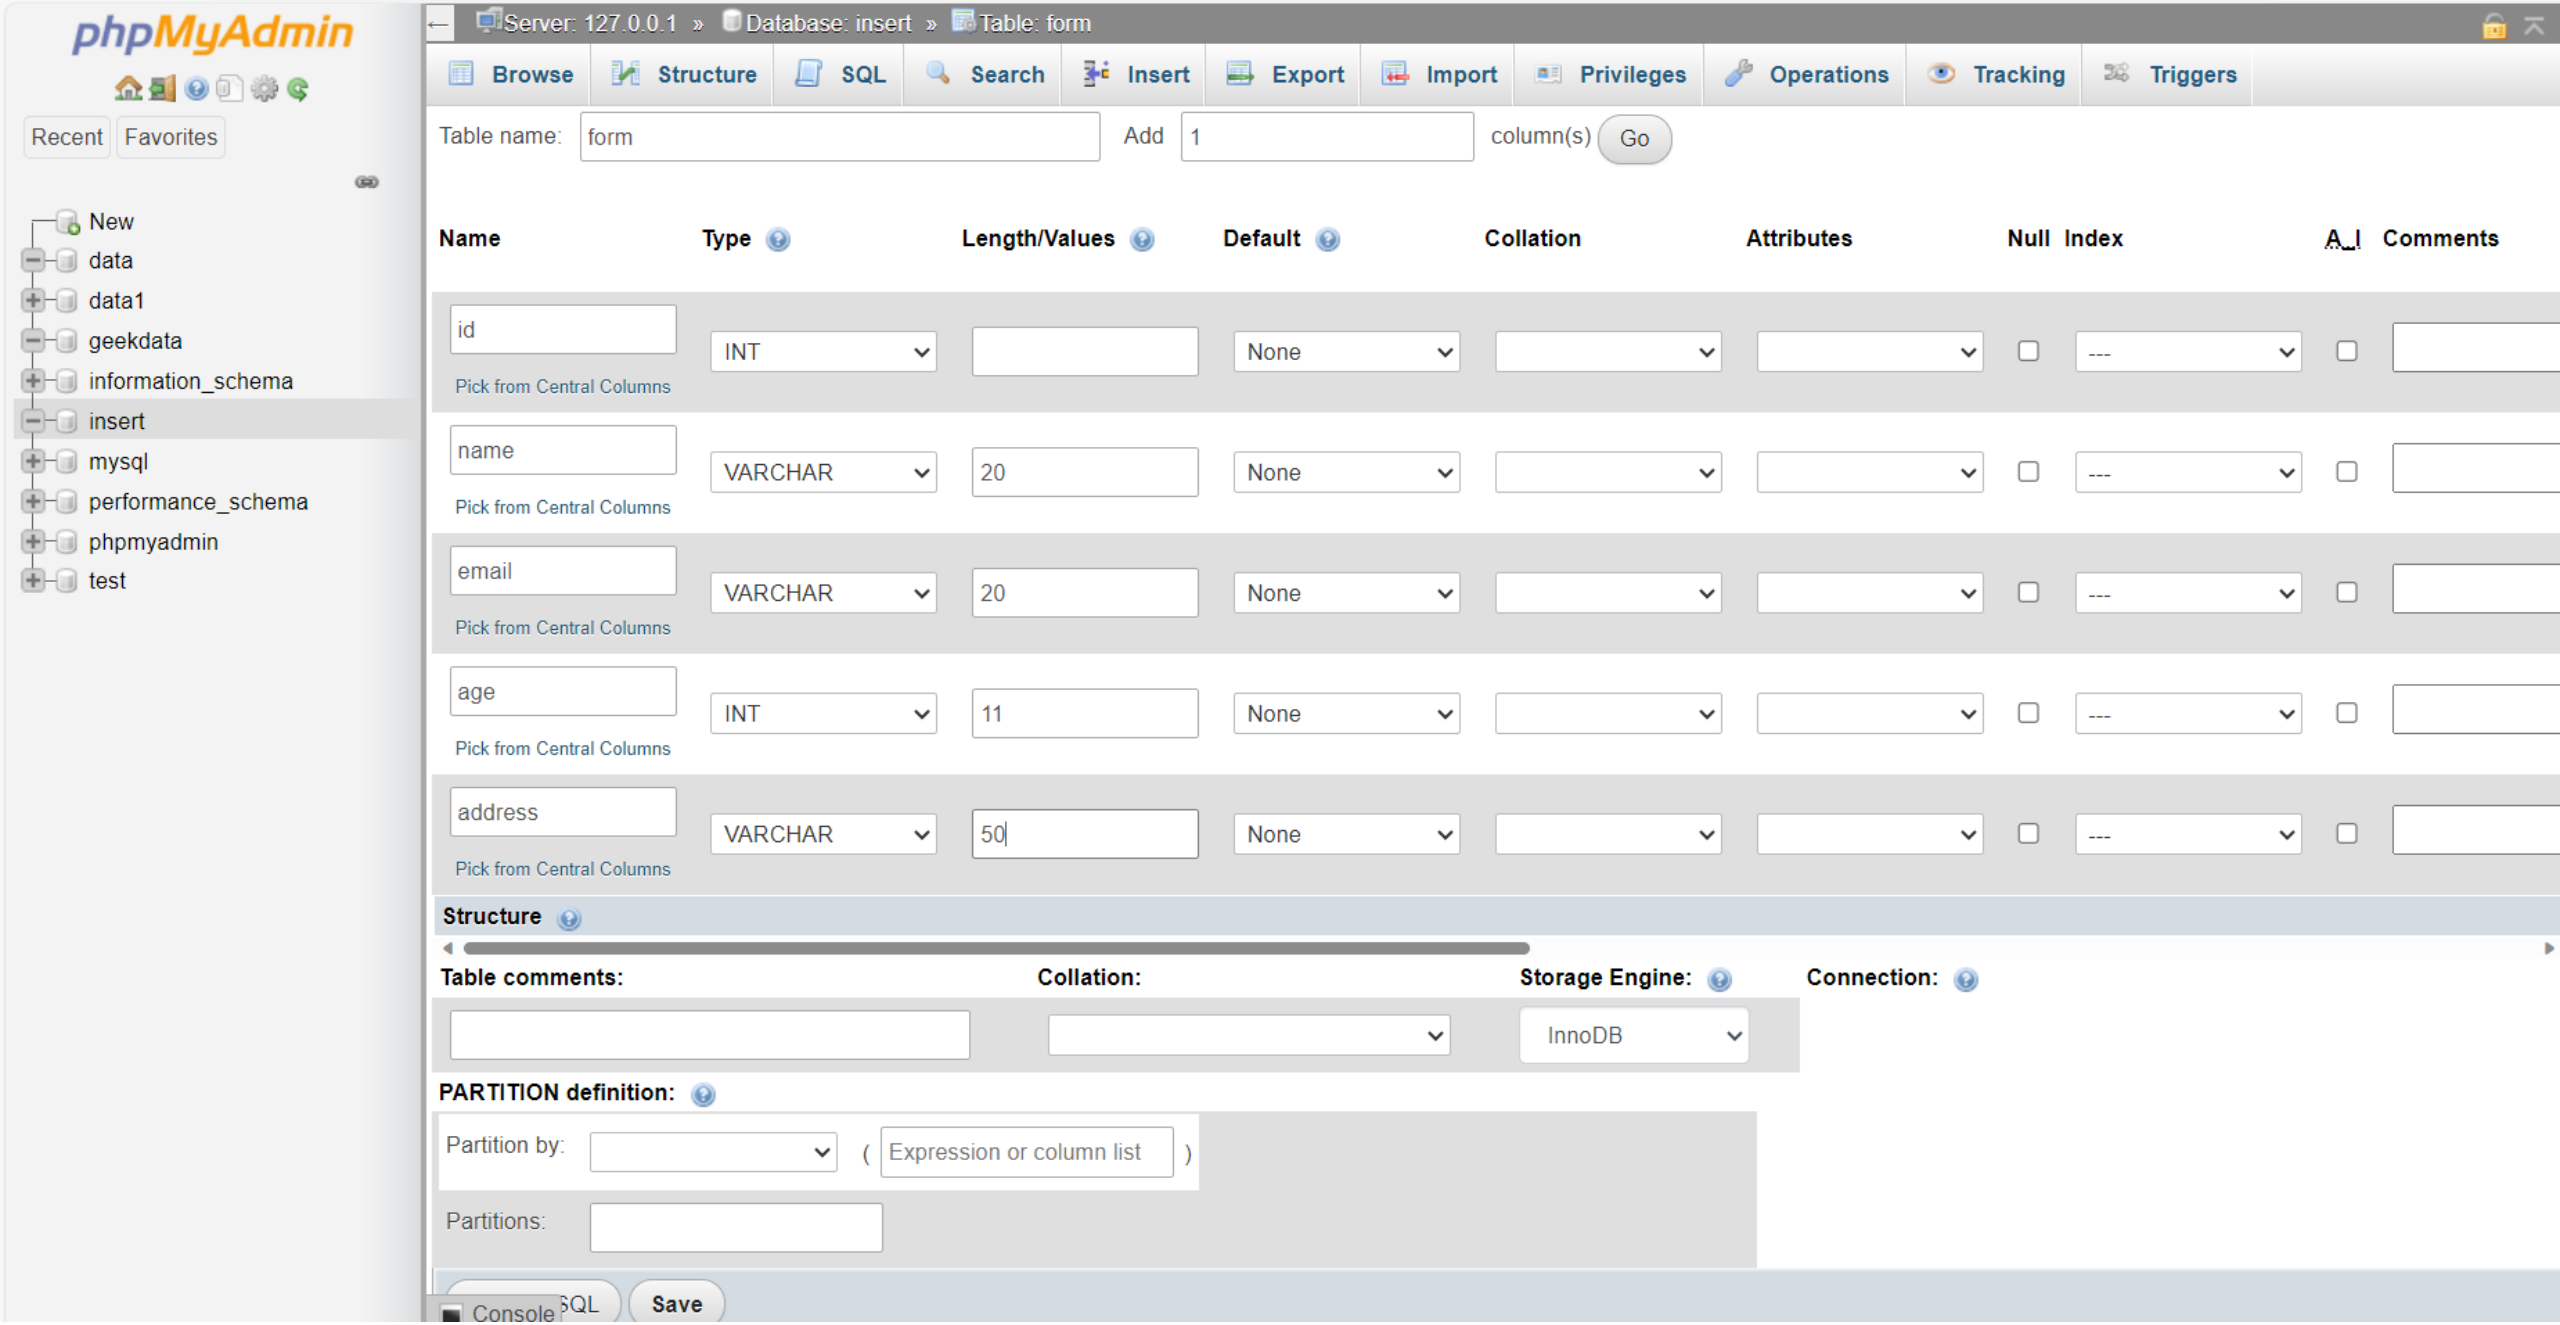
phpMyAdmin
Recent
Favorites
New
data
data1
geekdata
information_schema
insert
mysql
performance_schema
phpmyadmin
test
Server: 127.0.0.1 » Database: insert » Table: form
Browse
Structure
SQL
Search
Insert
Export
Import
Privileges
Operations
Tracking
Triggers
Table name: form
Add 1 column(s)
Go
Name
Type
Length/Values
Default
Collation
Attributes
Null
Index
A_I
Comments
id
INT
None
Pick from Central Columns
name
VARCHAR
20
None
Pick from Central Columns
email
VARCHAR
20
None
Pick from Central Columns
age
INT
11
None
Pick from Central Columns
address
VARCHAR
50
None
Pick from Central Columns
Structure
Table comments:
Collation:
Storage Engine:
InnoDB
Connection:
PARTITION definition:
Partition by:
Expression or column list
Partitions:
Console
SQL
Save

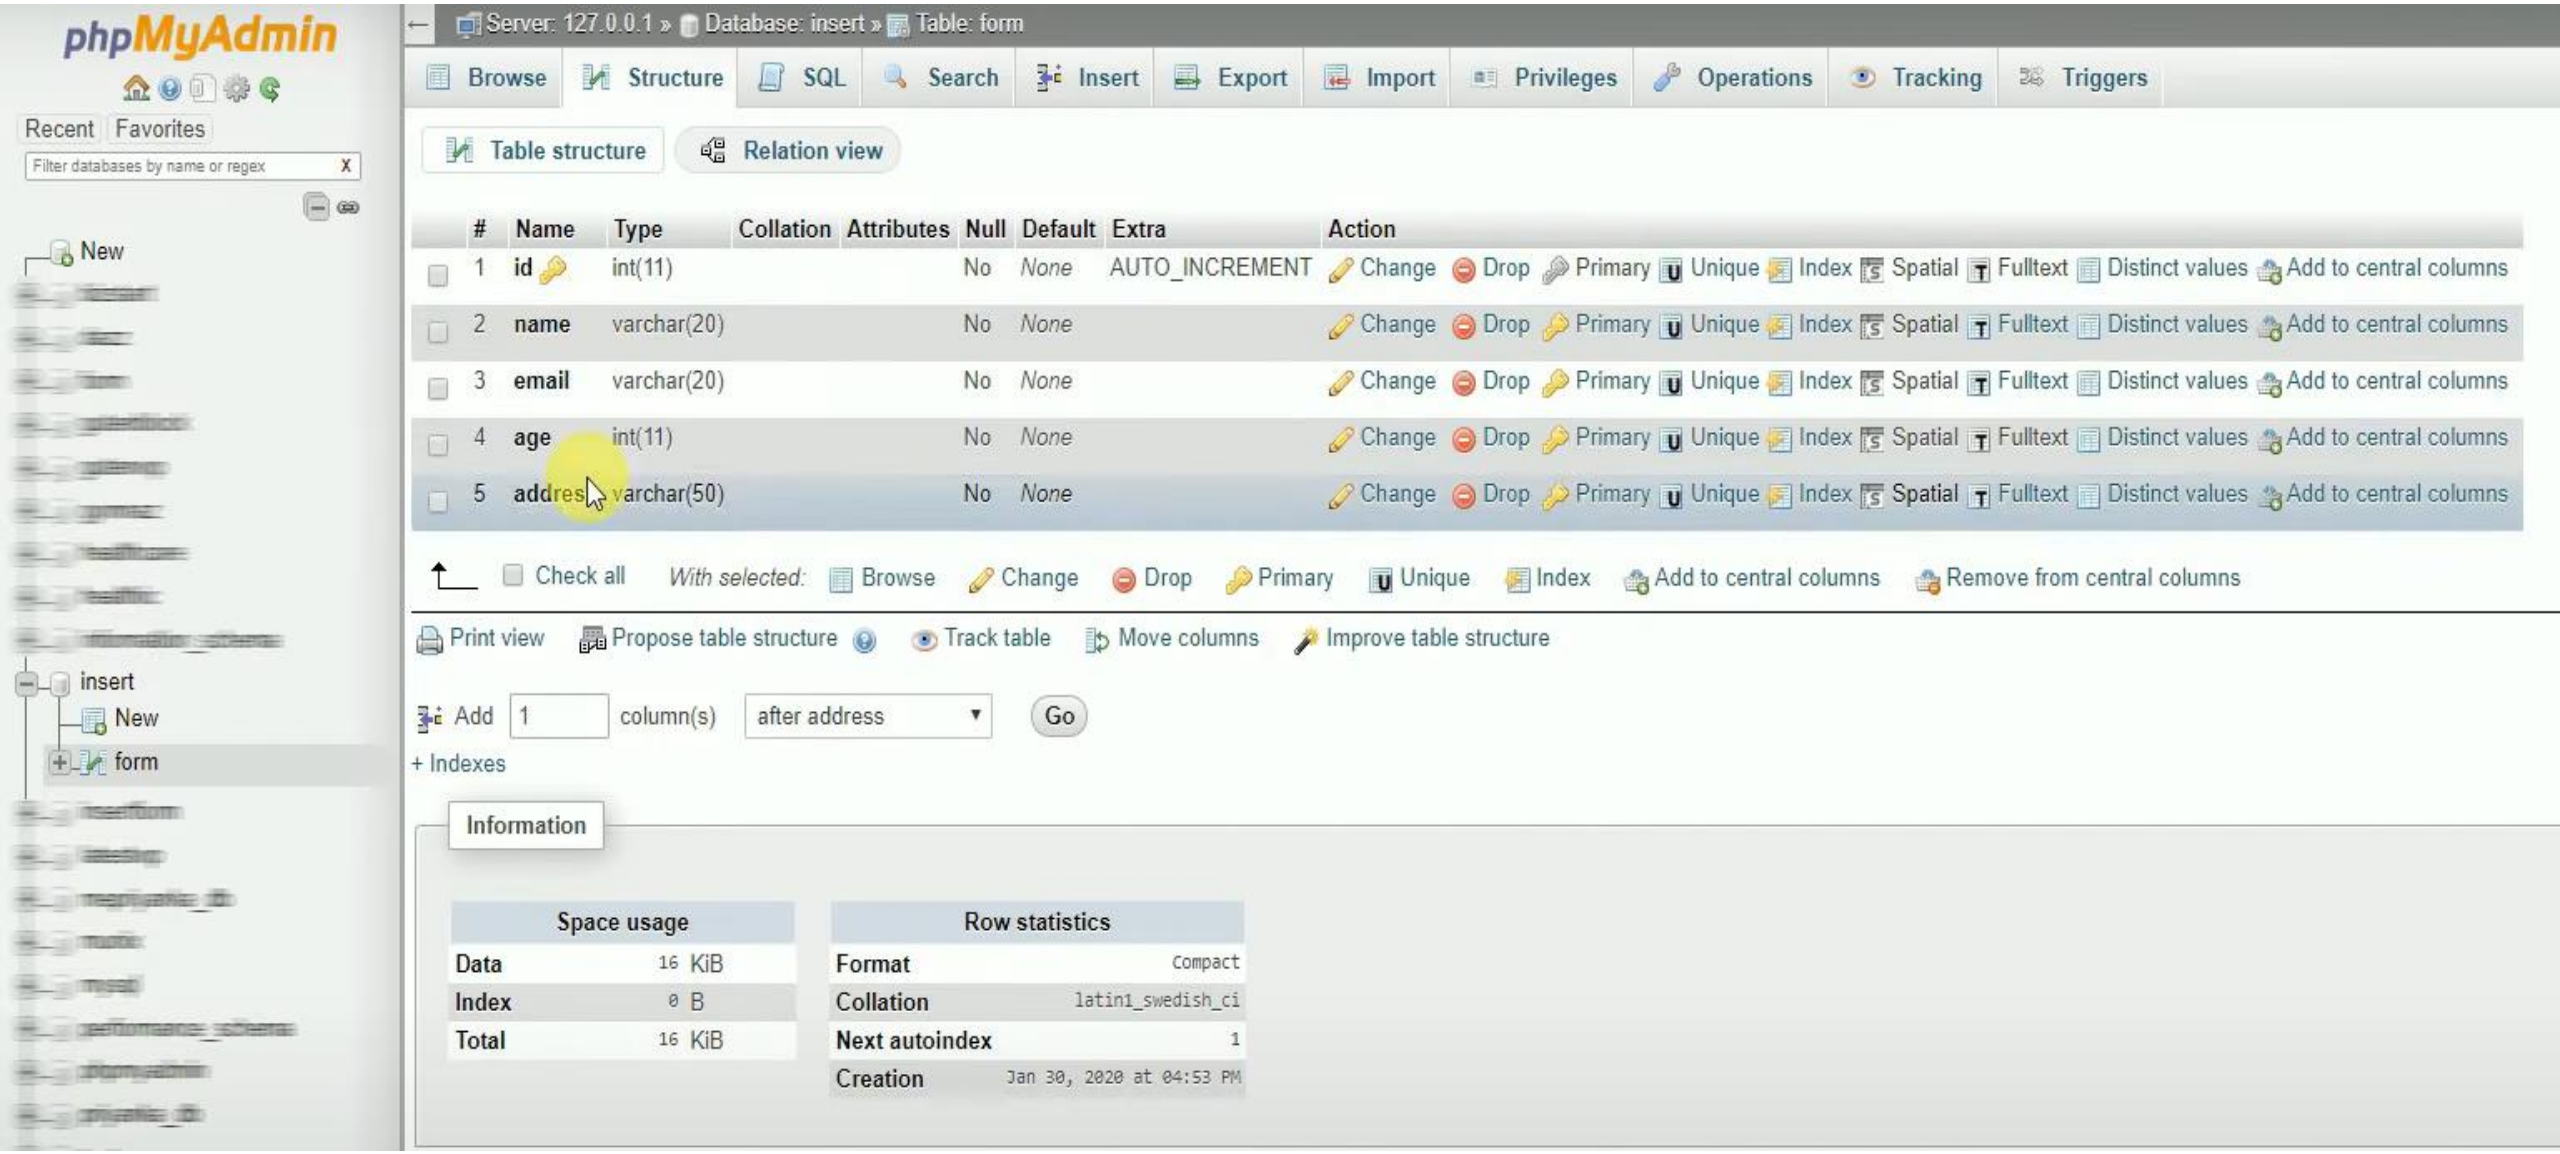
phpMyAdmin
Recent
Favorites
Filter databases by name or regex
New
insert
New
form
Server: 127.0.0.1 » Database: insert » Table: form
Browse
Structure
SQL
Search
Insert
Export
Import
Privileges
Operations
Tracking
Triggers
Table structure
Relation view
Name Type Collation Attributes Null Default Extra Action
1 id int(11) No None AUTO_INCREMENT Change Drop Primary Unique Index Spatial Fulltext Distinct values Add to central columns
2 name varchar(20) No None Change Drop Primary Unique Index Spatial Fulltext Distinct values Add to central columns
3 email varchar(20) No None Change Drop Primary Unique Index Spatial Fulltext Distinct values Add to central columns
4 age int(11) No None Change Drop Primary Unique Index Spatial Fulltext Distinct values Add to central columns
5 address varchar(50) No None Change Drop Primary Unique Index Spatial Fulltext Distinct values Add to central columns
Check all
With selected:
Browse
Change
Drop
Primary
Unique
Index
Add to central columns
Remove from central columns
Print view
Propose table structure
Track table
Move columns
Improve table structure
Add 1 column(s) after address Go
+ Indexes
Information
Space usage
Data 16 KiB
Index 0 B
Total 16 KiB
Row statistics
Format Compact
Collation latin1_swedish_ci
Next autoindex 1
Creation Jan 30, 2020 at 04:53 PM

```php
<?php
$server = "localhost" ;
$username = "root" ;
$password = "" ;
$dbname = "insert" ;


$conn = mysqli_connect($server , $username , $password , $dbname) ;

if(isset($_POST['submit'])){

    if(!empty($_POST['name']) && !empty($_POST['email']) && !empty($_POST['age']) && !empty($_POST['address'])){

        $name = $_POST['name'] ;
        $email =  $_POST['email'] ;
        $age = $_POST['age'] ;
        $address = $_POST['address'] ;

        $query = "insert into form(name,email,age,address) values('$name' , '$email' , '$age' , '$address')" ;

        $run = mysqli_query($conn,$query) or die(mysqli_error());

        if($run){
         echo " Form submitted successfully" ;

        }
        else {

         echo "Form not submitted" ;
        }

    }
    else{
        echo " all fields required" ;
    }

}


?>
```

Update Data

```
UPDATE table_name
SET column1=value, column2=value2,...
WHERE some_column=some_value
```

```php
<?php
$servername = "localhost";
$username = "username";
$password = "password";
$dbname = "myDB";

// Create connection
$conn = new mysqli($servername, $username, $password,
$dbname);
// Check connection
if ($conn->connect_error) {
  die("Connection failed: " . $conn->connect_error);
}

$sql = "UPDATE MyGuests SET lastname='Doe' WHERE id=2";

if ($conn->query($sql) === TRUE) {
  echo "Record updated successfully";
} else {
  echo "Error updating record: " . $conn->error;
}
$conn->close();
?>
```

Delete Data

```
DELETE FROM table_name
WHERE some_column = some_value
```

```php
<?php
$servername = "localhost";
$username = "username";
$password = "password";
$dbname = "myDB";

// Create connection
$conn = new mysqli($servername, $username, $password, $dbname);
// Check connection
if ($conn->connect_error) {
  die("Connection failed: " . $conn->connect_error);
}

// sql to delete a record
$sql = "DELETE FROM MyGuests WHERE id=3";

if ($conn->query($sql) === TRUE) {
  echo "Record deleted successfully";
} else {
  echo "Error deleting record: " . $conn->error;
}
$conn->close();
?>
```