

# HDF5 Audit Report

Gerd Heber and Elena Pourmal

---

HDF5 is a foundational component of the scientific software ecosystem, yet it has never undergone a systematic, ecosystem-wide review of its safety, security, and privacy properties. This report presents such an audit, spanning the core library and file format, the command-line tools, the extension mechanisms (VOL connectors, filter plugins, and virtual file drivers), language bindings, applications built on HDF5, the upstream and downstream software supply chain, independent format implementations, and long-term data accessibility.

Two findings dominate. First, HDF5's CVE history is not a collection of unrelated defects but a small number of recurring root-cause classes, chiefly the use of unvalidated file-derived sizes, counts, and offsets in low-level C memory operations. We therefore argue that patching individual crashes is insufficient and propose a program built on an explicit invariant registry for each on-disk structure, a two-phase parser boundary separating decode from object construction, centralized checked arithmetic, structure-aware fuzzing, and file-open security profiles that make hostile input a first-class concern. Second, privacy exposure in HDF5 arises largely from normal, correct operation rather than from an attack: the format's self-describing metadata, structural layout, workflow artifacts, and extension mechanisms can disclose sensitive information even when raw data are protected. Encryption is a necessary but partial control.

Throughout, we frame the recurring failure as trust-boundary confusion and give prioritized mitigations for library maintainers, extension authors, downstream projects, and end users. Although the subject is HDF5, the analysis is intended to generalize to comparable open-source scientific data ecosystems.

---

**Acknowledgments:** This material is based upon work supported by the U.S. National Science Foundation under Federal Award No. 2534078. Any opinions, findings, and conclusions or

recommendations expressed in this material are those of the author(s) and do not necessarily reflect the views of the National Science Foundation.

Revision History

| Version Number | Date            | Comments                                    |
|----------------|-----------------|---------------------------------------------|
| v1             | July 4, 2026    | Initial draft released for internal review. |
| v2             | August 31, 2026 | Public release.                             |

## Contents

|                                                                   |           |
|-------------------------------------------------------------------|-----------|
| <b>1. Introduction</b>                                            | <b>6</b>  |
| 1.1. Purpose and Engagement Type . . . . .                        | 6         |
| 1.2. Objectives and Intended Audience . . . . .                   | 6         |
| 1.3. Scope . . . . .                                              | 7         |
| 1.4. Assessment Dimensions . . . . .                              | 9         |
| 1.5. Temporal Boundary and Evidence Basis . . . . .               | 10        |
| 1.6. Methodology . . . . .                                        | 11        |
| 1.7. Limitations and Assurance . . . . .                          | 12        |
| 1.8. Privacy Context . . . . .                                    | 13        |
| <b>2. Assessment Surfaces</b>                                     | <b>15</b> |
| <b>3. HDF5 Core Library and File Format</b>                       | <b>17</b> |
| 3.1. Accidents Waiting to Happen – HDF5 Safety . . . . .          | 17        |
| 3.2. Verify and Verify – HDF5 Security . . . . .                  | 17        |
| 3.3. HDF5 Privacy: Assets and Exposure . . . . .                  | 18        |
| 3.3.1. Introduction . . . . .                                     | 18        |
| 3.3.2. HDF5 Assets and their Exposure . . . . .                   | 20        |
| 3.4. HDF5 Tools . . . . .                                         | 24        |
| 3.4.1. Privacy exposure through HDF5 command-line tools . . . . . | 24        |
| 3.5. Audit Findings and Mitigation Priorities . . . . .           | 28        |
| 3.5.1. Security and Safety . . . . .                              | 28        |
| 3.5.2. Privacy . . . . .                                          | 42        |
| <b>4. HDF5 Library Extensions</b>                                 | <b>47</b> |
| 4.1. Overview . . . . .                                           | 47        |
| 4.2. Virtual Object Layer (VOL) Connectors . . . . .              | 47        |
| 4.2.1. Privacy Risks for VOL Connectors . . . . .                 | 47        |
| 4.3. Filters Plugins . . . . .                                    | 50        |
| 4.3.1. Privacy Risks for Filters Plugins . . . . .                | 50        |
| 4.4. Virtual File Drivers (VFD) . . . . .                         | 54        |
| 4.4.1. Privacy Risks for VFDs . . . . .                           | 54        |

4.5. Audit Findings and Mitigation Priorities . . . . . 57

4.5.1. Privacy . . . . . 57

**5. HDF5 Wrappers and Language Bindings 64**

5.1. Overview . . . . . 64

5.2. Python . . . . . 64

5.3. Java . . . . . 64

5.4. Audit Findings and Mitigation Priorities . . . . . 64

**6. Applications using HDF5 65**

6.1. Audit Findings and Mitigation Priorities . . . . . 67

**7. HDF5 in the Software Supply Chain 73**

7.1. Upstream Dependencies . . . . . 73

7.2. Downstream Dependencies . . . . . 74

7.3. Audit Findings and Mitigation Priorities . . . . . 77

**8. Independent HDF5 Implementations 79**

8.1. Overview . . . . . 79

8.2. Audit Findings and Mitigation Priorities . . . . . 79

**9. Long-term Data Accessibility and Interpretability 80**

9.1. Audit Findings and Mitigation Priorities . . . . . 80

**10. Resources 81**

**References 82**

**A. CVE History Summary 86**

**B. Software Supply Chain Details 91**

# 1. Introduction

## 1.1. Purpose and Engagement Type

This report presents a targeted, evidence-based technical assessment of safety, security, and privacy risks in the HDF5 software and data ecosystem. Its purpose is to identify systemic risk patterns, explain the trust boundaries at which those risks arise, and recommend mitigations for the organizations and individuals that develop, distribute, deploy, or use HDF5.

The term *audit* denotes a documented technical examination. This engagement is not a compliance certification, attestation engagement, penetration test, or exhaustive line-by-line source-code review. It expresses no independent assurance opinion and does not certify that any HDF5 release, application, file, or deployment is safe, secure, privacy-preserving, conforming, or free from defects. Authorship and sponsorship are disclosed in the front matter.

## 1.2. Objectives and Intended Audience

The objectives of the assessment are to:

1. identify important assets, interfaces, capabilities, trust boundaries, and failure modes across the HDF5 ecosystem;
2. distinguish accidental safety and data-integrity failures from adversarial security failures and privacy harms arising during authorized operation;
3. identify recurring root-cause classes rather than treating individual crashes, CVEs, disclosures, and interoperability failures as unrelated events;
4. examine how risk propagates between the file format, core library, tools, extensions, bindings, applications, supply chain, and independent implementations;
5. distinguish file-format conformance, acceptance by a particular implementation, and safe use in a particular deployment;

6. recommend mitigations attributable to the actors able to implement and enforce them; and
7. identify lessons applicable to comparable open-source scientific data ecosystems.

The primary audience is The HDF Group's maintainers, security responders, release engineers, and technical governance bodies. Additional audiences include extension and plugin authors, binding and independent-implementation maintainers, downstream application and distribution maintainers, operators of data-ingestion services, research-infrastructure teams, data stewards, and security and privacy reviewers.

Recommendations are assigned, where possible, to the layer able to enforce them. A control failure at an application or deployment boundary is not classified as a core-library defect merely because an HDF5 mechanism was involved.

### 1.3. Scope

Component scope is not binary in this report. The assessment distinguishes the following levels of coverage:

**Primary assessment objects.** These are the HDF5 on-disk format; the core C library, with emphasis on its handling of file-controlled metadata; HDF5 command-line tools; the capability, trust, and privacy characteristics of VOL connectors, filter plugins, and Virtual File Drivers as extension classes; and HDF5 build, release, and dependency configuration. The report states findings and mitigations for these objects.

**Boundary case studies.** Selected downstream incidents and interoperability disputes are examined to determine how HDF5 capabilities interact with application authority, deployment policy, or independent implementations. The cases include model and dataset ingestion, external-resource resolution, plugin loading, and conformance disputes involving files produced by independent writers. The referenced projects are not audited as products.

**Contextual references.** Other components are identified to describe ecosystem reach, dependency relationships, compatibility consequences, or potential exposure. A contextual reference does not constitute an assessment or assurance conclusion about that component.

Case studies and samples are selected purposively according to exposure to untrusted input or ambient authority, evidence of a recurring failure class, interoperability or archival consequence, and relevance to cross-cutting mitigations. They are not a statistical sample and do not support prevalence or frequency estimates.

In this report, *ecosystem-wide* describes the breadth of surfaces considered. It does not mean that every implementation, configuration, or downstream product was examined exhaustively.

**Out of scope.** The following are outside the engagement:

- HSDS source code, client behavior, REST endpoints, authentication and authorization, tenant isolation, deployment configuration, storage backends, and service availability;
- a complete safety, security, or privacy assessment of HDFView, Keras, TensorFlow, Hugging Face, PureHDF, or any other application, service, framework, or independent implementation cited as a case study or ecosystem dependency;
- general AI or machine-learning safety, model behavior, training, inference, and framework functionality unrelated to an HDF5 integration boundary;
- detailed assessment of MPI semantics, collective-I/O correctness, concurrency, fault tolerance, performance, or parallel-filesystem security in Parallel HDF5;
- exhaustive review or testing of every HDF5 release, platform, build configuration, compiler, filter, connector, binding, application, package, or independent implementation;
- penetration testing of production services, exploit development, or proof that every defect or vulnerability class has been identified;



- assessment of a particular organization's production infrastructure, credentials, identity systems, network controls, or operational procedures, except as context for a cited incident or mitigation; and
- legal, regulatory, contractual, research-ethics, or functional-safety certification.

References to HDFView identify downstream exposure or reader behavior, not an HDFView finding. References to machine-learning frameworks or services concern only their handling of HDF5-controlled inputs. References to Parallel HDF5 are limited to the configuration, dependency, extension, or trust-boundary characteristics expressly discussed.

HSDS may appear in ecosystem diagrams for context, but no conclusion about HSDS should be inferred.

## 1.4. Assessment Dimensions

**Safety.** Safety means operational robustness and protection of data integrity, availability, recoverability, interoperability, and long-term accessibility in the absence of a malicious actor. Relevant conditions include malformed, truncated, inconsistent, or partially written files; resource exhaustion; I/O failure; incompatible implementations; and foreseeable misuse. Safety in this report does not mean regulated functional or physical safety.

**Security.** Security concerns the possibility that an adversary can compromise confidentiality, integrity, or availability, or cause a process to exercise authority contrary to the operator's intent. The principal threat scenario is an HDF5 file, metadata field, external reference, plugin requirement, archive, or model artifact controlled by an untrusted party and processed by an application possessing filesystem, network, compute, plugin-loading, or credential authority.

The assessment includes memory-safety defects, denial of service, resource exhaustion, external-resource resolution, dynamic code loading, downstream deserialization, and supply-chain compromise. A security consequence does not require

a defect in the HDF5 format or parser: an intentional HDF5 capability can become an attack mechanism when a downstream application interprets file-controlled instructions using authority unavailable to the file's originator.

**Privacy.** Privacy concerns adverse consequences arising from the disclosure, retention, inference, aggregation, correlation, or secondary use of information. Such consequences may arise during authorized and otherwise correct operation, without a security breach. The assessment includes scientific data, descriptive and structural metadata, object names and attributes, provenance, workflow artifacts, caches, temporary copies, external resources, and information that becomes sensitive when datasets are combined.

The report evaluates privacy-exposure mechanisms and possible technical or governance controls. It does not determine compliance with privacy statutes, regulations, contracts, consent requirements, institutional policies, or research-ethics obligations.

## 1.5. Temporal Boundary and Evidence Basis

The evidence cutoff for this revision is August 27, 2026. Public evidence available on or before that date is eligible for consideration. Later developments are outside this revision unless expressly incorporated as subsequent-event updates.

The historical analysis has no fixed lower date and includes earlier releases where necessary to examine cited vulnerabilities, compatibility behavior, and implementation changes. Because this is a historical, ecosystem-level assessment, no single software baseline applies. A conclusion concerning one release, commit, build configuration, platform, or third-party version is not presumed to apply to others. Version-specific conclusions are bounded by the artifact identifiers cited with them. Where an exact artifact is not identified, a statement should be read as an architectural or historical class-level observation, not as a release-specific conclusion.

The principal evidence consists of published HDF5 specifications and API documentation; selected source code and build configurations; security policies,

advisories, and CVE records; issue and pull-request discussions; cited commits and regression artifacts; and authoritative documentation or incident reports from representative downstream and independent projects.

## 1.6. Methodology

The engagement uses a qualitative, risk-informed technical-assessment method:

1. **Surface and trust-boundary mapping.** The ecosystem is decomposed into format, parser, tool, extension, binding, application, supply-chain, independent-implementation, and data-lifecycle surfaces.
2. **Asset and harm analysis.** The assessment identifies relevant data, meta-data, code, credentials, compute and storage resources, availability, interoperability, and interpretability, together with plausible safety, security, and privacy consequences.
3. **Document and artifact examination.** Specifications, documentation, public source artifacts, vulnerability records, fixes, issue records, build configuration, and representative ecosystem documentation are examined.
4. **Root-cause and pattern analysis.** Defects and incidents are grouped by the earliest violated invariant or trust-boundary failure supported by the evidence, rather than only by crash type, CVE identifier, or affected application.
5. **Conformance and interoperability analysis.** Acceptance by one HDF5 reader is not treated as proof that a file conforms to the applicable specification, and rejection by another reader is not treated as proof that it does not. Where implementations disagree, the analysis distinguishes the normative requirement, writer behavior, reader validation, and compatibility policy.
6. **Mitigation analysis.** Controls are evaluated according to potential impact, exposure to the failure mode, breadth and recurrence, existing controls, evidence strength, urgency, implementation dependencies, and the actor able to enforce them. Controls addressing cross-cutting root causes or enabling

prerequisite protections are distinguished from local remediations. Risk severity and implementation sequence are treated as separate judgments.

For incidents involving multiple components, the analysis distinguishes the HDF5 mechanism, the authority supplied by the host application, the failed control or policy boundary, and the resulting impact. The presence of HDF5 in an exploit chain is not, without additional evidence, classified as a parser or file-format defect.

The report distinguishes, where practicable, among:

**Documented observation:** directly supported by a cited specification, source artifact, test, advisory, incident record, or maintainer diagnosis; the applicable discussion distinguishes source-reported evidence from independent reproduction;

**Reasoned inference:** a conclusion drawn from observations, with material assumptions and uncertainty identified; and

**Recommendation:** a proposed control to be validated through implementation and acceptance evidence.

Unless a finding expressly records an independent reproduction or test, it should be understood as the result of document, artifact, or architecture examination rather than independent dynamic verification.

## 1.7. Limitations and Assurance

This assessment is time-bounded and based predominantly on public evidence. It is not an exhaustive review of the HDF5 source tree, every file-format feature, every configuration, or every ecosystem component. Representative sampling supports conclusions about observed mechanisms and recurring classes; it does not establish their frequency throughout the ecosystem.

Public CVE and issue records may be incomplete, duplicated, disputed, or subsequently corrected. Deployment-specific likelihood and impact depend on application privileges, isolation, resource limits, enabled features, data sensitivity, and

provenance. Proposed mitigations are evaluated analytically unless an implementation and verification procedure is expressly cited.

This report provides no formal assurance or certification opinion. Its conclusions are bounded by the assessment objects, methods, evidence, and cutoff described above. The absence of a reported finding does not establish the absence of defects, vulnerabilities, safety failures, or privacy risk.

Mitigation priorities express the authors' risk-informed judgment. They become auditable commitments only when paired with an owner, affected scope, target horizon, implementation status, acceptance criteria, and residual-risk decision.

## 1.8. Privacy Context

The National Institute of Standards and Technology (NIST) defines privacy as “a condition that safeguards human autonomy and dignity through various means, including confidentiality, predictability, manageability, and disassociability.” Historically, privacy was interpreted as preventing unauthorized access to or disclosure of Personally Identifiable Information (PII). However, NIST emphasizes that contemporary privacy risks extend far beyond traditional notions of confidentiality. Modern privacy concerns increasingly arise from inference, aggregation, behavioral profiling, secondary use of data, context changes, and surveillance effects [30]. NIST emphasizes that privacy risks are distinct from cybersecurity risks and may emerge even when systems are secure, lawful, and functioning exactly as intended [8]. HDF5 inherits many of the same classes of privacy risks identified by NIST, although these risks manifest differently in scientific and engineering environments.

HDF5 was designed to maximize data shareability, extensibility, portability, and long-term usability, and doesn't enforce data privacy or provide data protection mechanism. Its rich metadata model, self-describing structure, plugin architecture, and interoperability layers can expose information extending beyond the raw data stored within the file. Sensitive information in HDF5 ecosystems may emerge through HDF5 internal and user-defined metadata, for example, HDF5 attributes, object names, file organization, and objects properties. It may be exposed dur-

ing HDF5 data lifecycle through provenance records, workflow artifacts, and correlations across multiple datasets and files.


A common misconception in scientific computing is that privacy concerns are resolved once data access is restricted or datasets are anonymized. However, privacy risks often persist even when traditional security mechanisms are correctly implemented. Restricting access does not prevent inference from metadata. Anonymization may remove direct identifiers while leaving contextual information sufficient for re-identification. Similarly, data reduction or aggregation does not eliminate the possibility that sensitive information may be reconstructed through correlations across files, workflows, or external repositories. In modern scientific ecosystems, privacy exposure frequently results from accumulation of data and metadata over time rather than disclosure of a single sensitive piece of raw data or metadata.

The privacy risks are amplified by current scientific practice of data openness and shareability. HDF5 datasets increasingly move across organization, systems, cloud platforms, workflows, and public and private repositories. Data are routinely repurposed beyond their original intent and analyzed by users who were not involved in their creation. Machine learning systems further amplify these concerns by discovering hidden relationships across data stored in HDF5 and enabling new forms of inference that may not have been anticipated when data were originally collected. As a result, data stored in the HDF5 files may experience evolving privacy characteristics through its lifecycle.

Therefore, privacy exposure in HDF5 is not limited to unauthorized access, data breaches, unsafe use, or malicious behavior; it is distinct from, but can overlap with, data security and safety. By design HDF5 file format and library do not guarantee data privacy. In addition, privacy risks may emerge during legitimate scientific workflows, through data sharing, reuse, and analysis. In this document we audit privacy assets and different privacy exposure mechanisms (or surfaces) in HDF5 with the goal to raise awareness about privacy risks when using HDF5.

## 2. Assessment Surfaces

Figure 1 maps the principal components and interfaces considered when identifying HDF5 risk. Inclusion in the figure provides ecosystem context and does not override the scope levels and limitations defined in Section 1.3. In particular, HSDS is shown for context but remains outside the engagement.

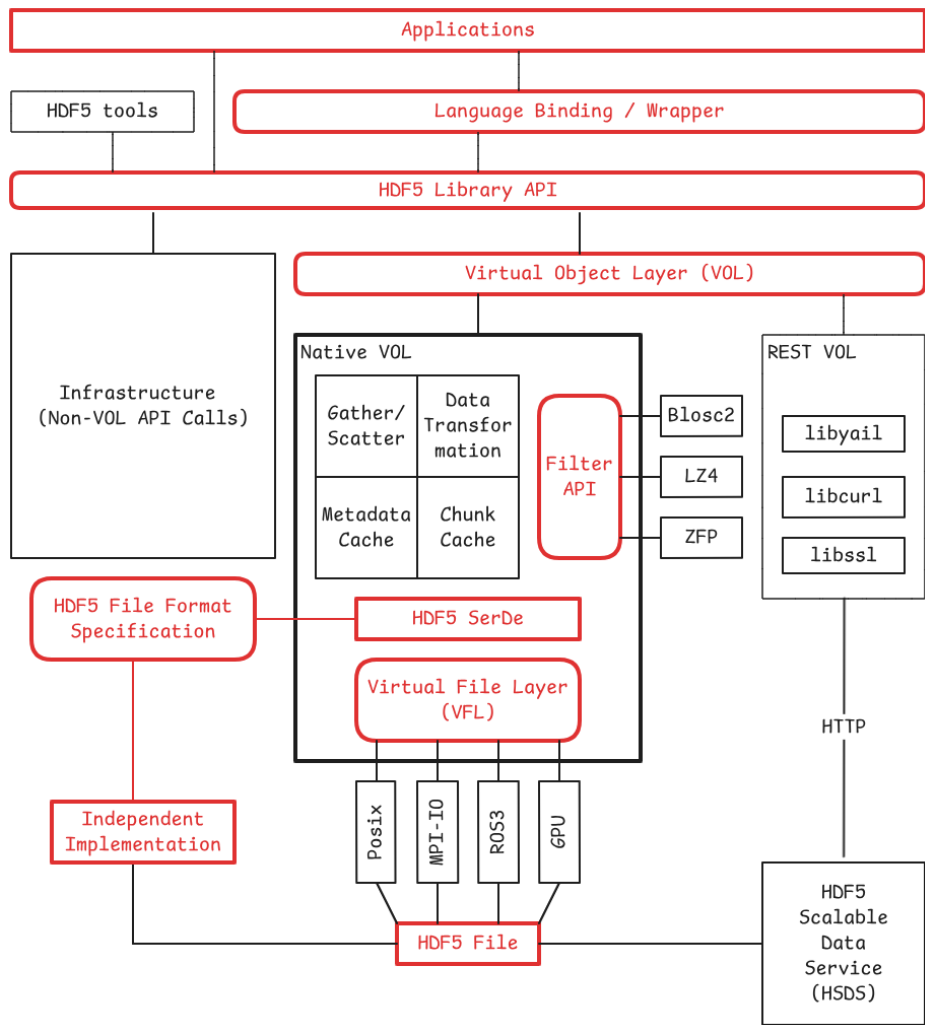

**Figure 1** – HDF5 assessment surfaces (interfaces: rounded rectangles)



### 3. HDF5 Core Library and File Format

#### 3.1. Accidents Waiting to Happen – HDF5 Safety

- Disk full [6]
- File corruption [4]
- Long-term data accessibility and interpretability, see section 9

#### 3.2. Verify and Verify – HDF5 Security

- Integer arithmetic
- File format parsing issues
- Malicious plugins, see section 4

A CVE history summary is included in Appendix A. The list mixes true HDF5-library issues, removed-tool issues, duplicate/rejected/not-HDF5 entries, and entries with no commit URL. The main pattern is not “many unrelated bugs”; it is repeated failure to validate file-derived structure sizes, offsets, counts, message lengths, continuation chunks, datatype metadata, or filter parameters before using them in low-level C memory operations. The 2025 entries alone show repeated heap overflows, use-after-free, null dereference, memory leak, and resource-consumption defects across object headers, file-space metadata, type conversion, filters, and metadata cache code.

The fix commentary confirms that several CVEs were symptoms of corrupted metadata not being rejected early. (Examples: the file-space page-size fix added a sanity check immediately after reading `page_size` from the file; the object-header-continuation fix rejects zero continuation chunk sizes; the self-referential continuation-message fix checks expected versus actual deserialized object-header chunks; and the cache-image fix added buffer-size arguments, overflow checks, input validation, and cleanup.)

The major root-cause categories are tighter than the CVE count suggests, and are summarized in Table 1.

**Table 1 – Major root-cause categories in the HDF5 CVE history**

| Root-cause category                                                                       | What it means for HDF5                                                                                                                                                                                                  |
|-------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| unchecked file-derived sizes / counts / offsets                                           | The dominant class. HDF5 metadata controls object layout, heap blocks, chunks, dataspace, filters, links, and type descriptors. When those fields are malformed, C code later trusts them.                              |
| inconsistent internal bookkeeping                                                         | Attribute tables, cache images, continuation chunks, and free lists often needed separate “allocated capacity” versus “actual count” tracking.                                                                          |
| decode/encode asymmetry                                                                   | Several issues happen because decode did not reject bad messages, then encode/flush later assumed valid native structures.                                                                                              |
| arithmetic precondition failures                                                          | Divide-by-zero and multiplication-overflow checks were missing in chunking, layout, b-tree, filter, and dataspace paths.                                                                                                |
| unsafe cleanup/lifetime paths                                                             | Use-after-free, double-free, leaks, and null dereferences show that malformed input often breaks unwinding logic as much as the primary decode logic.                                                                   |
| unbounded traversal, recursion, loop-progress, and resource-limit failures                | External-reference/path-opening behavior is a policy boundary, not necessarily a parser memory-safety defect.                                                                                                           |
| legacy tool attack surface                                                                | gif2h5, HDF to GIF conversion, h5dump, and h5repack appear repeatedly. Removal of gif2h5 was a structural mitigation, not just a patch.                                                                                 |
| triage quality, duplicate/variant clustering, reachability, and fix-completeness metadata | Several entries have <code>commit_url: null</code> , “not filed against HDF5,” “cannot reproduce,” “not applicable,” or tentative confidence. Those should not be counted as reviewed HDF5 fixes without qualification. |

### 3.3. HDF5 Privacy: Assets and Exposure

#### 3.3.1. Introduction

Privacy risks in the HDF5 core library and file format are not accidental; as discussed in the Introduction, they are systematic and arise from multiple factors. The design and implementation of the HDF5 file format and library present one important source of such risks. Additional risks emerge from scientific

workflows, software ecosystems, interoperability mechanisms, and evolving data usage contexts.

Before describing the assets that require protection in HDF5 and the mechanisms through which privacy exposure may occur, it is important to emphasize several fundamental characteristics of HDF5 and the audit approach adopted in this document.

- *HDF5 privacy primarily concerns accidental or unintended exposure of sensitive information rather than malicious attacks.* Malicious attacks and unauthorized access are primarily addressed through cybersecurity mechanisms and are outside the scope of this section.
- *HDF5, by design, does not provide privacy protections.* When privacy is a concern, users and organizations are responsible for protecting data throughout the entire data lifecycle. In this document, the term data refers not only to individual HDF5 objects within a single file, but also to collections of HDF5 files and external data accessible through the HDF5 library, connectors, and related software components.
- *HDF5 neither implements nor enforces privacy standards.* Furthermore, even when privacy standards and technical safeguards are in place, sensitive information may still be exposed through legitimate data processing, contextual interpretation, pattern discovery, inference, aggregation, and other analytical activities.
- *HDF5 does not manage authentication, authorization, or filesystem protection.* However, privacy risks extend beyond traditional security concerns. Sensitive information may be exposed during legitimate data use by authorized users, even within highly secure computing environments.
- *The risk of sensitive information exposure generally increases over the data lifecycle.* Sensitive information stored in HDF5 may be exposed during any stage of the lifecycle, including data creation, processing, storage, sharing, transfer, reuse, and archival.
- *HDF5 extensibility mechanisms and associated software ecosystems may alter the privacy characteristics of data.* Features such as filters, Virtual

Object Layer (VOL) connectors, Virtual File Drivers (VFDs), and external applications, including conversion and analysis tools, may introduce new privacy exposure surfaces or modify existing ones.

The remainder of this section focuses on the assets that require protection in HDF5, the mechanisms through which sensitive information may be exposed, and potential approaches for mitigating privacy risks.

### 3.3.2. HDF5 Assets and their Exposure

The primary assets requiring protection are the scientific data themselves. In HDF5, these include data stored in HDF5 objects, such as files, groups, datasets, datatypes, and dataspace, which represent experimental observations, measurements, simulations, images, sensor outputs, and computational results.

Scientific data may be exposed through direct access using HDF5-based software, including command-line utilities, graphical viewers, and programming interfaces such as Python. However, privacy-sensitive information may also be inferred through examination of the low-level storage organization and auxiliary metadata embedded within the file to support portability, interoperability, and efficient data access. For example, string attributes visible through standard operating system utilities (e.g., the Unix strings command) may disclose dataset names, experimental identifiers, or other descriptive information. Similarly, inspection of dataset headers may reveal storage layout, chunk organization, compression methods, or data acquisition patterns (e.g., frame-based acquisition stored as chunked datasets). Examination of embedded strings may also disclose the use of external storage or references to datasets located in other HDF5 files.

It is important to distinguish between protecting access to data values and protecting information about data representation. Even when raw data are protected through mechanisms such as compression or encryption, information describing their storage organization, layout, or access methods may remain accessible and reveal sensitive contextual information about the underlying data or the processes that generated them.

### **Data Assets**

The primary assets requiring protection are the scientific data themselves. In HDF5, these include data stored in HDF5 objects, such as files, groups, datasets, datatypes, and dataspace, which represent experimental observations, measurements, simulations, images, sensor outputs, and computational results.

Scientific data may be exposed through direct access using HDF5-based software, including command-line utilities, graphical viewers, and programming interfaces such as Python. However, privacy-sensitive information may also be inferred through examination of the low-level storage organization and auxiliary metadata embedded within the file to support portability, interoperability, and efficient data access. For example, string attributes visible through standard operating system utilities (e.g., the Unix strings command) may disclose dataset names, experimental identifiers, or other descriptive information. Similarly, inspection of dataset headers may reveal storage layout, chunk organization, compression methods, or data acquisition patterns (e.g., frame-based acquisition stored as chunked datasets). Examination of embedded strings may also disclose the use of external storage or references to datasets located in other HDF5 files.

It is important to distinguish between protecting access to data values and protecting information about data representation. Even when raw data are protected through mechanisms such as compression or encryption, information describing their storage organization, layout, or access methods may remain accessible and reveal sensitive contextual information about the underlying data or the processes that generated them.

### **Metadata Assets**

User-defined metadata often constitute one of the most privacy-sensitive asset classes in HDF5. The format was intentionally designed as a self-describing data model that allows extensive contextual information to be stored alongside scientific data. While HDF5 attributes are the most recognizable form of user-defined metadata, they represent only one category of descriptive information maintained within an HDF5 file.

User-defined metadata include all user-created HDF5 objects and object properties that organize, identify, or describe stored data. These include groups, datasets, their associated datatypes and dataspace, committed datatypes, and attributes attached to HDF5 objects. Each HDF5 attribute is itself a structured metadata object with a name, datatype, and dataspace. Additional metadata assets include file and object names (link names), committed datatype names, compound datatype member names, enumeration labels, object comments, and information stored in the user block. Collectively, these metadata describe the logical organization, semantics, and relationships of the stored data and frequently contain experiment-specific, operational, or organizational information.

Like scientific data, metadata assets may be exposed not only through HDF5 applications but also through direct examination of the binary file format. Inspection of file structures or extraction of embedded strings without using HDF5 software may reveal object names, descriptive attributes, storage relationships, user block contents, and other contextual information that could disclose sensitive information about the data, their origin, or the organization that produced them.

### **Structural Metadata Assets**

Privacy-sensitive information may also be inferred from the structural characteristics of HDF5 files. Structural metadata assets include user-defined organizational structures, such as the hierarchical arrangement of objects, dataset storage layouts (e.g., contiguous, chunked, compact, or external storage), filter pipelines, and relationships established through links, object references, region references, or virtual datasets (VDS). In addition, the HDF5 library maintains internal structural metadata that describe and manage these user-defined structures, including chunk indexing schemes, B-tree organizations, and other implementation-specific data structures.

Even when raw data are inaccessible, for example, because they are encrypted, compressed, stored externally, or protected by file-system access controls, structural metadata may disclose information about the purpose of the data, experimental design, workflow organization, relationships among datasets, or assumptions made by the generating application. Naming hierarchies, grouping strategies, stor-

age layouts, and reference relationships may reveal semantic information about scientific activities or operational processes. Likewise, implementation-specific structures, such as chunk indexing formats or other internal metadata, may disclose characteristics of the HDF5 library version or software implementation used to create or process the file.

Like scientific data and user-defined metadata, structural metadata may be exposed through HDF5 applications or by direct examination of the binary file format without using HDF5 software.

### **Derived and Reconstructed Information**

Privacy-sensitive information in HDF5 may also arise through inference or reconstruction from combinations of available data and metadata. Derived assets include relationships inferred from multiple HDF5 datasets, external links, object references, region references, virtual dataset (VDS) mappings, or information obtained by combining HDF5 data with external sources. These relationships may reveal information that is not explicitly represented within any single dataset or file.

For example, correlating quality-control datasets with experimental observations, combining temporal and spatial measurements, or reconstructing relationships across linked HDF5 files may disclose sensitive characteristics that are not apparent when individual datasets are examined in isolation. Consequently, privacy-sensitive assets extend beyond explicitly stored data and metadata to include information that can be inferred through aggregation, correlation, reconstruction, or other forms of analysis.

### **Workflow and Applications Artifacts**

Privacy-sensitive assets in HDF5 extend beyond data and metadata stored within HDF5 files to include artifacts created by applications, processing workflows, and the surrounding software ecosystem. These artifacts include command outputs (e.g., h5dump output), diagnostic logs, temporary files, metadata snapshots, cached intermediate datasets, conversion artifacts, and outputs generated by plu-

gins or connectors (e.g., binary files produced by an HDF5 VOL connector for another scientific data format).

Examples include VFD SWMR metadata snapshots, cached intermediate results, diagnostic logs, and metadata generated during translation between non-self-describing data formats and HDF5. Such artifacts may expose scientific data, metadata, storage organization, workflow decisions, or implementation details beyond what is contained in the original HDF5 file. Because they are often created automatically, these artifacts may persist beyond their intended lifetime and remain unnoticed by users focused primarily on the scientific datasets themselves.

Scientific data processing workflows routinely enrich, restructure, annotate, and transform datasets to improve interoperability, reproducibility, usability, or analytical value. However, these processes may also introduce or preserve contextual information that was not intended for disclosure. Automatically generated metadata, intermediate processing products, and derived datasets may reveal experimental assumptions, workflow decisions, data provenance, software implementation details, or scientific semantics that were absent from the original data. Consequently, privacy exposure may arise not from malicious activity or unauthorized access, but as an unintended consequence of routine scientific data processing.

### 3.4. HDF5 Tools

Not strictly part of the core library, but the tools are an important part of the ecosystem and have their own set of issues.

#### 3.4.1. Privacy exposure through HDF5 command-line tools

HDF5 command-line tools provide convenient mechanisms for managing HDF5 files. They can be used to display or extract raw data, and user-defined and structural HDF5 metadata (e.g., `h5dump`, `h5ls`, `h5debug`), edit raw data and attributes with `h5edit`, extract or aggregate data using `h5copy`, change characteristics of HDF5 objects, for example, remove or add data filters and change storage properties using `h5repack`. HDF5 command-line tools are routinely



employed throughout the HDF5 data lifecycle. While the command-line tools are essential for working with HDF5 data, they are ultimate sources of unintended privacy exposure.

The HDF5 tools were designed to ease access to HDF5 data, to reveal information about the contents and organization of HDF5 files, and to manage that information while avoiding steep learning curve of HDF5 programming. I.e., HDF5 command-line tools were designed to expose HDF5 assets. Depending on the tool and the selected options, they may display object names, attributes, datatype definitions, storage layouts, chunking parameters, filter pipelines, external storage locations, object references, virtual dataset mappings, and portions or all of the stored data to name a few. Even when users intend only to verify file integrity or inspect metadata, command output may disclose information that is considered sensitive in a particular context.

Privacy exposure is not limited to information displayed on the terminal by `h5dump` or `h5ls`. Command output is frequently redirected to files, incorporated into automated workflow logs, attached to bug reports, archived as diagnostic information, or shared. The output can be used by other tools (e.g., `h5import`) or applications to generate new data. Consequently, metadata and scientific data extracted by HDF5 tools may persist outside the original HDF5 file and become accessible to individuals who were never intended to access the underlying information.

Several command-line tools may also create new HDF5 files or transform existing ones. `h5repack` and `h5copy` may generate additional copies of data and/or aggregate data, modify storage layouts, remove or add data filtering; `h5edit` may modify and introduce new metadata, change raw data values and preserve information that was not expected to be retained. I.e., the tools can alter the privacy characteristics of the resulting files, particularly when they are incorporated into larger workflows, backups, or public data repositories.

Because HDF5 command-line tools are widely used in automated scripts, continuous integration systems, and scientific workflows, their privacy implications should be evaluated alongside those of the HDF5 library and HDF5-based applications. The privacy mitigation strategies discussed in the next section apply not

only to the HDF5 library itself but also, and often to an even greater extent, to HDF5 command-line tools. This is because these tools are designed to expose HDF5 assets and to generate persistent outputs (e.g., new binary and text files).

The table below summarizes the assets exposed by the listed command-line tools.

**Table 2** – Privacy exposure through HDF5 command-line tools

| <b>Tool</b> | <b>Exposed assets</b>                                      | <b>Workflow artifacts</b>           | <b>Privacy considerations</b>                                                                                                                                                                                                                                                                                           |
|-------------|------------------------------------------------------------|-------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| h5dump      | Raw data; user-defined and structural metadata             | Text dumps, redirected output, logs | Displays datasets, attributes, datatypes, storage layout, filter information, object references, and VDS mappings. May expose data stored in other HDF5 files through external links and Virtual Datasets (VDS). Output is frequently redirected to files or logs, creating persistent copies of sensitive information. |
| h5ls        | User-defined and structural metadata (optionally raw data) | Terminal output, logs               | Reveals object hierarchy, object names, datatypes, storage properties, links, and object relationships. With the <code>-d</code> option, also displays dataset values.                                                                                                                                                  |
| h5repack    | Raw data; user-defined and structural metadata             | New HDF5 file                       | Creates additional HDF5 copies while potentially modifying storage layout, filters, and metadata. The <code>-merge</code> option can aggregate datasets reachable through external links into a single file. May access non-HDF5 data through configured VFDs and VOL connectors.                                       |
| h5diff      | Raw data; user-defined metadata                            | Comparison reports                  | Reads and compares datasets and attributes. Reports may disclose sensitive values or structural differences.                                                                                                                                                                                                            |
| h5copy      | Raw data; user-defined and structural metadata             | Additional HDF5 files               | Copies objects within or between HDF5 files, increasing the number of persistent copies of sensitive information.                                                                                                                                                                                                       |
| h5stat      | Structural metadata                                        | Statistics reports, logs            | Reports object counts, storage statistics, chunk information, free space, and other implementation characteristics that may reveal dataset complexity or workflow properties.                                                                                                                                           |
| h5debug     | Structural metadata                                        | Debug output                        | Displays low-level internal file structures, addresses, B-trees, heaps, chunk indexes, and other implementation metadata intended for debugging.                                                                                                                                                                        |

**Table 2** – Privacy exposure through HDF5 command-line tools, continued

| <b>Tool</b>      | <b>Exposed assets</b>           | <b>Workflow artifacts</b>   | <b>Privacy considerations</b>                                                                                                                        |
|------------------|---------------------------------|-----------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|
| h5watch          | Raw data; user-defined metadata | Monitoring output, logs     | Monitors SWMR datasets and reports newly written data, timestamps, and update activity in real time.                                                 |
| h5import         | Raw data; user-defined metadata | New HDF5 file               | Imports external data into HDF5, creating additional copies while potentially preserving metadata and semantics from the source format.              |
| h5jam/h5unjam    | User block contents             | Extracted or embedded files | Stores or extracts arbitrary information in the HDF5 user block, including scripts, XML documents, application metadata, or proprietary information. |
| h5mkgrp          | Structural metadata             | Modified HDF5 file          | Creates or modifies the group hierarchy. Limited direct privacy exposure but changes descriptive metadata and namespace organization.                |
| h5edit           | Raw data; user-defined metadata | Modified HDF5 file          | Creates or modifies attributes; modifies raw data. Limited direct privacy exposure but changes data and user-defined metadata.                       |
| h5format_convert | Raw data; structural metadata   | Converted HDF5 file         | Converts files between HDF5 format versions, creating additional copies while preserving or rewriting internal metadata structures.                  |
| h5clear          | Structural metadata             | Modified HDF5 file          | Clears SWMR status and metadata cache information. Primarily affects recovery metadata and file consistency information.                             |

**Note:** All HDF5 command-line tools are built on top of the HDF5 library and therefore inherit its capabilities. When VFDs or VOL connectors are configured, these tools may transparently access data stored in remote services, external storage systems, or non-HDF5 data sources exposed through connectors. Consequently, privacy exposure is not necessarily limited to the HDF5 file specified on the command line but may extend to the broader HDF5 ecosystem.

### 3.5. Audit Findings and Mitigation Priorities

#### 3.5.1. Security and Safety

The blunt conclusion: HDF5's CVE history is mostly malformed-file parsing pressure against a complex binary metadata machine. The fix direction should not be "patch each crash." It should be systematic metadata validation at decode boundaries, explicit invariants for each on-disk structure, fuzz corpora tied to invariants, and hard separation between parser acceptance and internal object construction.

**Goal:** HDF5 should be able to parse any byte stream as hostile input and either reject it cleanly or produce a validated internal object graph. Anything else is security debt.

**Implementation program:** define parser invariants first, harden decode boundaries, then make fuzzing, CI gates, and release governance enforce them.

The next priority is parser normalization: decode file bytes into a validated intermediate form before constructing internal objects, so malformed metadata cannot reach trusted C paths.

Our goal should be: *make malformed HDF5 files boring*. Every corrupted file should terminate in a controlled H5E\_BADVALUE, H5E\_OVERFLOW, H5E\_CORRUPT, or H5E\_RESOURCE path. No segfaults. No assertions. No leaks. No undefined behavior. No late-stage encode/flush crash from a bad decode.

The current CVE list includes many issues in H5FS, H5C, H5O, H5T, H5Z, and vector-copy paths, with repeated heap overflows, use-after-free, null dereference, and resource-consumption outcomes. HDF5's own format documentation explains why this happens: a file is a graph of groups, datasets, and named datatypes; on disk it is represented through lower-level structures such as the superblock, B-tree nodes, object headers, global heaps, local heaps, and free-space metadata. That means the library is parsing a dense graph of mutually referential, *attacker-controlled* metadata.

## Priority 0: Stop closing CVEs as “fixed” unless the class is killed

Make this rule immediate:

*If the fix is not a structural change that eliminates the root cause, then it is not a fix.*

For every new CVE or crash:

**Table 3** – Required artifacts for closing HDF5 CVEs or crash reports

| Required artifact         | Purpose                          |
|---------------------------|----------------------------------|
| crashing input            | becomes a permanent corpus seed  |
| minimized input           | used in quick PR regression      |
| root-cause category       | maps to a known invariant class  |
| invariant update          | prevents sibling bugs            |
| sanitizer regression      | proves no crash, no leak, no UAF |
| negative test             | checks controlled failure code   |
| reviewer checklist update | prevents reintroduction          |

This is the first cultural shift. A patch that only adds a local `if` is tolerated for embargoed fixes, but the issue remains open as a **class bug** until the invariant framework catches sibling cases.

Recent commits show the right direction, but too locally. One fix added a sanity check immediately after reading file-space page size from the file and used the same fuzzer to verify that the previous assertion became a corrupted-file error. [14] Another hardened `H5C__reconstruct_cache_entry()` by adding buffer-size tracking, overflow checks, input validation, and safe cleanup. [13] Those are exactly the moves to systematize.

## Priority 1: Build an invariant registry for the file format

Create a versioned document and machine-readable metadata file, for example:

`security/invariants/`

```
superblock.yml
object_header.yml
dataspace.yml
datatype.yml
layout.yml
filters.yml
heaps.yml
free_space.yml
links.yml
cache_image.yml
```

Each entry should define:

```
id: H5O-CONT-001
component: object_header
structure: continuation_message
condition: continuation_chunk_size > 0
failure: H5E_CORRUPT
checked_at:
  - H5O__cont_decode
  - H5O__chunk_deserialize
fuzz_targets:
  - fuzz_object_header
cves:
  - CVE-2025-6856
  - CVE-2025-6816
```

Start with these invariant families.

Table 4 – Invariant families to enforce first

| Area       | Invariants to enforce first                                                                                                                                                   |
|------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| superblock | offset size and length size are valid; base address, EOF address, driver info address, and root object address are inside the file or explicitly undefined; EOF does not wrap |

**Table 4** – Invariant families to enforce first, continued

| <b>Area</b>          | <b>Invariants to enforce first</b>                                                                                                                                                                                                 |
|----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| object headers       | message length fits inside chunk; continuation chunks are nonzero; continuations do not self-reference; continuations are acyclic; message flags match message type; unknown messages cannot be cast into known message structures |
| free-space meta-data | page size is nonzero and below max; section size fits page/file bounds; serialized section count matches decoded section count                                                                                                     |
| heaps                | heap object offset and size are inside heap; free-list blocks do not overlap; free-block list is acyclic; no allocation uses unchecked <code>count*size</code>                                                                     |
| dataspaces           | rank is bounded; dimension product is checked; selected point count is checked; hyperslab stride, count, block, and start do not overflow                                                                                          |
| datatypes            | storage size is nonzero; precision fits storage size; member offsets fit compound size; string length is bounded; vlen/ref types cannot escape validation                                                                          |
| layouts              | compact data size equals <code>dataspaceelements*datatype size</code> ; chunk dimensions are nonzero; chunk product is checked; chunk index references are inside file bounds                                                      |
| filters              | parameter count is bounded; decompressed size is bounded; scale-offset precision is validated; filter output ratio cannot exceed configured resource limits                                                                        |
| cache image          | cache-entry count, address, size, and alignment are bounded; decoding consumes exactly the expected number of bytes; cleanup is safe after partial decode                                                                          |
| tools                | string rendering is length-bounded; conversion tools never trust input dimensions; tool-only parsers use the same checked arithmetic wrappers as the library                                                                       |

This registry becomes the source of truth for code review, tests, fuzzing, and documentation.

## Priority 2: Introduce a two-phase parser boundary

Right now, too many paths appear to do this:

```
file bytes -> native internal object
           -> later code assumes validity
```

Change the architecture to:

file bytes -> bounded raw decode  
 -> semantic validation  
 -> native object construction

Concrete rule: *No public or internal runtime object is constructed from file metadata until the corresponding validator has passed.*

Implement the pattern by component:

```
1 | herr_t H5O_msg_decode_raw(const uint8_t *buf, size_t buf_size,
   |   ↳ H5O_msg_raw_t *raw);
2 | herr_t H5O_msg_validate(const H5F_t *f, const H5O_msg_raw_t *raw,
   |   ↳ H5O_validation_ctx_t *ctx);
3 | herr_t H5O_msg_construct(const H5O_msg_raw_t *raw, H5O_msg_t *out);
```

Do not let decode functions allocate complex structures before basic bounds are known. A raw decoded object should hold values, offsets, and spans, not trusted pointers into long-lived internal state.

All decode functions that consume file bytes should take one of these forms:

```
1 | herr_t decode(const H5F_t *f, const uint8_t *buf, size_t buf_size,
   |   ↳ out_t *out);
2 |
3 | herr_t decode_cursor(H5_decode_cursor_t *cur, out_t *out);
```

Ban this pattern in security-sensitive decode code:

```
1 | const uint8_t **pp
```

unless there is also an explicit `p_end` or remaining-size counter. The cache-image fix already moved in this direction by adding a buffer-size argument and bounds checks. [13]

### Priority 3: Centralize checked arithmetic and allocation

Most parser bugs become exploitable when metadata reaches allocation, copy, or pointer arithmetic. Add a small, mandatory checked-arithmetic layer.

Example API:

```
1 | herr_t H5_checked_add_hsize(hsize_t a, hsize_t b, hsize_t *out);
2 | herr_t H5_checked_mul_hsize(hsize_t a, hsize_t b, hsize_t *out);
```



```
3 | herr_t H5_checked_addr_add(haddr_t base, hsize_t len, haddr_t eoa,
  | ↪ haddr_t *end);
4 | herr_t H5_checked_alloc_size(size_t count, size_t elem_size, size_t
  | ↪ *bytes);
```

Then make these rules review-blocking:

Table 5 – Review-blocking parser arithmetic and allocation patterns

| Ban                                        | Replacement                                        |
|--------------------------------------------|----------------------------------------------------|
| malloc(n*size)                             | H5MM_calloc_checked(n, size)                       |
| addr+size                                  | H5_checked_addr_add(addr, size, eoa, &end)         |
| memcpy(dst, src, n) from file-derived size | H5_checked_memcpy(dst, dst_size, src, src_size, n) |
| pointer increment without p_end            | cursor-based decode                                |
| raw recursion through object graph         | bounded traversal context                          |

The 2024 security commit added multiplication-overflow checks for dataset storage size and checks against file bounds. [15] That pattern should become a library-wide rule, not a local repair.

Priority 4: Create security profiles for file opening

Add explicit modes. Do not rely on users to infer safe behavior.

```
1 | typedef enum {
2 |     H5_SECURITY_PROFILE_LEGACY,
3 |     H5_SECURITY_PROFILE_TRUSTED_FAST,
4 |     H5_SECURITY_PROFILE_UNTRUSTED_STRICT,
5 |     H5_SECURITY_PROFILE_FORENSIC
6 | } H5_security_profile_t;
```

Suggested semantics:

**Table 6** – Security profile semantics

| Profile          | Behavior                                                                                                  |
|------------------|-----------------------------------------------------------------------------------------------------------|
| legacy           | current compatibility bias                                                                                |
| trusted_fast     | normal validation, generous resource limits                                                               |
| untrusted_strict | strict metadata validation, plugin loading disabled unless allowed, resource limits enforced              |
| forensic         | never repairs silently, reports all structural anomalies, best-effort inspection without unsafe traversal |

Expose it through file-access property lists:

```

1 H5Pset_security_profile(fapl, H5_SECURITY_PROFILE_UNTRUSTED_STRICT);
2 H5Pset_max_metadata_bytes(fapl, 256 * 1024 * 1024);
3 H5Pset_max_object_header_chunks(fapl, 1024);
4 H5Pset_max_btree_depth(fapl, 64);
5 H5Pset_max_filter_expansion_ratio(fapl, 100);
6 H5Pset_plugin_policy(fapl, H5_PLUGIN_POLICY_DISABLED);

```

This matters because HDF5 supports dynamically loaded plugins, and the runtime API can enable or disable plugin classes; the docs also state that `HDF5_PLUGIN_PRELOAD=: :` disables all dynamic plugins. Turn that capability into a first-class security policy, not an environment-variable trick.

### Priority 5: Fuzz by structure, not just by whole-file crashes

Whole-file fuzzing is necessary but insufficient. It finds symptoms. Structure-aware fuzzing finds families.

Build fuzz targets in this order:

**Table 7** – Structure-aware fuzzing priorities

| Order | Fuzz target                    | Why first                                       |
|-------|--------------------------------|-------------------------------------------------|
| 1     | object-header message decoder  | many paths flow through it                      |
| 2     | datatype decoder and converter | high exploitability and complex nested metadata |

**Table 7** – Structure-aware fuzzing priorities, continued

| Order | Fuzz target                               | Why first                                              |
|-------|-------------------------------------------|--------------------------------------------------------|
| 3     | dataspace and selection decoder           | rank, count, hyperslab, and point math                 |
| 4     | layout and chunk index decoder            | storage-size, address, and chunk-product risks         |
| 5     | free-space and local/global heap decoders | repeated historical overflow and list-corruption class |
| 6     | filter pipeline and scale-offset filter   | compression/decompression boundary risk                |
| 7     | metadata cache image reconstruction       | high complexity and recent CVE pattern                 |
| 8     | h5dump/h5repack rendering paths           | tool paths often bypass library assumptions            |

Use three fuzzing layers:

**Table 8** – Fuzzing layers

| Layer                       | Description                                                                                                                      |
|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------|
| byte-level fuzzing          | current randomized mutation against APIs                                                                                         |
| structure-aware mutation    | valid superblock with corrupted object headers, valid object header with bad continuation, valid datatype with bad member offset |
| invariant-guided generation | generate files that violate exactly one invariant at a time                                                                      |

OSS-Fuzz already supports libFuzzer, AFL++, Honggfuzz, Centipede, sanitizers, and distributed execution for C/C++ projects. Use OSS-Fuzz for long-running public coverage and ClusterFuzzLite or local CI for PR-level checks.

**Table 9** – Fuzzing acceptance criteria

| Stage | Gate                                           |
|-------|------------------------------------------------|
| PR    | run minimized CVE corpus under ASan/UBSan/LSan |

**Table 9** – Fuzzing acceptance criteria, continued

| Stage             | Gate                                                       |
|-------------------|------------------------------------------------------------|
| nightly           | run structure fuzzers for core parsers                     |
| weekly            | report coverage by component, not just total line coverage |
| release candidate | 72-hour fuzz soak on changed parser areas                  |
| CVE closure       | crashing input added to corpus and mapped to invariant     |

**Priority 6: Make malformed-input regression cheap**

Create this repository layout:

```
test/security/
  corpus/
    cve/
      CVE-2025-7069/
        input.h5
        expected.yml
      CVE-2025-6269/
        input.h5
        expected.yml
    invariants/
      H5O-CONT-001/
      H5T-SIZE-002/
  harnesses/
    fuzz_object_header.c
    fuzz_datatype.c
    fuzz_dataspace.c
    fuzz_layout.c
    fuzz_filters.c
  expected_errors/
    corrupt_file.yml
```

Each expected.yml should include:

**expected:****exit:** controlled\_error**allowed\_errors:**

- H5E\_CORRUPT
- H5E\_BADVALUE
- H5E\_OVERFLOW

**forbidden:**

- SIGSEGV
- SIGABRT
- leak
- use\_after\_free
- timeout

**invariant:**

- H5FS-PAGE-001

This gives maintainers a fast way to prove that old crashes remain dead.

### Priority 7: Add a security-review checklist that blocks risky parser changes

Every PR touching decode, encode, object lifecycle, filters, tools, or plugin loading should answer:

**Table 10** – Security-review checklist for parser-adjacent changes

| Question                                                            | Required answer                    |
|---------------------------------------------------------------------|------------------------------------|
| Does this read file-derived bytes?                                  | list buffer and bounds source      |
| Does this allocate using file-derived values?                       | show checked multiplication        |
| Does this copy memory using file-derived sizes?                     | show source and destination bounds |
| Does this traverse links, chunks, heaps, B-trees, or continuations? | show cycle and depth bounds        |
| Does this construct native objects before validation?               | explain why or refactor            |
| Does this add or change cleanup paths?                              | show partial-init safety           |
| Does this invoke plugins or filters?                                | show policy interaction            |

**Table 10** – Security-review checklist for parser-adjacent changes, continued

| Question                        | Required answer           |
|---------------------------------|---------------------------|
| Does this alter error handling? | show malformed-input test |

Add automated enforcement where possible:

```
fail PR if new decode function lacks size parameter
fail PR if malloc(count * size) appears outside checked wrapper
fail PR if memcpy appears in parser code without checked wrapper annotation
fail PR if new parser file lacks fuzz target registration
fail PR if new object traversal lacks max-depth or visited-set logic
```

This will annoy contributors at first. Good. That friction is cheaper than post-release CVEs.

**Priority 8: Separate compatibility from safety**

HDF5’s backward compatibility is valuable, but it creates a security trap: old, permissive parsing keeps malformed legacy structures alive.

Implement this policy:

**Table 11** – Compatibility and safety profile policy

| Case                                                  | Behavior                                                                                   |
|-------------------------------------------------------|--------------------------------------------------------------------------------------------|
| valid legacy file                                     | accepted                                                                                   |
| ambiguous legacy construct                            | accepted only in legacy or trusted_fast; warning in forensic; rejected in untrusted_strict |
| structurally invalid file that old versions tolerated | rejected in all non-legacy profiles                                                        |
| parser repair needed                                  | repair only through explicit tool, never silently during normal open                       |

**Table 11** – Compatibility and safety profile policy, continued

| Case                              | Behavior                                               |
|-----------------------------------|--------------------------------------------------------|
| unknown message with unsafe flags | rejected unless profile explicitly allows preservation |

The point is not to break legitimate archives. The point is to stop treating corrupted metadata as compatibility.

### Priority 9: Harden tools as separate attack surfaces

Do not assume `h5dump`, `h5repack`, converters, and test utilities are less important. They are often the first thing users run on untrusted files.

Actions:

**Table 12** – Tool hardening actions

| Tool class             | Change                                                                                    |
|------------------------|-------------------------------------------------------------------------------------------|
| inspection tools       | use <code>H5_SECURITY_PROFILE_FORENSIC</code> by default                                  |
| conversion tools       | use <code>H5_SECURITY_PROFILE_UNTRUSTED_STRICT</code> by default                          |
| rendering paths        | bounded strings only                                                                      |
| legacy converters      | disable by default; build behind explicit <code>HDF5_ENABLE_LEGACY_UNSAFE_TOOLS=ON</code> |
| plugin-dependent tools | warn or require allowlist                                                                 |

A dangerous file should not become more dangerous because the user tried to inspect it.

### Priority 10: Plugin policy and signed extensions

Plugins are a different risk class. They are executable code loaded at runtime. HDF5's plugin system supports dynamically loaded filter plugins and lets users

implement custom filters. That is useful, but it must not be invisible in untrusted mode.

Implement:

```
default profile:
  trusted_fast: existing plugin behavior
  untrusted_strict: plugins disabled unless allowlisted
  forensic: plugins disabled; report missing filter
```

Add a plugin manifest:

```
plugin_id: 32008
name: blosc
version: 1.0.0
sha256: ...
signer: ...
allowed_profiles:
  - trusted_fast
  - untrusted_strict
capabilities:
  - filter_decode
limits:
  max_expansion_ratio: 100
  max_alloc_bytes: 1073741824
```

Do not start with a perfect PKI. Start with allowlisted hashes and paths. Then add signatures. The signed-plugin work matters, but without resource limits a signed buggy plugin can still crash the process.

### Priority 11: Supply-chain controls after parser controls

Supply-chain work matters, but it is second-order relative to malformed-file parsing. Do it in parallel only after the parser program has owners.

Minimum controls:



**Table 13** – Minimum supply-chain controls

| <b>Control</b>           | <b>Target</b>                                     |
|--------------------------|---------------------------------------------------|
| OpenSSF Scorecard        | weekly scheduled run, alerts in security tab      |
| CodeQL                   | required for PRs touching C/C++ parser surfaces   |
| pinned GitHub Actions    | no floating third-party action refs               |
| SBOM                     | release artifacts include source and binary SBOMs |
| signed release artifacts | signatures plus checksums                         |
| SLSA provenance          | release builds produce verifiable provenance      |

OpenSSF Scorecard has an official GitHub Action, and public repositories can use it without cost. The SLSA GitHub generator provides tooling for SLSA provenance on GitHub Actions, including provenance that users can verify to understand how an artifact was built.

### **Priority 12: Metrics that force the right behavior**

Use metrics that measure class elimination, not activity.

**Table 14** – Security program metrics

| <b>Metric</b>                                                        | <b>Target</b>         |
|----------------------------------------------------------------------|-----------------------|
| CVE corpus pass rate under ASan/UBSan/LSan                           | 100%                  |
| parser decode functions with explicit buffer size or cursor          | 100%                  |
| parser allocations through checked wrappers                          | 100%                  |
| parser memcpy/memmove through checked wrappers or reviewed exemption | 100%                  |
| high-risk structures with invariant files                            | 100%                  |
| high-risk structures with fuzz target                                | 100%                  |
| new CVEs that add invariant updates                                  | 100%                  |
| time from new crash to minimized corpus seed                         | under 48 hours        |
| time from minimized seed to invariant classification                 | under 5 business days |
| sanitizer-clean nightly fuzz runs                                    | sustained             |

Table 14 – Security program metrics, continued

| Metric                          | Target        |
|---------------------------------|---------------|
| untrusted profile test coverage | every release |

Track this in a public dashboard. Not because dashboards fix bugs. They stop the team from pretending that “more tests” is a plan.

3.5.2. Privacy

In this section we summarize privacy threats in HDF5 based on the audit findings and describe mitigation strategies and their priorities.

Overview of Privacy Threat Categories

The HDF5 Privacy Exposure Model [39] identifies seven categories of privacy threats that describe the principal mechanisms through which sensitive information may be unintentionally exposed in HDF5. Privacy threats primarily arise during normal scientific data creation, processing, sharing, and preservation. They are a consequence of HDF5’s self-describing data model, rich metadata capabilities, extensible software architecture, broad interoperability across scientific applications, and prolonged data life cycle.

Several threat categories involve direct disclosure of information stored within HDF5 files. Metadata Exposure (P1) occurs when descriptive information, such as object names, attributes, datatype member names, or other user-defined metadata, reveals sensitive contextual information even when the underlying scientific data are protected. Structural Metadata Exposure (P2) arises from examination of HDF5’s internal storage structures, including file layout, storage organization, and implementation metadata, which may disclose characteristics of the stored data without requiring HDF5 software. Raw Data Exposure (P3) addresses situations in which information about scientific data becomes observable through storage

patterns, embedded textual descriptions, or other implementation artifacts rather than through intended data access.

Another group of threats results from routine scientific data processing. Unintended Data Alteration or Inclusion (P4) occurs when software automatically generates, expands, or preserves additional information during data conversion or processing. Data Aggregation and Correlation (P5) recognizes that individually non-sensitive datasets may collectively reveal sensitive information when combined or interpreted together. Persistent Data Beyond Intended Usage (P6) addresses privacy risks associated with temporary files, metadata snapshots, cached datasets, archived copies, and other artifacts that remain accessible after their intended purpose has ended.

The remaining threat category Misplaced Trust in Privacy by format (P7) reflects broader characteristics of modern HDF5 ecosystems. Examples include:

- Misinterpretation of data privacy in HDF5 format leads to the possibility of sensitive information disclosure through metadata, structural information, or inference.
- Conversion to HDF5 highlights that transforming legacy scientific formats into HDF5 often increases accessibility and interoperability by making implicit information explicit, but this additional semantic information may itself introduce new privacy risks.
- Loss of Data Control describes situations in which data movement, replication, backup, cloud migration, or transfer across organizational boundaries weakens the original privacy protections and governance mechanisms applied to the data.

Although presented as distinct categories, these threats frequently occur together. A single scientific workflow may enrich metadata during format conversion, aggregate datasets from multiple sources, generate temporary processing artifacts, and replicate results across multiple storage systems. Consequently, privacy risks should be evaluated across the complete scientific data lifecycle rather than by considering individual HDF5 files in isolation.

## Mitigation Priorities

Because HDF5 was designed to maximize scientific data sharing, portability, interoperability, and long-term usability rather than enforce privacy, no single mechanism can eliminate all privacy risks. Effective privacy protection therefore requires a multi-facet approach that considers the entire scientific data lifecycle, including data creation, processing, storage, sharing, transfer, and archival. Privacy should be treated as a property of the complete HDF5 ecosystem including applications, plugins, workflows, storage systems, and organizational practices rather than solely of the HDF5 file format. Here we list mitigation strategies and their priorities.

### **Priority 1: *Privacy exposure awareness***

Scientists, software developers, data stewards, and infrastructure providers should recognize that HDF5's self-describing nature inherently exposes contextual information in many ways. Privacy reviews should therefore evaluate not only scientific datasets, but also metadata, structural organization, workflow artifacts, derived products, and information that may be inferred through aggregation or correlation. Reviews should also take into consideration possible privacy exposure during data lifecycle.

### **Priority 2: *Privacy exposure through HDF5 tools and plugins awareness***

The HDF5 ecosystem extends beyond the core HDF5 software (i.e., file format and the library), and includes a diverse collection of command-line utilities, visualization tools, analysis libraries, VOL connectors, VFDs, filters, and third-party applications. These components frequently generate additional outputs such as logs, diagnostic messages, temporary files, metadata snapshots, converted datasets, and cached intermediate results that may expose sensitive information beyond the contents of the original HDF5 file. Furthermore, plugins may introduce new metadata, or transform data in ways that alter their privacy characteristics.

Consequently, privacy assessments should evaluate not only HDF5 files but also the behavior of the software ecosystem that processes them. Developers should document the privacy implications of their tools, minimize unnecessary generation of sensitive artifacts, and provide users with mechanisms to control logging, metadata generation, and retention of intermediate products.

### **Priority 3: *Privacy-aware system design***

HDF5 software systems should be built with data privacy in mind. Applications should minimize collection and retention of unnecessary metadata, avoid embedding sensitive information in object names or descriptive attributes, remove temporary processing artifacts when they are no longer needed, and carefully evaluate automatically generated metadata introduced during data conversion or interoperability. Workflow designers should review intermediate products, logs, cached datasets, and derived files before publication or long-term archival.

### **Priority 4: *Data encryption as privacy control***

Encryption represents an important but limited privacy control.

Currently, HDF5 doesn't support data encryption that allows I/O on encrypted data, effectively disabling sensitive data exposure during data transfer and storage. Users may implement custom raw data encryption and partial metadata encryption (i.e., names of the objects) using existing HDF5 filtering mechanism. Such approach still leaves user-defined metadata (e.g., attributes) and structural metadata unencrypted. Information that remains unencrypted as application-specific workflow artifacts, temporary files, system logs, or derived datasets may continue to disclose sensitive information.

HDF5 encryption feature that properly implements encryption of all data stored in HDF5 while allowing partial I/O on encrypted data is currently under development. However, encryption does not eliminate all HDF5 privacy risks. Once encrypted data are decrypted for legitimate processing, applications, plugins,

caches, diagnostic logs, and intermediate workflow products may again become sources of unintended exposure. Encryption therefore reduces the attack surface but does not address inference, aggregation, excessive metadata generation, data retention, or loss of governance. Encryption also complicates workflows and may lead to data loss if on some stage of data life cycle encryption keys become unavailable.

Therefore, encryption should be viewed as one component of a comprehensive privacy strategy rather than as a complete solution. Effective protection requires combining encryption with careful metadata management, lifecycle-aware data governance, privacy-aware application design, access controls provided by the underlying computing environment, and education of users regarding the unique privacy characteristics of HDF5-based scientific data systems.

## 4. HDF5 Library Extensions

### 4.1. Overview

Supply chain-related issues are discussed in more detail in [Section 7](#).

### 4.2. Virtual Object Layer (VOL) Connectors

#### 4.2.1. Privacy Risks for VOL Connectors

HDF5 VOL connectors present one of the most significant privacy challenges in the HDF5 ecosystem. When a VOL connector (or a stack of VOL connectors) is used, data privacy can no longer be evaluated by examining only the HDF5 file, its lifecycle, and the workflows in which it is used. Instead, the privacy boundary extends to the entire data ecosystem, including all underlying data sources, connector-generated data and metadata, caches, authentication credentials, network communications, and the dynamically loaded plugin code itself. Consequently, any comprehensive HDF5 privacy model must account for these components, their interactions, and the trust relationships they establish.

We identified the following risks when using HDF5 VOL connectors.

#### **External Data Sources (P8 Ecosystem Exposure)**

Users traditionally assume that an HDF5 file contains all of the data being accessed and that inspecting or protecting the file is sufficient to understand and secure the complete dataset. However, this assumption no longer holds when HDF5 VOL connectors are used. A VOL connector can transparently retrieve and integrate data from numerous external sources while presenting it as a single HDF5 file. These sources may include cloud object stores, databases, remote servers accessed through REST or other network services, live data streams, or files in non-HDF5 formats. In addition, connectors may generate derived data, metadata, or virtual objects that do not physically exist in the underlying storage. As a result, users may be unaware of the true origin, location, ownership, and privacy policies

governing the data being accessed, making it more difficult to assess privacy risks and apply appropriate protections.

### **Transparent Data Aggregation (P3 Derived Information, P8 Ecosystem Exposure)**

A VOL connector can transparently aggregate data from multiple HDF5 files, databases, cloud object stores, external file formats, and live data streams into a single logical HDF5 dataset. For example, a connector could combine data from a geospatial database, near real-time weather and natural disaster feeds, and property assessment records to produce an HDF5 dataset for analyzing the potential impact of natural disasters on property values. From the application's perspective, all of these heterogeneous data sources appear as a single HDF5 dataset, potentially obscuring the number, nature, and privacy policies of the underlying data sources. Such transparent aggregation increases the risk of unintended disclosure because data originating from independent sources with different ownership, access controls, or privacy policies may be analyzed or shared as a single integrated dataset without the user's explicit awareness.

### **Access to non-HDF5 data (P8 Ecosystem Exposure)**

VOL connectors can access data in other binary formats, for example TIFF/GeoTIFF, BUFR, GRIB2, and CDF, and special storage systems, for example, DAOS. Therefore, the privacy implications of these formats and storage systems become HDF5 privacy issues.

### **Generated metadata (P1 Metadata Exposure, P3 Derived Information)**

VOL connectors may generate their own metadata that in turn may reveal, for example, dataset relationships, storage locations, URLs, cloud bucket names, and provenance. VOL connectors may generate additional metadata; for example, BUFR and GRIB2 VOL connectors generate file inventories revealing file organization, create derived attributes and dimension scales even when raw data remain protected.



**Network Workflow Artifacts (P6 Workflow Artifacts)**

HDF5 VOL connectors that access remote data sources generate network workflow artifacts as part of normal operation. These artifacts may include HTTP request and response headers, DNS queries and logs, proxy logs, browser or client history, authentication records, local caches, temporary downloads, and other network-related metadata retained on local or remote systems. Such artifacts can create a detailed record of the datasets accessed, potentially exposing sensitive information even when the underlying data remain protected. Consequently, HDF5 VOL connectors that rely on network communications inherit many of the privacy risks associated with networked systems and should be evaluated within a broader network privacy and security model.

**Caching (P2 Raw Data Exposure, P3 Derived Information)**

HDF5 VOL connectors may cache all sorts of data (metadata, downloaded raw data, authentication information, etc.) that remain after execution and may be shared, copied, and archived. A user may not be even aware of VOL's artifacts and leaked data.

**Provenance leakage (P1 Metadata Exposure, P3 Derived Information, P8 Ecosystem Exposure)**

VOL connectors may reveal provenance information, e.g., data origin, timestamps, organizational structure, modification history.

**Policy Bypass (P8 Ecosystem Exposure)**

HDF5 applications are generally privacy-policy agnostic and have no inherent awareness of the privacy policies governing the data they access. When VOL connectors are used, the same application may transparently access data originating from multiple sources, each subject to different ownership, access controls, retention requirements, or privacy regulations. Because the application interacts only with the HDF5 API, it may unknowingly combine, process, or redistribute data under incompatible privacy policies, effectively bypassing policy boundaries that would otherwise apply to the individual data sources.

### Plugin Trust (P7 Trust and Supply Chain)

HDF5 VOL connectors are dynamically loaded plugins that execute external code within the application's process. As a result, a connector has direct access to the data flowing through the HDF5 API and can inspect, copy, modify, cache, export, or share that data before returning it to the application. A malicious or untrusted VOL connector could therefore compromise the confidentiality, integrity, or privacy of the data without the application's knowledge. Consequently, VOL connectors should be obtained from trusted sources, verified before deployment, and included within the application's overall trust and privacy model.

**Table 15** – Primary privacy mechanisms for VOL connector privacy risks

| <b>Risk</b>                  | <b>Primary Privacy Mechanism</b>                                        |
|------------------------------|-------------------------------------------------------------------------|
| External Data Sources        | P8 Ecosystem Exposure                                                   |
| Transparent Data Aggregation | P3 Derived Information<br>P8 Ecosystem Exposure                         |
| Access to non-HDF5 Data      | P8 Ecosystem Exposure                                                   |
| Generated Metadata           | P1 Metadata Exposure<br>P3 Derived Information                          |
| Network Workflow Artifacts   | P6 Workflow Artifacts                                                   |
| Caching                      | P2 Raw Data Exposure<br>P3 Derived Information                          |
| Provenance Leakage           | P1 Metadata Exposure<br>P3 Derived Information<br>P8 Ecosystem Exposure |
| Policy Bypass                | P8 Ecosystem Exposure                                                   |
| Plugin Trust                 | P7 Trust and Supply Chain                                               |

## 4.3. Filters Plugins

### 4.3.1. Privacy Risks for Filters Plugins

immediately before storage and immediately after retrieval. As a result, the privacy boundary extends beyond the HDF5 file itself and the application that

uses the data. Filter plugins execute external code, may create temporary plaintext copies of sensitive data, generate intermediate artifacts, maintain internal state, or transmit information outside the application. Consequently, evaluating privacy risks requires considering not only the stored HDF5 file but also the behavior of the filter plugins, their execution environment, and any artifacts they produce during data processing.

We identified the following major risks when using HDF5 filters.

**Metadata leakage via filters identifiers (P1 Metadata Exposure)**

The filter pipeline is stored in the file as HDF5 metadata in the object header. Filter identifier and its parameters may reveal security mechanisms, organizational standards, software ecosystem, application domain, etc.

**Data characteristics leakage via filter parameters (P1 Metadata Exposure, P3 Derived Information)**

Filter parameters such as compression level, block sizes, scale-offset parameters, etc. may reveal expected precision, data resolution, floating-point accuracy, acceptable information loss. Usage of lossy filters shows acceptable data approximation, expected error bounds, and precision requirements. Such data characteristics can give insights into assumptions under which data was collected and characteristics of experimental setup.

**Sizes of compressed chunks reveal data characteristics (P1 Metadata Exposure, P3 Derived Information)**

Chunk sizes are metadata and can be examined without access to data. Different sizes of compressed chunks may reveal sparsity, repeated patterns, data randomness, and empty regions to name a few.

**Filters operate on plaintext data buffers (P2 Raw Data Exposure)**

Before data compression or encryption is applied filters have access to data. Mali-

cious filter may have access to data before specialized compression or encryption are applied to protect data.

**Filters may persist data outside HDF5 (P2 Raw Data Exposure, P6 Workflow Artifacts)**

Filters may allocate memory buffers that may remain in memory, or paged to disk, appear in crash dumps. This sensitive data may persist outside the HDF5 file.

**Plugin trust (P7 Trust and Supply Chain)**

As HDF5 VOL connectors, HDF5 filters are dynamically loaded plugins that execute external code within the application's process. If the filter is malicious, it can do anything before passing data to application or to storage, for example, inspect memory, write logs, copy decoded data and send it elsewhere or retain it. Untrusted filter plugin could compromise data confidentiality, integrity and privacy without application's knowledge.

**Plugin search path (P7 Trust and Supply Chain)**

Dynamic filters are loaded from directories specified by environment variables while the HDF5 library is searching for the requested plugin. Such process may result in loading a malicious filter. On different systems application may load different plugins. Thus, it becomes a supply-chain problem.

**Filters may generate derived information (P3 Derived Information).** Since filters have access to data they can generate and store any type of derived information, e.g., statistics, patterns, sparsity characteristics, etc. The derived information may reveal sensitive information about data.

The table below provides primary privacy mechanism for built-in filters and several popular third-party filters.

**Table 16** – Primary privacy mechanisms associated with HDF5 filter plugins

| <b>HDF5 Filter</b> | <b>Primary Privacy Categories</b>              | <b>Representative Privacy Considerations</b>                                                                                                                           |
|--------------------|------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Deflate (GZIP)     | P1 Metadata Exposure<br>P3 Derived Information | Compression method, compression level, and resulting chunk sizes may reveal data entropy, sparsity, and redundancy.                                                    |
| Shuffle            | P3 Derived Information                         | Byte reordering itself is reversible, but its use together with compression may reveal characteristics of the underlying numeric representation and data organization. |
| Fletcher32         | P1 Metadata Exposure                           | Checksum metadata reveals integrity protection is used but generally introduces minimal additional privacy risk.                                                       |
| N-bit              | P1 Metadata Exposure<br>P3 Derived Information | Bit-width reduction reveals effective numeric precision and expected value ranges, providing insight into experimental accuracy and measurement characteristics.       |
| Scale-Offset       | P1 Metadata Exposure<br>P3 Derived Information | Scale factors and offsets reveal expected precision, acceptable quantization error, and data resolution.                                                               |
| ZFP                | P1 Metadata Exposure<br>P3 Derived Information | Compression mode (fixed rate, fixed precision, or fixed accuracy) and associated parameters reveal acceptable information loss and numerical accuracy requirements.    |
| SZ / SZ3           | P1 Metadata Exposure<br>P3 Derived Information | Error bounds expose tolerated approximation error and characteristics of scientific datasets.                                                                          |
| Blosc              | P1 Metadata Exposure<br>P3 Derived Information | Compression algorithm, block size, and shuffle/bitshuffle options reveal storage optimization choices and data organization.                                           |
| Zstandard (Zstd)   | P1 Metadata Exposure<br>P3 Derived Information | Compression level and resulting compressed sizes may reveal entropy and structural properties of datasets.                                                             |
| LZ4                | P1 Metadata Exposure<br>P3 Derived Information | Fast compression with modest ratios may reveal data compressibility through chunk sizes.                                                                               |
| BZIP2              | P1 Metadata Exposure<br>P3 Derived Information | Compression characteristics and block sizes may expose redundancy and data structure.                                                                                  |

**Table 16** – Primary privacy mechanisms associated with HDF5 filter plugins, continued

| <b>HDF5 Filter</b>  | <b>Primary Privacy Categories</b> | <b>Representative Privacy Considerations</b>                                                                                                                                                                   |
|---------------------|-----------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| All Dynamic Filters | P2 Raw Data Exposure              | Filters operate on plaintext data before writing or after reading. Dynamically loaded plugins may inspect, cache, copy, or export sensitive data and may generate temporary buffers, logs, or crash artifacts. |
|                     | P6 Workflow Artifacts             |                                                                                                                                                                                                                |
|                     | P7 Trust and Supply Chain         |                                                                                                                                                                                                                |

## 4.4. Virtual File Drivers (VFD)

### 4.4.1. Privacy Risks for VFDs

HDF5 VFDs manage how actual bytes are stored and retrieved. While VFDs perform I/O and do not change logical HDF5 file and data model they may reveal privacy issues related to data movement, data storage, and application's I/O characteristics.

We identified the following major risks when using HDF5 VFDs.

#### **External Data Sources (P8 Ecosystem Exposure)**

Unlike traditional file I/O, Virtual File Drivers may transparently store and retrieve HDF5 data from cloud object stores, distributed file systems, network storage, memory-resident files, or multiple physical storage devices. Consequently, users and system administrators may incorrectly assume where sensitive information resides and which security policies, regulatory requirements, or administrative controls apply. The privacy boundary therefore extends beyond the HDF5 file to the entire storage ecosystem.

#### **Multiple Copies of Data (P2 Raw Data Exposure, P6 Workflow Artifacts)**

Some VFDs create additional copies of HDF5 data without the application's explicit awareness. These copies may exist in replicated files, metadata journals, backing stores, memory dumps, swap files, or mirrored storage systems. Because

these copies may persist beyond the lifetime of the primary HDF5 file, sensitive information can remain recoverable even after the original file has been deleted or relocated.

**Storage Metadata Exposure (P1 Metadata Exposure)**

Although VFDs do not understand HDF5 objects, they manage physical storage and therefore may expose low-level storage metadata, including physical offsets, allocation sizes, storage layouts, and file organization. Such information can reveal characteristics of datasets, storage architecture, and application behavior even without accessing the logical HDF5 objects.

**Access Pattern Leakage (P3 Derived Information)**

Storage activity observed by the operating system, distributed file system, storage servers, or cloud infrastructure may reveal application behavior. Access frequency, read/write ratios, sequential versus random I/O, update frequency, and accessed file regions can reveal properties of the underlying datasets, application algorithms, or user activity. These observations enable inference of information that is not explicitly stored within the HDF5 file.

**Workflow Artifacts (P6 Workflow Artifacts)**

VFDs may generate artifacts during normal operation, including metadata journals, temporary files, swap files, memory images, crash dumps, replicated storage objects, and cloud access logs. These artifacts frequently persist outside the HDF5 file itself and may retain sensitive information or evidence of application activity.

**Plugin Trust (P7 Trust and Supply Chain)**

Dynamically loadable Virtual File Drivers execute external code within the application's process. A malicious or compromised VFD can inspect, modify, retain, duplicate, or export data before writing it to storage or returning it to the application. Consequently, VFDs should be obtained only from trusted sources and considered part of the application's overall trust and privacy model.

**Table 17** – Major privacy risks associated with HDF5 Virtual File Drivers

| <b>HDF5 VFD</b> | <b>Privacy Categories</b>                                                  | <b>Representative Privacy Risks</b>                                                                                                                                                                                                                  |
|-----------------|----------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SEC2            | P2 Raw Data Exposure                                                       | Disk blocks allocated for new HDF5 files may contain residual information if the underlying storage is not securely initialized or overwritten.                                                                                                      |
| STDIO           | P2 Raw Data Exposure                                                       | Similar to the SEC2 driver, persistent storage may expose residual data remaining on reused disk blocks.                                                                                                                                             |
| Core            | P2 Raw Data Exposure<br>P6 Workflow Artifacts                              | Stores the entire HDF5 file in memory. Sensitive information may persist in process memory, swap space, or operating-system crash dumps. When the backing-store option is enabled, the in-memory file is written to persistent storage upon closing. |
| Family          | P2 Raw Data Exposure                                                       | Splits a logical HDF5 file into multiple physical files. Misconfigured permissions or incomplete deletion of family members may expose portions of the dataset.                                                                                      |
| Split           | P1 Metadata Exposure<br>P2 Raw Data Exposure<br>P8 Ecosystem Exposure      | Stores metadata and raw data in separate files, which may have different permissions or reside on different storage systems. The driver also creates multiple physical copies of file information.                                                   |
| Multi           | P1 Metadata Exposure<br>P2 Raw Data Exposure<br>P8 Ecosystem Exposure      | Stores different HDF5 memory types in separate files. Independent storage locations and permissions increase the risk of metadata and raw data disclosure.                                                                                           |
| Mirror          | P2 Raw Data Exposure<br>P7 Trust and Supply Chain<br>P8 Ecosystem Exposure | Replicates HDF5 data to a remote mirror service. Privacy depends on secure communication, trusted mirror daemons, authentication, and protection of replicated copies.                                                                               |
| Log SWMR)       | (VFD P1 Metadata Exposure<br>P6 Workflow Artifacts                         | Metadata journaling creates persistent journal files containing metadata snapshots for crash recovery, leaving additional workflow artifacts outside the HDF5 file.                                                                                  |



**Table 17** – Major privacy risks associated with HDF5 Virtual File Drivers, continued

| <b>HDF5 VFD</b> | <b>Privacy Categories</b> | <b>Representative Privacy Risks</b>                                                                                                                                                                                      |
|-----------------|---------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| MPI-I/O         | P1 Metadata Exposure      | Transfers metadata and raw data through the underlying HPC communication infrastructure. Unless protected by lower-layer mechanisms, network traffic may expose sensitive information.                                   |
|                 | P2 Raw Data Exposure      |                                                                                                                                                                                                                          |
|                 | P8 Ecosystem Exposure     |                                                                                                                                                                                                                          |
| Subfiling       | P1 Metadata Exposure      | Divides a logical HDF5 file into multiple subfiles distributed across storage devices. Fragmentation and independently managed files increase the risk of unauthorized disclosure through misconfigured access controls. |
|                 | P2 Raw Data Exposure      |                                                                                                                                                                                                                          |
|                 | P8 Ecosystem Exposure     |                                                                                                                                                                                                                          |
| Onion           | P1 Metadata Exposure      | Maintains historical versions of HDF5 files, allowing recovery of deleted or overwritten data and reconstruction of meta-data evolution, provenance, and workflow history.                                               |
|                 | P2 Raw Data Exposure      |                                                                                                                                                                                                                          |
|                 | P3 Derived Information    |                                                                                                                                                                                                                          |
| ROS3            | P6 Workflow Artifacts     | Accesses HDF5 files stored in S3-compatible object stores. HTTP requests, DNS queries, cloud access logs, and HTTP Range requests create network artifacts and extend the privacy boundary to cloud infrastructure.      |
|                 | P8 Ecosystem Exposure     |                                                                                                                                                                                                                          |

## 4.5. Audit Findings and Mitigation Priorities

### 4.5.1. Privacy

The audit of HDF5 library extensions demonstrates that privacy risks extend well beyond the HDF5 file itself. VOL connectors, filter plugins, and Virtual File Drivers introduce new privacy exposure surfaces through external data sources, dynamically loaded plugins, storage systems, cloud services, and network infrastructure. These mechanisms may expose raw data, metadata, derived information, workflow artifacts, or information about the surrounding software ecosystem, even when the HDF5 file itself is adequately protected. The following sections summarize the principal audit findings for each extension mechanism and present

prioritized mitigation strategies to improve privacy awareness, transparency, and trustworthiness within the HDF5 ecosystem.

## **Privacy – HDF5 VOL Connectors**

### **Audit Findings**

The audit identified HDF5 VOL connectors as one of the largest sources of privacy exposure within the HDF5 ecosystem. Unlike the HDF5 core library, VOL connectors extend the privacy boundary beyond the HDF5 file to include external data sources, cloud services, databases, network infrastructure, authentication systems, caches, and dynamically loaded plugins. Because applications interact only with the HDF5 API, users may be unaware of the true origin of data, the privacy policies governing those data, or the workflow artifacts generated during processing. Consequently, privacy risks arise not only from the HDF5 file itself but also from the broader software ecosystem accessed by the connector.

### **Mitigation Priorities**

We identified the following mitigation strategies and their priorities:

#### **Priority 1 - Document connector privacy characteristics**

Each VOL connector should explicitly document any of applicable items listed below:

- External data sources VOL connector accesses
- Generated metadata
- Caching mechanism
- Network communications
- Authenticaion mechanism
- Workflow artifacts
- Privacy assumptions

**Priority 2 - Improve connector transparency and introspection**

HDF5 should provide a standardized mechanism through which applications and audit tools can identify the active VOL connector or connector stack and query privacy-relevant operational characteristics. Existing VOL introspection callbacks can report connector identity and selected capabilities, but they do not expose whether a connector accesses external resources, aggregates multiple sources, generates metadata, maintains caches, creates workflow artifacts, or performs network communication. The VOL introspection interface, connector capability flags, or standardized optional operations should therefore be extended to expose this information.

Possible standartize queries could include:

- Connector name, version, and stack composition
- Types and locations of external data sources
- Whether
  - network access is performed
  - raw data, metadata, or credentials are cached
  - the connector creates temporary or persistent artifacts
  - the connector generates metadata or derived data
  - the connector combines data governed by different policies
  - privacy-relevant configuration information can be obtained
- TBD

**Priority 3 - Strengthen connector trust and deployment practices**

VOL connectors are dynamically loaded shared libraries and therefore become part of the application's trusted computing base. Organizations should deploy only trusted connectors, restrict the directories searched for plugins, verify the provenance and integrity of connector libraries, and avoid loading untrusted plugins from user-writable or publicly accessible locations.

Future versions of HDF5 could further improve security by providing configurable policies that restrict connector loading based on connector identity, implemented transparency and introspection, or administrative policy. Users and HDF5 applications developers should switch to the latest HDF5 releases that support digital signature verification for dynamically loaded plugins.

**Priority 4 - Follow privacy-aware connector development guidelines**

Future connector implementations should minimize unnecessary metadata generation, avoid persistent caches unless explicitly requested, and clearly document connector's privacy characteristics.

**Privacy – HDF5 Filter Plugins****Audit Findings**

The audit found that HDF5 filters alter the privacy characteristics of HDF5 data because they execute immediately before storage and immediately after retrieval while operating directly on plaintext data. Filter parameters, compression characteristics, and generated metadata may reveal information about the underlying datasets even when the data themselves remain protected. Dynamically loaded filter plugins further introduce supply-chain risks because they execute arbitrary code within the application's process and may generate temporary artifacts outside the HDF5 file.

**Mitigation Priorities**

We identified the following mitigation strategies and their priorities:

**Priority 1 - Strengthen filter trust and deployment practices**

Organizations should deploy only trusted connectors, restrict the directories searched for plugins, verify the provenance and integrity of connector libraries, and avoid loading untrusted plugins from user-writable or publicly accessible locations.

Future versions of HDF5 could further improve security by providing configurable policies that restrict connector loading based on connector identity, implemented transparency and introspection, or administrative policy. Users and HDF5 applications developers should switch to the latest HDF5 releases that support digital signature verification for dynamically loaded plugins.

**Priority 2 - Select and document filter configurations with privacy in mind**

Filter identifiers and parameters are stored in HDF5 object headers and are required for correct interpretation of the stored data. Consequently, this metadata cannot generally be removed or obscured without affecting interoperability. Users should evaluate whether filter configurations reveal sensitive information about data precision, compression characteristics, or scientific workflows, and document these privacy implications when selecting filter pipelines.

**Priority 3 - Use encryption when filter metadata are provacy sensitive**

When filter metadata themselves may disclose sensitive information, encrypting the entire HDF5 file provides the most effective mitigation. Encryption solutions that protect both raw data and HDF5 metadata—including filter pipelines, object headers, and structural metadata—prevent unauthorized disclosure of filter identifiers, parameters, compressed chunk characteristics, and other metadata that could otherwise be used to infer properties of the underlying data.

**Priority 4 - Minimize workflow artifacts**

Filter implementations should securely erase temporary buffers when possible, avoid persistent temporary files, and clearly document any generated artifacts.

**Priority 5 - Standardize privacy documentation**

Built-in and registered filters should document:

- Generated metadata
- Plaintext processing

- Derived information
- Temporary artifacts
- Privacy implications of filter parameters

## **Privacy – HDF5 Virtual File Drivers**

### **Audit Findings**

The audit found that Virtual File Drivers primarily affect privacy through physical storage management rather than the logical HDF5 data model. VFDs influence where data are stored, how they are replicated, transmitted, cached, or versioned, and consequently extend the HDF5 privacy boundary to operating systems, distributed storage systems, cloud infrastructure, and network services. Different VFDs emphasize different privacy concerns, including persistent copies of data, storage metadata exposure, historical version retention, network artifacts, and cloud-based workflow exposure.

### **Mitigation Priorities**

We identified the following mitigation strategies and their priorities:

#### **Priority 1 - Document storage behavior**

Every VFD should clearly describe:

- Where data are stored
- Whether additional copies are created
- Whether network communication occurs
- Generated workflow artifacts
- Storage assumptions

#### **Priority 2 - Minimize unintended persistence**

Drivers that create replicated files, journal files, historical versions, or backing

stores should provide mechanisms for secure deletion, retention management, and lifecycle control.

**Priority 3 - Strengthen cloud and distributed-storage guidance**

Cloud-based and distributed-storage VFDs should document authentication requirements, network communications, logging behavior, and storage-provider privacy assumptions.

**Priority 4 - Strengthen VFD trust and deployment practices**

Organizations should deploy only trusted VFD plugins, restrict the directories searched for plugins, verify the provenance and integrity of connector libraries, and avoid loading untrusted plugins from user-writable or publicly accessible locations.

Future versions of HDF5 could further improve security by providing configurable policies that restrict VFD plugin loading based on VFD's identity, implemented transparency and introspection, or administrative policy. Users and HDF5 applications developers should switch to the latest HDF5 releases that support digital signature verification for dynamically loaded plugins.

**Summary**

The audit demonstrates that HDF5 library extensions fundamentally alter the privacy characteristics of HDF5 data. While the HDF5 core library primarily exposes information through the file format itself, VOL connectors, filter plugins, and Virtual File Drivers extend the privacy boundary beyond the HDF5 file to include external software, storage systems, network infrastructure, cloud services, and dynamically loaded plugins. Consequently, effective privacy protection requires evaluating not only HDF5 files but also the complete execution environment in which HDF5 operates. This broader ecosystem perspective should guide the design, implementation, deployment, and auditing of future HDF5 extensions.

## 5. HDF5 Wrappers and Language Bindings

### 5.1. Overview

Complete:

- C#
- Java
- Python
- JavaScript
- Rust

Partials...

### 5.2. Python

- CVE-2025-995 [[26](#)]
- CVE-2026-0897 [[27](#)]
- CVE-2026-1669 [[28](#)]
- CVE-2026-2492 [[22](#)]

### 5.3. Java

### 5.4. Audit Findings and Mitigation Priorities



## 6. Applications using HDF5

Applications treat HDF5 as inert data, but HDF5 files can carry behavior-relevant metadata: paths, external references, huge declared shapes, filter/plugin requirements, serialized application objects, and model-layer definitions. That creates integration bugs even when the HDF5 library is behaving as designed.

The HDF Group's security policy [40] already attempts the right scope distinction: core libhdf5, official tools, Remote Code Execution (RCE) via parsing/API abuse, and supply-chain compromise are in scope; third-party plugins and application-level usage are usually triaged or referred to their maintainers.

**Table 18** – Common application-level HDF5 failure families

| Family                                        | Typical failure                                                                | Examples                                                                                                                                                                                                  | Why it is common                                                                                                                                                                                                                                |
|-----------------------------------------------|--------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| malformed file metadata reaches C memory code | buffer overflow, over-read, UAF, double-free, null dereference, divide-by-zero | many HDFGroup records, including 2024 and 2025 issues in object headers, datatypes, dataspaces, filters, heaps, free-space metadata, and cache images                                                     | HDF5 is a complex binary metadata graph, not a flat byte container                                                                                                                                                                              |
| application deserialization layered on HDF5   | arbitrary code execution                                                       | Keras CVE-2025-9905: crafted <code>.h5/.hdf5</code> model archives can execute code because legacy <code>.h5</code> loading did not honor <code>safe_mode=True</code> for Lambda-layer pickled code [26]. | ML frameworks often use HDF5 as a model container, then deserialize framework-level objects from it.                                                                                                                                            |
| external references and file path indirection | arbitrary local file read, path traversal, data exfiltration                   | Keras CVE-2026-1669: crafted <code>.keras</code> model file using HDF5 external dataset references could read local files [28].                                                                           | HDF5 supports links and external storage mechanisms. External links store both target filename and object path; external storage can resolve raw-data files through prefixes and current working directory rules [38].                          |
| unbounded resource allocation                 | memory exhaustion / interpreter crash                                          | Keras CVE-2026-0897: crafted <code>.keras</code> archive with <code>model.weights.h5</code> declaring an extremely large dataset shape could exhaust memory and crash Python [27].                        | HDF5 metadata can declare logical shapes much larger than the actual useful payload; application code may allocate based on declared shape before policy checks.                                                                                |
| dynamic plugin loading and search paths       | local privilege escalation / arbitrary code loading                            | TensorFlow CVE-2026-2492: HDF5 plugin handling loaded plugins from an uncured location, enabling local privilege escalation [22].                                                                         | HDF5 supports dynamic plugin loading, and plugin paths can be affected by defaults or <code>HDF5_PLUGIN_PATH</code> ; dynamic loading can also be disabled via <code>H5PLset_loading_state()</code> or <code>HDF5_PLUGIN_PRELOAD=:</code> [36]. |

**Table 18** – Common application-level HDF5 failure families, continued

| Family                                   | Typical failure                                                   | Examples                                                                                                                                                          | Why it is common                                                                                                                          |
|------------------------------------------|-------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| vulnerable or stale embedded HDF5 copies | inherited CVEs, unpatched parser behavior                         | unratio CVE-2021-36977 involved a heap overflow related to use of HDF5 1.12.0; Apple CVE-2021-31009 says multiple issues were addressed by removing HDF5 [10, 3]. | Downstream products vendor, statically link, or lag HDF5 releases; vulnerability scanners then attribute HDF5 defects to the application. |
| helper-tool exposure                     | crashes or code execution through inspection/conversion utilities | h5dump appears in older and newer issues; CVE-2026-34734 describes a heap-use-after-free in the h5dump helper utility triggered by a malicious .h5 file [11].     | Applications often call h5dump, h5repack, or converters as “safe inspection” tools on untrusted files.                                    |

**The unifying root cause:** The repeated mistake is *trust-boundary confusion*. HDF5 sits at the boundary between a file and the process. Downstream frameworks often add another boundary: model loading, dataset ingestion, scientific workflow execution, browser upload, cloud service processing, or plugin resolution. Many CVEs happen because those layers collapse into one assumption: “This is just an HDF5 file, so reading it is safe.” That assumption is false. An HDF5 file can influence:

- memory allocation size
- dataset rank and shape
- chunk count and cache pressure
- filter/plugin loading
- external file lookup
- link traversal
- datatype conversion
- application-level model reconstruction
- tool output rendering

The common issue is **unsafe interpretation of HDF5-controlled metadata at the application boundary**.

## 6.1. Audit Findings and Mitigation Priorities

Mitigation has to be layered. Patching `libhdf5` alone will not fix Keras model deserialization, TensorFlow plugin path handling, or application-level external-reference policy.

### Priority 1: Define an “untrusted HDF5” profile

HDF5 should offer, and downstreams should use, a strict profile for any file received from users, networks, archives, model hubs, object stores, email, web uploads, or third-party datasets.

Default behavior for that profile:

```
dynamic plugins disabled
external links disabled or sandboxed
external raw dataset storage disabled or sandboxed
VDS source traversal restricted
maximum rank enforced
maximum element count enforced
maximum allocation size enforced
maximum metadata bytes enforced
maximum chunk count enforced
maximum filter expansion ratio enforced
cycles and deep graph traversal rejected
unknown or legacy-dangerous messages rejected
    unless explicitly allowed
```

Today, pieces exist: plugin loading can be controlled, and all dynamic plugins can be disabled with `H5PLset_loading_state(0)` or `HDF5_PLUGIN_PRELOAD=:`. But this needs to become a cohesive security profile, not a set of hidden knobs.

## Priority 2: Ship a preflight validator

Create a validator that reads metadata only and returns a policy decision before the application allocates large arrays or deserializes model objects.

Example output:

```
{
  "safe_for_untrusted_load": false,
  "reasons": [
    "external dataset reference outside sandbox",
    "dataset declares 8.7 TB logical size",
    "requires dynamic filter plugin",
    "contains legacy Keras Lambda layer metadata"
  ]
}
```

For core HDF5, this validator should reason about file-format invariants. For downstreams, it should expose application hooks:

```
on_external_reference(path)
on_dataset_shape(path, dtype, shape, logical_bytes)
on_filter_required(filter_id)
on_link_traversal(source, target)
on_attribute(name, size)
```

Keras and TensorFlow could then enforce model-specific policy before creating Python objects.

## Priority 3: Disable dangerous HDF5 features by default in ML model loading

ML loaders should not behave like general HDF5 viewers.

For Keras/TensorFlow-style use:

- do not allow Lambda or pickled code from legacy .h5
- do not allow external dataset references
- do not allow dynamic HDF5 plugins
- do not eagerly allocate declared tensors before checking total byte budget
- do not resolve paths relative to current working directory
- do not honor HDF5\_PLUGIN\_PATH in model loading contexts

This directly addresses the Keras arbitrary-code issue, the Keras arbitrary-file-read issue, the Keras memory-exhaustion issue, and the TensorFlow plugin-search-path issue.

#### **Priority 4: Make external references opt-in**

External links and external raw dataset storage are legitimate HDF5 features, but they are unsafe defaults for hostile content. HDF5 documentation states that external links store a target filename and object path, and external dataset storage search behavior can involve the current working directory, absolute paths, relative paths, `{ORIGIN}`, and `HDF5_EXTFILE_PREFIX`.

Mitigation:

- reject absolute external paths
- reject path traversal
- reject current-working-directory lookup
- require explicit sandbox root
- require explicit allowlist by extension or path
- log every external resolution
- never follow external references during metadata preview

For services, the safest default is: `externalreferences=off`.

**Priority 5: Treat plugins as executable code**

HDF5 filter plugins, VOL connectors, and VFDs are not data. They are code. The HDF5 docs state that plugins are shared libraries and that the default path can be overwritten by `HDF5_PLUGIN_PATH`. That is enough to create an application-level vulnerability if a privileged process uses an attacker-controlled path.

Mitigation:

```
clear HDF5_PLUGIN_PATH, HDF5_PLUGIN_PRELOAD,  
      HDF5_EXTFILE_PREFIX in services  
set plugin loading state explicitly at process start  
allow plugins only from root/admin-owned directories  
reject writable plugin directories  
require hashes or signatures for plugins  
never load plugins in setuid, service, notebook-hub,  
      web-worker, or privileged contexts unless explicitly  
      allowlisted
```

Sandboxing plugins...

**Priority 6: Require downstream SBOM and version reporting**

Downstream projects should report:

```
HDF5 version  
linkage type: static / dynamic / vendored / system  
enabled filters  
enabled VOL/VFD connectors  
plugin search path policy  
external-reference policy  
safe-mode policy
```

This solves a practical problem: a user seeing “HDF5 CVE” in a scanner often cannot tell whether they are affected through `libhdf5`, an official tool, a vendored copy, a Python wheel, a model loader, or a plugin.

### Priority 7: Split CVE classification into scope tags

For HDF5-related CVE triage, use explicit tags:

```
HDF5-core-parser
HDF5-official-tool
HDF5-legacy-tool
HDF5-plugin-loading
HDF5-external-reference
HDF5-downstream-deserialization
HDF5-downstream-resource-policy
HDF5-vendored-library
not-HDF5
duplicate/rejected
```

This avoids bad prioritization. A heap overflow in `H5T__conv_struct_opt` is not the same class as Keras ignoring `safe_mode` for legacy `.h5` files, even though both mention HDF5.

### A practical mitigation matrix for downstream maintainers

**Table 19** – Minimum safe policies for downstream HDF5 use cases

| Downstream use case                    | Minimum safe policy                                                                                                  |
|----------------------------------------|----------------------------------------------------------------------------------------------------------------------|
| viewing unknown <code>.h5</code> files | run in a sandbox; disable plugins; disable external references; cap metadata and output size                         |
| loading ML models                      | never load untrusted legacy <code>.h5</code> ; disable Lambda/pickled code; validate tensor shapes before allocation |

**Table 19** – Minimum safe policies for downstream HDF5 use cases, continued

| Downstream use case    | Minimum safe policy                                                                                                                  |
|------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| cloud upload service   | preflight only; no plugin loading; no external file access; resource limits; process isolation                                       |
| HPC workflow           | separate trusted internal files from imported files; scrub environment; pin plugin directories; use module-level HDF5 version floors |
| desktop scientific app | prompt before following external references; ship patched HDF5; avoid writable global plugin dirs                                    |
| package/distribution   | publish SBOM; expose HDF5 version; rebuild promptly after HDF5 security releases                                                     |
| library binding        | expose security controls in the binding API, not just through environment variables                                                  |

**What The HDF Group can do to reduce downstream CVEs:** The most useful move is not just more parser hardening. It is to give downstreams safe controls that are easy to use.

Recommended deliverables:

```
H5Pset_security_profile(fapl, H5_SECURITY_PROFILE_UNTRUSTED)
H5Pset_external_reference_policy(fapl, H5_EXTREF_DENY
    | H5_EXTREF_SANDBOX)
H5Pset_plugin_policy(fapl, H5_PLUGIN_DENY
    | H5_PLUGIN_ALLOWLIST)
H5Pset_max_logical_dataset_bytes(fapl, n)
H5Pset_max_metadata_bytes(fapl, n)
H5Pset_max_object_count(fapl, n)
H5Pset_max_link_traversal_depth(fapl, n)
h5validate --profile untrusted --json file.h5
```

Then publish downstream recipes for Keras, TensorFlow, h5py, netCDF, MATLAB, R, Java, and cloud services.



## 7. HDF5 in the Software Supply Chain

- HDF5 2.0.0 source-artifact integrity check [\[37\]](#)
- SBOM

### 7.1. Upstream Dependencies

This subsection summarizes external software that can be required by an HDF5 build. It starts with the default serial C library and is organized by build option, because the default serial C library has a much smaller dependency set than feature-complete, testing, packaging, or developer builds. More details are provided in [Appendix B](#).

HDF5's CMake build can either locate dependencies that are already installed or, for selected filter-related projects, add external source trees to the build with `FetchContent`. See [table 22](#) for details.

The baseline HDF5 build has no mandatory external dependencies. The core library and C API tests can be built and run without any additional software. See [table 23](#) for details.

The HDF5 build system has options that trigger additional dependencies when enabled. For example, enabling parallel HDF5 requires an MPI implementation, while enabling Fortran support requires a Fortran compiler. See [table 24](#) for details.

Enabling filter plugins or the plugin project can introduce additional filter-library dependencies. The HDF5 cache defaults include entries for bitgroom, bitround, bitshuffle, Blosc, Blosc2, bzip2, fpzip, JPEG, LZ4, LZF, SZ, ZFP, and Zstandard. Those libraries are controlled by the plugin project's own options when `hdf5_plugins` is built or found. See [table 25](#) for details.

Enabling VFDs for ROS3, HDFS, or other storage systems can introduce dependencies on external libraries and credentials. The same applies to VOL connectors. These are not filter dependencies, but they can affect the security and robustness of HDF5 file access, especially for third-party data. See [table 26](#) for details.

Additional dependencies are required for optional tools, tests, and security features. For example, the `hdf5_security` target depends on OpenSSL when built with `HDF5_ENABLE_SECURITY_FEATURES`. See table 27 for details.

Finally, developer builds and packaging scripts have their own dependencies. These include code linters, formatters, static analyzers, documentation tools, and packaging tools. These dependencies are not required for a default HDF5 build, but they are relevant for the supply-chain risk of development and release processes. For example, if a security vulnerability is introduced in a packager or source formatter, it could affect the integrity of HDF5 releases even if the vulnerability is not present in the HDF5 source code itself. See table 28 for details.

Several default upstream source locations are encoded in `config/CacheURLs.cmake` for dependencies that HDF5 can fetch or whose values are passed to external filter-plugin builds. See table 29 for details.

## 7.2. Downstream Dependencies

For this audit, downstream dependencies are projects that compile against, dynamically load, package, or define data conventions on top of HDF5. The HDF5 ecosystem is much larger than any static list, so the most important downstreams are best identified by blast radius: broad installation footprint, long-lived archival data, domain-standard file conventions, or use as an intermediate layer for other tools. The following categories of downstreams are especially relevant.

### Scientific data models and exchange formats.

The highest-impact downstream is netCDF-4, which uses HDF5 as the storage layer for the enhanced netCDF data model and is central to climate, weather, ocean, atmospheric, and other Earth-system data workflows [41]. NASA HDF-EOS5, NeXus, and CGNS similarly define domain-specific conventions over HDF5 for Earth observation, neutron/x-ray/muon facilities, and CFD or aerospace simulation data [21, 31, 9]. For these formats, HDF5 compatibility is not just a library question: it affects the readability of long-lived archives and the ability of independent tools to interpret a shared schema.

**Language bindings and analysis libraries.**

h5py, PyTables, pandas HDFStore, Bioconductor’s rhdf5, HDF5.jl, and MATLAB’s HDF5 interfaces make HDF5 a routine dependency for Python, R, Julia, and MATLAB users [20, 34, 33, 7, 24, 29]. These packages are important because they often sit at the boundary between upstream HDF5 builds and end-user scripts. Their packaging choices determine whether users load a bundled HDF5, a system HDF5, or an environment-provided HDF5, and therefore whether ABI, plugin-path, thread-safety, MPI, and filter support match the files being opened.

**Geospatial, visualization, and inspection tools.**

GDAL’s HDF5 driver, ParaView/VTK-family builds, ITK’s HDF5 module, HDFView, and similar readers expose HDF5 files to interactive and automated analysis workflows [32, 25, 23]. This is an important security boundary: these tools are commonly used to inspect third-party data files, so robustness against malformed HDF5 objects, unusual filters, and unexpected VFD/plugin configuration has direct operational value.

**HPC and parallel-I/O frameworks.**

ADIOS2 includes an HDF5 engine, while netCDF-4, CGNS, h5py, and many simulation applications can be built against serial or parallel HDF5 variants [1]. These downstreams amplify configuration risk: MPI ABI compatibility, collective I/O semantics, file locking behavior, subfiling support, and optional VFDs must line up across the application, HDF5, MPI, and filesystem stack.

**Machine-learning and model-artifact workflows.**

TensorFlow/Keras still supports older HDF5 model and weight files even as newer native formats are preferred [35]. This keeps HDF5 in the model-exchange and training-checkpoint ecosystem, usually through h5py, and makes HDF5 parser behavior relevant for model files obtained from external sources.

**Table 20** – Representative downstream projects that depend on HDF5.

| Downstream | Role | Supply-chain relevance |
|------------|------|------------------------|
|------------|------|------------------------|

|                                     |                                                                     |                                                                                                                                                                                                         |
|-------------------------------------|---------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| netCDF-4                            | Common scientific data model and format layered on HDF5.            | Large transitive footprint through climate, weather, ocean, remote-sensing, and HPC data stacks. Uses a constrained HDF5 subset, so compatibility depends on both HDF5 behavior and netCDF conventions. |
| HDF-EOS5                            | NASA Earth-observation format built on HDF5 concepts and libraries. | Long-lived public archives and many third-party readers make backward compatibility and robust metadata handling high-value.                                                                            |
| NeXus                               | Facility data convention for neutron, x-ray, and muon science.      | Uses HDF5 groups, datasets, and attributes as a standardized experimental-data container, so HDF5 schema interpretation affects reproducibility across facilities.                                      |
| CGNS                                | CFD and aerospace data standard with an HDF5 mapping.               | Important for mesh and simulation-result exchange; parallel-HDF5 behavior and large-file support affect production simulation workflows.                                                                |
| h5py, PyTables, and pandas HDFStore | Python interfaces and tabular/array storage layers.                 | Common bridge between binary HDF5 files and Python analysis. Wheel and conda packaging can hide which HDF5 build is actually loaded.                                                                    |
| rhdf5, HDF5.jl, MATLAB HDF5 APIs    | R, Julia, and MATLAB access layers.                                 | Expose HDF5 to laboratory and scientific-computing workflows where files are often exchanged outside controlled build environments.                                                                     |

---

|                                         |                                                                             |                                                                                                                                             |
|-----------------------------------------|-----------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------|
| GDAL and geospatial readers             | Raster and subdataset access for HDF5-based products.                       | Converts HDF5 issues into geospatial ingestion issues, especially for remote-sensing products with complex metadata and nested subdatasets. |
| ParaView/VTK, ITK, HDFView, and viewers | Interactive inspection, visualization, and conversion.                      | Frequently open untrusted or externally generated files; defensive parsing, filter availability, and plugin search paths matter.            |
| ADIOS2 and simulation I/O layers        | Alternative I/O stacks with HDF5 read/write engines or compatibility paths. | Parallel and high-throughput workflows depend on matching MPI, filesystem, and HDF5 feature assumptions across the whole stack.             |
| TensorFlow/Keras HDF5 artifacts         | Legacy model and weight serialization.                                      | Keeps HDF5 in ML artifact exchange; malformed or incompatible model files surface through h5py and HDF5 library behavior.                   |

---

### 7.3. Audit Findings and Mitigation Priorities

- HDF5 changes have a large transitive blast radius because many users reach HDF5 through netCDF, GDAL, h5py, MATLAB, or domain formats rather than through the HDF5 C API directly.
- ABI and packaging mismatches are a recurring downstream risk. Python, R, Julia, MATLAB, MPI, and system-package environments may all load different HDF5 builds in the same organization.
- File parsing is a practical security boundary. Viewers, converters, notebooks, and data-ingestion jobs often process files received from outside the organization that built the HDF5 library.

- Optional features can become hidden interoperability requirements: filter plugins, SZIP/zlib variants, ROS3/HDFS/VFD support, parallel HDF5, and file-locking behavior may be assumed by downstream data even when they are not present in a default HDF5 build.
- Long-lived scientific archives make deprecation slower than ordinary application software. Even when a downstream project prefers a newer format, historic HDF5 files remain operationally relevant.

## 8. Independent HDF5 Implementations

### 8.1. Overview

- HDF5 library playing footsie with the file format spec: GitHub issue 6409 [2]

**PureHDF** Managed .NET read/write without native binaries

**jHDF** JVM HDF5 reading

**netCDF-Java** JVM netCDF/HDF-EOS/HDF5 scientific-data reading

**pyfive** Pure Python read-only inspection

**jsfive** Browser-side direct HDF5 read

**scigolib/hdf5** Pure Go read/write

**hdf5-pure and rusty hdf5-format/rusty hdf5** Pure Rust read/write

**async-hdf5 or h5coro** Cloud object-store chunk mapping

**JLD2.jl** Julia-native persistence in HDF5-compatible files

### 8.2. Audit Findings and Mitigation Priorities

The main risk across all direct-format implementations is not opening simple files; it is coverage of the long tail: dense groups, fractal heaps, shared object-header messages, all chunk-index variants, references, VLEN, compound/nested datatypes, virtual datasets, external storage, SWMR flags, user blocks, non-core filters, unusual libver bounds, and files produced by different HDF5 library releases. For any production use, build a compatibility corpus and round-trip the generated files using `h5dump`, `h5debug`, `h5py/libhdf5`, and the target-independent implementation.

Machine-readable specification: `hdf5-pickles`

## **9. Long-term Data Accessibility and Interpretability**

Long term data accessibility and interpretability [5]

### **9.1. Audit Findings and Mitigation Priorities**



## 10. Resources

- HDF SSP SIG [[19](#)]
- Tools
  - HDF5 CVE test suite [[16](#)]
  - A machine-readable specification of the HDF5 file format. [[12](#)]
  - HDF5 extension templates [[17](#)]
  - HDF5 plugins [[18](#)]
- S2D2

## References

- [1] ADIOS2 Developers. *ADIOS2 Supported Engines: HDF5*. 2026. URL: <https://adios2.readthedocs.io/en/latest/engines/engines.html#hdf5>. (accessed: 29.05.2026).
- [2] Apollo3zehn. *HDF5 lib is more restrictive than file format spec*. 2026. URL: <https://github.com/HDFGroup/hdf5/issues/6409>. (accessed: 21.05.2026).
- [3] Apple. *CVE-2021-31009*. 2021. URL: <https://www.cve.org/CVERecord?id=CVE-2021-31009>. (accessed: 04.06.2026).
- [4] Multiple authors. *179 results for 'file corruption'*. 2007-2026. URL: <https://forum.hdfgroup.org/search?q=file%20corruption>. (accessed: 21.05.2026).
- [5] Multiple authors. *223 results for 'plugin'*. 2007-2026. URL: <https://forum.hdfgroup.org/search?q=plugin>. (accessed: 21.05.2026).
- [6] Andreas Beckmann. *How to properly close HDF files when disk is full?* 2023. URL: <https://forum.hdfgroup.org/t/how-to-properly-close-hdf-files-when-disk-is-full/11714>. (accessed: 21.05.2026).
- [7] Bioconductor Project. *rhdf5*. 2026. URL: <https://bioconductor.org/packages/rhdf5>. (accessed: 29.05.2026).
- [8] Sean Brooks et al. *An Introduction to Privacy Engineering and Risk Management in Federal Systems*. NISTIR 8062. Gaithersburg, MD: National Institute of Standards and Technology, Jan. 2017. DOI: 10.6028/NIST.IR.8062. URL: <https://doi.org/10.6028/NIST.IR.8062>.
- [9] CGNS Steering Committee. *CGNS/HDF5 – An HPC implementation*. 2026. URL: <https://cgns.org/standard/hdf5.html>. (accessed: 29.05.2026).
- [10] CVE Project. *CVE-2021-36977*. 2021. URL: <https://www.cve.org/CVERecord?id=CVE-2021-36977>. (accessed: 04.06.2026).

- [11] CVE Project. *CVE-2026-34734*. 2026. URL: <https://www.cve.org/CVERecord?id=CVE-2026-34734>. (accessed: 04.06.2026).
- [12] The HDF Group. *A machine-readable specification of the HDF5 file format*. 2026. URL: <https://github.com/HDFGroup/hdf5-pickles>. (accessed: 21.05.2026).
- [13] The HDF Group. *Commit 3914bb7*. Sep 25, 2025. URL: <https://github.com/HDFGroup/hdf5/commit/3914bb7f7ec7105d8bfbeb3aebd92e867cff5> (accessed: 21.05.2026).
- [14] The HDF Group. *Commit 804f3bae*. Aug 13, 2025. URL: <https://github.com/HDFGroup/hdf5/commit/804f3bace997e416917b235dbd3beac3652a8> (accessed: 21.05.2026).
- [15] The HDF Group. *Commit ce53bc0*. Mar 31, 2024. URL: <https://github.com/HDFGroup/hdf5/commit/ce53bc020d37e10a06a59501c45f1ab82539f> (accessed: 21.05.2026).
- [16] The HDF Group. *HDF5 CVE Test Suite*. 2026. URL: [https://github.com/HDFGroup/cve\\_hdf5](https://github.com/HDFGroup/cve_hdf5). (accessed: 21.05.2026).
- [17] The HDF Group. *HDF5 extension skeletons, literally*. 2026. URL: <https://github.com/HDFGroup/hdf5-boneyard>. (accessed: 21.05.2026).
- [18] The HDF Group. *HDF5 Plugins*. 2026. URL: [https://github.com/HDFGroup/hdf5\\_plugins](https://github.com/HDFGroup/hdf5_plugins). (accessed: 21.05.2026).
- [19] The HDF Group. *HDF5 Safety, Security & Privacy (SSP) Special Interest Group's governance, processes, and artifacts*. 2026. URL: <https://github.com/HDFGroup/hdf5-ssp-sig>. (accessed: 21.05.2026).
- [20] h5py Developers. *HDF5 for Python*. 2026. URL: <https://docs.h5py.org/>. (accessed: 29.05.2026).
- [21] HDF-EOS Tools and Information Center. *HDF-EOS Libraries*. 2026. URL: <https://hdfeos.org/software/library.php>. (accessed: 29.05.2026).
- [22] Zero Day Initiative. *CVE-2026-2492*. 2026. URL: <https://www.cve.org/CVERecord?id=CVE-2026-2492>. (accessed: 21.05.2026).

- [23] Insight Software Consortium. *ITK Module: ITKHDF5*. 2026. URL: [https://docs.itk.org/projects/doxygen/en/stable/group\\_\\_ITKHDF5.html](https://docs.itk.org/projects/doxygen/en/stable/group__ITKHDF5.html). (accessed: 29.05.2026).
- [24] JuliaIO. *HDF5.jl*. 2026. URL: <https://juliaio.github.io/HDF5.jl/dev/>. (accessed: 29.05.2026).
- [25] Kitware, Inc. *Building ParaView*. 2026. URL: [https://www.paraview.org/paraview-docs/latest/cxx/md\\_\\_builds\\_gitlab-kitware-sciviz-ci\\_Documentation\\_dev\\_build.html](https://www.paraview.org/paraview-docs/latest/cxx/md__builds_gitlab-kitware-sciviz-ci_Documentation_dev_build.html). (accessed: 29.05.2026).
- [26] Google LLC. *CVE-2025-9905*. 2025. URL: <https://www.cve.org/CVERecord?id=CVE-2025-9905>. (accessed: 21.05.2026).
- [27] Google LLC. *CVE-2026-0897*. 2026. URL: <https://www.cve.org/CVERecord?id=CVE-2026-0897>. (accessed: 21.05.2026).
- [28] Google LLC. *CVE-2026-1669*. 2026. URL: <https://www.cve.org/CVERecord?id=CVE-2026-1669>. (accessed: 21.05.2026).
- [29] MathWorks. *HDF5 Files*. 2026. URL: <https://www.mathworks.com/help/matlab/hdf5-files.html>. (accessed: 29.05.2026).
- [30] National Institute of Standards and Technology. *NIST Privacy Framework: A Tool for Improving Privacy through Enterprise Risk Management, Version 1.0*. Framework. Gaithersburg, MD: National Institute of Standards and Technology, Jan. 2020. URL: <https://www.nist.gov/privacy-framework> (visited on 06/25/2026).
- [31] NeXus International Advisory Committee. *NeXus Data Format Manual*. 2026. URL: <https://manual.nexusformat.org/>. (accessed: 29.05.2026).
- [32] Open Source Geospatial Foundation. *HDF5 – Hierarchical Data Format Release 5 (HDF5)*. 2026. URL: <https://gdal.org/en/stable/drivers/raster/hdf5.html>. (accessed: 29.05.2026).
- [33] pandas Developers. *IO tools: HDF5 / PyTables*. 2026. URL: [https://pandas.pydata.org/docs/dev/user\\_guide/io.html#hdf5-pytables](https://pandas.pydata.org/docs/dev/user_guide/io.html#hdf5-pytables). (accessed: 29.05.2026).

- [34] PyTables Developers. *PyTables Documentation*. 2026. URL: <https://www.pytables.org/>. (accessed: 29.05.2026).
- [35] TensorFlow Authors. *Save, serialize, and export models*. 2026. URL: [https://www.tensorflow.org/guide/keras/save\\_and\\_serialize](https://www.tensorflow.org/guide/keras/save_and_serialize). (accessed: 29.05.2026).
- [36] The HDF Group. *Dynamically-loaded Plugins (H5PL)*. 2026. URL: [https://support.hdfgroup.org/documentation/hdf5/latest/group\\_\\_\\_h5\\_p\\_l.html](https://support.hdfgroup.org/documentation/hdf5/latest/group___h5_p_l.html). (accessed: 04.06.2026).
- [37] The HDF Group. *HDF5 2.0.0 source-artifact integrity check*. URL: <https://github.com/HDFGroup/hdf5-ssp-sig/tree/main/audit/proofs/hdf5-core/2.0.0/psirt/release-integrity/PRISUPP-2204>. (accessed: 03.05.2026).
- [38] The HDF Group. *HDF5 Data Model and File Structure*. 2026. URL: [https://support.hdfgroup.org/documentation/hdf5/latest/\\_h5\\_d\\_m\\_u\\_g.html](https://support.hdfgroup.org/documentation/hdf5/latest/_h5_d_m_u_g.html). (accessed: 04.06.2026).
- [39] The HDF Group. *HDF5 Privacy Exposure Model*. 2026. URL: <https://github.com/HDFGroup/hdf5-ssp-sig/blob/main/models/Privacy%20Exposure.md#hdf5-privacy-exposure-model>. (accessed: 14.07.2026).
- [40] The HDF Group. *HDF5 Security Policy*. 2026. URL: <https://github.com/HDFGroup/hdf5/security/policy>. (accessed: 29.05.2026).
- [41] Unidata Program Center. *NetCDF-4 File Format*. 2026. URL: [https://docs.unidata.ucar.edu/nug/2.0-draft/nc4\\_file\\_format.html](https://docs.unidata.ucar.edu/nug/2.0-draft/nc4_file_format.html). (accessed: 29.05.2026).

## A. CVE History Summary

**Table 21** – HDF5 CVE history summary

| CVE(s)                                                                                                                                             | Affected area                               | Reported failure mode                                                 | Root cause summary                                                                                                                                                                                                            |
|----------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------|-----------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CVE-2025-7069,<br>CVE-2025-6270,<br>CVE-2025-2914                                                                                                  | file-space info / free-space manager        | heap buffer overflow                                                  | file-derived file-space metadata, especially page size / section data, was accepted without sufficient sanity checks. Fix rejects invalid page size and corrupted free-space info early.                                      |
| CVE-2025-6858,<br>CVE-2025-6817,<br>CVE-2025-2913,<br>CVE-2025-2912                                                                                | object-header / metadata-cache cascade      | null dereference, resource consumption, use-after-free, heap overflow | corrupted object-header continuation metadata caused later cache/free-list/object-message failures. Root cause is bad continuation-message size/state not rejected at decode time.                                            |
| CVE-2025-6856,<br>CVE-2025-6816,<br>CVE-2025-2923                                                                                                  | object-header continuation messages         | heap buffer overflow / use-after-free                                 | crafted object header with continuation message pointing back to itself led to under-sized internal buffer allocation. Fix compares expected and actual object-header chunk counts during deserialization.                    |
| CVE-2025-6750,<br>CVE-2024-33874                                                                                                                   | mtime object-header messages                | heap buffer overflow                                                  | old/new modification-time messages were not properly decoded; an invalid message size could produce a zero-size buffer passed to an encoder. Fix decodes both mtime formats and rejects invalid size.                         |
| CVE-2025-6269,<br>CVE-2025-6516                                                                                                                    | metadata cache image / address decode       | heap buffer overflow                                                  | cache-image reconstruction used insufficient bounds and input validation. Fix adds buffer-size tracking, overflow checks, input validation, and cleanup on failure.                                                           |
| CVE-2025-44905,<br>CVE-2025-2308,<br>CVE-2024-29159,<br>CVE-2024-32615,<br>CVE-2016-4331                                                           | scale-offset / n-bit filters                | heap overflow / buffer overrun / arbitrary code execution             | filter decoders trusted encoded precision, byte counts, or scale-offset parameters from the file. Root cause is insufficient bounds checking in decompression/filter parameter handling.                                      |
| CVE-2025-44904,<br>CVE-2024-32614,<br>CVE-2024-32605,<br>CVE-2024-29165,<br>CVE-2019-9151,<br>CVE-2018-14035,<br>CVE-2018-13875,<br>CVE-2018-11205 | vectorized memory copy / scatter-fill paths | heap/stack overflow or over-read                                      | memory-vector copy routines copied between mismatched source/destination selections or trusted element counts too far. Root cause is insufficient validation of vector extents and copy sizes before memcpy-style operations. |
| CVE-2025-2926                                                                                                                                      | object-header cache checksum serialization  | null pointer dereference                                              | object-header checksum/serialization path could operate on incomplete or invalid object-header state. Root cause is missing null/state validation before serialization.                                                       |
| CVE-2025-2925                                                                                                                                      | memory management wrapper                   | double free                                                           | reallocation/error path mishandled ownership of mem. Root cause is ambiguous ownership/cleanup semantics around failed or edge-case realloc.                                                                                  |
| CVE-2025-2924,<br>CVE-2024-32613,<br>CVE-2024-32612                                                                                                | local heap free-list deserialization        | heap buffer overflow                                                  | local-heap free-block metadata from the file was trusted. Root cause is insufficient validation of free-block size/offset before rebuilding heap structures.                                                                  |

**Table 21** – HDF5 CVE history summary, continued

| <b>CVE(s)</b>                                                          | <b>Affected area</b>                 | <b>Reported failure mode</b>              | <b>Root cause summary</b>                                                                                                                                                                               |
|------------------------------------------------------------------------|--------------------------------------|-------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CVE-2025-2915,<br>CVE-2018-13867                                       | file accumulator                     | heap overflow / out-of-bounds read        | accumulator overlap/offset math accepted invalid ranges. Root cause is weak range validation for file accumulator reads/frees.                                                                          |
| CVE-2025-2310,<br>CVE-2019-9152                                        | datatype / attribute string decoding | heap buffer overflow / out-of-bounds read | string duplication from metadata used file-derived length or unterminated data. Root cause is unsafe string length handling during datatype/attribute decode.                                           |
| CVE-2025-2309,<br>CVE-2024-29163                                       | datatype bit operations              | heap buffer overflow                      | bit-copy / bit-find logic trusted bit offsets, lengths, or precision metadata. Root cause is insufficient bounds checking in datatype bitfield operations.                                              |
| CVE-2025-2153                                                          | shared-message deletion              | heap buffer overflow                      | shared-message deletion path could process corrupted shared-message/object-header state. Root cause appears to be insufficient validation of shared-message metadata and cleanup state before deletion. |
| CVE-2025-26200,<br>CVE-2024-33877,<br>CVE-2017-17507                   | compound datatype conversion         | heap overflow / out-of-bounds read/write  | compound datatype conversion trusted complex datatype layout details. Root cause is unsafe datatype conversion when member layout, unused bits, or conversion metadata are malformed.                   |
| CVE-2024-33876                                                         | point selection deserialization      | heap overflow                             | serialized point-selection metadata was trusted. Root cause is missing bounds/count validation when rebuilding point selections.                                                                        |
| CVE-2024-33875,<br>CVE-2019-8396                                       | dataset layout encode                | heap/buffer overflow                      | dataset layout metadata could encode inconsistent dimensions/storage sizes. Fix family adds dataset layout size checks, multiplication overflow checks, and file-bound checks.                          |
| CVE-2024-33873                                                         | dataset scatter memory               | heap overflow                             | scatter operation accepted inconsistent memory/file selection sizes. Root cause is insufficient validation of selected element counts and destination capacity.                                         |
| CVE-2024-32624,<br>CVE-2024-32610                                      | reference datatype memory nulling    | heap overflow                             | reference-memory initialization/nulling used malformed datatype/reference metadata. Root cause is missing size/type validation before clearing reference memory.                                        |
| CVE-2024-32623                                                         | generic array fill                   | heap overflow                             | array fill operation trusted element count/size metadata. Root cause is missing multiplication/range validation before filling memory.                                                                  |
| CVE-2024-32622,<br>CVE-2024-29158,<br>CVE-2024-29161<br>note           | free-list array allocation           | out-of-bounds read / stack overflow       | array allocation/free-list path accepted invalid counts or sizes. Root cause is weak validation of allocation quantity derived from file metadata.                                                      |
| CVE-2024-32621,<br>CVE-2024-29162,<br>CVE-2024-29157                   | global heap read                     | heap/stack overflow                       | global heap object size/offset metadata could be inconsistent with actual buffer. Root cause is insufficient validation of heap object boundaries before read.                                          |
| CVE-2024-32620,<br>CVE-2025-6516,<br>CVE-2021-45830,<br>CVE-2018-13866 | address-length decode                | heap/stack overflow / over-read           | encoded file addresses/lengths could exceed expected bounds. Root cause is insufficient validation of decoded address/length byte counts and destination capacity.                                      |

**Table 21** – HDF5 CVE history summary, continued

| <b>CVE(s)</b>                                                                                                 | <b>Affected area</b>                 | <b>Reported failure mode</b>                           | <b>Root cause summary</b>                                                                                                                                                           |
|---------------------------------------------------------------------------------------------------------------|--------------------------------------|--------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CVE-2024-32619,<br>CVE-2018-14031                                                                             | datatype copy/reopen                 | heap overflow / over-read                              | datatype copy path accepted malformed nested datatype metadata. Root cause is missing validation while copying or reopening datatype structures.                                    |
| CVE-2024-32618                                                                                                | native datatype conversion           | heap overflow                                          | native-type construction trusted malformed datatype metadata. Root cause is inadequate validation during recursive datatype normalization.                                          |
| CVE-2024-32617                                                                                                | H5MM_xstrdup                         | heap overflow                                          | unsafe string duplication from file-derived metadata. Root cause is missing bounded string handling.                                                                                |
| CVE-2024-32616                                                                                                | datatype object-header encode helper | heap overflow                                          | datatype message encode helper accepted inconsistent datatype message size/state. Root cause is missing encode-time size validation.                                                |
| CVE-2024-32611                                                                                                | attribute release table              | uninitialized value / DoS                              | attribute-table bookkeeping conflated allocated capacity and actual attribute count. Fix separates current count and maximum capacity and cleans partial tables on error.           |
| CVE-2024-32608,<br>CVE-2024-32607                                                                             | attribute close                      | memory corruption / segfault                           | attribute close/release path could operate on partially initialized or corrupted attribute state. Root cause is unsafe cleanup after failed attribute-table construction or decode. |
| CVE-2024-32606                                                                                                | h5tools string printing              | uninitialized dereference / DoS                        | tool-side string formatting could dereference uninitialized values. No commit URL listed, so fix review was not possible.                                                           |
| CVE-2024-29166                                                                                                | link-info decode                     | buffer overrun                                         | object link-info metadata decode trusted malformed encoded size/flags. No commit URL listed.                                                                                        |
| CVE-2022-26061,<br>CVE-2022-25972,<br>CVE-2022-25942,<br>CVE-2020-10809,<br>CVE-2018-17436,<br>CVE-2018-17433 | gif2h5 tool / GIF parser             | heap overflow, out-of-bounds write/read, invalid write | legacy GIF conversion code parsed attacker-controlled GIF/HDF inputs unsafely. Commentary says the tool was removed rather than surgically hardened.                                |
| CVE-2021-46244                                                                                                | datatype copy completion             | divide by zero / DoS                                   | datatype copy logic failed to guard arithmetic denominators or zero-sized datatype state.                                                                                           |
| CVE-2021-46243                                                                                                | datatype object-header decode        | untrusted pointer dereference / DoS                    | datatype decode accepted malformed pointer/metadata state. Root cause is missing validation before dereference.                                                                     |
| CVE-2021-46242,<br>CVE-2020-10810                                                                             | metadata cache pin/unpin             | use-after-free / null dereference                      | cache entry lifecycle operations did not robustly handle malformed or unexpected cache state.                                                                                       |
| CVE-2021-45833                                                                                                | chunk file-map hyperslab             | stack overflow / DoS                                   | chunk/hyperslab mapping trusted malformed dataspace/chunk metadata. Root cause is inadequate bounds checking in chunk mapping.                                                      |
| CVE-2021-45832                                                                                                | error stack internals                | stack overflow / DoS                                   | listed as cannot reproduce; no fix commit. Treat root cause as unconfirmed.                                                                                                         |
| CVE-2021-45829                                                                                                | unspecified HDF5 path                | segfault / DoS                                         | Root cause undetermined.                                                                                                                                                            |
| CVE-2021-37501                                                                                                | h5dump string sprint                 | buffer overflow / DoS                                  | h5dump formatting path wrote beyond buffer while rendering file-derived data.                                                                                                       |
| CVE-2021-36977                                                                                                | mat file I/O library using HDF5      | heap overflow                                          | not filed against HDF5. Root cause belongs to downstream integration/context, not the HDF5 fix set.                                                                                 |



**Table 21** – HDF5 CVE history summary, continued

| <b>CVE(s)</b>                                                                              | <b>Affected area</b>                                     | <b>Reported failure mode</b>               | <b>Root cause summary</b>                                                                                                            |
|--------------------------------------------------------------------------------------------|----------------------------------------------------------|--------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|
| CVE-2021-31009                                                                             | Apple platform issue                                     | multiple HDF5 issues                       | not filed against HDF5; fixed by Apple by removing HDF5 from affected components.                                                    |
| CVE-2020-18494,<br>CVE-2020-18232                                                          | dataspace close                                          | buffer overflow / possible RCE             | malformed file could corrupt dataspace cleanup/close state. Root cause is unsafe lifecycle handling of malformed dataspace metadata. |
| CVE-2020-10812                                                                             | file reference count query                               | null pointer dereference / DoS             | file query path failed to validate file/reference state before dereference.                                                          |
| CVE-2020-10811,<br>CVE-2018-14033                                                          | layout decode                                            | heap over-read                             | dataset layout message decoder trusted encoded layout fields. Root cause is missing bounds checks around decoded layout data.        |
| CVE-2019-8398,<br>CVE-2019-8397                                                            | datatype size/close                                      | out-of-bounds read                         | datatype object state could be malformed before size/close operations. No commit URL listed.                                         |
| CVE-2018-17439                                                                             | dataspace extent dimensions during HDF to GIF conversion | stack overflow                             | conversion tool path trusted dataspace dimensions from file.                                                                         |
| CVE-2018-17438                                                                             | selected I/O                                             | divide by zero / DoS                       | selected-I/O path failed to guard divisor/count metadata from crafted file. Tool-removal commit, so the listed fix is coarse.        |
| CVE-2018-17437                                                                             | datatype decode helper                                   | memory leak / DoS                          | error path leaked allocations when datatype metadata was malformed.                                                                  |
| CVE-2018-17435                                                                             | attribute decode                                         | heap over-read                             | attribute message decoder trusted encoded sizes/offsets.                                                                             |
| CVE-2018-17434                                                                             | h5repack filter application                              | divide by zero / DoS                       | tool-side filter setup failed to guard zero-valued filter/chunk parameters.                                                          |
| CVE-2018-17432                                                                             | simple dataspace encode                                  | null pointer dereference / DoS             | dataspace encode path accepted invalid dataspace state before dereference.                                                           |
| CVE-2018-17237,<br>CVE-2018-17233,<br>CVE-2018-11207,<br>CVE-2018-11203,<br>CVE-2017-17508 | chunking / b-tree / datatype arithmetic                  | divide by zero / SIGFPE / DoS              | crafted file could set chunk, b-tree, datatype, or layout parameters to zero. Root cause is missing arithmetic precondition checks.  |
| CVE-2018-17234,<br>CVE-2018-13873,<br>CVE-2018-11204                                       | object-header chunk deserialize                          | memory leak / over-read / null dereference | object-header chunk deserialization accepted malformed chunk metadata and mishandled error cleanup.                                  |
| CVE-2018-16438                                                                             | external links                                           | out-of-bounds read                         | external-link query trusted malformed external-link metadata.                                                                        |
| CVE-2018-15672,<br>CVE-2018-14032                                                          | duplicate/rejected IDs                                   | not applicable                             | rejected duplicate CVEs; no HDF5 root cause to summarize beyond the referenced canonical CVEs.                                       |
| CVE-2018-15671                                                                             | property-list callback lookup                            | excessive stack consumption / DoS          | recursive or malformed property-list callback state allowed stack exhaustion.                                                        |
| CVE-2018-14460                                                                             | simple dataspace decode                                  | heap over-read                             | dataspace message decoder trusted encoded extent/rank metadata.                                                                      |
| CVE-2018-14034                                                                             | filter pipeline reset                                    | out-of-bounds read                         | malformed filter-pipeline metadata caused unsafe reset/read behavior. No commit URL listed.                                          |

**Table 21** – HDF5 CVE history summary, continued

| <b>CVE(s)</b>                     | <b>Affected area</b>                   | <b>Reported failure mode</b>              | <b>Root cause summary</b>                                                                                              |
|-----------------------------------|----------------------------------------|-------------------------------------------|------------------------------------------------------------------------------------------------------------------------|
| CVE-2018-13876,<br>CVE-2018-13874 | sec2 VFD read path                     | stack overflow                            | low-level file-driver read/memset path could be driven out of bounds by malformed file metadata. No commit URL listed. |
| CVE-2018-13872                    | group entry decode                     | heap overflow                             | group-entry decoder trusted malformed symbol-table/group metadata. No commit URL listed.                               |
| CVE-2018-13871                    | free-list block allocation             | heap overflow                             | free-list block allocator accepted invalid allocation size/count.                                                      |
| CVE-2018-13870,<br>CVE-2018-13869 | link decode                            | heap over-read / overlapping memcpy       | link-message decoder trusted malformed link metadata, including overlapping source/destination regions.                |
| CVE-2018-13868                    | old fill-value decode                  | heap over-read                            | old fill-value decoder trusted encoded fill-value size. No commit URL listed.                                          |
| CVE-2018-11206                    | fill-value decode                      | out-of-bounds read / possible disclosure  | fill-value message decoders trusted encoded size/type fields.                                                          |
| CVE-2018-11202                    | hyperslab spans                        | null pointer dereference / DoS            | hyperslab span construction failed to validate malformed selection state.                                              |
| CVE-2017-17509                    | group cache entry decode vector        | out-of-bounds write                       | group-entry vector decoder trusted file-derived counts/array bounds. No commit URL listed.                             |
| CVE-2017-17506,<br>CVE-2017-17505 | filter pipeline decode                 | out-of-bounds read / null dereference     | pipeline decoder failed to validate malformed filter counts or fields. No commit URL listed.                           |
| CVE-2016-4333                     | array allocation / initialization loop | out-of-bounds write                       | file-controlled value could modify loop termination while initializing an allocated array.                             |
| CVE-2016-4332                     | object-header message flags            | heap out-of-bounds write / code execution | library failed to check whether a message type supported a flag before casting to an incompatible structure.           |
| CVE-2016-4330                     | dataspace rank/dimensions              | array heap overflow / code execution      | file-supplied array dimensionality was not checked against allocated space.                                            |

## B. Software Supply Chain Details

The `HDF5_ALLOW_EXTERNAL_SUPPORT` modes apply to filter-related dependencies. Some test and example configurations have their own source-fetch paths, such as KWSys for the API test driver and h5py for Python examples. MPI, HDF5, ROS3, OpenSSL, Java, documentation, packaging, and developer tools must be provided by the build environment.

**Table 22 – Dependency source modes**

| Mode            | Relevant options                                                                                              | Meaning                                                                                                                                                                                    |
|-----------------|---------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| System packages | <code>HDF5_ALLOW_EXTERNAL_SUPPORT=NO</code>                                                                   | CMake uses <code>find_package()</code> , <code>find_library()</code> , or <code>find_program()</code> to locate installed dependencies. This is the default.                               |
| Git fetch       | <code>HDF5_ALLOW_EXTERNAL_SUPPORT=GIT</code> plus a dependency-specific <code>*_USE_EXTERNAL=ON</code> option | CMake downloads source from the configured <code>*_GIT_URL</code> and <code>*_GIT_TAG</code> values and builds it with HDF5.                                                               |
| Tarball fetch   | <code>HDF5_ALLOW_EXTERNAL_SUPPORT=TGZ</code> plus a dependency-specific <code>*_USE_EXTERNAL=ON</code> option | CMake downloads from <code>*_TGZ_ORIGPATH</code> and <code>*_TGZ_NAME</code> , or uses <code>TGZPATH</code> when the dependency-specific <code>*_USE_LOCALCONTENT=ON</code> option is set. |

**Table 23 – Baseline build**

| Dependency                                    | Trigger            | Notes                                                                                                                                                                                                                             |
|-----------------------------------------------|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CMake 3.26 or newer                           | Always             | Required by the top-level <code>cmake_minimum_required()</code> .                                                                                                                                                                 |
| C compiler and native build tool              | Always             | The top-level project is a C project.                                                                                                                                                                                             |
| Platform C library, headers, and system calls | Always             | CMake probes standard headers, types, functions, byte order, large-file support, file locking, <code>pread/pwrite</code> , and related platform features.                                                                         |
| Platform link libraries                       | Platform-dependent | CMake adds libraries only when probes show they are needed: <code>m</code> , <code>dl</code> , <code>rt</code> , <code>posix4</code> , <code>ucb</code> , <code>ws2_32</code> , <code>wsock32</code> , and <code>shlwapi</code> . |

|           |                                                                                             |                                                                                                                                                                                      |
|-----------|---------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| PkgConfig | Optional probe                                                                              | Used only when available. It can help some find modules, such as zlib-ng and libaec, but it is not a hard requirement for the default build.                                         |
| Threads   | Found in every configure; CMake searches for C11 threads, Win32 required by thread features | threads, or pthreads. When found, HDF5 records thread support and links Threads::Threads; HDF5_ENABLE_THREADSAFE, HDF5_ENABLE_CONCURRENCY, and HDF5_ENABLE_SUBFILING_VFD require it. |

Table 24 – HDF5 feature triggers

| Feature or component | Build options                                  | Dependency                                   | Notes                                                                                                                                                                                                           |
|----------------------|------------------------------------------------|----------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Parallel HDF5        | HDF5_ENABLE_PARALLEL=ON                        | MPI C with MPI-IO, MPI standard 3.0 or newer | Adds MPI::MPI_C to public link libraries. Parallel filtered writes and large parallel I/O are enabled only when the required MPI symbols are present. Parallel tests also need an MPI launcher such as mpiexec. |
| Parallel Fortran     | HDF5_ENABLE_PARALLEL=ON, HDF5_BUILD_FORTRAN=ON | MPI Fortran                                  | The Fortran build adds MPI Fortran libraries. The mpi_f08 module is used when available.                                                                                                                        |
| Thread-safe library  | HDF5_ENABLE_THREADSAFE=ON                      | Threads                                      | Unsupported with parallel, Fortran, C++, or high-level library unless HDF5_ALLOW_UNSUPPORTED=ON. On Windows, static libraries are rejected.                                                                     |

|                            |                                                                             |                                                          |                                                                                                                                                                |
|----------------------------|-----------------------------------------------------------------------------|----------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Multi-threaded concurrency | HDF5_ENABLE_CONCURRENCY=ON                                                  | Threads                                                  | Experimental. Mutually exclusive with HDF5_ENABLE_THREADS; has the same unsupported combinations as thread-safety unless overridden with HDF5_ALLOW_UNSAFE=ON. |
| C++ wrappers               | HDF5_BUILD_CPP_LIB=ON                                                       | C++ compiler                                             | Unsupported with parallel unless HDF5_ALLOW_UNSAFE=ON. High-level C++ wrappers also require HDF5_BUILD_HL_LIB=ON.                                              |
| Fortran wrappers           | HDF5_BUILD_FORTRAN=ON                                                       | Fortran compiler with Fortran 2003 ISO_C_BINDING support | Unsupported with thread-safety or concurrency unless HDF5_ALLOW_UNSAFE=ON. High-level Fortran wrappers also require HDF5_BUILD_HL_LIB=ON.                      |
| Java wrappers              | HDF5_BUILD_JAVA=ON                                                          | Java/JDK, shared HDF5 libraries, Java dependency JARs    | Java requires shared HDF5 libraries. Java 11 or newer is required for the JNI implementation. Java tests additionally require the JUnit and Hamcrest JARs.     |
| Java JNI implementation    | HDF5_BUILD_JAVA=ON, HDF5_ENABLE_JNI=ON, or any Java version earlier than 25 | JNI headers and libraries                                | JNI is the default Java implementation. HDF5 also requires JNI.                                                                                                |
| Java FFM implementation    | HDF5_BUILD_JAVA=ON, Java 25 or newer, HDF5_ENABLE_JNI=OFF                   | jextract from JEXTRACT_HOME/bin or JAVA_HOME/bin         | Generates FFM bindings at configure time.                                                                                                                      |

|                        |                           |                                                                                     |                                                                                                                                                                                                                                            |
|------------------------|---------------------------|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Java logging/test JARs | HDF5_BUILD_JAVA=ON        | slf4j-api,<br>slf4j-nop,<br>slf4j-simple;<br>plus JUnit 4 and<br>Hamcrest for tests | The default paths point to bundled JARs under java/lib. They can be overridden with HDF5_JAVA*_JAR cache variables. HDF5_ENABLE_MAVEN_DEPLOY=ON generates Maven-style artifacts and POM files; the CMake build does not locate or run mvn. |
| Documentation          | HDF5_BUILD_DOC=ON         | Doxygen                                                                             | HDF5_ENABLE_DOXY_WARNINGS=ON makes Doxygen warnings fail the build.                                                                                                                                                                        |
| Header regeneration    | HDF5_GENERATE_HEADERS=ON  | Perl                                                                                | Perl is optional otherwise. If it is missing, generated headers are not regenerated.                                                                                                                                                       |
| Python examples        | H5EXAMPLE_BUILD_PYTHON=ON | Python3 interpreter, Python development files, NumPy, h5py source, pip              | The examples CMake project fetches h5py from Git and installs it with python3 -m pip.                                                                                                                                                      |

**Table 25** – HDF5 filter dependency choices

| Feature        | Build options                                        | Dependency | Source choices                                                                                                                    |
|----------------|------------------------------------------------------|------------|-----------------------------------------------------------------------------------------------------------------------------------|
| DEFLATE filter | HDF5_ENABLE_ZLIB_SUPPORT=ON,<br>HDF5_USE_ZLIB_NG=OFF | zlib       | System package by default; ZLIB_USE_EXTERNAL=ON can build zlib from Git or TGZ. HDF5_USE_ZLIB_STATIC=ON prefers a static library. |

|                         |                |                                                     |                                                                                     |                                                                                                                                       |
|-------------------------|----------------|-----------------------------------------------------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------|
| DEFLATE through zlib-ng | filter         | HDF5_ENABLE_ZLIB_SUPPORT=ON,<br>HDF5_USE_ZLIB_NG=ON | zlib-ng                                                                             | System package by default; ZLIB_USE_EXTERNAL=ON can build zlib-ng from Git or TGZ. zlib compatibility mode is detected.               |
| SZIP filter             |                | HDF5_ENABLE_SZIP_SUPPORT=ON                         | libaec with libsz compatibility, or another package selected by LIBAEC_PACKAGE_NAME | System package by default; SZIP_USE_EXTERNAL=ON can build libaec from Git or TGZ. HDF5_USE_LIBAEC_STATIC=ON prefers static libraries. |
| HDF5 filter project     | filter plugins | HDF5_ENABLE_PLUGIN_SUPPORT=ON                       | Installed h5pl/HDF5 filter plugins package, or the hdf5_plugins project             | PLUGIN_USE_EXTERNAL=ON can build the plugin project from Git or TGZ. Plugin support is disabled for the 1.6 API.                      |

**Table 26 – HDF5 VFD and VOL connector dependency choices**

| Feature    | Build options             | Dependency                                  | Notes                                                                                          |
|------------|---------------------------|---------------------------------------------|------------------------------------------------------------------------------------------------|
| Direct VFD | HDF5_ENABLE_DIRECT_VFD=ON | POSIX O_DIRECT and posix_memalign() support | No third-party library. Configuration fails if the platform support is missing.                |
| Mirror VFD | HDF5_ENABLE_MIRROR_VFD=ON | POSIX socket/fork headers and functions     | No third-party library. Requires netinet/in.h, netdb.h, arpa/inet.h, sys/socket.h, and fork(). |

|                          |                                                                               |                                              |       |                                                                                                                                                                                                                                                                                                                               |
|--------------------------|-------------------------------------------------------------------------------|----------------------------------------------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ROS3 VFD                 | HDF5_ENABLE_ROS3_VFD=ON                                                       | aws-c-s3 package                             | CMake | HDF5 does not fetch this library. Building aws-c-s3 from source can also require AWS C libraries such as aws-c-common, aws-checksums, aws-c-cal, aws-c-io, aws-c-compression, aws-c-http, aws-c-sdkutils, aws-c-auth, and, on Linux, aws-lc and s2n-tls. ROS3 docker-proxy tests additionally require docker and the AWS CLI. |
| HDFS VFD                 | HDF5_ENABLE_HDFS=ON                                                           | JNI/JVM and Hadoop libhdfs                   |       | HADOOP_HOME is used to locate hdfs.h, libhdfs, and the Hadoop version command. Non-MSVC builds also add -pthread.                                                                                                                                                                                                             |
| Subfilng VFD and IOC VFD | HDF5_ENABLE_PARALLEL=ON, HDF5_ENABLE_SUBFILING_VFD=ON                         | MPI C with MPI_Comm_split_type, plus Threads |       | Not available on Windows. IOC VFD is built when subfilng is enabled.                                                                                                                                                                                                                                                          |
| External VOL connectors  | HDF5_VOL_ALLOW_EXTERNAL=GIT<br>LOCAL_DIR<br>HDF5_VOL_URLnn<br>HDF5_VOL_PATHnn | Connector-defined<br>or<br>with<br>or        |       | Up to ten CMake-based VOL connectors can be added. HDF5 patches connector CMake code to use the in-tree HDF5 build, but each connector may bring its own dependencies.                                                                                                                                                        |



**Table 27** – Tools, Tests, and Security Features

| Feature                    | Build options                                                    | Dependency                          | Notes                                                                                                |
|----------------------------|------------------------------------------------------------------|-------------------------------------|------------------------------------------------------------------------------------------------------|
| Signed plugin verification | HDF5_REQUIRE_SIGNED_PLUGINS=ON                                   | OpenSSL 1.1.0 or newer<br>libcrypto | Adds OpenSSL: : Crypto to HDF5. HDF5_LOCK_PLUGIN_KEYSTORE=ON also requires HDF5_PLUGIN_KEYSTORE_DIR. |
| h5sign tool                | HDF5_REQUIRE_SIGNED_PLUGINS=ON,<br>HDF5_BUILD_TOOLS=ON           | OpenSSL libcrypto                   | Used to sign HDF5 plugins.                                                                           |
| Signed-plugin tests        | HDF5_REQUIRE_SIGNED_PLUGINS=ON,<br>BUILD_TESTING=ON              | openssl executable                  | Tests generate RSA keys with the OpenSSL command-line tool.                                          |
| Parallel tools utilities   | HDF5_ENABLE_PARALLEL=ON,<br>HDF5_BUILD_PARALLEL_TOOLS=ON         | MFU, CIRCLE, DTCMP                  | CMake looks for headers and libraries, using MFU_ROOT as a hint.                                     |
| API test driver            | BUILD_TESTING=ON,<br>HDF5_TEST_API_ENABLE_DRIVER=ON              | KWSys                               | The test driver fetches KWSys from a tarball or from TGZPATH when KWSYS_USE_LOCALCONTENT=ON.         |
| Shell-script tests         | BUILD_TESTING=ON                                                 | PowerShell or Bash                  | CMake uses pwsh/powershell when available; otherwise Unix builds look for bash.                      |
| ROS3 VFD tests             | HDF5_ENABLE_ROS3_VFD=ON,<br>HDF5_ENABLE_ROS3_VFD_DOCKER_PROXY=ON | Docker daemon and AWS CLI           | Used to run S3 proxy tests.                                                                          |

**Table 28** – Developer and Packaging Dependencies

| Configuration                      | Build options                                                 | Dependency                                                                                               |
|------------------------------------|---------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|
| Analyzer tooling                   | HDF5_ENABLE_ANALYZER_TOOLS=ON                                 | clang-tidy, include-what-you-use, and cppcheck are probed and used by the analyzer macros.               |
| Source formatting targets          | HDF5_ENABLE_FORMATTERS=ON                                     | clang-format and cmake-format.                                                                           |
| Code coverage with Clang/IntelLLVM | HDF5_ENABLE_COVERAGE=ON, CODE_COVERAGE=ON                     | llvm-cov and llvm-profdata; AppleClang uses xcrun llvm-cov and xcrun llvm-profdata.                      |
| Code coverage with GCC             | HDF5_ENABLE_COVERAGE=ON, CODE_COVERAGE=ON                     | lcov and genhtml; fallback instrumentation can also link gcov.                                           |
| Sanitizers                         | HDF5_ENABLE_SANITIZERS=ON, HDF5_USE_SANITIZER=<kind>          | Compiler sanitizer runtime support. Supported values depend on compiler and platform.                    |
| AFL support module                 | Explicit inclusion of config/sanitizer/afl-fuzzing.cmake      | afl-cc and afl-c++. This module is available but is not included by the top-level HDF5 build by default. |
| Dependency graph support module    | Explicit inclusion of config/sanitizer/dependency-graph.cmake | Graphviz dot. This module is available but is not included by the top-level HDF5 build by default.       |
| Windows installers                 | CPack on Windows                                              | NSIS and WiX are probed when available.                                                                  |
| Linux packages                     | CPack on Unix-like systems                                    | dpkg-shlibdeps enables DEB generation; rpmbuild enables RPM generation for non-parallel builds.          |

**Table 29** – External Source Defaults

| Dependency | Default version/tag | Default source |
|------------|---------------------|----------------|
|------------|---------------------|----------------|

|                       |                          |                                                                                                                                                                                                                                                                                                                        |
|-----------------------|--------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| zlib                  | 1.3.2 / v1.3.2           | <a href="https://github.com/madler/zlib.git">https://github.com/madler/zlib.git</a><br>or <a href="https://github.com/madler/zlib/releases/download/v1.3.2/zlib-1.3.2.tar.gz">https://github.com/madler/zlib/releases/download/v1.3.2/zlib-1.3.2.tar.gz</a>                                                            |
| zlib-ng               | 2.3.3                    | <a href="https://github.com/zlib-ng/zlib-ng.git">https://github.com/zlib-ng/zlib-ng.git</a><br>or <a href="https://github.com/zlib-ng/zlib-ng/archive/refs/tags/2.3.3.tar.gz">https://github.com/zlib-ng/zlib-ng/archive/refs/tags/2.3.3.tar.gz</a>                                                                    |
| libaec                | 1.1.6 / v1.1.6           | <a href="https://github.com/MathisRosenhauer/libaec.git">https://github.com/MathisRosenhauer/libaec.git</a> or <a href="https://github.com/MathisRosenhauer/libaec/releases/download/v1.1.6/libaec-1.1.6.tar.gz">https://github.com/MathisRosenhauer/libaec/releases/download/v1.1.6/libaec-1.1.6.tar.gz</a>           |
| HDF5 filter plugins   | master                   | <a href="https://github.com/HDFGroup/hdf5_plugins.git">https://github.com/HDFGroup/hdf5_plugins.git</a> or <a href="https://github.com/HDFGroup/hdf5_plugins/releases/download/snapshot/hdf5_plugins-master.tar.gz">https://github.com/HDFGroup/hdf5_plugins/releases/download/snapshot/hdf5_plugins-master.tar.gz</a> |
| KWSys API-test helper | master tarball           | <a href="https://gitlab.kitware.com/utils/kwsys/-/archive/master/kwsys-master.tar.gz">https://gitlab.kitware.com/utils/kwsys/-/archive/master/kwsys-master.tar.gz</a>                                                                                                                                                  |
| h5py Python examples  | master                   | <a href="https://github.com/h5py/h5py.git">https://github.com/h5py/h5py.git</a>                                                                                                                                                                                                                                        |
| bitshuffle            | master or 0.5.2 tarball  | <a href="https://github.com/kiyo-masui/bitshuffle.git">https://github.com/kiyo-masui/bitshuffle.git</a> or <a href="https://github.com/kiyo-masui/bitshuffle/archive/refs/tags/bitshuffle-0.5.2.tar.gz">https://github.com/kiyo-masui/bitshuffle/archive/refs/tags/bitshuffle-0.5.2.tar.gz</a>                         |
| Blosc                 | 1.21.6                   | <a href="https://github.com/Blosc/c-blosc.git">https://github.com/Blosc/c-blosc.git</a><br>or <a href="https://github.com/Blosc/c-blosc/archive/refs/tags/c-blosc-1.21.6.tar.gz">https://github.com/Blosc/c-blosc/archive/refs/tags/c-blosc-1.21.6.tar.gz</a>                                                          |
| Blosc zlib helper     | develop or 1.3.1 tarball | <a href="https://github.com/madler/zlib.git">https://github.com/madler/zlib.git</a><br>or <a href="https://github.com/madler/zlib/releases/download/v1.3.1/zlib-1.3.1.tar.gz">https://github.com/madler/zlib/releases/download/v1.3.1/zlib-1.3.1.tar.gz</a>                                                            |
| Blosc2                | 2.17.1                   | <a href="https://github.com/Blosc/c-blosc2.git">https://github.com/Blosc/c-blosc2.git</a><br>or <a href="https://github.com/Blosc/c-blosc2/archive/refs/tags/c-blosc2-2.17.1.tar.gz">https://github.com/Blosc/c-blosc2/archive/refs/tags/c-blosc2-2.17.1.tar.gz</a>                                                    |

---

|                    |                            |                                                                                                                                                                                                                                                                                  |
|--------------------|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Blosc2 zlib helper | develop or 1.3.1 tarball   | <a href="https://github.com/madler/zlib.git">https://github.com/madler/zlib.git</a> or <a href="https://github.com/madler/zlib/releases/download/v1.3.1/zlib-1.3.1.tar.gz">https://github.com/madler/zlib/releases/download/v1.3.1/zlib-1.3.1.tar.gz</a>                         |
| bzip2              | bzip2-1.0.8                | <a href="https://github.com/libarchive/bzip2.git">https://github.com/libarchive/bzip2.git</a> or <a href="https://github.com/libarchive/bzip2/archive/refs/tags/bzip2-bzip2-1.0.8.tar.gz">https://github.com/libarchive/bzip2/archive/refs/tags/bzip2-bzip2-1.0.8.tar.gz</a>     |
| fpzip              | develop or 1.3.0 tarball   | <a href="https://github.com/LLNL/fpzip.git">https://github.com/LLNL/fpzip.git</a> or <a href="https://github.com/LLNL/fpzip/releases/download/1.3.0/fpzip-1.3.0.tar.gz">https://github.com/LLNL/fpzip/releases/download/1.3.0/fpzip-1.3.0.tar.gz</a>                             |
| JPEG               | jpeg-9e                    | <a href="https://github.com/libjpeg-turbo/libjpeg-turbo.git">https://github.com/libjpeg-turbo/libjpeg-turbo.git</a> or <a href="https://www.ijg.org/files/jpegsrc.v9e.tar.gz">https://www.ijg.org/files/jpegsrc.v9e.tar.gz</a>                                                   |
| LZ4                | dev or 1.10.0 tarball      | <a href="https://github.com/lz4/lz4.git">https://github.com/lz4/lz4.git</a> or <a href="https://github.com/lz4/lz4/releases/download/v1.10.0/lz4-1.10.0.tar.gz">https://github.com/lz4/lz4/releases/download/v1.10.0/lz4-1.10.0.tar.gz</a>                                       |
| LZF                | 3.6 tarball                | <a href="http://dist.schmorp.de/liblzf/liblzf-3.6.tar.gz">http://dist.schmorp.de/liblzf/liblzf-3.6.tar.gz</a>                                                                                                                                                                    |
| SZ                 | master or 2.1.12.5 tarball | <a href="https://github.com/szcompressor/SZ.git">https://github.com/szcompressor/SZ.git</a> or <a href="https://github.com/szcompressor/SZ/releases/download/v2.1.12.5/SZ-2.1.12.5.tar.gz">https://github.com/szcompressor/SZ/releases/download/v2.1.12.5/SZ-2.1.12.5.tar.gz</a> |
| ZFP                | develop or 1.0.1 tarball   | <a href="https://github.com/LLNL/zfp.git">https://github.com/LLNL/zfp.git</a> or <a href="https://github.com/LLNL/zfp/releases/download/1.0.0/zfp-1.0.1.tar.gz">https://github.com/LLNL/zfp/releases/download/1.0.0/zfp-1.0.1.tar.gz</a>                                         |
| Zstandard          | 1.5.7                      | <a href="https://github.com/facebook/zstd.git">https://github.com/facebook/zstd.git</a> or <a href="https://github.com/facebook/zstd/releases/download/v1.5.7/zstd-1.5.7.tar.gz">https://github.com/facebook/zstd/releases/download/v1.5.7/zstd-1.5.7.tar.gz</a>                 |

---