

EXERCISE – 9

Question

Execute and display the results for the following Nmap Timing and Performance commands in Kali Linux Operating System:

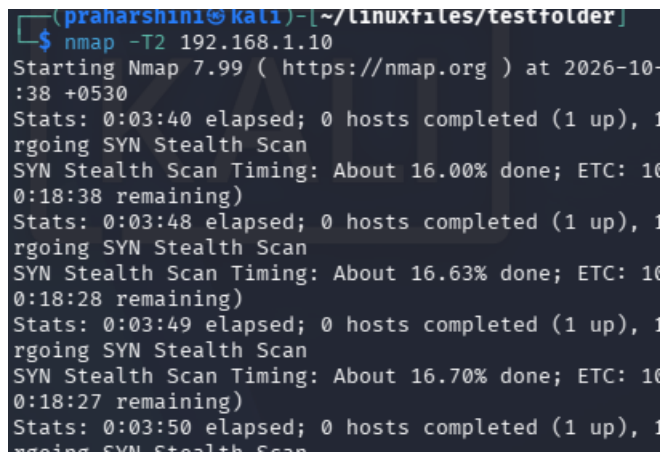
- i) Polite IDS evasion
- ii) Normal IDS evasion

Aim

To execute Nmap timing and performance commands using polite and normal timing options in Kali Linux..

1. POLITE IDS EVASION:

```
nmap -T2 192.168.1.10
```

A terminal window screenshot showing the execution of the command 'nmap -T2 192.168.1.10'. The output displays the start of the scan, the elapsed time (0:03:40), and the progress of the SYN Stealth Scan (About 16.00% done). The scan is running slowly and cautiously, as indicated by the -T2 option.

```
(pranarshini@kali) - [~/linuxfiles/testfolder]
$ nmap -T2 192.168.1.10
Starting Nmap 7.99 ( https://nmap.org ) at 2026-10-
:38 +0530
Stats: 0:03:40 elapsed; 0 hosts completed (1 up), 1
rgoing SYN Stealth Scan
SYN Stealth Scan Timing: About 16.00% done; ETC: 10
0:18:38 remaining)
Stats: 0:03:48 elapsed; 0 hosts completed (1 up), 1
rgoing SYN Stealth Scan
SYN Stealth Scan Timing: About 16.63% done; ETC: 10
0:18:28 remaining)
Stats: 0:03:49 elapsed; 0 hosts completed (1 up), 1
rgoing SYN Stealth Scan
SYN Stealth Scan Timing: About 16.70% done; ETC: 10
0:18:27 remaining)
Stats: 0:03:50 elapsed; 0 hosts completed (1 up), 1
rgoing SYN Stealth Scan
```

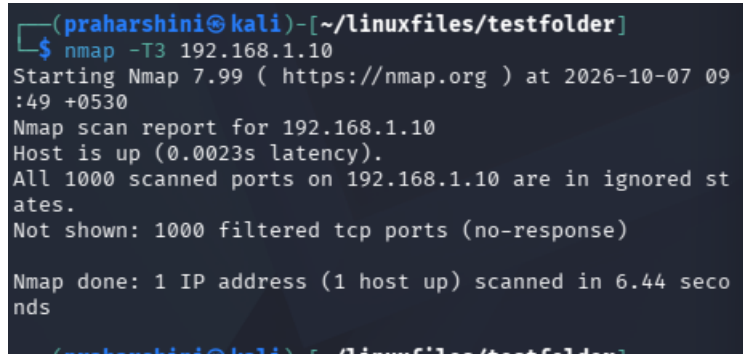
Use

The -T2 option performs the scan more slowly and cautiously, reducing the scanning speed and network load.

2. Normal ids evasion

Command

`nmap -T3 192.168.1.10`

A terminal window screenshot from a Kali Linux machine. The prompt is (praharshini@kali) - [~/linuxfiles/testfolder]. The command entered is nmap -T3 192.168.1.10. The output shows the Nmap version (7.99), start time (2026-10-07 09:49 +0530), and a scan report for 192.168.1.10. It states the host is up with a latency of 0.0023s, and all 1000 scanned ports are in ignored states. It also mentions 1000 filtered TCP ports with no response. The scan completed in 6.44 seconds.

```
(praharshini@kali) - [~/linuxfiles/testfolder]
$ nmap -T3 192.168.1.10
Starting Nmap 7.99 ( https://nmap.org ) at 2026-10-07 09:49 +0530
Nmap scan report for 192.168.1.10
Host is up (0.0023s latency).
All 1000 scanned ports on 192.168.1.10 are in ignored states.
Not shown: 1000 filtered tcp ports (no-response)

Nmap done: 1 IP address (1 host up) scanned in 6.44 seconds
(praharshini@kali) - [~/linuxfiles/testfolder]
```

Use

The -T3 option uses Nmap's **normal timing template**, providing a balanced scan speed and network performance

Result

Thus, the Nmap timing and performance commands for polite (-T2) and normal (-T3) scanning were successfully executed in Kali Linux and the results were displayed.