pidnet_smoke_BRK_sample110

September 16, 2026

1 PIDNet smoke CRP and PCX

Smoke-specific version of `pidnet_BRK.ipynb`. It uses `smokemodel_pidnet.pth`, grayscale smoke masks (`0=background`, `255=smoke`), resumable all-layer CRP/PCX generation, and smoke-specific output directories.

[1]:
```
# Smoke PIDNet CRP/PCX setup
import os, sys, gc, logging
from pathlib import Path
os.environ.setdefault("PYTORCH_CUDA_ALLOC_CONF", "max_split_size_mb:64")

import cv2
import matplotlib.pyplot as plt
import numpy as np
from PIL import Image
import torch
from torch.utils.data import Dataset, DataLoader

candidates = [Path.cwd(), Path.cwd().parent, Path('/home/heydari/FHHI-XAI_RAS')]
REPO_ROOT = next(p.resolve() for p in candidates if (p / 'LCRP/models/pidnet.
 ↪py').is_file())
if str(REPO_ROOT) not in sys.path: sys.path.insert(0, str(REPO_ROOT))
import src  # installs compatibility shims
from src.glocal_analysis import run_analysis
from LCRP.models import get_model
from LCRP.utils.crp_configs import ATTRIBUTORS, CANONIZERS, COMPOSITES
from crp.helper import get_layer_names

logging.getLogger("LCRP.utils.crp").setLevel(logging.CRITICAL)
logging.getLogger("PIL").setLevel(logging.WARNING)
device = "cuda:0" if torch.cuda.is_available() else "cpu"
print('Repository:', REPO_ROOT)
print('Device:', device)
```

```
Repository: /home/heydari/FHHI-XAI_RAS
Device: cuda:0
```

[2]:
```
# Exact smoke dataset and preprocessing
DATA_ROOT = REPO_ROOT / "data/smoke_segmentation"
IMAGE_DIR = DATA_ROOT / "images"
MASK_DIR = DATA_ROOT / "segmenation/smoke"  # spelling on disk
TARGET_SIZE = (720, 1280)
MEAN = np.array([0.485, 0.456, 0.406], dtype=np.float32)
STD = np.array([0.229, 0.224, 0.225], dtype=np.float32)
MIN_SMOKE_COVERAGE = 0.0  # set to 0.10 to keep only masks with >10% smoke

def by_stem(directory):
    return {p.stem.casefold(): p for p in directory.iterdir() if p.suffix.
 ↪lower() in {'.jpg','.jpeg','.png'}}
images, masks = by_stem(IMAGE_DIR), by_stem(MASK_DIR)
paired = sorted(images.keys() & masks.keys())

def mask_coverage(stem):
    mask = np.asarray(Image.open(masks[stem]).convert('L'))
    return float((mask >= 128).mean())
coverages = {stem: mask_coverage(stem) for stem in paired}
selected = [stem for stem in paired if coverages[stem] > MIN_SMOKE_COVERAGE]

class SmokeDataset(Dataset):
    class_names = ('background', 'smoke')
    ignore_label = -1
    def __init__(self, stems):
        self.stems = list(stems)
        self.files = [{'img': images[s], 'label': masks[s], 'name': s,
                       'smoke_coverage': coverages[s]} for s in self.stems]
    def __len__(self): return len(self.stems)
    def _image(self, stem): return np.asarray(Image.open(images[stem]).
 ↪convert('RGB'))
    def _mask(self, stem): return np.asarray(Image.open(masks[stem]).
 ↪convert('L'))
    def __getitem__(self, index):
        stem = self.stems[index]
        rgb, raw_mask = self._image(stem), self._mask(stem)
        x = rgb.astype(np.float32) / 255.0
        x = (x - MEAN) / STD
        x = cv2.resize(x, (TARGET_SIZE[1], TARGET_SIZE[0]), interpolation=cv2.
 ↪INTER_LINEAR)
        x = torch.from_numpy(np.ascontiguousarray(x.transpose(2,0,1))).float()
        y = (raw_mask >= 128).astype(np.uint8)
        y = cv2.resize(y, (TARGET_SIZE[1], TARGET_SIZE[0]), interpolation=cv2.
 ↪INTER_NEAREST)
        return x, torch.from_numpy(np.ascontiguousarray(y)).long()
    def reverse_augmentation(self, tensor):
        x = tensor.detach().cpu().float()
```

```
        mean = torch.tensor(MEAN).view(3,1,1)
        std = torch.tensor(STD).view(3,1,1)
        return ((x * std + mean).clamp(0,1) * 255.0)
    reverse_normalization = reverse_augmentation

dataset = SmokeDataset(selected)
print('Images:', len(images), 'masks:', len(masks), 'pairs:', len(paired))
print(f'MIN_SMOKE_COVERAGE={MIN_SMOKE_COVERAGE:.2f}; selected={len(dataset)}')
assert len(dataset) > 0
```

```
Images: 668 masks: 497 pairs: 497
MIN_SMOKE_COVERAGE=0.00; selected=497
```

[3]:
```
# Inspect one paired sample and visible smoke overlay
sample_id = 110
stem = dataset.stems[sample_id]
x, y = dataset[sample_id]
rgb = dataset._image(stem)
raw_mask = dataset._mask(stem)
display = (dataset.reverse_augmentation(x).permute(1,2,0).numpy()).astype(np.
 ↪uint8)
smoke = y.numpy() == 1
mask_rgb = np.zeros((*smoke.shape,3), dtype=np.uint8); mask_rgb[smoke] =␣
 ↪[255,80,220]
overlay = display.copy(); overlay[smoke] = (0.35*overlay[smoke] + 0.65*np.
 ↪array([255,80,220])).astype(np.uint8)
fig, axes = plt.subplots(1,4,figsize=(20,5))
axes[0].imshow(rgb); axes[0].set_title('Original RGB')
axes[1].imshow(raw_mask,cmap='gray',vmin=0,vmax=255); axes[1].set_title('Raw␣
 ↪smoke mask (0/255)')
axes[2].imshow(mask_rgb); axes[2].set_title('Smoke class (magenta)')
axes[3].imshow(overlay); axes[3].set_title(f'Overlay ({100*smoke.mean():.2f}%␣
 ↪smoke)')
for ax in axes: ax.axis('off')
plt.tight_layout()
```

```
DEBUG:matplotlib.pyplot:Loaded backend module://matplotlib_inline.backend_inline
version unknown.
DEBUG:matplotlib.pyplot:Loaded backend module://matplotlib_inline.backend_inline
version unknown.
DEBUG:matplotlib.font_manager:findfont: Matching
sans\-serif:style=normal:variant=normal:weight=normal:stretch=normal:size=10.0.
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/STIXNonUni.ttf', name='STIXNonUnicode',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/STIXSizFourSymReg.ttf',
name='STIXSizeFourSym', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/DejaVuSans-Oblique.ttf', name='DejaVu
Sans', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 1.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/STIXSizOneSymBol.ttf',
name='STIXSizeOneSym', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/DejaVuSansMono-Oblique.ttf', name='DejaVu
Sans Mono', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/DejaVuSerif.ttf', name='DejaVu Serif',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/DejaVuSans.ttf', name='DejaVu Sans',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 0.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/STIXGeneralItalic.ttf',
name='STIXGeneral', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/STIXNonUniBolIta.ttf',
name='STIXNonUnicode', style='italic', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/STIXGeneral.ttf', name='STIXGeneral',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/STIXNonUniBol.ttf',
```

```
name='STIXNonUnicode', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/DejaVuSansMono.ttf', name='DejaVu Sans
Mono', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/DejaVuSansDisplay.ttf', name='DejaVu Sans
Display', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/STIXGeneralBol.ttf', name='STIXGeneral',
style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/STIXSizFourSymBol.ttf',
name='STIXSizeFourSym', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/DejaVuSansMono-Bold.ttf', name='DejaVu
Sans Mono', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/DejaVuSerif-Bold.ttf', name='DejaVu
Serif', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/DejaVuSerif-BoldItalic.ttf', name='DejaVu
Serif', style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/STIXSizOneSymReg.ttf',
name='STIXSizeOneSym', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/cmex10.ttf', name='cmex10',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/DejaVuSans-BoldOblique.ttf', name='DejaVu
Sans', style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 1.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/DejaVuSerif-Italic.ttf', name='DejaVu
Serif', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/STIXSizTwoSymReg.ttf',
name='STIXSizeTwoSym', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/cmsy10.ttf', name='cmsy10',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/cmss10.ttf', name='cmss10',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/cmr10.ttf', name='cmr10', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/STIXSizTwoSymBol.ttf',
name='STIXSizeTwoSym', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/STIXNonUniIta.ttf',
name='STIXNonUnicode', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/cmmi10.ttf', name='cmmi10',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/STIXGeneralBolIta.ttf',
name='STIXGeneral', style='italic', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/DejaVuSerifDisplay.ttf', name='DejaVu
Serif Display', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/cmtt10.ttf', name='cmtt10',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/DejaVuSansMono-BoldOblique.ttf',
name='DejaVu Sans Mono', style='oblique', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/cmb10.ttf', name='cmb10', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/STIXSizThreeSymBol.ttf',
name='STIXSizeThreeSym', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/STIXSizThreeSymReg.ttf',
name='STIXSizeThreeSym', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/DejaVuSans-Bold.ttf', name='DejaVu Sans',
style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 0.33499999999999996
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/STIXSizFiveSymReg.ttf',
name='STIXSizeFiveSym', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/NimbusSans-
BoldItalic.otf', name='Nimbus Sans', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmonolt10-boldoblique.otf', name='Latin Modern Mono
Light', style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/opentype/freefont/FreeSansOblique.otf',
name='FreeSans', style='oblique', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTagbanwa-
Regular.ttf', name='Noto Sans Tagbanwa', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Sawasdee-Oblique.ttf',
name='Sawasdee', style='oblique', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/croscore/Arimo-Italic.ttf',
name='Arimo', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansLisu-Bold.ttf',
name='Noto Sans Lisu', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Umpush-Light.ttf',
name='Umpush', style='normal', variant='normal', weight=300, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXSizeTwoSym-
Regular.otf', name='STIXSizeTwoSym', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/AccanthisADFStd-
Regular.otf', name='Accanthis ADF Std', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-
extra/UnJamoBatang.ttf', name='UnJamoBatang', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXIntegralsSm-Bold.otf',
name='STIXIntegralsSm', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXNonUnicode-Bold.otf',
name='STIXNonUnicode', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoCondensed-Bold.ttf', name='Roboto Condensed',
style='normal', variant='normal', weight=700, stretch='condensed',
size='scalable')) = 10.535
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/gentiumplus/GentiumPlus-
Italic.ttf', name='Gentium Plus', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansBrahmi-
Regular.ttf', name='Noto Sans Brahmi', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/kacst/KacstNaskh.ttf',
name='KacstNaskh', style='normal', variant='normal', weight=500,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansHanunoo-
Regular.ttf', name='Noto Sans Hanunoo', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix-word/STIX-Regular.otf',
name='STIX', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansCaucasianAlbanian-
Regular.ttf', name='Noto Sans Caucasian Albanian', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTelugu-Bold.ttf',
name='Noto Sans Telugu', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyretermes-bold.otf', name='TeX Gyre Termes', style='normal',
variant='normal', weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/cabin/Cabin-MediumItalic.otf',
name='Cabin', style='italic', variant='normal', weight=500, stretch='normal',
size='scalable')) = 11.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/malayalam/Uroob-Regular.ttf',
name='Uroob', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXIntegralsUp-Bold.otf',
name='STIXIntegralsUp', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-core/UnBatang.ttf',
name='UnBatang', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
```

```
truetype/roboto/unhinted/RobotoTTF/Roboto-MediumItalic.ttf', name='Roboto',
style='italic', variant='normal', weight=500, stretch='normal',
size='scalable')) = 11.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/linux-
libertine/LinLibertine_M.otf', name='Linux Libertine Mono O', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/noto/NotoSerifCJK-Bold.ttc',
name='Noto Serif CJK JP', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/arphic/uming.ttc', name='AR PL
UMing CN', style='normal', variant='normal', weight=300, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansBalinese-
Bold.ttf', name='Noto Sans Balinese', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentiumplus/GentiumPlus-
Bold.ttf', name='Gentium Plus', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/sinhala/lklug.ttf',
name='LKLUG', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/fonts-hosny-amiri/Amiri-
Bold.ttf', name='Amiri', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/ebgaramond/EBGaramondSC08-Regular.ttf', name='EB Garamond SC',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSans-Italic.ttf',
name='Noto Sans', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-gyre-
math/texgyrebonum-math.otf', name='TeX Gyre Bonum Math', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXVariants-Regular.otf',
name='STIXVariants', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
```

```
fonts/opentype/public/lm/lmroman6-bold.otf', name='Latin Modern Roman',
style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXSizeOneSym-
Regular.otf', name='STIXSizeOneSym', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMedefaidrin-
Bold.ttf', name='Noto Sans Medefaidrin', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansWarangCiti-
Regular.ttf', name='Noto Sans Warang Citi', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansSoyombo-
Regular.ttf', name='Noto Sans Soyombo', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/TlwgTypist-
BoldOblique.ttf', name='Tlwg Typist', style='oblique', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmromandunh10-regular.otf', name='Latin Modern Roman
Dunhill', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMeroitic-
Regular.ttf', name='Noto Sans Meroitic', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsans17-oblique.otf', name='Latin Modern Sans',
style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/junicode/Junicode-Italic.ttf',
name='Junicode', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmonoslant10-regular.otf', name='Latin Modern Mono
Slanted', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoNaskhArabic-Bold.ttf',
name='Noto Naskh Arabic', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansHatran-
Regular.ttf', name='Noto Sans Hatran', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXSizeFourSym-
Regular.otf', name='STIXSizeFourSym', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ttf-khmeros-
core/KhmerOSsys.ttf', name='Khmer OS System', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-yrsa-rasa/Yrsa-
Italic.ttf', name='Yrsa', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmono10-italic.otf', name='Latin Modern Mono',
style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerif-Regular.ttf',
name='Noto Serif', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansArmenian-
Bold.ttf', name='Noto Sans Armenian', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXSizeFiveSym-
Regular.otf', name='STIXSizeFiveSym', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansOlChiki-
Regular.ttf', name='Noto Sans Ol Chiki', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/URWGothic-
BookOblique.otf', name='URW Gothic', style='oblique', variant='normal',
weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/cantarell/Cantarell-Bold.otf',
name='Cantarell', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/TlwgTypewriter-Bold.otf',
name='Tlwg Typewriter', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/NimbusMonoPS-
BoldItalic.otf', name='Nimbus Mono PS', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/NimbusSansNarrow-
Regular.otf', name='Nimbus Sans Narrow', style='normal', variant='normal',
weight=400, stretch='condensed', size='scalable')) = 10.25
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifDisplay-
Bold.ttf', name='Noto Serif Display', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSerifCondensed-
Italic.ttf', name='DejaVu Serif', style='italic', variant='normal', weight=400,
stretch='condensed', size='scalable')) = 11.25
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansKayahLi-
Regular.ttf', name='Noto Sans Kayah Li', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifKhmer-Bold.ttf',
name='Noto Serif Khmer', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation/LiberationMono-
Italic.ttf', name='Liberation Mono', style='italic', variant='normal',
weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-core/UnDotumBold.ttf',
name='UnDotum', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/open-sans/OpenSans-Italic.ttf',
name='Open Sans', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoLoopedLao-
Regular.ttf', name='Noto Looped Lao', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/freefont/FreeMonoBold.otf',
name='FreeMono', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansGurmukhi-
Regular.ttf', name='Noto Sans Gurmukhi', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/TlwgTypist-Oblique.otf',
name='Tlwg Typist', style='oblique', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansPauCinHau-
Regular.ttf', name='Noto Sans Pau Cin Hau', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifEthiopic-
Regular.ttf', name='Noto Serif Ethiopic', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoMono-Regular.ttf',
name='Noto Mono', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-HeavyItalic.ttf',
name='Lato', style='italic', variant='normal', weight=800, stretch='normal',
size='scalable')) = 11.43
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansElbasan-
Regular.ttf', name='Noto Sans Elbasan', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansSoraSompeng-
Regular.ttf', name='Noto Sans Sora Sompeng', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman10-regular.otf', name='Latin Modern Roman',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmromanslant12-regular.otf', name='Latin Modern Roman
Slanted', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifDevanagari-
Regular.ttf', name='Noto Serif Devanagari', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation2/LiberationSerif-
Regular.ttf', name='Liberation Serif', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-beng-extra/Mukti.ttf',
name='Mukti', style='normal', variant='normal', weight=500, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/TlwgTypist.otf',
name='Tlwg Typist', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman12-regular.otf', name='Latin Modern Roman',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansSogdian-
Regular.ttf', name='Noto Sans Sogdian', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Loma-Oblique.otf',
name='Loma', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyreschola-bold.otf', name='TeX Gyre Schola', style='normal',
variant='normal', weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansWancho-
Regular.ttf', name='Noto Sans Wancho', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/theokritos/GFSTheokritos.otf',
name='GFS Theokritos', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/didot/GFSDidotBold.otf',
name='GFS Didot', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/teluguvijayam/mallanna.ttf',
name='Mallanna', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/lobstertwo/LobsterTwo-
Regular.otf', name='Lobster Two', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Umpush-Bold.ttf',
name='Umpush', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-Bold.ttf',
name='Lato', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
```

```
fonts/opentype/public/lm/lmroman12-bold.otf', name='Latin Modern Roman',
style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansOldNorthArabian-
Regular.ttf', name='Noto Sans Old North Arabian', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentium-basic/GenBasB.ttf',
name='Gentium Basic', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/open-sans/OpenSans-
CondBold.ttf', name='Open Sans Condensed', style='normal', variant='normal',
weight=700, stretch='condensed', size='scalable')) = 10.535
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmromanslant17-regular.otf', name='Latin Modern Roman
Slanted', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/cabin/Cabin-SemiBold.otf',
name='Cabin', style='normal', variant='normal', weight=600, stretch='normal',
size='scalable')) = 10.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansModi-Regular.ttf',
name='Noto Sans Modi', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/UniversalisADFStd-
Cond.otf', name='Universalis ADF Std', style='normal', variant='normal',
weight=400, stretch='condensed', size='scalable')) = 10.25
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Purisa-Bold.otf',
name='Purisa', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTifinaghAhaggar-
Regular.ttf', name='Noto Sans Tifinagh Ahaggar', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ubuntu/Ubuntu-Th.ttf',
name='Ubuntu', style='normal', variant='normal', weight=250, stretch='normal',
size='scalable')) = 10.1925
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/open-sans/OpenSans-
ExtraBold.ttf', name='Open Sans', style='normal', variant='normal', weight=800,
stretch='normal', size='scalable')) = 10.43
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXGeneral-Bold.otf',
name='STIXGeneral', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansAdlam-
Regular.ttf', name='Noto Sans Adlam', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/UniversalisADFStd-
Bold.otf', name='Universalis ADF Std', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ubuntu/Ubuntu-LI.ttf',
name='Ubuntu', style='italic', variant='normal', weight=300, stretch='normal',
size='scalable')) = 11.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ubuntu/Ubuntu-R.ttf',
name='Ubuntu', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansEthiopic-
Regular.ttf', name='Noto Sans Ethiopic', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/artemisia/GFSArtemisiaIt.otf',
name='GFS Artemisia', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/teluguvijayam/suranna.ttf',
name='Suranna', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/open-sans/OpenSans-Bold.ttf',
name='Open Sans', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXVariants-Bold.otf',
name='STIXVariants', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/URWBookman-
Demi.otf', name='URW Bookman', style='normal', variant='normal', weight=600,
stretch='normal', size='scalable')) = 10.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyretermes-regular.otf', name='TeX Gyre Termes', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Loma-Bold.ttf',
name='Loma', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyreschola-italic.otf', name='TeX Gyre Schola', style='italic',
variant='normal', weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-BoldItalic.ttf',
name='Lato', style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation2/LiberationSans-
Regular.ttf', name='Liberation Sans', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/adf/AccanthisADFStdNo3-BoldItalic.otf', name='Accanthis ADF Std No3',
style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/freefont/FreeSans.otf',
name='FreeSans', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoTTF/Roboto-Thin.ttf', name='Roboto',
style='normal', variant='normal', weight=250, stretch='normal',
size='scalable')) = 10.1925
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/fonts-go/Go-Mono.ttf', name='Go Mono',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/NimbusSansNarrow-
BoldOblique.otf', name='Nimbus Sans Narrow', style='oblique', variant='normal',
weight=700, stretch='condensed', size='scalable')) = 11.535
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoMusic-Regular.ttf',
name='Noto Music', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/C059-Italic.otf',
name='C059', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTamil-Bold.ttf',
name='Noto Sans Tamil', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansArabic-Bold.ttf',
name='Noto Sans Arabic', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/open-sans/OpenSans-
CondLightItalic.ttf', name='Open Sans', style='italic', variant='normal',
weight=300, stretch='condensed', size='scalable')) = 11.344999999999999
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansCarian-
Regular.ttf', name='Noto Sans Carian', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Purisa-BoldOblique.otf',
name='Purisa', style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/linux-
libertine/LinLibertine_RZ.otf', name='Linux Libertine O', style='normal',
variant='normal', weight=600, stretch='normal', size='scalable')) = 10.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyreheroscn-regular.otf', name='TeX Gyre Heros Cn', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/croscore/Tinos-Regular.ttf',
name='Tinos', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/TlwgTypo-Oblique.otf',
name='Tlwg Typo', style='oblique', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/NimbusRoman-
Regular.otf', name='Nimbus Roman', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/TlwgTypo-BoldOblique.ttf',
name='Tlwg Typo', style='oblique', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-Heavy.ttf',
name='Lato', style='normal', variant='normal', weight=800, stretch='normal',
size='scalable')) = 10.43
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Sawasdee.otf',
name='Sawasdee', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/opentype/ebgaramond/EBGaramond-
InitialsF2.otf', name='EB Garamond Initials Fill2', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/baekmuk/batang.ttf',
name='Baekmuk Batang', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmromandemi10-regular.otf', name='Latin Modern Roman
Demi', style='normal', variant='normal', weight=600, stretch='normal',
size='scalable')) = 10.24
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman17-regular.otf', name='Latin Modern Roman',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/linux-
libertine/LinLibertine_RBI.otf', name='Linux Libertine O', style='italic',
variant='normal', weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/kacst/KacstArt.ttf',
name='KacstArt', style='normal', variant='normal', weight=500, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-telu-
extra/Pothana2000.ttf', name='Pothana2000', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
opentype/neohellenic/GFSNeohellenicBoldIt.otf', name='GFS Neohellenic',
style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/charis/CharisSIL-
BoldItalic.ttf', name='Charis SIL', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/ebgaramond/EBGaramond12-AllSC.ttf', name='EB Garamond 12 All SC',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansPhagsPa-
Regular.ttf', name='Noto Sans PhagsPa', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/ebgaramond/EBGaramond12-Regular.ttf', name='EB Garamond',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
```

```
truetype/adf/AccanthisADFStdNo2-Italic.otf', name='Accanthis ADF Std No2',
style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-LightItalic.ttf',
name='Lato', style='italic', variant='normal', weight=300, stretch='normal',
size='scalable')) = 11.145
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmonolt10-regular.otf', name='Latin Modern Mono
Light', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/GilliusADF-Cond.otf',
name='Gillius ADF', style='normal', variant='normal', weight=400,
stretch='condensed', size='scalable')) = 10.25
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansSaurashtra-
Regular.ttf', name='Noto Sans Saurashtra', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/adf/GilliusADFNo2-BoldCond.otf', name='Gillius ADF No2',
style='normal', variant='normal', weight=700, stretch='condensed',
size='scalable')) = 10.535
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSansMono-
BoldOblique.ttf', name='DejaVu Sans Mono', style='oblique', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
opentype/neohellenic/GFSNeohellenicIt.otf', name='GFS Neohellenic',
style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoTTF/Roboto-Regular.ttf', name='Roboto',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifBalinese-
Regular.ttf', name='Noto Serif Balinese', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/noto/NotoSansCJK-Regular.ttc',
name='Noto Sans CJK JP', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-extra/UnTaza.ttf',
name='UnTaza', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
```

```
truetype/freefont/FreeSansBoldOblique.ttf', name='FreeSans', style='oblique',
variant='normal', weight=600, stretch='normal', size='scalable')) = 11.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyreheros-bolditalic.otf', name='TeX Gyre Heros', style='italic',
variant='normal', weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyreheroscn-bolditalic.otf', name='TeX Gyre Heros Cn', style='italic',
variant='normal', weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansDisplay-Bold.ttf',
name='Noto Sans Display', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/teluguvijayam/SreeKrushnadevaraya.ttf', name='Sree Krushnadevaraya',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyreadventor-italic.otf', name='TeX Gyre Adventor', style='italic',
variant='normal', weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/malayalam/Chilanka-
Regular.otf', name='Chilanka', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/crosextra/Carlito-Regular.ttf',
name='Carlito', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/freefont/FreeSans.ttf',
name='FreeSans', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/AccanthisADFStd-
BoldItalic.otf', name='Accanthis ADF Std', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Garuda-Oblique.otf',
name='Garuda', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/BerenisADFProMath-
Regular.otf', name='Berenis ADF Pro Math', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansLisu-Regular.ttf',
```

```
name='Noto Sans Lisu', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSans-
BoldOblique.ttf', name='DejaVu Sans', style='oblique', variant='normal',
weight=700, stretch='normal', size='scalable')) = 1.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansCherokee-
Bold.ttf', name='Noto Sans Cherokee', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/UniversalisADFStd-
Italic.otf', name='Universalis ADF Std', style='italic', variant='normal',
weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansPahawhHmong-
Regular.ttf', name='Noto Sans Pahawh Hmong', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Kinnari.otf',
name='Kinnari', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentium-basic/GenBkBasI.ttf',
name='Gentium Book Basic', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/freefont/FreeSerif.otf',
name='FreeSerif', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-deva-extra/kalimati.ttf',
name='Kalimati', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/gazis/GFSGazis.otf', name='GFS
Gazis', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/TlwgTypist.ttf',
name='Tlwg Typist', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifGujarati-
Bold.ttf', name='Noto Serif Gujarati', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansGothic-
```

```
Regular.ttf', name='Noto Sans Gothic', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/open-sans/OpenSans-
LightItalic.ttf', name='Open Sans', style='italic', variant='normal',
weight=300, stretch='normal', size='scalable')) = 11.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/GilliusADF-CondItalic.otf',
name='Gillius ADF', style='italic', variant='normal', weight=400,
stretch='condensed', size='scalable')) = 11.25
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-yrsa-rasa/Yrsa-
LightItalic.ttf', name='Yrsa', style='italic', variant='normal', weight=300,
stretch='normal', size='scalable')) = 11.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXNonUnicode-
BoldItalic.otf', name='STIXNonUnicode', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/freefont/FreeSerifBoldItalic.ttf', name='FreeSerif', style='italic',
variant='normal', weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/kacst/KacstFarsi.ttf',
name='KacstFarsi', style='normal', variant='normal', weight=500,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/kacst/KacstBook.ttf',
name='KacstBook', style='normal', variant='normal', weight=500,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifTelugu-
Regular.ttf', name='Noto Serif Telugu', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/linux-
libertine/LinLibertine_DR.otf', name='Linux Libertine Display O',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-core/UnDinaruBold.ttf',
name='UnDinaru', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-yrsa-rasa/Yrsa-
MediumItalic.ttf', name='Yrsa', style='italic', variant='normal', weight=500,
stretch='normal', size='scalable')) = 11.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Laksaman-BoldItalic.ttf',
```

```
name='Laksaman', style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Laksaman-Bold.otf',
name='Laksaman', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/lobster/lobster.otf',
name='Lobster Two', style='italic', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/noto/NotoSansEgyptianHieroglyphs-Regular.ttf', name='Noto Sans Egyptian
Hieroglyphs', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Norasi-BoldOblique.ttf',
name='Norasi', style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-
base35/Z003-MediumItalic.otf', name='Z003', style='italic', variant='normal',
weight=500, stretch='normal', size='scalable')) = 11.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-gujr-extra/padmaa-
Medium-0.5.ttf', name='padmaa', style='normal', variant='normal', weight=500,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmonoprop10-regular.otf', name='Latin Modern Mono
Prop', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation2/LiberationMono-
Bold.ttf', name='Liberation Mono', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ubuntu/Ubuntu-L.ttf',
name='Ubuntu', style='normal', variant='normal', weight=300, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/ipafont-gothic/ipag.ttf',
name='IPAGothic', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSans-Oblique.ttf',
name='DejaVu Sans', style='oblique', variant='normal', weight=400,
stretch='normal', size='scalable')) = 1.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/ebgaramond/EBGaramondSC12-Regular.ttf', name='EB Garamond SC',
```

```
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentiumplus/GentiumBookPlus-
BoldItalic.ttf', name='Gentium Book Plus', style='italic', variant='normal',
weight=800, stretch='normal', size='scalable')) = 11.43
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/padauk/Padauk-Regular.ttf',
name='Padauk', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/droid/DroidSansFallbackFull.ttf', name='Droid Sans Fallback',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Norasi.otf',
name='Norasi', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/dejavu/DejaVuSerifCondensed.ttf', name='DejaVu Serif', style='normal',
variant='normal', weight=400, stretch='condensed', size='scalable')) = 10.25
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentiumplus/GentiumPlus-
BoldItalic.ttf', name='Gentium Plus', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsansquot8-bold.otf', name='Latin Modern Sans
Quotation', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-gujr-extra/padmaa.ttf',
name='padmaa', style='normal', variant='normal', weight=500, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/D050000L.otf',
name='D050000L', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTelugu-
Regular.ttf', name='Noto Sans Telugu', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/BerenisADFPro-Bold.otf',
name='Berenis ADF Pro', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/didot/GFSDidot.otf', name='GFS
Didot', style='normal', variant='normal', weight=400, stretch='normal',
```

```
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/liberation/LiberationSansNarrow-Bold.ttf', name='Liberation Sans
Narrow', style='normal', variant='normal', weight=700, stretch='condensed',
size='scalable')) = 10.535
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyrecursor-bolditalic.otf', name='TeX Gyre Cursor', style='italic',
variant='normal', weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/open-sans/OpenSans-
SemiboldItalic.ttf', name='Open Sans', style='italic', variant='normal',
weight=600, stretch='normal', size='scalable')) = 11.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/samyak/Samyak-Devanagari.ttf',
name='Samyak Devanagari', style='normal', variant='normal', weight=500,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation/LiberationSans-
Italic.ttf', name='Liberation Sans', style='italic', variant='normal',
weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansNewTaiLue-
Regular.ttf', name='Noto Sans New Tai Lue', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/NimbusMonoPS-
Italic.otf', name='Nimbus Mono PS', style='italic', variant='normal',
weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Purisa-BoldOblique.ttf',
name='Purisa', style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lohit-tamil-classical/Lohit-
Tamil-Classical.ttf', name='Lohit Tamil Classical', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/NimbusSans-
Regular.otf', name='Nimbus Sans', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSansCondensed-
Oblique.ttf', name='DejaVu Sans', style='oblique', variant='normal', weight=400,
stretch='condensed', size='scalable')) = 1.25
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansSymbols-
Regular.ttf', name='Noto Sans Symbols', style='normal', variant='normal',
```

```
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/teluguvijayam/Gidugu.ttf',
name='Gidugu', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Norasi.ttf',
name='Norasi', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansOldTurkic-
Regular.ttf', name='Noto Sans Old Turkic', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Sawasdee-BoldOblique.ttf',
name='Sawasdee', style='oblique', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoRashiHebrew-
Regular.ttf', name='Noto Rashi Hebrew', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/linux-
libertine/LinLibertine_R.otf', name='Linux Libertine O', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyrebonum-bolditalic.otf', name='TeX Gyre Bonum', style='italic',
variant='normal', weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansAdlamUnjoined-
Regular.ttf', name='Noto Sans Adlam Unjoined', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/URWGothic-Demi.otf',
name='URW Gothic', style='normal', variant='normal', weight=600,
stretch='normal', size='scalable')) = 10.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/pagul/Pagul.ttf', name='Pagul',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/liberation/LiberationSansNarrow-Italic.ttf', name='Liberation Sans
Narrow', style='italic', variant='normal', weight=400, stretch='condensed',
size='scalable')) = 11.25
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsansdemicond10-regular.otf', name='Latin Modern Sans
Demi Cond', style='normal', variant='normal', weight=600, stretch='condensed',
```

```
size='scalable')) = 10.44
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/malayalam/Gayathri-Bold.otf',
name='Gayathri', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyrepagella-bold.otf', name='TeX Gyre Pagella', style='normal',
variant='normal', weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifMalayalam-
Bold.ttf', name='Noto Serif Malayalam', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Loma-BoldOblique.otf',
name='Loma', style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansKhmer-Bold.ttf',
name='Noto Sans Khmer', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/UniversalisADFStd-
BoldItalic.otf', name='Universalis ADF Std', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ebgaramond/EBGaramond-
InitialsF1.ttf', name='EB Garamond Initials Fill1', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyreheros-italic.otf', name='TeX Gyre Heros', style='italic',
variant='normal', weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifMalayalam-
Regular.ttf', name='Noto Serif Malayalam', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/samyak-fonts/Samyak-Tamil.ttf',
name='Samyak Tamil', style='normal', variant='normal', weight=500,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/freefont/FreeSerif.ttf',
name='FreeSerif', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/NimbusRoman-
BoldItalic.otf', name='Nimbus Roman', style='italic', variant='normal',
```

```
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/font-awesome/fontawesome-
webfont.ttf', name='FontAwesome', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/C059-Bold.otf',
name='C059', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoNastaliqUrdu-
Bold.ttf', name='Noto Nastaliq Urdu', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/noto/NotoSansInscriptionalPahlavi-Regular.ttf', name='Noto Sans
Inscriptional Pahlavi', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifDogra-
Regular.ttf', name='Noto Serif Dogra', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lohit-punjabi/Lohit-
Gurmukhi.ttf', name='Lohit Gurmukhi', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/charis/CharisSIL-Bold.ttf',
name='Charis SIL', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSans-Bold.ttf',
name='DejaVu Sans', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 0.33499999999999996
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-yrsa-rasa/Yrsa-
Regular.ttf', name='Yrsa', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoTTF/Roboto-Medium.ttf', name='Roboto',
style='normal', variant='normal', weight=500, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/crosextra/Caladea-Bold.ttf',
name='Caladea', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansArmenian-
Regular.ttf', name='Noto Sans Armenian', style='normal', variant='normal',
```

```
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXGeneral-Regular.otf',
name='STIXGeneral', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/kacst/KacstScreen.ttf',
name='KacstScreen', style='normal', variant='normal', weight=500,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ubuntu/Ubuntu-M.ttf',
name='Ubuntu', style='normal', variant='normal', weight=500, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/adf/GilliusADFNo2-BoldItalic.otf', name='Gillius ADF No2',
style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/ebgaramond/EBGaramond12-Bold.ttf', name='EB Garamond', style='normal',
variant='normal', weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/baekmuk/dotum.ttf',
name='Baekmuk Dotum', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
opentype/ebgaramond/EBGaramondSC08-Regular.otf', name='EB Garamond SC',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifKhojki-Bold.ttf',
name='Noto Serif Khojki', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansOldSouthArabian-
Regular.ttf', name='Noto Sans Old South Arabian', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Purisa-Oblique.ttf',
name='Purisa', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/TlwgTypist-
BoldOblique.otf', name='Tlwg Typist', style='oblique', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoKufiArabic-Bold.ttf',
name='Noto Kufi Arabic', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXIntegralsD-Bold.otf',
name='STIXIntegralsD', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-yrsa-rasa/Yrsa-
SemiBold.ttf', name='Yrsa', style='normal', variant='normal', weight=600,
stretch='normal', size='scalable')) = 10.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Waree.ttf', name='Waree',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansThai-Bold.ttf',
name='Noto Sans Thai', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerif-Bold.ttf',
name='Noto Serif', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Norasi-BoldOblique.otf',
name='Norasi', style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-Regular.ttf',
name='Lato', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-beng-
extra/LikhanNormal.ttf', name='Likhan', style='normal', variant='normal',
weight=500, stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-core/UnGraphic.ttf',
name='UnGraphic', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/malayalam/Manjari-Regular.otf',
name='Manjari', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/didot-
classic/GFSDidotClassic.otf', name='GFS Didot Classic', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/croscore/Cousine-Bold.ttf',
name='Cousine', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
```

```
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmromandemi10-oblique.otf', name='Latin Modern Roman
Demi', style='oblique', variant='normal', weight=600, stretch='normal',
size='scalable')) = 11.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansThaana-
Regular.ttf', name='Noto Sans Thaana', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXSizeThreeSym-
Regular.otf', name='STIXSizeThreeSym', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansGujarati-
Bold.ttf', name='Noto Sans Gujarati', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/porson/GFSPorson.otf',
name='GFS Porson', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ubuntu/UbuntuMono-B.ttf',
name='Ubuntu Mono', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ubuntu/Ubuntu-MI.ttf',
name='Ubuntu', style='italic', variant='normal', weight=500, stretch='normal',
size='scalable')) = 11.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/Nakula/nakula.ttf',
name='Nakula', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Kinnari-Bold.ttf',
name='Kinnari', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-
core/UnGraphicBold.ttf', name='UnGraphic', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Norasi-BoldItalic.ttf',
name='Norasi', style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/croscore/Tinos-Italic.ttf',
name='Tinos', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansDevanagari-
Regular.ttf', name='Noto Sans Devanagari', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman10-italic.otf', name='Latin Modern Roman',
style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Umpush-BoldOblique.ttf',
name='Umpush', style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/teluguvijayam/TimmanaRegular.ttf', name='Timmana', style='normal',
variant='normal', weight=900, stretch='normal', size='scalable')) = 10.525
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/adf/AccanthisADFStdNo3-Regular.otf', name='Accanthis ADF Std No3',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansKannada-
Regular.ttf', name='Noto Sans Kannada', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/ebgaramond/EBGaramond08-Regular.ttf', name='EB Garamond',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/fonts-hosny-amiri/Amiri-
BoldSlanted.ttf', name='Amiri', style='italic', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifArmenian-
Bold.ttf', name='Noto Serif Armenian', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsansquot8-oblique.otf', name='Latin Modern Sans
Quotation', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansHanifiRohingya-
Bold.ttf', name='Noto Sans Hanifi Rohingya', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-core/UnDinaru.ttf',
name='UnDinaru', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Waree-BoldOblique.ttf',
name='Waree', style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-Black.ttf',
name='Lato', style='normal', variant='normal', weight=900, stretch='normal',
size='scalable')) = 10.525
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/lm-
math/latinmodern-math.otf', name='Latin Modern Math', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/fonts-hosny-amiri/Amiri-
Slanted.ttf', name='Amiri', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoCondensed-Light.ttf', name='Roboto Condensed',
style='normal', variant='normal', weight=300, stretch='condensed',
size='scalable')) = 10.344999999999999
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifDisplay-
Italic.ttf', name='Noto Serif Display', style='italic', variant='normal',
weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/arphic-bkai00mp/bkai00mp.ttf',
name='AR PL KaitiM Big5', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lohit-assamese/Lohit-
Assamese.ttf', name='Lohit Assamese', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/freefont/FreeSansBold.ttf',
name='FreeSans', style='normal', variant='normal', weight=600, stretch='normal',
size='scalable')) = 10.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSansMono.ttf',
name='DejaVu Sans Mono', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
opentype/ebgaramond/EBGaramond12-Bold.otf', name='EB Garamond', style='normal',
variant='normal', weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/libreoffice/opens___.ttf',
name='OpenSymbol', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansPalmyrene-
```

```
Regular.ttf', name='Noto Sans Palmyrene', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/ebgaramond/EBGaramond12-Italic.ttf', name='EB Garamond',
style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXGeneral-Italic.otf',
name='STIXGeneral', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/GilliusADF-BoldCond.otf',
name='Gillius ADF', style='normal', variant='normal', weight=700,
stretch='condensed', size='scalable')) = 10.535
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/dejavu/DejaVuSansCondensed.ttf', name='DejaVu Sans', style='normal',
variant='normal', weight=400, stretch='condensed', size='scalable')) = 0.25
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansLao-Regular.ttf',
name='Noto Sans Lao', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/charis/CharisSIL-Regular.ttf',
name='Charis SIL', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/kacst/KacstDecorative.ttf',
name='KacstDecorative', style='normal', variant='normal', weight=500,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/junicode/FoulisGreek.ttf',
name='FoulisGreek', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmonocaps10-regular.otf', name='Latin Modern Mono
Caps', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/kacst-one/KacstOne-Bold.ttf',
name='KacstOne', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoTTF/Roboto-Light.ttf', name='Roboto',
style='normal', variant='normal', weight=300, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansSundanese-
Bold.ttf', name='Noto Sans Sundanese', style='normal', variant='normal',
```

```
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/teluguvijayam/ramabhadra.ttf',
name='Ramabhadra', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansShavian-
Regular.ttf', name='Noto Sans Shavian', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifSinhala-
Regular.ttf', name='Noto Serif Sinhala', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyrecursor-italic.otf', name='TeX Gyre Cursor', style='italic',
variant='normal', weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-Light.ttf',
name='Lato', style='normal', variant='normal', weight=300, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lao/Phetsarath_OT.ttf',
name='Phetsarath OT', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/fonts-go/Go-Bold.ttf', name='Go',
style='normal', variant='normal', weight=600, stretch='normal',
size='scalable')) = 10.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Laksaman.otf',
name='Laksaman', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ubuntu/Ubuntu-BI.ttf',
name='Ubuntu', style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/Gubbi/Gubbi.ttf', name='Gubbi',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSerif-Italic.ttf',
name='DejaVu Serif', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMandaic-
Regular.ttf', name='Noto Sans Mandaic', style='normal', variant='normal',
```

```
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/fonts-go/Go-Mono-Italic.ttf', name='Go
Mono', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-core/UnPilgiBold.ttf',
name='UnPilgi', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansOriya-Bold.ttf',
name='Noto Sans Oriya', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/noto/NotoSansAnatolianHieroglyphs-Regular.ttf', name='Noto Sans
Anatolian Hieroglyphs', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman5-regular.otf', name='Latin Modern Roman',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansImperialAramaic-
Regular.ttf', name='Noto Sans Imperial Aramaic', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/malayalam/Gayathri-
Regular.otf', name='Gayathri', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansChakma-
Regular.ttf', name='Noto Sans Chakma', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-
base35/StandardSymbolsPS.otf', name='Standard Symbols PS', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansSamaritan-
Regular.ttf', name='Noto Sans Samaritan', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/NimbusMonoPS-
Bold.otf', name='Nimbus Mono PS', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Norasi-Italic.otf',
name='Norasi', style='italic', variant='normal', weight=400, stretch='normal',
```

```
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
opentype/freefont/FreeMonoBoldOblique.otf', name='FreeMono', style='oblique',
variant='normal', weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-yrsa-rasa/Rasa-
Regular.ttf', name='Rasa', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-MediumItalic.ttf',
name='Lato', style='italic', variant='normal', weight=500, stretch='normal',
size='scalable')) = 11.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/kacst/KacstPoster.ttf',
name='KacstPoster', style='normal', variant='normal', weight=500,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTirhuta-
Regular.ttf', name='Noto Sans Tirhuta', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/teluguvijayam/Mandali-
Regular.ttf', name='Mandali', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/fonts-hosny-amiri/Amiri-
Regular.ttf', name='Amiri', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-gyre-
math/texgyretermes-math.otf', name='TeX Gyre Termes Math', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lohit-malayalam/Lohit-
Malayalam.ttf', name='Lohit Malayalam', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansCoptic-
Regular.ttf', name='Noto Sans Coptic', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSans-
ExtraLight.ttf', name='DejaVu Sans', style='normal', variant='normal',
weight=200, stretch='normal', size='scalable')) = 0.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansLycian-
Regular.ttf', name='Noto Sans Lycian', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansCypriot-
Regular.ttf', name='Noto Sans Cypriot', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-gujr-extra/Rekha.ttf',
name='Rekha', style='normal', variant='normal', weight=500, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation2/LiberationSerif-
Bold.ttf', name='Liberation Serif', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/linux-
libertine/LinLibertine_I.otf', name='Linux Libertine Initials O',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-yrsa-rasa/Rasa-
Medium.ttf', name='Rasa', style='normal', variant='normal', weight=500,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansCham-Bold.ttf',
name='Noto Sans Cham', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/freefont/FreeMonoBold.ttf',
name='FreeMono', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-yrsa-rasa/Yrsa-
SemiBoldItalic.ttf', name='Yrsa', style='italic', variant='normal', weight=600,
stretch='normal', size='scalable')) = 11.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/GilliusADFNo2-Bold.otf',
name='Gillius ADF No2', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoNaskhArabic-
Regular.ttf', name='Noto Naskh Arabic', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSans-Regular.ttf',
name='Noto Sans', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/open-sans/OpenSans-
CondLight.ttf', name='Open Sans', style='normal', variant='normal', weight=300,
```

```
stretch='condensed', size='scalable')) = 10.344999999999999
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansThai-Regular.ttf',
name='Noto Sans Thai', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/GilliusADF-Italic.otf',
name='Gillius ADF', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Kinnari-Italic.ttf',
name='Kinnari', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Waree-Oblique.otf',
name='Waree', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/baskerville/GFSBaskerville.otf', name='GFS Baskerville',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansGunjalaGondi-
Regular.ttf', name='Noto Sans Gunjala Gondi', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/linux-
libertine/LinBiolinum_RI.otf', name='Linux Biolinum O', style='italic',
variant='normal', weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTifinaghRhissaIxa-
Regular.ttf', name='Noto Sans Tifinagh Rhissa Ixa', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/ebgaramond/EBGaramond-
Initials.otf', name='EB Garamond Initials', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/teluguvijayam/NATS.ttf',
name='NATS', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ubuntu/Ubuntu-RI.ttf',
name='Ubuntu', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Norasi-Oblique.otf',
name='Norasi', style='oblique', variant='normal', weight=400, stretch='normal',
```

```
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Kinnari-Oblique.otf',
name='Kinnari', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerif-BoldItalic.ttf',
name='Noto Serif', style='italic', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansOsage-
Regular.ttf', name='Noto Sans Osage', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation/LiberationSans-
BoldItalic.ttf', name='Liberation Sans', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/TlwgMono.ttf', name='Tlwg
Mono', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Waree-Bold.ttf',
name='Waree', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ubuntu/UbuntuMono-R.ttf',
name='Ubuntu Mono', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTaiLe-
Regular.ttf', name='Noto Sans Tai Le', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSans.ttf',
name='DejaVu Sans', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 0.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXIntegralsUpSm-
Bold.otf', name='STIXIntegralsUpSm', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/teluguvijayam/Ponnala.ttf',
name='Ponnala', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
opentype/ebgaramond/EBGaramond08-Italic.otf', name='EB Garamond',
style='italic', variant='normal', weight=400, stretch='normal',
```

```
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/NimbusSansNarrow-
Oblique.otf', name='Nimbus Sans Narrow', style='oblique', variant='normal',
weight=400, stretch='condensed', size='scalable')) = 11.25
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/NimbusMonoPS-
Regular.otf', name='Nimbus Mono PS', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/lobstertwo/LobsterTwo-
BoldItalic.otf', name='Lobster Two', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/kacst/mry_KacstQurn.ttf',
name='mry_KacstQurn', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/cabin/Cabin-Regular.otf',
name='Cabin', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Garuda-BoldOblique.ttf',
name='Garuda', style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Purisa-Oblique.otf',
name='Purisa', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmromanslant10-regular.otf', name='Latin Modern Roman
Slanted', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/samyak-fonts/Samyak-
Malayalam.ttf', name='Samyak Malayalam', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Sawasdee.ttf',
name='Sawasdee', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/NimbusRoman-
Italic.otf', name='Nimbus Roman', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman9-italic.otf', name='Latin Modern Roman',
style='italic', variant='normal', weight=400, stretch='normal',
```

```
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoTTF/Roboto-LightItalic.ttf', name='Roboto',
style='italic', variant='normal', weight=300, stretch='normal',
size='scalable')) = 11.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Loma-Bold.otf',
name='Loma', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmonolt10-oblique.otf', name='Latin Modern Mono
Light', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/GilliusADF-Regular.otf',
name='Gillius ADF', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/linux-
libertine/LinLibertine_RB.otf', name='Linux Libertine O', style='normal',
variant='normal', weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/samyak-fonts/Samyak-
Gujarati.ttf', name='Samyak Gujarati', style='normal', variant='normal',
weight=500, stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/charis/CharisSIL-Italic.ttf',
name='Charis SIL', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTamilSupplement-
Regular.ttf', name='Noto Sans Tamil Supplement', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
opentype/artemisia/GFSArtemisiaBold.otf', name='GFS Artemisia', style='normal',
variant='normal', weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-japanese-mincho.ttf',
name='IPAexMincho', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyreschola-regular.otf', name='TeX Gyre Schola', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoRashiHebrew-Bold.ttf',
name='Noto Rashi Hebrew', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifTibetan-
Regular.ttf', name='Noto Serif Tibetan', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/TlwgMono-Oblique.ttf',
name='Tlwg Mono', style='oblique', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/noto/NotoSerifNyiakengPuachueHmong-Regular.ttf', name='Noto Serif Hmong
Nyiakeng', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentium/GentiumAlt-R.ttf',
name='GentiumAlt', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyreheros-regular.otf', name='TeX Gyre Heros', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation/LiberationMono-
BoldItalic.ttf', name='Liberation Mono', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-extra/UnPenheulim.ttf',
name='UnPenheulim', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMarchen-
Regular.ttf', name='Noto Sans Marchen', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/croscore/Cousine-Regular.ttf',
name='Cousine', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoLoopedLao-Bold.ttf',
name='Noto Looped Lao', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/baekmuk/gulim.ttf',
name='Baekmuk Gulim', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/font-awesome/FontAwesome.otf',
name='FontAwesome', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyrepagella-italic.otf', name='TeX Gyre Pagella', style='italic',
variant='normal', weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Umpush-Oblique.otf',
name='Umpush', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifMyanmar-
Regular.ttf', name='Noto Serif Myanmar', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansAvestan-
Regular.ttf', name='Noto Sans Avestan', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lohit-telugu/Lohit-Telugu.ttf',
name='Lohit Telugu', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/fonts-go/Go-Regular.ttf', name='Go',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmromandunh10-oblique.otf', name='Latin Modern Roman
Dunhill', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/fonts-go/Go-Bold-Italic.ttf', name='Go',
style='italic', variant='normal', weight=600, stretch='normal',
size='scalable')) = 11.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifHebrew-
Regular.ttf', name='Noto Serif Hebrew', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansGujarati-
Regular.ttf', name='Noto Sans Gujarati', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoCondensed-MediumItalic.ttf', name='Roboto
Condensed', style='italic', variant='normal', weight=500, stretch='condensed',
size='scalable')) = 11.344999999999999
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Purisa.otf',
name='Purisa', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentium-basic/GenBkBasB.ttf',
name='Gentium Book Basic', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTifinaghAir-
Regular.ttf', name='Noto Sans Tifinagh Air', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-yrsa-rasa/Rasa-Bold.ttf',
name='Rasa', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/junicode/Junicode.ttf',
name='Junicode', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSansMono-
Oblique.ttf', name='DejaVu Sans Mono', style='oblique', variant='normal',
weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTifinaghHawad-
Regular.ttf', name='Noto Sans Tifinagh Hawad', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation/LiberationSerif-
Regular.ttf', name='Liberation Serif', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation2/LiberationSans-
Bold.ttf', name='Liberation Sans', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-Hairline.ttf',
name='Lato', style='normal', variant='normal', weight=100, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/croscore/Arimo-Bold.ttf',
name='Arimo', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansHanifiRohingya-
Regular.ttf', name='Noto Sans Hanifi Rohingya', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Waree.otf', name='Waree',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/TlwgTypewriter-Bold.ttf',
name='Tlwg Typewriter', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTamil-
Regular.ttf', name='Noto Sans Tamil', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansKaithi-
Regular.ttf', name='Noto Sans Kaithi', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/freefont/FreeSerifBold.otf',
name='FreeSerif', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXIntegralsUp-
Regular.otf', name='STIXIntegralsUp', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Umpush.otf',
name='Umpush', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Norasi-Bold.otf',
name='Norasi', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSerif-Bold.ttf',
name='DejaVu Serif', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/teluguvijayam/Gurajada.ttf',
name='Gurajada', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/teluguvijayam/SyamalaRamana.ttf', name='Syamala Ramana',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/cantarell/Cantarell-Thin.otf',
name='Cantarell', style='normal', variant='normal', weight=100,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMultani-
Regular.ttf', name='Noto Sans Multani', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Umpush.ttf',
name='Umpush', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/crosextra/Caladea-Regular.ttf',
name='Caladea', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Laksaman-Italic.ttf',
name='Laksaman', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/arphic-bsmi00lp/bsmi00lp.ttf',
name='AR PL Mingti2L Big5', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsans10-bold.otf', name='Latin Modern Sans',
style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansGlagolitic-
Regular.ttf', name='Noto Sans Glagolitic', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-core/UnBatangBold.ttf',
name='UnBatang', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/open-sans/OpenSans-
Regular.ttf', name='Open Sans', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/cabin/Cabin-Italic.otf',
name='Cabin', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/padauk/Padauk-Bold.ttf',
name='Padauk', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation/LiberationMono-
Bold.ttf', name='Liberation Mono', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSansCondensed-
Bold.ttf', name='DejaVu Sans', style='normal', variant='normal', weight=700,
stretch='condensed', size='scalable')) = 0.5349999999999999
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansOldSogdian-
Regular.ttf', name='Noto Sans Old Sogdian', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-extra/UnShinmun.ttf',
name='UnShinmun', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/baekmuk/hline.ttf',
name='Baekmuk Headline', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMeeteiMayek-
Bold.ttf', name='Noto Sans Meetei Mayek', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Sawasdee-Bold.ttf',
name='Sawasdee', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansBamum-
Regular.ttf', name='Noto Sans Bamum', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoLoopedThai-Bold.ttf',
name='Noto Looped Thai', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMayanNumerals-
Regular.ttf', name='Noto Sans Mayan Numerals', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lohit-tamil/Lohit-Tamil.ttf',
name='Lohit Tamil', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmromanslant9-regular.otf', name='Latin Modern Roman
Slanted', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansBuginese-
Regular.ttf', name='Noto Sans Buginese', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsans17-regular.otf', name='Latin Modern Sans',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
```

```
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman9-bold.otf', name='Latin Modern Roman',
style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuMathTeXGyre.ttf',
name='DejaVu Math TeX Gyre', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentiumplus/GentiumBookPlus-
Italic.ttf', name='Gentium Book Plus', style='italic', variant='normal',
weight=500, stretch='normal', size='scalable')) = 11.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifThai-
Regular.ttf', name='Noto Serif Thai', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyreadventor-regular.otf', name='TeX Gyre Adventor', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTifinaghAPT-
Regular.ttf', name='Noto Sans Tifinagh APT', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansSinhala-Bold.ttf',
name='Noto Sans Sinhala', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/TlwgTypewriter-
Oblique.otf', name='Tlwg Typewriter', style='oblique', variant='normal',
weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/linux-
libertine/LinBiolinum_RB.otf', name='Linux Biolinum O', style='normal',
variant='normal', weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXNonUnicode-
Regular.otf', name='STIXNonUnicode', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/TlwgMono-BoldOblique.otf',
name='Tlwg Mono', style='oblique', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansSignWriting-
Regular.ttf', name='Noto Sans SignWriting', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansSundanese-
Regular.ttf', name='Noto Sans Sundanese', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentium-basic/GenBasBI.ttf',
name='Gentium Basic', style='italic', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifDevanagari-
Bold.ttf', name='Noto Serif Devanagari', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/comfortaa/Comfortaa-Bold.ttf',
name='Comfortaa', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmromancaps10-oblique.otf', name='Latin Modern Roman
Caps', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansOldPermic-
Regular.ttf', name='Noto Sans Old Permic', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/TlwgTypo.ttf', name='Tlwg
Typo', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansOlChiki-Bold.ttf',
name='Noto Sans Ol Chiki', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/URWGothic-Book.otf',
name='URW Gothic', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansPhoenician-
Regular.ttf', name='Noto Sans Phoenician', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansSyriac-
Regular.ttf', name='Noto Sans Syriac', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsans10-regular.otf', name='Latin Modern Sans',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/TlwgTypo-BoldOblique.otf',
name='Tlwg Typo', style='oblique', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/cantarell/Cantarell-
Regular.otf', name='Cantarell', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/TlwgTypo-Bold.otf',
name='Tlwg Typo', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/malayalam/Karumbi-Regular.ttf',
name='Karumbi', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
opentype/artemisia/GFSArtemisiaBoldIt.otf', name='GFS Didot', style='italic',
variant='normal', weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyretermes-italic.otf', name='TeX Gyre Termes', style='italic',
variant='normal', weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/cantarell/Cantarell-
ExtraBold.otf', name='Cantarell', style='normal', variant='normal', weight=800,
stretch='normal', size='scalable')) = 10.43
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoCondensed-Italic.ttf', name='Roboto Condensed',
style='italic', variant='normal', weight=400, stretch='condensed',
size='scalable')) = 11.25
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsansquot8-regular.otf', name='Latin Modern Sans
Quotation', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation/LiberationSerif-
BoldItalic.ttf', name='Liberation Serif', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Waree-Bold.otf',
name='Waree', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/P052-Roman.otf',
name='P052', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifGeorgian-
Regular.ttf', name='Noto Serif Georgian', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/malayalam/AnjaliOldLipi-
Regular.ttf', name='AnjaliOldLipi', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansSoraSompeng-
Bold.ttf', name='Noto Sans Sora Sompeng', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ubuntu/UbuntuMono-RI.ttf',
name='Ubuntu Mono', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXSizeFourSym-Bold.otf',
name='STIXSizeFourSym', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/complutum/GFSPolyglot.otf',
name='GFS Complutum', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentiumplus/GentiumBookPlus-
Regular.ttf', name='Gentium Book Plus', style='normal', variant='normal',
weight=500, stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/UniversalisADFStd-
BoldCondIt.otf', name='Universalis ADF Std', style='italic', variant='normal',
weight=700, stretch='condensed', size='scalable')) = 11.535
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifBengali-
Bold.ttf', name='Noto Serif Bengali', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/adf/AccanthisADFStdNo2-Bold.otf', name='Accanthis ADF Std No2',
style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tibetan-
machine/TibetanMachineUni.ttf', name='Tibetan Machine Uni', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-yrsa-rasa/Yrsa-Bold.ttf',
name='Yrsa', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Norasi-Oblique.ttf',
name='Norasi', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMendeKikakui-
Regular.ttf', name='Noto Sans Mende Kikakui', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifYezidi-Bold.ttf',
name='Noto Serif Yezidi', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-gyre-
math/texgyredejavu-math.otf', name='TeX Gyre DejaVu Math', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansEthiopic-
Bold.ttf', name='Noto Sans Ethiopic', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lohit-kannada/Lohit-
Kannada.ttf', name='Lohit Kannada', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifLao-Bold.ttf',
name='Noto Serif Lao', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Garuda-Bold.ttf',
name='Garuda', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansSymbols-Bold.ttf',
name='Noto Sans Symbols', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentiumplus/GentiumPlus-
Regular.ttf', name='Gentium Plus', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyrepagella-regular.otf', name='TeX Gyre Pagella', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/bodoni-
classic/GFSBodoniClassic.otf', name='GFS BodoniClassic', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/opentype/malayalam/Manjari-Bold.otf',
name='Manjari', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
opentype/neohellenic/GFSNeohellenic.otf', name='GFS Neohellenic',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-kalapi/Kalapi.ttf',
name='Kalapi', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/linux-
libertine/LinBiolinum_K.otf', name='Linux Biolinum Keyboard O', style='normal',
variant='normal', weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/malayalam/Meera-Regular.ttf',
name='Meera', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsans8-regular.otf', name='Latin Modern Sans',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/comfortaa/Comfortaa-Light.ttf',
name='Comfortaa', style='normal', variant='normal', weight=300,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation2/LiberationSans-
Italic.ttf', name='Liberation Sans', style='italic', variant='normal',
weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyreheroscn-bold.otf', name='TeX Gyre Heros Cn', style='normal',
variant='normal', weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation2/LiberationSerif-
Italic.ttf', name='Liberation Serif', style='italic', variant='normal',
weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXSizeTwoSym-Bold.otf',
name='STIXSizeTwoSym', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/malayalam/Keraleeyam-
Regular.ttf', name='Keraleeyam', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXSizeOneSym-Bold.otf',
name='STIXSizeOneSym', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-gyre-
math/texgyreschola-math.otf', name='TeX Gyre Schola Math', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Sawasdee-Bold.otf',
name='Sawasdee', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmonoltcond10-oblique.otf', name='Latin Modern Mono
Light Cond', style='oblique', variant='normal', weight=400, stretch='condensed',
size='scalable')) = 11.25
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/C059-BdIta.otf',
name='C059', style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/teluguvijayam/Ramaraja-
Regular.ttf', name='Ramaraja', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/teluguvijayam/PottiSreeramulu.ttf', name='Potti Sreeramulu',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansOldPersian-
Regular.ttf', name='Noto Sans Old Persian', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansSylotiNagri-
Regular.ttf', name='Noto Sans Syloti Nagri', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansJavanese-
Regular.ttf', name='Noto Sans Javanese', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/cabin/Cabin-Medium.otf',
name='Cabin', style='normal', variant='normal', weight=500, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifKannada-
Bold.ttf', name='Noto Serif Kannada', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
```

```
truetype/adf/AccanthisADFStdNo3-Italic.otf', name='Accanthis ADF Std No3',
style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-core/UnPilgi.ttf',
name='UnPilgi', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation2/LiberationMono-
Italic.ttf', name='Liberation Mono', style='italic', variant='normal',
weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/inconsolata/Inconsolata.otf',
name='Inconsolata', style='normal', variant='normal', weight=500,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifArmenian-
Regular.ttf', name='Noto Serif Armenian', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-beng-
extra/MitraMono.ttf', name='Mitra ', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansDisplay-
BoldItalic.ttf', name='Noto Sans Display', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMalayalam-
Bold.ttf', name='Noto Sans Malayalam', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifTamilSlanted-
Bold.ttf', name='Noto Serif Tamil Slanted', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Garuda-Bold.otf',
name='Garuda', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/UniversalisADFStd-
CondItalic.otf', name='Universalis ADF Std', style='italic', variant='normal',
weight=400, stretch='condensed', size='scalable')) = 11.25
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmonoproplt10-boldoblique.otf', name='Latin Modern
Mono Prop Light', style='oblique', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXIntegralsUpSm-
Regular.otf', name='STIXIntegralsUpSm', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-orya-extra/utkal.ttf',
name='ori1Uni', style='normal', variant='normal', weight=500, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansJavanese-
Bold.ttf', name='Noto Sans Javanese', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoCondensed-LightItalic.ttf', name='Roboto
Condensed', style='italic', variant='normal', weight=300, stretch='condensed',
size='scalable')) = 11.344999999999999
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-SemiboldItalic.ttf',
name='Lato', style='italic', variant='normal', weight=600, stretch='normal',
size='scalable')) = 11.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyrecursor-bold.otf', name='TeX Gyre Cursor', style='normal',
variant='normal', weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansUgaritic-
Regular.ttf', name='Noto Sans Ugaritic', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Kinnari-BoldOblique.otf',
name='Kinnari', style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman6-regular.otf', name='Latin Modern Roman',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansOldItalic-
Regular.ttf', name='Noto Sans Old Italic', style='italic', variant='normal',
weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/TlwgTypewriter-
Oblique.ttf', name='Tlwg Typewriter', style='oblique', variant='normal',
weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoTTF/Roboto-Bold.ttf', name='Roboto',
style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/opentype/stix-word/STIX-BoldItalic.otf',
name='STIX', style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Umpush-Oblique.ttf',
name='Umpush', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman10-bolditalic.otf', name='Latin Modern Roman',
style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmono8-regular.otf', name='Latin Modern Mono',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/noto/NotoSansCanadianAboriginal-Regular.ttf', name='Noto Sans Canadian
Aboriginal', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/UniversalisADFStd-
BoldCond.otf', name='Universalis ADF Std', style='normal', variant='normal',
weight=700, stretch='condensed', size='scalable')) = 10.535
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation/LiberationMono-
Regular.ttf', name='Liberation Mono', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifTangut-
Regular.ttf', name='Noto Serif Tangut', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/fonts-go/Go-Medium.ttf', name='Go
Medium', style='normal', variant='normal', weight=500, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Laksaman.ttf',
name='Laksaman', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansOsmanya-
Regular.ttf', name='Noto Sans Osmanya', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-guru-extra/Saab.ttf',
name='Saab', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifAhom-
Regular.ttf', name='Noto Serif Ahom', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTaiTham-
Regular.ttf', name='Noto Sans Tai Tham', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansOldHungarian-
Regular.ttf', name='Noto Sans Old Hungarian', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifLao-Regular.ttf',
name='Noto Serif Lao', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifThai-Bold.ttf',
name='Noto Serif Thai', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifGeorgian-
Bold.ttf', name='Noto Serif Georgian', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoCondensed-Regular.ttf', name='Roboto Condensed',
style='normal', variant='normal', weight=400, stretch='condensed',
size='scalable')) = 10.25
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyreadventor-bold.otf', name='TeX Gyre Adventor', style='normal',
variant='normal', weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/NimbusRoman-
Bold.otf', name='Nimbus Roman', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/GilliusADFNo2-Regular.otf',
name='Gillius ADF No2', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation2/LiberationSans-
BoldItalic.ttf', name='Liberation Sans', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
opentype/ebgaramond/EBGaramondSC12-Regular.otf', name='EB Garamond SC',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansBengali-Bold.ttf',
name='Noto Sans Bengali', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/arphic-gkai00mp/gkai00mp.ttf',
name='AR PL KaitiM GB', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-extra/UnYetgul.ttf',
name='UnYetgul', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifEthiopic-
Bold.ttf', name='Noto Serif Ethiopic', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation/LiberationSans-
Bold.ttf', name='Liberation Sans', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentium/GentiumAlt-I.ttf',
name='GentiumAlt', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/TlwgMono-Bold.otf',
name='Tlwg Mono', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-deva-
extra/chandas1-2.ttf', name='Chandas', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansRejang-
Regular.ttf', name='Noto Sans Rejang', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/freefont/FreeSerifItalic.ttf',
name='FreeSerif', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansDevanagari-
Bold.ttf', name='Noto Sans Devanagari', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-extra/UnJamoSora.ttf',
name='UnJamoSora', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMalayalam-
Regular.ttf', name='Noto Sans Malayalam', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
opentype/ebgaramond/EBGaramond12-Italic.otf', name='EB Garamond',
style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentiumplus-
compact/GentiumPlusCompact-R.ttf', name='Gentium Plus Compact', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/liberation/LiberationSansNarrow-BoldItalic.ttf', name='Liberation Sans
Narrow', style='italic', variant='normal', weight=700, stretch='condensed',
size='scalable')) = 11.535
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-extra/UnJamoDotum.ttf',
name='UnJamoDotum', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ttf-khmeros-core/KhmerOS.ttf',
name='Khmer OS', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansPsalterPahlavi-
Regular.ttf', name='Noto Sans Psalter Pahlavi', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/cabin/Cabin-Bold.otf',
name='Cabin', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/solomos/GFSSolomos.otf',
name='GFS Solomos', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation2/LiberationSerif-
BoldItalic.ttf', name='Liberation Serif', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentium/Gentium-R.ttf',
name='Gentium', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation/LiberationSerif-
Bold.ttf', name='Liberation Serif', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansNewa-Regular.ttf',
name='Noto Sans Newa', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-extra/UnJamoNovel.ttf',
name='UnJamoNovel', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/Sahadeva/sahadeva.ttf',
name='Sahadeva', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmonolt10-bold.otf', name='Latin Modern Mono Light',
style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lohit-devanagari/Lohit-
Devanagari.ttf', name='Lohit Devanagari', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Norasi-BoldItalic.otf',
name='Norasi', style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Kinnari-BoldOblique.ttf',
name='Kinnari', style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentium-basic/GenBasI.ttf',
name='Gentium Basic', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Laksaman-Bold.ttf',
name='Laksaman', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Waree-Oblique.ttf',
name='Waree', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/NimbusSansNarrow-
Bold.otf', name='Nimbus Sans Narrow', style='normal', variant='normal',
weight=700, stretch='condensed', size='scalable')) = 10.535
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansLinearB-
Regular.ttf', name='Noto Sans Linear B', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/adf/BerenisADFPro-Regular.otf',
name='Berenis ADF Pro', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/ipafont-gothic/ipagp.ttf',
name='IPAPGothic', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansVai-Regular.ttf',
name='Noto Sans Vai', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-japanese-gothic.ttf',
name='IPAexGothic', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSansCondensed-
BoldOblique.ttf', name='DejaVu Sans', style='oblique', variant='normal',
weight=700, stretch='condensed', size='scalable')) = 1.535
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Loma.ttf', name='Loma',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/Sarai/Sarai.ttf', name='Sarai',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/asana-math/Asana-Math.otf',
name='Asana Math', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansOriya-
Regular.ttf', name='Noto Sans Oriya', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-beng-
extra/Muktibold.ttf', name='Mukti', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/fonts-hosny-
amiri/AmiriQuran.ttf', name='Amiri Quran', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/noto/NotoSansTifinaghTawellemmet-Regular.ttf', name='Noto Sans Tifinagh
Tawellemmet', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Garuda.ttf',
name='Garuda', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansDeseret-
Regular.ttf', name='Noto Sans Deseret', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ebgaramond/EBGaramond-
InitialsF2.ttf', name='EB Garamond Initials Fill2', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/adf/AccanthisADFStdNo2-BoldItalic.otf', name='Accanthis ADF Std No2',
style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifGurmukhi-
Regular.ttf', name='Noto Serif Gurmukhi', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansBamum-Bold.ttf',
name='Noto Sans Bamum', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansHebrew-
Regular.ttf', name='Noto Sans Hebrew', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ebgaramond/EBGaramond-
Initials.ttf', name='EB Garamond Initials', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/teluguvijayam/NTR.ttf',
name='NTR', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoCondensed-BoldItalic.ttf', name='Roboto
Condensed', style='italic', variant='normal', weight=700, stretch='condensed',
size='scalable')) = 11.535
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/freefont/FreeMono.ttf',
name='FreeMono', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/padauk/PadaukBook-Bold.ttf',
name='Padauk Book', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Kinnari-Italic.otf',
name='Kinnari', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansNabataean-
Regular.ttf', name='Noto Sans Nabataean', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoTTF/Roboto-ThinItalic.ttf', name='Roboto',
style='italic', variant='normal', weight=250, stretch='normal',
size='scalable')) = 11.1925
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/padauk/PadaukBook-Regular.ttf',
name='Padauk Book', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Garuda-Oblique.ttf',
name='Garuda', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmromancaps10-regular.otf', name='Latin Modern Roman
Caps', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifGrantha-
Regular.ttf', name='Noto Serif Grantha', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/noto/NotoSerifNyiakengPuachueHmong-Bold.ttf', name='Noto Serif Hmong
Nyiakeng', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-Semibold.ttf',
name='Lato', style='normal', variant='normal', weight=600, stretch='normal',
size='scalable')) = 10.24
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman8-italic.otf', name='Latin Modern Roman',
style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/P052-Italic.otf',
name='P052', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSerif.ttf',
name='DejaVu Serif', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/fonts-go/Go-Smallcaps-Italic.ttf',
name='Go Smallcaps', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifDisplay-
BoldItalic.ttf', name='Noto Serif Display', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMahajani-
Regular.ttf', name='Noto Sans Mahajani', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/crosextra/Carlito-Bold.ttf',
name='Carlito', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerif-Italic.ttf',
name='Noto Serif', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMono-Bold.ttf',
name='Noto Sans Mono', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansBhaiksuki-
Regular.ttf', name='Noto Sans Bhaiksuki', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/BerenisADFPro-Italic.otf',
name='Berenis ADF Pro', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/freefont/FreeSerifItalic.otf',
name='FreeSerif', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsans12-oblique.otf', name='Latin Modern Sans',
style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsans10-boldoblique.otf', name='Latin Modern Sans',
style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/teluguvijayam/LakkiReddy.ttf',
name='LakkiReddy', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansKannada-Bold.ttf',
name='Noto Sans Kannada', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/freefont/FreeSansOblique.ttf',
name='FreeSans', style='oblique', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/TlwgTypist-Bold.otf',
name='Tlwg Typist', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/adf/AccanthisADFStdNo3-Bold.otf', name='Accanthis ADF Std No3',
style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/TlwgTypewriter-
BoldOblique.ttf', name='Tlwg Typewriter', style='oblique', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lohit-bengali/Lohit-
Bengali.ttf', name='Lohit Bengali', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/freefont/FreeSansBold.otf',
name='FreeSans', style='normal', variant='normal', weight=600, stretch='normal',
size='scalable')) = 10.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/open-sans/OpenSans-
BoldItalic.ttf', name='Open Sans', style='italic', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansRunic-
Regular.ttf', name='Noto Sans Runic', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/malayalam/Rachana-Regular.ttf',
name='Rachana', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ubuntu/UbuntuMono-BI.ttf',
name='Ubuntu Mono', style='italic', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/TlwgTypo.otf', name='Tlwg
Typo', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/malayalam/RaghuMalayalamSans-
Regular.ttf', name='RaghuMalayalamSans', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTaiTham-Bold.ttf',
name='Noto Sans Tai Tham', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifMyanmar-
Bold.ttf', name='Noto Serif Myanmar', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Kinnari.ttf',
name='Kinnari', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ubuntu/Ubuntu-C.ttf',
name='Ubuntu Condensed', style='normal', variant='normal', weight=400,
stretch='condensed', size='scalable')) = 10.25
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTifinaghAzawagh-
Regular.ttf', name='Noto Sans Tifinagh Azawagh', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoLoopedThai-
Regular.ttf', name='Noto Looped Thai', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsans10-oblique.otf', name='Latin Modern Sans',
style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/linux-
libertine/LinBiolinum_R.otf', name='Linux Biolinum O', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyrecursor-regular.otf', name='TeX Gyre Cursor', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/TlwgTypo-Oblique.ttf',
name='Tlwg Typo', style='oblique', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Norasi-Bold.ttf',
name='Norasi', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-extra/UnPilgia.ttf',
name='UnPilgia', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmonocaps10-oblique.otf', name='Latin Modern Mono
Caps', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTifinagh-
Regular.ttf', name='Noto Sans Tifinagh', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/linux-
libertine/LinLibertine_RI.otf', name='Linux Libertine O', style='italic',
variant='normal', weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMasaramGondi-
Regular.ttf', name='Noto Sans Masaram Gondi', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMath-Regular.ttf',
name='Noto Sans Math', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/TlwgTypewriter.otf',
name='Tlwg Typewriter', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Kinnari-Oblique.ttf',
name='Kinnari', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/teluguvijayam/TenaliRamakrishna-Regular.ttf', name='TenaliRamakrishna',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/crosextra/Carlito-Italic.ttf',
name='Carlito', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentium/Gentium-I.ttf',
name='Gentium', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-Italic.ttf',
name='Lato', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/opentype/lobstertwo/LobsterTwo-
Italic.otf', name='Lobster Two', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMyanmar-Bold.ttf',
name='Noto Sans Myanmar', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Loma.otf', name='Loma',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/fonts-hosny-
amiri/AmiriQuranColored.ttf', name='Amiri Quran Colored', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Purisa-Bold.ttf',
name='Purisa', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSans-BoldItalic.ttf',
name='Noto Sans', style='italic', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman10-bold.otf', name='Latin Modern Roman',
style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Kinnari-BoldItalic.ttf',
name='Kinnari', style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix-word/STIX-Bold.otf',
name='STIX', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/crosextra/Caladea-
BoldItalic.ttf', name='Caladea', style='italic', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansKharoshthi-
Regular.ttf', name='Noto Sans Kharoshthi', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/noto/NotoSansCJK-Bold.ttc',
name='Noto Sans CJK JP', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXIntegralsUpD-
Bold.otf', name='STIXIntegralsUpD', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/crosextra/Caladea-Italic.ttf',
name='Caladea', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/TlwgTypo-Bold.ttf',
name='Tlwg Typo', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman7-italic.otf', name='Latin Modern Roman',
style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTaiViet-
Regular.ttf', name='Noto Sans Tai Viet', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansGeorgian-
Bold.ttf', name='Noto Sans Georgian', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix-word/STIX-Italic.otf',
name='STIX', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoTTF/Roboto-Italic.ttf', name='Roboto',
style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentiumplus-
compact/GentiumPlusCompact-I.ttf', name='Gentium Plus Compact', style='italic',
variant='normal', weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/arphic-gbsn00lp/gbsn00lp.ttf',
name='AR PL SungtiL GB', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/Navilu/Navilu.ttf',
name='Navilu', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXIntegralsUpD-
Regular.otf', name='STIXIntegralsUpD', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/NimbusSans-
Italic.otf', name='Nimbus Sans', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/ipafont-mincho/ipamp.ttf',
name='IPAPMincho', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansLimbu-
Regular.ttf', name='Noto Sans Limbu', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/kacst/KacstDigital.ttf',
name='KacstDigital', style='normal', variant='normal', weight=500,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Loma-BoldOblique.ttf',
name='Loma', style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXNonUnicode-
Italic.otf', name='STIXNonUnicode', style='italic', variant='normal',
weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifSinhala-
Bold.ttf', name='Noto Serif Sinhala', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyreschola-bolditalic.otf', name='TeX Gyre Schola', style='italic',
variant='normal', weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansKayahLi-Bold.ttf',
name='Noto Sans Kayah Li', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/croscore/Cousine-
BoldItalic.ttf', name='Cousine', style='italic', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-HairlineItalic.ttf',
name='Lato', style='italic', variant='normal', weight=100, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansKhmer-
Regular.ttf', name='Noto Sans Khmer', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-beng-
extra/JamrulNormal.ttf', name='Jamrul', style='normal', variant='normal',
weight=500, stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/URWBookman-
DemiItalic.otf', name='URW Bookman', style='italic', variant='normal',
weight=600, stretch='normal', size='scalable')) = 11.24
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmromanslant8-regular.otf', name='Latin Modern Roman
Slanted', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsans12-regular.otf', name='Latin Modern Sans',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/kacst-one/KacstOne.ttf',
name='KacstOne', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansLao-Bold.ttf',
name='Noto Sans Lao', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/noto/NotoSansInscriptionalParthian-Regular.ttf', name='Noto Sans
Inscriptional Parthian', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/kacst/KacstTitleL.ttf',
name='KacstTitleL', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoNastaliqUrdu-
Regular.ttf', name='Noto Nastaliq Urdu', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/croscore/Cousine-Italic.ttf',
name='Cousine', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-Thin.ttf',
name='Lato', style='normal', variant='normal', weight=200, stretch='normal',
size='scalable')) = 10.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansDuployan-
Regular.ttf', name='Noto Sans Duployan', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-yrsa-rasa/Rasa-
Light.ttf', name='Rasa', style='normal', variant='normal', weight=300,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/liberation/LiberationSansNarrow-Regular.ttf', name='Liberation Sans
Narrow', style='normal', variant='normal', weight=400, stretch='condensed',
size='scalable')) = 10.25
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
opentype/ebgaramond/EBGaramond12-AllSC.otf', name='EB Garamond 12 All SC',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/adf/GilliusADFNo2-BoldCondItalic.otf', name='Gillius ADF No2',
style='italic', variant='normal', weight=700, stretch='condensed',
size='scalable')) = 11.535
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/adf/AccanthisADFStdNo2-Regular.otf', name='Accanthis ADF Std No2',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/TlwgTypist-Bold.ttf',
name='Tlwg Typist', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifHebrew-Bold.ttf',
name='Noto Serif Hebrew', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifBengali-
Regular.ttf', name='Noto Serif Bengali', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/TlwgTypewriter.ttf',
name='Tlwg Typewriter', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/noto/NotoSansTifinaghAgrawImazighen-Regular.ttf', name='Noto Sans
Tifinagh Agraw Imazighen', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/GilliusADFNo2-Cond.otf',
name='Gillius ADF No2', style='normal', variant='normal', weight=400,
stretch='condensed', size='scalable')) = 10.25
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansSharada-
Regular.ttf', name='Noto Sans Sharada', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Umpush-LightOblique.ttf',
name='Umpush', style='oblique', variant='normal', weight=300, stretch='normal',
size='scalable')) = 11.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/open-sans/OpenSans-
ExtraBoldItalic.ttf', name='Open Sans', style='italic', variant='normal',
weight=800, stretch='normal', size='scalable')) = 11.43
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmonoproplt10-bold.otf', name='Latin Modern Mono Prop
Light', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation2/LiberationMono-
BoldItalic.ttf', name='Liberation Mono', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmonoltcond10-regular.otf', name='Latin Modern Mono
Light Cond', style='normal', variant='normal', weight=400, stretch='condensed',
size='scalable')) = 10.25
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/ebgaramond/EBGaramond08-Italic.ttf', name='EB Garamond',
style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansHebrew-Bold.ttf',
name='Noto Sans Hebrew', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/didot/GFSDidotBoldItalic.otf',
name='GFS Didot', style='italic', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansBatak-
Regular.ttf', name='Noto Sans Batak', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifTibetan-
Bold.ttf', name='Noto Serif Tibetan', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/open-sans/OpenSans-
Semibold.ttf', name='Open Sans', style='normal', variant='normal', weight=600,
stretch='normal', size='scalable')) = 10.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-
base35/P052-BoldItalic.otf', name='P052', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/opentype/ipafont-mincho/ipam.ttf',
name='IPAMincho', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman5-bold.otf', name='Latin Modern Roman',
style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansThaana-Bold.ttf',
name='Noto Sans Thaana', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/TlwgMono-Bold.ttf',
name='Tlwg Mono', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/croscore/Arimo-Regular.ttf',
name='Arimo', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/TlwgMono-BoldOblique.ttf',
name='Tlwg Mono', style='oblique', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSerifCondensed-
BoldItalic.ttf', name='DejaVu Serif', style='italic', variant='normal',
weight=700, stretch='condensed', size='scalable')) = 11.535
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/malayalam/Dyuthi-Regular.ttf',
name='Dyuthi', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/fonts-go/Go-Medium-Italic.ttf', name='Go
Medium', style='italic', variant='normal', weight=500, stretch='normal',
size='scalable')) = 11.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/malayalam/Suruma.ttf',
name='Suruma', style='normal', variant='normal', weight=500, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentium-basic/GenBkBasBI.ttf',
name='Gentium Book Basic', style='italic', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/ipaexfont-mincho/ipaexm.ttf',
name='IPAexMincho', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/opentype/cantarell/Cantarell-Light.otf',
name='Cantarell', style='normal', variant='normal', weight=300,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansKhudawadi-
Regular.ttf', name='Noto Sans Khudawadi', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Laksaman-BoldItalic.otf',
name='Laksaman', style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/GilliusADF-Bold.otf',
name='Gillius ADF', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Umpush-BoldOblique.otf',
name='Umpush', style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Umpush-LightOblique.otf',
name='Umpush', style='oblique', variant='normal', weight=300, stretch='normal',
size='scalable')) = 11.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansDisplay-
Regular.ttf', name='Noto Sans Display', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-extra/UnPen.ttf',
name='UnPen', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifTamil-Bold.ttf',
name='Noto Serif Tamil', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmromanslant10-bold.otf', name='Latin Modern Roman
Slanted', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/C059-Roman.otf',
name='C059', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/teluguvijayam/dhurjati.ttf',
name='Dhurjati', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Loma-Oblique.ttf',
name='Loma', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyreheroscn-italic.otf', name='TeX Gyre Heros Cn', style='italic',
variant='normal', weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansBalinese-
Regular.ttf', name='Noto Sans Balinese', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansLinearA-
Regular.ttf', name='Noto Sans Linear A', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Sawasdee-Oblique.otf',
name='Sawasdee', style='oblique', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-gujr-extra/padmaa-
Bold.1.1.ttf', name='padmaa-Bold.1.1', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMeeteiMayek-
Regular.ttf', name='Noto Sans Meetei Mayek', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansBengali-
Regular.ttf', name='Noto Sans Bengali', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation/LiberationSans-
Regular.ttf', name='Liberation Sans', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-gujr-extra/aakar-
medium.ttf', name='aakar', style='normal', variant='normal', weight=500,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMro-Regular.ttf',
name='Noto Sans Mro', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-deva-extra/samanata.ttf',
name='Samanata', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/adf/AccanthisADFStd-
Italic.otf', name='Accanthis ADF Std', style='italic', variant='normal',
weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/freefont/FreeSerifBold.ttf',
name='FreeSerif', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifTamil-
Regular.ttf', name='Noto Serif Tamil', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/GilliusADFNo2-Italic.otf',
name='Gillius ADF No2', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/NimbusSans-
Bold.otf', name='Nimbus Sans', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Garuda.otf',
name='Garuda', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmono12-regular.otf', name='Latin Modern Mono',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsansdemicond10-oblique.otf', name='Latin Modern Sans
Demi Cond', style='oblique', variant='normal', weight=600, stretch='condensed',
size='scalable')) = 11.44
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-Medium.ttf',
name='Lato', style='normal', variant='normal', weight=500, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMongolian-
Regular.ttf', name='Noto Sans Mongolian', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-yrsa-rasa/Yrsa-
BoldItalic.ttf', name='Yrsa', style='italic', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansManichaean-
Regular.ttf', name='Noto Sans Manichaean', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/URWBookman-
LightItalic.otf', name='URW Bookman', style='italic', variant='normal',
weight=300, stretch='normal', size='scalable')) = 11.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansLydian-
Regular.ttf', name='Noto Sans Lydian', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/Gargi/Gargi.ttf', name='Gargi',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTakri-
Regular.ttf', name='Noto Sans Takri', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTifinaghGhat-
Regular.ttf', name='Noto Sans Tifinagh Ghat', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-beng-extra/Ani.ttf',
name='Ani', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansCuneiform-
Regular.ttf', name='Noto Sans Cuneiform', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/fonts-go/Go-Mono-Bold.ttf', name='Go
Mono', style='normal', variant='normal', weight=600, stretch='normal',
size='scalable')) = 10.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Umpush-Light.otf',
name='Umpush', style='normal', variant='normal', weight=300, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Garuda-BoldOblique.otf',
name='Garuda', style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTagalog-
Regular.ttf', name='Noto Sans Tagalog', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/GilliusADF-BoldItalic.otf',
name='Gillius ADF', style='italic', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-BlackItalic.ttf',
name='Lato', style='italic', variant='normal', weight=900, stretch='normal',
size='scalable')) = 11.525
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Sawasdee-BoldOblique.otf',
name='Sawasdee', style='oblique', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansSiddham-
Regular.ttf', name='Noto Sans Siddham', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lohit-gujarati/Lohit-
Gujarati.ttf', name='Lohit Gujarati', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Laksaman-Italic.otf',
name='Laksaman', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyrepagella-bolditalic.otf', name='TeX Gyre Pagella', style='italic',
variant='normal', weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman12-italic.otf', name='Latin Modern Roman',
style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/malayalam/Manjari-Thin.otf',
name='Manjari', style='normal', variant='normal', weight=100, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansCherokee-
Regular.ttf', name='Noto Sans Cherokee', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/didot/GFSDidotItalic.otf',
name='GFS Didot', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/cabin/Cabin-
SemiBoldItalic.otf', name='Cabin', style='italic', variant='normal', weight=600,
stretch='normal', size='scalable')) = 11.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansBassaVah-
Regular.ttf', name='Noto Sans Bassa Vah', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyreheros-bold.otf', name='TeX Gyre Heros', style='normal',
variant='normal', weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
opentype/ebgaramond/EBGaramond12-Regular.otf', name='EB Garamond',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifDisplay-
Regular.ttf', name='Noto Serif Display', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMiao-Regular.ttf',
name='Noto Sans Miao', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansDisplay-
Italic.ttf', name='Noto Sans Display', style='italic', variant='normal',
weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lohit-oriya/Lohit-Odia.ttf',
name='Lohit Odia', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/croscore/Arimo-BoldItalic.ttf',
name='Arimo', style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmono10-regular.otf', name='Latin Modern Mono',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/freefont/FreeMonoBoldOblique.ttf', name='FreeMono', style='oblique',
variant='normal', weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoKufiArabic-
Regular.ttf', name='Noto Kufi Arabic', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/crosextra/Carlito-
BoldItalic.ttf', name='Carlito', style='italic', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/kacst/KacstQurn.ttf',
name='KacstQurn', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifGujarati-
```

```
Regular.ttf', name='Noto Serif Gujarati', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsans9-oblique.otf', name='Latin Modern Sans',
style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansAdlam-Bold.ttf',
name='Noto Sans Adlam', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentiumplus/GentiumBookPlus-
Bold.ttf', name='Gentium Book Plus', style='normal', variant='normal',
weight=800, stretch='normal', size='scalable')) = 10.43
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansOgham-
Regular.ttf', name='Noto Sans Ogham', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/abyssinica/AbyssinicaSIL-
Regular.ttf', name='Abyssinica SIL', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMono-Regular.ttf',
name='Noto Sans Mono', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/TlwgTypist-Oblique.ttf',
name='Tlwg Typist', style='oblique', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXIntegralsD-
Regular.otf', name='STIXIntegralsD', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXIntegralsSm-
Regular.otf', name='STIXIntegralsSm', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifKannada-
Regular.ttf', name='Noto Serif Kannada', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
opentype/freefont/FreeSerifBoldItalic.otf', name='FreeSerif', style='italic',
variant='normal', weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsans8-oblique.otf', name='Latin Modern Sans',
style='oblique', variant='normal', weight=400, stretch='normal',
```

```
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix-word/STIXMath-
Regular.otf', name='STIX Math', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Waree-BoldOblique.otf',
name='Waree', style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifGurmukhi-
Bold.ttf', name='Noto Serif Gurmukhi', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/olga/GFSOlga.otf', name='GFS
Olga', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/teluguvijayam/Peddana-
Regular.ttf', name='Peddana', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/GilliusADF-
BoldCondItalic.otf', name='Gillius ADF', style='italic', variant='normal',
weight=700, stretch='condensed', size='scalable')) = 11.535
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMedefaidrin-
Regular.ttf', name='Noto Sans Medefaidrin', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/fonts-go/Go-Smallcaps.ttf', name='Go
Smallcaps', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/noto/NotoSansCanadianAboriginal-Bold.ttf', name='Noto Sans Canadian
Aboriginal', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansNKo-Regular.ttf',
name='Noto Sans NKo', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmono9-regular.otf', name='Latin Modern Mono',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation2/LiberationMono-
Regular.ttf', name='Liberation Mono', style='normal', variant='normal',
```

```
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/teluguvijayam/Suravaram.ttf',
name='Suravaram', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTifinaghSIL-
Regular.ttf', name='Noto Sans Tifinagh SIL', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyreadventor-bolditalic.otf', name='TeX Gyre Adventor', style='italic',
variant='normal', weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifKhojki-
Regular.ttf', name='Noto Serif Khojki', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSerif-
BoldItalic.ttf', name='DejaVu Serif', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/P052-Bold.otf',
name='P052', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/malayalam/Gayathri-Thin.otf',
name='Gayathri', style='normal', variant='normal', weight=100, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
opentype/freefont/FreeSansBoldOblique.otf', name='FreeSans', style='oblique',
variant='normal', weight=600, stretch='normal', size='scalable')) = 11.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifKhmer-
Regular.ttf', name='Noto Serif Khmer', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/ebgaramond/EBGaramond-
InitialsF1.otf', name='EB Garamond Initials Fill1', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/URWGothic-
DemiOblique.otf', name='URW Gothic', style='oblique', variant='normal',
weight=600, stretch='normal', size='scalable')) = 11.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSansMono-
Bold.ttf', name='DejaVu Sans Mono', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/junicode/Junicode-
BoldItalic.ttf', name='Junicode', style='italic', variant='normal', weight=600,
stretch='normal', size='scalable')) = 11.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansBuhid-
Regular.ttf', name='Noto Sans Buhid', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/adf/GilliusADFNo2-CondItalic.otf', name='Gillius ADF No2',
style='italic', variant='normal', weight=400, stretch='condensed',
size='scalable')) = 11.25
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-
core/UnDinaruLight.ttf', name='UnDinaru', style='normal', variant='normal',
weight=300, stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/fonts-go/Go-Mono-Bold-Italic.ttf',
name='Go Mono', style='italic', variant='normal', weight=600, stretch='normal',
size='scalable')) = 11.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/kacst/KacstTitle.ttf',
name='KacstTitle', style='normal', variant='normal', weight=500,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman8-regular.otf', name='Latin Modern Roman',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoTTF/Roboto-BlackItalic.ttf', name='Roboto',
style='italic', variant='normal', weight=900, stretch='normal',
size='scalable')) = 11.525
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-gyre-
math/texgyrepagella-math.otf', name='TeX Gyre Pagella Math', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmonoprop10-oblique.otf', name='Latin Modern Mono
Prop', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmromanunsl10-regular.otf', name='Latin Modern Roman
Unslanted', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXGeneral-
BoldItalic.otf', name='STIXGeneral', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansLepcha-
Regular.ttf', name='Noto Sans Lepcha', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-extra/UnVada.ttf',
name='UnVada', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-yrsa-rasa/Yrsa-
Medium.ttf', name='Yrsa', style='normal', variant='normal', weight=500,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation/LiberationSerif-
Italic.ttf', name='Liberation Serif', style='italic', variant='normal',
weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansKhojki-
Regular.ttf', name='Noto Sans Khojki', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Norasi-Italic.ttf',
name='Norasi', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansSinhala-
Regular.ttf', name='Noto Sans Sinhala', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentium-basic/GenBasR.ttf',
name='Gentium Basic', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Purisa.ttf',
name='Purisa', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoTTF/Roboto-BoldItalic.ttf', name='Roboto',
style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/kacst/KacstPen.ttf',
name='KacstPen', style='normal', variant='normal', weight=500, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/freefont/FreeMonoOblique.otf',
name='FreeMono', style='oblique', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifTelugu-Bold.ttf',
name='Noto Serif Telugu', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXSizeThreeSym-
Bold.otf', name='STIXSizeThreeSym', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/BerenisADFPro-
BoldItalic.otf', name='Berenis ADF Pro', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansElymaic-
Regular.ttf', name='Noto Sans Elymaic', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/comfortaa/Comfortaa-
Regular.ttf', name='Comfortaa', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman8-bold.otf', name='Latin Modern Roman',
style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/TlwgMono-Oblique.otf',
name='Tlwg Mono', style='oblique', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansNushu-
Regular.ttf', name='Noto Sans Nushu', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-core/UnGungseo.ttf',
name='UnGungseo', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/kacst/KacstLetter.ttf',
name='KacstLetter', style='normal', variant='normal', weight=500,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/noto/NotoSansSymbols2-Regular.ttf', name='Noto Sans Symbols2',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/AccanthisADFStd-Bold.otf',
name='Accanthis ADF Std', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSans-Bold.ttf',
name='Noto Sans', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentium-basic/GenBkBasR.ttf',
name='Gentium Book Basic', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/TlwgMono.otf', name='Tlwg
Mono', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansArabic-
Regular.ttf', name='Noto Sans Arabic', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-yrsa-rasa/Yrsa-
Light.ttf', name='Yrsa', style='normal', variant='normal', weight=300,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/URWBookman-
Light.otf', name='URW Bookman', style='normal', variant='normal', weight=300,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-yrsa-rasa/Rasa-
SemiBold.ttf', name='Rasa', style='normal', variant='normal', weight=600,
stretch='normal', size='scalable')) = 10.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyrebonum-bold.otf', name='TeX Gyre Bonum', style='normal',
variant='normal', weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-core/UnDotum.ttf',
name='UnDotum', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman7-regular.otf', name='Latin Modern Roman',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Umpush-Bold.otf',
name='Umpush', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansGurmukhi-
Bold.ttf', name='Noto Sans Gurmukhi', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansAdlamUnjoined-
Bold.ttf', name='Noto Sans Adlam Unjoined', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Kinnari-BoldItalic.otf',
name='Kinnari', style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
opentype/ebgaramond/EBGaramond08-Regular.otf', name='EB Garamond',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansCham-Regular.ttf',
name='Noto Sans Cham', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmonoproplt10-regular.otf', name='Latin Modern Mono
Prop Light', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/UniversalisADFStd-
Regular.otf', name='Universalis ADF Std', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansZanabazarSquare-
Regular.ttf', name='Noto Sans Zanabazar Square', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-ThinItalic.ttf',
name='Lato', style='italic', variant='normal', weight=200, stretch='normal',
size='scalable')) = 11.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansIndicSiyaqNumbers-
Regular.ttf', name='Noto Sans Indic Siyaq Numbers', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/malayalam/Rachana-Bold.ttf',
name='Rachana', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman9-regular.otf', name='Latin Modern Roman',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTifinaghAdrar-
Regular.ttf', name='Noto Sans Tifinagh Adrar', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifYezidi-
Regular.ttf', name='Noto Serif Yezidi', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmonoproplt10-oblique.otf', name='Latin Modern Mono
Prop Light', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoCondensed-Medium.ttf', name='Roboto Condensed',
style='normal', variant='normal', weight=500, stretch='condensed',
size='scalable')) = 10.344999999999999
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansGeorgian-
Regular.ttf', name='Noto Sans Georgian', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/teluguvijayam/RaviPrakash.ttf',
name='RaviPrakash', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyretermes-bolditalic.otf', name='TeX Gyre Termes', style='italic',
variant='normal', weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/croscore/Tinos-Bold.ttf',
name='Tinos', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansGrantha-
Regular.ttf', name='Noto Sans Grantha', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifTamilSlanted-
Regular.ttf', name='Noto Serif Tamil Slanted', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/artemisia/GFSArtemisia.otf',
name='GFS Artemisia', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman7-bold.otf', name='Latin Modern Roman',
style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-telu-
extra/vemana2000.ttf', name='Vemana2000', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/cabin/Cabin-BoldItalic.otf',
name='Cabin', style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoTraditionalNushu-
Regular.ttf', name='Noto Traditional Nushu', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/noto/NotoSerifCJK-Regular.ttc',
name='Noto Serif CJK JP', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyrechorus-mediumitalic.otf', name='TeX Gyre Chorus', style='normal',
variant='normal', weight=500, stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/linux-
libertine/LinLibertine_RZI.otf', name='Linux Libertine O', style='italic',
variant='normal', weight=600, stretch='normal', size='scalable')) = 11.24
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoTTF/Roboto-Black.ttf', name='Roboto',
style='normal', variant='normal', weight=900, stretch='normal',
size='scalable')) = 10.525
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/croscore/Tinos-BoldItalic.ttf',
name='Tinos', style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/lobstertwo/LobsterTwo-
Bold.otf', name='Lobster Two', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
opentype/neohellenic/GFSNeohellenicBold.otf', name='GFS Neohellenic',
style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/TlwgTypewriter-
BoldOblique.otf', name='Tlwg Typewriter', style='oblique', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/freefont/FreeMono.otf',
name='FreeMono', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyrebonum-regular.otf', name='TeX Gyre Bonum', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
```

```
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsansquot8-boldoblique.otf', name='Latin Modern Sans
Quotation', style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSerifCondensed-
Bold.ttf', name='DejaVu Serif', style='normal', variant='normal', weight=700,
stretch='condensed', size='scalable')) = 10.535
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansYi-Regular.ttf',
name='Noto Sans Yi', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/fonts-go/Go-Italic.ttf', name='Go',
style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMyanmar-
Regular.ttf', name='Noto Sans Myanmar', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/kacst/KacstOffice.ttf',
name='KacstOffice', style='normal', variant='normal', weight=500,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Kinnari-Bold.otf',
name='Kinnari', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/junicode/Junicode-Bold.ttf',
name='Junicode', style='normal', variant='normal', weight=600, stretch='normal',
size='scalable')) = 10.24
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsans9-regular.otf', name='Latin Modern Sans',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/ipaexfont-gothic/ipaexg.ttf',
name='IPAexGothic', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyrebonum-italic.otf', name='TeX Gyre Bonum', style='italic',
variant='normal', weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/open-sans/OpenSans-Light.ttf',
name='Open Sans', style='normal', variant='normal', weight=300,
stretch='normal', size='scalable')) = 10.145
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/freefont/FreeMonoOblique.ttf',
name='FreeMono', style='oblique', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ubuntu/Ubuntu-B.ttf',
name='Ubuntu', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: Matching
sans\-serif:style=normal:variant=normal:weight=normal:stretch=normal:size=10.0
to DejaVu Sans ('/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/DejaVuSans.ttf') with score of 0.050000.
DEBUG:matplotlib.font_manager:findfont: Matching
sans\-serif:style=normal:variant=normal:weight=normal:stretch=normal:size=12.0.
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/STIXNonUni.ttf', name='STIXNonUnicode',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/STIXSizFourSymReg.ttf',
name='STIXSizeFourSym', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/DejaVuSans-Oblique.ttf', name='DejaVu
Sans', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 1.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/STIXSizOneSymBol.ttf',
name='STIXSizeOneSym', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/DejaVuSansMono-Oblique.ttf', name='DejaVu
Sans Mono', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/DejaVuSerif.ttf', name='DejaVu Serif',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/DejaVuSans.ttf', name='DejaVu Sans',
style='normal', variant='normal', weight=400, stretch='normal',
```

```
size='scalable')) = 0.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/STIXGeneralItalic.ttf',
name='STIXGeneral', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/STIXNonUniBolIta.ttf',
name='STIXNonUnicode', style='italic', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/STIXGeneral.ttf', name='STIXGeneral',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/STIXNonUniBol.ttf',
name='STIXNonUnicode', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/DejaVuSansMono.ttf', name='DejaVu Sans
Mono', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/DejaVuSansDisplay.ttf', name='DejaVu Sans
Display', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/STIXGeneralBol.ttf', name='STIXGeneral',
style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/STIXSizFourSymBol.ttf',
name='STIXSizeFourSym', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/DejaVuSansMono-Bold.ttf', name='DejaVu
Sans Mono', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
```

```
packages/matplotlib/mpl-data/fonts/ttf/DejaVuSerif-Bold.ttf', name='DejaVu
Serif', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/DejaVuSerif-BoldItalic.ttf', name='DejaVu
Serif', style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/STIXSizOneSymReg.ttf',
name='STIXSizeOneSym', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/cmex10.ttf', name='cmex10',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/DejaVuSans-BoldOblique.ttf', name='DejaVu
Sans', style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 1.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/DejaVuSerif-Italic.ttf', name='DejaVu
Serif', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/STIXSizTwoSymReg.ttf',
name='STIXSizeTwoSym', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/cmsy10.ttf', name='cmsy10',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/cmss10.ttf', name='cmss10',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/cmr10.ttf', name='cmr10', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/STIXSizTwoSymBol.ttf',
name='STIXSizeTwoSym', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/STIXNonUniIta.ttf',
name='STIXNonUnicode', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/cmmi10.ttf', name='cmmi10',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/STIXGeneralBolIta.ttf',
name='STIXGeneral', style='italic', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/DejaVuSerifDisplay.ttf', name='DejaVu
Serif Display', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/cmtt10.ttf', name='cmtt10',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/DejaVuSansMono-BoldOblique.ttf',
name='DejaVu Sans Mono', style='oblique', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/cmb10.ttf', name='cmb10', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/STIXSizThreeSymBol.ttf',
name='STIXSizeThreeSym', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/STIXSizThreeSymReg.ttf',
name='STIXSizeThreeSym', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/DejaVuSans-Bold.ttf', name='DejaVu Sans',
style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 0.33499999999999996
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/STIXSizFiveSymReg.ttf',
name='STIXSizeFiveSym', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/NimbusSans-
BoldItalic.otf', name='Nimbus Sans', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmonolt10-boldoblique.otf', name='Latin Modern Mono
Light', style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/freefont/FreeSansOblique.otf',
name='FreeSans', style='oblique', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTagbanwa-
Regular.ttf', name='Noto Sans Tagbanwa', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Sawasdee-Oblique.ttf',
name='Sawasdee', style='oblique', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/croscore/Arimo-Italic.ttf',
name='Arimo', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansLisu-Bold.ttf',
name='Noto Sans Lisu', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Umpush-Light.ttf',
name='Umpush', style='normal', variant='normal', weight=300, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXSizeTwoSym-
Regular.otf', name='STIXSizeTwoSym', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/AccanthisADFStd-
```

```
Regular.otf', name='Accanthis ADF Std', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-
extra/UnJamoBatang.ttf', name='UnJamoBatang', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXIntegralsSm-Bold.otf',
name='STIXIntegralsSm', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXNonUnicode-Bold.otf',
name='STIXNonUnicode', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoCondensed-Bold.ttf', name='Roboto Condensed',
style='normal', variant='normal', weight=700, stretch='condensed',
size='scalable')) = 10.535
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentiumplus/GentiumPlus-
Italic.ttf', name='Gentium Plus', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansBrahmi-
Regular.ttf', name='Noto Sans Brahmi', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/kacst/KacstNaskh.ttf',
name='KacstNaskh', style='normal', variant='normal', weight=500,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansHanunoo-
Regular.ttf', name='Noto Sans Hanunoo', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix-word/STIX-Regular.otf',
name='STIX', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansCaucasianAlbanian-
Regular.ttf', name='Noto Sans Caucasian Albanian', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTelugu-Bold.ttf',
name='Noto Sans Telugu', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
```

```
gyre/texgyretermes-bold.otf', name='TeX Gyre Termes', style='normal',
variant='normal', weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/cabin/Cabin-MediumItalic.otf',
name='Cabin', style='italic', variant='normal', weight=500, stretch='normal',
size='scalable')) = 11.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/malayalam/Uroob-Regular.ttf',
name='Uroob', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXIntegralsUp-Bold.otf',
name='STIXIntegralsUp', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-core/UnBatang.ttf',
name='UnBatang', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoTTF/Roboto-MediumItalic.ttf', name='Roboto',
style='italic', variant='normal', weight=500, stretch='normal',
size='scalable')) = 11.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/linux-
libertine/LinLibertine_M.otf', name='Linux Libertine Mono O', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/noto/NotoSerifCJK-Bold.ttc',
name='Noto Serif CJK JP', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/arphic/uming.ttc', name='AR PL
UMing CN', style='normal', variant='normal', weight=300, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansBalinese-
Bold.ttf', name='Noto Sans Balinese', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentiumplus/GentiumPlus-
Bold.ttf', name='Gentium Plus', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/sinhala/lklug.ttf',
name='LKLUG', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/fonts-hosny-amiri/Amiri-
```

```
Bold.ttf', name='Amiri', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/ebgaramond/EBGaramondSC08-Regular.ttf', name='EB Garamond SC',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSans-Italic.ttf',
name='Noto Sans', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-gyre-
math/texgyrebonum-math.otf', name='TeX Gyre Bonum Math', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXVariants-Regular.otf',
name='STIXVariants', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman6-bold.otf', name='Latin Modern Roman',
style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXSizeOneSym-
Regular.otf', name='STIXSizeOneSym', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMedefaidrin-
Bold.ttf', name='Noto Sans Medefaidrin', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansWarangCiti-
Regular.ttf', name='Noto Sans Warang Citi', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansSoyombo-
Regular.ttf', name='Noto Sans Soyombo', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/TlwgTypist-
BoldOblique.ttf', name='Tlwg Typist', style='oblique', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmromandunh10-regular.otf', name='Latin Modern Roman
Dunhill', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMeroitic-
```

```
Regular.ttf', name='Noto Sans Meroitic', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsans17-oblique.otf', name='Latin Modern Sans',
style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/junicode/Junicode-Italic.ttf',
name='Junicode', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmonoslant10-regular.otf', name='Latin Modern Mono
Slanted', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoNaskhArabic-Bold.ttf',
name='Noto Naskh Arabic', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansHatran-
Regular.ttf', name='Noto Sans Hatran', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXSizeFourSym-
Regular.otf', name='STIXSizeFourSym', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ttf-khmeros-
core/KhmerOSsys.ttf', name='Khmer OS System', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-yrsa-rasa/Yrsa-
Italic.ttf', name='Yrsa', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmono10-italic.otf', name='Latin Modern Mono',
style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerif-Regular.ttf',
name='Noto Serif', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansArmenian-
Bold.ttf', name='Noto Sans Armenian', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXSizeFiveSym-
```

```
Regular.otf', name='STIXSizeFiveSym', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansOlChiki-
Regular.ttf', name='Noto Sans Ol Chiki', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/URWGothic-
BookOblique.otf', name='URW Gothic', style='oblique', variant='normal',
weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/cantarell/Cantarell-Bold.otf',
name='Cantarell', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/TlwgTypewriter-Bold.otf',
name='Tlwg Typewriter', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/NimbusMonoPS-
BoldItalic.otf', name='Nimbus Mono PS', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/NimbusSansNarrow-
Regular.otf', name='Nimbus Sans Narrow', style='normal', variant='normal',
weight=400, stretch='condensed', size='scalable')) = 10.25
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifDisplay-
Bold.ttf', name='Noto Serif Display', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSerifCondensed-
Italic.ttf', name='DejaVu Serif', style='italic', variant='normal', weight=400,
stretch='condensed', size='scalable')) = 11.25
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansKayahLi-
Regular.ttf', name='Noto Sans Kayah Li', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifKhmer-Bold.ttf',
name='Noto Serif Khmer', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation/LiberationMono-
Italic.ttf', name='Liberation Mono', style='italic', variant='normal',
weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-core/UnDotumBold.ttf',
```

```
name='UnDotum', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/open-sans/OpenSans-Italic.ttf',
name='Open Sans', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoLoopedLao-
Regular.ttf', name='Noto Looped Lao', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/freefont/FreeMonoBold.otf',
name='FreeMono', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansGurmukhi-
Regular.ttf', name='Noto Sans Gurmukhi', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/TlwgTypist-Oblique.otf',
name='Tlwg Typist', style='oblique', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansPauCinHau-
Regular.ttf', name='Noto Sans Pau Cin Hau', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifEthiopic-
Regular.ttf', name='Noto Serif Ethiopic', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoMono-Regular.ttf',
name='Noto Mono', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-HeavyItalic.ttf',
name='Lato', style='italic', variant='normal', weight=800, stretch='normal',
size='scalable')) = 11.43
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansElbasan-
Regular.ttf', name='Noto Sans Elbasan', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansSoraSompeng-
Regular.ttf', name='Noto Sans Sora Sompeng', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman10-regular.otf', name='Latin Modern Roman',
```

```
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmromanslant12-regular.otf', name='Latin Modern Roman
Slanted', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifDevanagari-
Regular.ttf', name='Noto Serif Devanagari', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation2/LiberationSerif-
Regular.ttf', name='Liberation Serif', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-beng-extra/Mukti.ttf',
name='Mukti', style='normal', variant='normal', weight=500, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/TlwgTypist.otf',
name='Tlwg Typist', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman12-regular.otf', name='Latin Modern Roman',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansSogdian-
Regular.ttf', name='Noto Sans Sogdian', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Loma-Oblique.otf',
name='Loma', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyreschola-bold.otf', name='TeX Gyre Schola', style='normal',
variant='normal', weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansWancho-
Regular.ttf', name='Noto Sans Wancho', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/theokritos/GFSTheokritos.otf',
name='GFS Theokritos', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/didot/GFSDidotBold.otf',
```

```
name='GFS Didot', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/teluguvijayam/mallanna.ttf',
name='Mallanna', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/lobstertwo/LobsterTwo-
Regular.otf', name='Lobster Two', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Umpush-Bold.ttf',
name='Umpush', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-Bold.ttf',
name='Lato', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman12-bold.otf', name='Latin Modern Roman',
style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansOldNorthArabian-
Regular.ttf', name='Noto Sans Old North Arabian', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentium-basic/GenBasB.ttf',
name='Gentium Basic', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/open-sans/OpenSans-
CondBold.ttf', name='Open Sans Condensed', style='normal', variant='normal',
weight=700, stretch='condensed', size='scalable')) = 10.535
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmromanslant17-regular.otf', name='Latin Modern Roman
Slanted', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/cabin/Cabin-SemiBold.otf',
name='Cabin', style='normal', variant='normal', weight=600, stretch='normal',
size='scalable')) = 10.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansModi-Regular.ttf',
name='Noto Sans Modi', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/UniversalisADFStd-
```

```
Cond.otf', name='Universalis ADF Std', style='normal', variant='normal',
weight=400, stretch='condensed', size='scalable')) = 10.25
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Purisa-Bold.otf',
name='Purisa', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTifinaghAhaggar-
Regular.ttf', name='Noto Sans Tifinagh Ahaggar', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ubuntu/Ubuntu-Th.ttf',
name='Ubuntu', style='normal', variant='normal', weight=250, stretch='normal',
size='scalable')) = 10.1925
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/open-sans/OpenSans-
ExtraBold.ttf', name='Open Sans', style='normal', variant='normal', weight=800,
stretch='normal', size='scalable')) = 10.43
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXGeneral-Bold.otf',
name='STIXGeneral', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansAdlam-
Regular.ttf', name='Noto Sans Adlam', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/UniversalisADFStd-
Bold.otf', name='Universalis ADF Std', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ubuntu/Ubuntu-LI.ttf',
name='Ubuntu', style='italic', variant='normal', weight=300, stretch='normal',
size='scalable')) = 11.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ubuntu/Ubuntu-R.ttf',
name='Ubuntu', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansEthiopic-
Regular.ttf', name='Noto Sans Ethiopic', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/artemisia/GFSArtemisiaIt.otf',
name='GFS Artemisia', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/teluguvijayam/suranna.ttf',
```

```
name='Suranna', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/open-sans/OpenSans-Bold.ttf',
name='Open Sans', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXVariants-Bold.otf',
name='STIXVariants', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/URWBookman-
Demi.otf', name='URW Bookman', style='normal', variant='normal', weight=600,
stretch='normal', size='scalable')) = 10.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyretermes-regular.otf', name='TeX Gyre Termes', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Loma-Bold.ttf',
name='Loma', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyreschola-italic.otf', name='TeX Gyre Schola', style='italic',
variant='normal', weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-BoldItalic.ttf',
name='Lato', style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation2/LiberationSans-
Regular.ttf', name='Liberation Sans', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/adf/AccanthisADFStdNo3-BoldItalic.otf', name='Accanthis ADF Std No3',
style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/freefont/FreeSans.otf',
name='FreeSans', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoTTF/Roboto-Thin.ttf', name='Roboto',
style='normal', variant='normal', weight=250, stretch='normal',
size='scalable')) = 10.1925
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/fonts-go/Go-Mono.ttf', name='Go Mono',
```

```
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/NimbusSansNarrow-
BoldOblique.otf', name='Nimbus Sans Narrow', style='oblique', variant='normal',
weight=700, stretch='condensed', size='scalable')) = 11.535
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoMusic-Regular.ttf',
name='Noto Music', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/C059-Italic.otf',
name='C059', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTamil-Bold.ttf',
name='Noto Sans Tamil', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansArabic-Bold.ttf',
name='Noto Sans Arabic', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/open-sans/OpenSans-
CondLightItalic.ttf', name='Open Sans', style='italic', variant='normal',
weight=300, stretch='condensed', size='scalable')) = 11.344999999999999
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansCarian-
Regular.ttf', name='Noto Sans Carian', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Purisa-BoldOblique.otf',
name='Purisa', style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/linux-
libertine/LinLibertine_RZ.otf', name='Linux Libertine O', style='normal',
variant='normal', weight=600, stretch='normal', size='scalable')) = 10.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyreheroscn-regular.otf', name='TeX Gyre Heros Cn', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/croscore/Tinos-Regular.ttf',
name='Tinos', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/TlwgTypo-Oblique.otf',
```

```
name='Tlwg Typo', style='oblique', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/NimbusRoman-
Regular.otf', name='Nimbus Roman', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/TlwgTypo-BoldOblique.ttf',
name='Tlwg Typo', style='oblique', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-Heavy.ttf',
name='Lato', style='normal', variant='normal', weight=800, stretch='normal',
size='scalable')) = 10.43
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Sawasdee.otf',
name='Sawasdee', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/ebgaramond/EBGaramond-
InitialsF2.otf', name='EB Garamond Initials Fill2', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/baekmuk/batang.ttf',
name='Baekmuk Batang', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmromandemi10-regular.otf', name='Latin Modern Roman
Demi', style='normal', variant='normal', weight=600, stretch='normal',
size='scalable')) = 10.24
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman17-regular.otf', name='Latin Modern Roman',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/linux-
libertine/LinLibertine_RBI.otf', name='Linux Libertine O', style='italic',
variant='normal', weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/kacst/KacstArt.ttf',
name='KacstArt', style='normal', variant='normal', weight=500, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-telu-
extra/Pothana2000.ttf', name='Pothana2000', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
opentype/neohellenic/GFSNeohellenicBoldIt.otf', name='GFS Neohellenic',
```

```
style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/charis/CharisSIL-
BoldItalic.ttf', name='Charis SIL', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/ebgaramond/EBGaramond12-AllSC.ttf', name='EB Garamond 12 All SC',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansPhagsPa-
Regular.ttf', name='Noto Sans PhagsPa', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/ebgaramond/EBGaramond12-Regular.ttf', name='EB Garamond',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/adf/AccanthisADFStdNo2-Italic.otf', name='Accanthis ADF Std No2',
style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-LightItalic.ttf',
name='Lato', style='italic', variant='normal', weight=300, stretch='normal',
size='scalable')) = 11.145
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmonolt10-regular.otf', name='Latin Modern Mono
Light', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/GilliusADF-Cond.otf',
name='Gillius ADF', style='normal', variant='normal', weight=400,
stretch='condensed', size='scalable')) = 10.25
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansSaurashtra-
Regular.ttf', name='Noto Sans Saurashtra', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/adf/GilliusADFNo2-BoldCond.otf', name='Gillius ADF No2',
style='normal', variant='normal', weight=700, stretch='condensed',
size='scalable')) = 10.535
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSansMono-
BoldOblique.ttf', name='DejaVu Sans Mono', style='oblique', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
opentype/neohellenic/GFSNeohellenicIt.otf', name='GFS Neohellenic',
```

```
style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoTTF/Roboto-Regular.ttf', name='Roboto',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifBalinese-
Regular.ttf', name='Noto Serif Balinese', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/noto/NotoSansCJK-Regular.ttc',
name='Noto Sans CJK JP', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-extra/UnTaza.ttf',
name='UnTaza', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/freefont/FreeSansBoldOblique.ttf', name='FreeSans', style='oblique',
variant='normal', weight=600, stretch='normal', size='scalable')) = 11.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyreheros-bolditalic.otf', name='TeX Gyre Heros', style='italic',
variant='normal', weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyreheroscn-bolditalic.otf', name='TeX Gyre Heros Cn', style='italic',
variant='normal', weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansDisplay-Bold.ttf',
name='Noto Sans Display', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/teluguvijayam/SreeKrushnadevaraya.ttf', name='Sree Krushnadevaraya',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyreadventor-italic.otf', name='TeX Gyre Adventor', style='italic',
variant='normal', weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/malayalam/Chilanka-
Regular.otf', name='Chilanka', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/crosextra/Carlito-Regular.ttf',
name='Carlito', style='normal', variant='normal', weight=400, stretch='normal',
```

```
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/freefont/FreeSans.ttf',
name='FreeSans', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/AccanthisADFStd-
BoldItalic.otf', name='Accanthis ADF Std', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Garuda-Oblique.otf',
name='Garuda', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/BerenisADFProMath-
Regular.otf', name='Berenis ADF Pro Math', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansLisu-Regular.ttf',
name='Noto Sans Lisu', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSans-
BoldOblique.ttf', name='DejaVu Sans', style='oblique', variant='normal',
weight=700, stretch='normal', size='scalable')) = 1.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansCherokee-
Bold.ttf', name='Noto Sans Cherokee', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/UniversalisADFStd-
Italic.otf', name='Universalis ADF Std', style='italic', variant='normal',
weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansPahawhHmong-
Regular.ttf', name='Noto Sans Pahawh Hmong', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Kinnari.otf',
name='Kinnari', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentium-basic/GenBkBasI.ttf',
name='Gentium Book Basic', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/freefont/FreeSerif.otf',
name='FreeSerif', style='normal', variant='normal', weight=400,
```

```
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-deva-extra/kalimati.ttf',
name='Kalimati', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/gazis/GFSGazis.otf', name='GFS
Gazis', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/TlwgTypist.ttf',
name='Tlwg Typist', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifGujarati-
Bold.ttf', name='Noto Serif Gujarati', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansGothic-
Regular.ttf', name='Noto Sans Gothic', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/open-sans/OpenSans-
LightItalic.ttf', name='Open Sans', style='italic', variant='normal',
weight=300, stretch='normal', size='scalable')) = 11.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/GilliusADF-CondItalic.otf',
name='Gillius ADF', style='italic', variant='normal', weight=400,
stretch='condensed', size='scalable')) = 11.25
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-yrsa-rasa/Yrsa-
LightItalic.ttf', name='Yrsa', style='italic', variant='normal', weight=300,
stretch='normal', size='scalable')) = 11.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXNonUnicode-
BoldItalic.otf', name='STIXNonUnicode', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/freefont/FreeSerifBoldItalic.ttf', name='FreeSerif', style='italic',
variant='normal', weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/kacst/KacstFarsi.ttf',
name='KacstFarsi', style='normal', variant='normal', weight=500,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/kacst/KacstBook.ttf',
name='KacstBook', style='normal', variant='normal', weight=500,
stretch='normal', size='scalable')) = 10.145
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifTelugu-
Regular.ttf', name='Noto Serif Telugu', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/linux-
libertine/LinLibertine_DR.otf', name='Linux Libertine Display O',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-core/UnDinaruBold.ttf',
name='UnDinaru', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-yrsa-rasa/Yrsa-
MediumItalic.ttf', name='Yrsa', style='italic', variant='normal', weight=500,
stretch='normal', size='scalable')) = 11.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Laksaman-BoldItalic.ttf',
name='Laksaman', style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Laksaman-Bold.otf',
name='Laksaman', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/lobster/lobster.otf',
name='Lobster Two', style='italic', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/noto/NotoSansEgyptianHieroglyphs-Regular.ttf', name='Noto Sans Egyptian
Hieroglyphs', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Norasi-BoldOblique.ttf',
name='Norasi', style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-
base35/Z003-MediumItalic.otf', name='Z003', style='italic', variant='normal',
weight=500, stretch='normal', size='scalable')) = 11.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-gujr-extra/padmaa-
Medium-0.5.ttf', name='padmaa', style='normal', variant='normal', weight=500,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmonoprop10-regular.otf', name='Latin Modern Mono
Prop', style='normal', variant='normal', weight=400, stretch='normal',
```

```
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation2/LiberationMono-
Bold.ttf', name='Liberation Mono', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ubuntu/Ubuntu-L.ttf',
name='Ubuntu', style='normal', variant='normal', weight=300, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/ipafont-gothic/ipag.ttf',
name='IPAGothic', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSans-Oblique.ttf',
name='DejaVu Sans', style='oblique', variant='normal', weight=400,
stretch='normal', size='scalable')) = 1.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/ebgaramond/EBGaramondSC12-Regular.ttf', name='EB Garamond SC',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentiumplus/GentiumBookPlus-
BoldItalic.ttf', name='Gentium Book Plus', style='italic', variant='normal',
weight=800, stretch='normal', size='scalable')) = 11.43
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/padauk/Padauk-Regular.ttf',
name='Padauk', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/droid/DroidSansFallbackFull.ttf', name='Droid Sans Fallback',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Norasi.otf',
name='Norasi', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/dejavu/DejaVuSerifCondensed.ttf', name='DejaVu Serif', style='normal',
variant='normal', weight=400, stretch='condensed', size='scalable')) = 10.25
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentiumplus/GentiumPlus-
BoldItalic.ttf', name='Gentium Plus', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsansquot8-bold.otf', name='Latin Modern Sans
Quotation', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-gujr-extra/padmaa.ttf',
name='padmaa', style='normal', variant='normal', weight=500, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/D050000L.otf',
name='D050000L', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTelugu-
Regular.ttf', name='Noto Sans Telugu', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/BerenisADFPro-Bold.otf',
name='Berenis ADF Pro', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/didot/GFSDidot.otf', name='GFS
Didot', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/liberation/LiberationSansNarrow-Bold.ttf', name='Liberation Sans
Narrow', style='normal', variant='normal', weight=700, stretch='condensed',
size='scalable')) = 10.535
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyrecursor-bolditalic.otf', name='TeX Gyre Cursor', style='italic',
variant='normal', weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/open-sans/OpenSans-
SemiboldItalic.ttf', name='Open Sans', style='italic', variant='normal',
weight=600, stretch='normal', size='scalable')) = 11.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/samyak/Samyak-Devanagari.ttf',
name='Samyak Devanagari', style='normal', variant='normal', weight=500,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation/LiberationSans-
Italic.ttf', name='Liberation Sans', style='italic', variant='normal',
weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansNewTaiLue-
Regular.ttf', name='Noto Sans New Tai Lue', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/NimbusMonoPS-
Italic.otf', name='Nimbus Mono PS', style='italic', variant='normal',
weight=400, stretch='normal', size='scalable')) = 11.05
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Purisa-BoldOblique.ttf',
name='Purisa', style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lohit-tamil-classical/Lohit-
Tamil-Classical.ttf', name='Lohit Tamil Classical', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/NimbusSans-
Regular.otf', name='Nimbus Sans', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSansCondensed-
Oblique.ttf', name='DejaVu Sans', style='oblique', variant='normal', weight=400,
stretch='condensed', size='scalable')) = 1.25
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansSymbols-
Regular.ttf', name='Noto Sans Symbols', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/teluguvijayam/Gidugu.ttf',
name='Gidugu', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Norasi.ttf',
name='Norasi', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansOldTurkic-
Regular.ttf', name='Noto Sans Old Turkic', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Sawasdee-BoldOblique.ttf',
name='Sawasdee', style='oblique', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoRashiHebrew-
Regular.ttf', name='Noto Rashi Hebrew', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/linux-
libertine/LinLibertine_R.otf', name='Linux Libertine O', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyrebonum-bolditalic.otf', name='TeX Gyre Bonum', style='italic',
variant='normal', weight=700, stretch='normal', size='scalable')) = 11.335
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansAdlamUnjoined-
Regular.ttf', name='Noto Sans Adlam Unjoined', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/URWGothic-Demi.otf',
name='URW Gothic', style='normal', variant='normal', weight=600,
stretch='normal', size='scalable')) = 10.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/pagul/Pagul.ttf', name='Pagul',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/liberation/LiberationSansNarrow-Italic.ttf', name='Liberation Sans
Narrow', style='italic', variant='normal', weight=400, stretch='condensed',
size='scalable')) = 11.25
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsansdemicond10-regular.otf', name='Latin Modern Sans
Demi Cond', style='normal', variant='normal', weight=600, stretch='condensed',
size='scalable')) = 10.44
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/malayalam/Gayathri-Bold.otf',
name='Gayathri', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyrepagella-bold.otf', name='TeX Gyre Pagella', style='normal',
variant='normal', weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifMalayalam-
Bold.ttf', name='Noto Serif Malayalam', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Loma-BoldOblique.otf',
name='Loma', style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansKhmer-Bold.ttf',
name='Noto Sans Khmer', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/UniversalisADFStd-
BoldItalic.otf', name='Universalis ADF Std', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ebgaramond/EBGaramond-
InitialsF1.ttf', name='EB Garamond Initials Fill1', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyreheros-italic.otf', name='TeX Gyre Heros', style='italic',
variant='normal', weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifMalayalam-
Regular.ttf', name='Noto Serif Malayalam', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/samyak-fonts/Samyak-Tamil.ttf',
name='Samyak Tamil', style='normal', variant='normal', weight=500,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/freefont/FreeSerif.ttf',
name='FreeSerif', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/NimbusRoman-
BoldItalic.otf', name='Nimbus Roman', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/font-awesome/fontawesome-
webfont.ttf', name='FontAwesome', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/C059-Bold.otf',
name='C059', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoNastaliqUrdu-
Bold.ttf', name='Noto Nastaliq Urdu', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/noto/NotoSansInscriptionalPahlavi-Regular.ttf', name='Noto Sans
Inscriptional Pahlavi', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifDogra-
Regular.ttf', name='Noto Serif Dogra', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lohit-punjabi/Lohit-
Gurmukhi.ttf', name='Lohit Gurmukhi', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/charis/CharisSIL-Bold.ttf',
name='Charis SIL', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSans-Bold.ttf',
name='DejaVu Sans', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 0.33499999999999996
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-yrsa-rasa/Yrsa-
Regular.ttf', name='Yrsa', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoTTF/Roboto-Medium.ttf', name='Roboto',
style='normal', variant='normal', weight=500, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/crosextra/Caladea-Bold.ttf',
name='Caladea', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansArmenian-
Regular.ttf', name='Noto Sans Armenian', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXGeneral-Regular.otf',
name='STIXGeneral', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/kacst/KacstScreen.ttf',
name='KacstScreen', style='normal', variant='normal', weight=500,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ubuntu/Ubuntu-M.ttf',
name='Ubuntu', style='normal', variant='normal', weight=500, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/adf/GilliusADFNo2-BoldItalic.otf', name='Gillius ADF No2',
style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/ebgaramond/EBGaramond12-Bold.ttf', name='EB Garamond', style='normal',
variant='normal', weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/baekmuk/dotum.ttf',
name='Baekmuk Dotum', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
opentype/ebgaramond/EBGaramondSC08-Regular.otf', name='EB Garamond SC',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifKhojki-Bold.ttf',
name='Noto Serif Khojki', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansOldSouthArabian-
Regular.ttf', name='Noto Sans Old South Arabian', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Purisa-Oblique.ttf',
name='Purisa', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/TlwgTypist-
BoldOblique.otf', name='Tlwg Typist', style='oblique', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoKufiArabic-Bold.ttf',
name='Noto Kufi Arabic', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXIntegralsD-Bold.otf',
name='STIXIntegralsD', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-yrsa-rasa/Yrsa-
SemiBold.ttf', name='Yrsa', style='normal', variant='normal', weight=600,
stretch='normal', size='scalable')) = 10.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Waree.ttf', name='Waree',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansThai-Bold.ttf',
name='Noto Sans Thai', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerif-Bold.ttf',
name='Noto Serif', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Norasi-BoldOblique.otf',
name='Norasi', style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-Regular.ttf',
name='Lato', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-beng-
extra/LikhanNormal.ttf', name='Likhan', style='normal', variant='normal',
weight=500, stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-core/UnGraphic.ttf',
name='UnGraphic', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/malayalam/Manjari-Regular.otf',
name='Manjari', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/didot-
classic/GFSDidotClassic.otf', name='GFS Didot Classic', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/croscore/Cousine-Bold.ttf',
name='Cousine', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmromandemi10-oblique.otf', name='Latin Modern Roman
Demi', style='oblique', variant='normal', weight=600, stretch='normal',
size='scalable')) = 11.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansThaana-
Regular.ttf', name='Noto Sans Thaana', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXSizeThreeSym-
Regular.otf', name='STIXSizeThreeSym', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansGujarati-
Bold.ttf', name='Noto Sans Gujarati', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/porson/GFSPorson.otf',
name='GFS Porson', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ubuntu/UbuntuMono-B.ttf',
name='Ubuntu Mono', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ubuntu/Ubuntu-MI.ttf',
name='Ubuntu', style='italic', variant='normal', weight=500, stretch='normal',
size='scalable')) = 11.145
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/Nakula/nakula.ttf',
name='Nakula', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Kinnari-Bold.ttf',
name='Kinnari', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-
core/UnGraphicBold.ttf', name='UnGraphic', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Norasi-BoldItalic.ttf',
name='Norasi', style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/croscore/Tinos-Italic.ttf',
name='Tinos', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansDevanagari-
Regular.ttf', name='Noto Sans Devanagari', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman10-italic.otf', name='Latin Modern Roman',
style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Umpush-BoldOblique.ttf',
name='Umpush', style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/teluguvijayam/TimmanaRegular.ttf', name='Timmana', style='normal',
variant='normal', weight=900, stretch='normal', size='scalable')) = 10.525
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/adf/AccanthisADFStdNo3-Regular.otf', name='Accanthis ADF Std No3',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansKannada-
Regular.ttf', name='Noto Sans Kannada', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/ebgaramond/EBGaramond08-Regular.ttf', name='EB Garamond',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/fonts-hosny-amiri/Amiri-
```

```
BoldSlanted.ttf', name='Amiri', style='italic', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifArmenian-
Bold.ttf', name='Noto Serif Armenian', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsansquot8-oblique.otf', name='Latin Modern Sans
Quotation', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansHanifiRohingya-
Bold.ttf', name='Noto Sans Hanifi Rohingya', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-core/UnDinaru.ttf',
name='UnDinaru', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Waree-BoldOblique.ttf',
name='Waree', style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-Black.ttf',
name='Lato', style='normal', variant='normal', weight=900, stretch='normal',
size='scalable')) = 10.525
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/lm-
math/latinmodern-math.otf', name='Latin Modern Math', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/fonts-hosny-amiri/Amiri-
Slanted.ttf', name='Amiri', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoCondensed-Light.ttf', name='Roboto Condensed',
style='normal', variant='normal', weight=300, stretch='condensed',
size='scalable')) = 10.344999999999999
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifDisplay-
Italic.ttf', name='Noto Serif Display', style='italic', variant='normal',
weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/arphic-bkai00mp/bkai00mp.ttf',
name='AR PL KaitiM Big5', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lohit-assamese/Lohit-
```

```
Assamese.ttf', name='Lohit Assamese', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/freefont/FreeSansBold.ttf',
name='FreeSans', style='normal', variant='normal', weight=600, stretch='normal',
size='scalable')) = 10.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSansMono.ttf',
name='DejaVu Sans Mono', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
opentype/ebgaramond/EBGaramond12-Bold.otf', name='EB Garamond', style='normal',
variant='normal', weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/libreoffice/opens___.ttf',
name='OpenSymbol', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansPalmyrene-
Regular.ttf', name='Noto Sans Palmyrene', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/ebgaramond/EBGaramond12-Italic.ttf', name='EB Garamond',
style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXGeneral-Italic.otf',
name='STIXGeneral', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/GilliusADF-BoldCond.otf',
name='Gillius ADF', style='normal', variant='normal', weight=700,
stretch='condensed', size='scalable')) = 10.535
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/dejavu/DejaVuSansCondensed.ttf', name='DejaVu Sans', style='normal',
variant='normal', weight=400, stretch='condensed', size='scalable')) = 0.25
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansLao-Regular.ttf',
name='Noto Sans Lao', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/charis/CharisSIL-Regular.ttf',
name='Charis SIL', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/kacst/KacstDecorative.ttf',
name='KacstDecorative', style='normal', variant='normal', weight=500,
stretch='normal', size='scalable')) = 10.145
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/junicode/FoulisGreek.ttf',
name='FoulisGreek', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmonocaps10-regular.otf', name='Latin Modern Mono
Caps', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/kacst-one/KacstOne-Bold.ttf',
name='KacstOne', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoTTF/Roboto-Light.ttf', name='Roboto',
style='normal', variant='normal', weight=300, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansSundanese-
Bold.ttf', name='Noto Sans Sundanese', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/teluguvijayam/ramabhadra.ttf',
name='Ramabhadra', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansShavian-
Regular.ttf', name='Noto Sans Shavian', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifSinhala-
Regular.ttf', name='Noto Serif Sinhala', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyrecursor-italic.otf', name='TeX Gyre Cursor', style='italic',
variant='normal', weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-Light.ttf',
name='Lato', style='normal', variant='normal', weight=300, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lao/Phetsarath_OT.ttf',
name='Phetsarath OT', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/fonts-go/Go-Bold.ttf', name='Go',
style='normal', variant='normal', weight=600, stretch='normal',
size='scalable')) = 10.24
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Laksaman.otf',
name='Laksaman', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ubuntu/Ubuntu-BI.ttf',
name='Ubuntu', style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/Gubbi/Gubbi.ttf', name='Gubbi',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSerif-Italic.ttf',
name='DejaVu Serif', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMandaic-
Regular.ttf', name='Noto Sans Mandaic', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/fonts-go/Go-Mono-Italic.ttf', name='Go
Mono', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-core/UnPilgiBold.ttf',
name='UnPilgi', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansOriya-Bold.ttf',
name='Noto Sans Oriya', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/noto/NotoSansAnatolianHieroglyphs-Regular.ttf', name='Noto Sans
Anatolian Hieroglyphs', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman5-regular.otf', name='Latin Modern Roman',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansImperialAramaic-
Regular.ttf', name='Noto Sans Imperial Aramaic', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/malayalam/Gayathri-
Regular.otf', name='Gayathri', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansChakma-
Regular.ttf', name='Noto Sans Chakma', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-
base35/StandardSymbolsPS.otf', name='Standard Symbols PS', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansSamaritan-
Regular.ttf', name='Noto Sans Samaritan', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/NimbusMonoPS-
Bold.otf', name='Nimbus Mono PS', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Norasi-Italic.otf',
name='Norasi', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
opentype/freefont/FreeMonoBoldOblique.otf', name='FreeMono', style='oblique',
variant='normal', weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-yrsa-rasa/Rasa-
Regular.ttf', name='Rasa', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-MediumItalic.ttf',
name='Lato', style='italic', variant='normal', weight=500, stretch='normal',
size='scalable')) = 11.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/kacst/KacstPoster.ttf',
name='KacstPoster', style='normal', variant='normal', weight=500,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTirhuta-
Regular.ttf', name='Noto Sans Tirhuta', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/teluguvijayam/Mandali-
Regular.ttf', name='Mandali', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/fonts-hosny-amiri/Amiri-
Regular.ttf', name='Amiri', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-gyre-
math/texgyretermes-math.otf', name='TeX Gyre Termes Math', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lohit-malayalam/Lohit-
Malayalam.ttf', name='Lohit Malayalam', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansCoptic-
Regular.ttf', name='Noto Sans Coptic', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSans-
ExtraLight.ttf', name='DejaVu Sans', style='normal', variant='normal',
weight=200, stretch='normal', size='scalable')) = 0.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansLycian-
Regular.ttf', name='Noto Sans Lycian', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansCypriot-
Regular.ttf', name='Noto Sans Cypriot', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-gujr-extra/Rekha.ttf',
name='Rekha', style='normal', variant='normal', weight=500, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation2/LiberationSerif-
Bold.ttf', name='Liberation Serif', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/linux-
libertine/LinLibertine_I.otf', name='Linux Libertine Initials O',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-yrsa-rasa/Rasa-
Medium.ttf', name='Rasa', style='normal', variant='normal', weight=500,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansCham-Bold.ttf',
name='Noto Sans Cham', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/freefont/FreeMonoBold.ttf',
name='FreeMono', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-yrsa-rasa/Yrsa-
SemiBoldItalic.ttf', name='Yrsa', style='italic', variant='normal', weight=600,
stretch='normal', size='scalable')) = 11.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/GilliusADFNo2-Bold.otf',
name='Gillius ADF No2', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoNaskhArabic-
Regular.ttf', name='Noto Naskh Arabic', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSans-Regular.ttf',
name='Noto Sans', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/open-sans/OpenSans-
CondLight.ttf', name='Open Sans', style='normal', variant='normal', weight=300,
stretch='condensed', size='scalable')) = 10.344999999999999
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansThai-Regular.ttf',
name='Noto Sans Thai', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/GilliusADF-Italic.otf',
name='Gillius ADF', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Kinnari-Italic.ttf',
name='Kinnari', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Waree-Oblique.otf',
name='Waree', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/baskerville/GFSBaskerville.otf', name='GFS Baskerville',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansGunjalaGondi-
Regular.ttf', name='Noto Sans Gunjala Gondi', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/linux-
libertine/LinBiolinum_RI.otf', name='Linux Biolinum O', style='italic',
variant='normal', weight=400, stretch='normal', size='scalable')) = 11.05
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTifinaghRhissaIxa-
Regular.ttf', name='Noto Sans Tifinagh Rhissa Ixa', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/ebgaramond/EBGaramond-
Initials.otf', name='EB Garamond Initials', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/teluguvijayam/NATS.ttf',
name='NATS', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ubuntu/Ubuntu-RI.ttf',
name='Ubuntu', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Norasi-Oblique.otf',
name='Norasi', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Kinnari-Oblique.otf',
name='Kinnari', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerif-BoldItalic.ttf',
name='Noto Serif', style='italic', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansOsage-
Regular.ttf', name='Noto Sans Osage', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation/LiberationSans-
BoldItalic.ttf', name='Liberation Sans', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/TlwgMono.ttf', name='Tlwg
Mono', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Waree-Bold.ttf',
name='Waree', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ubuntu/UbuntuMono-R.ttf',
name='Ubuntu Mono', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTaiLe-
Regular.ttf', name='Noto Sans Tai Le', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSans.ttf',
name='DejaVu Sans', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 0.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXIntegralsUpSm-
Bold.otf', name='STIXIntegralsUpSm', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/teluguvijayam/Ponnala.ttf',
name='Ponnala', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
opentype/ebgaramond/EBGaramond08-Italic.otf', name='EB Garamond',
style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/NimbusSansNarrow-
Oblique.otf', name='Nimbus Sans Narrow', style='oblique', variant='normal',
weight=400, stretch='condensed', size='scalable')) = 11.25
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/NimbusMonoPS-
Regular.otf', name='Nimbus Mono PS', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/lobstertwo/LobsterTwo-
BoldItalic.otf', name='Lobster Two', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/kacst/mry_KacstQurn.ttf',
name='mry_KacstQurn', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/cabin/Cabin-Regular.otf',
name='Cabin', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Garuda-BoldOblique.ttf',
name='Garuda', style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Purisa-Oblique.otf',
name='Purisa', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
```

```
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmromanslant10-regular.otf', name='Latin Modern Roman
Slanted', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/samyak-fonts/Samyak-
Malayalam.ttf', name='Samyak Malayalam', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Sawasdee.ttf',
name='Sawasdee', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/NimbusRoman-
Italic.otf', name='Nimbus Roman', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman9-italic.otf', name='Latin Modern Roman',
style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoTTF/Roboto-LightItalic.ttf', name='Roboto',
style='italic', variant='normal', weight=300, stretch='normal',
size='scalable')) = 11.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Loma-Bold.otf',
name='Loma', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmonolt10-oblique.otf', name='Latin Modern Mono
Light', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/GilliusADF-Regular.otf',
name='Gillius ADF', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/linux-
libertine/LinLibertine_RB.otf', name='Linux Libertine O', style='normal',
variant='normal', weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/samyak-fonts/Samyak-
Gujarati.ttf', name='Samyak Gujarati', style='normal', variant='normal',
weight=500, stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/charis/CharisSIL-Italic.ttf',
name='Charis SIL', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTamilSupplement-
Regular.ttf', name='Noto Sans Tamil Supplement', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
opentype/artemisia/GFSArtemisiaBold.otf', name='GFS Artemisia', style='normal',
variant='normal', weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-japanese-mincho.ttf',
name='IPAexMincho', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyreschola-regular.otf', name='TeX Gyre Schola', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoRashiHebrew-Bold.ttf',
name='Noto Rashi Hebrew', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifTibetan-
Regular.ttf', name='Noto Serif Tibetan', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/TlwgMono-Oblique.ttf',
name='Tlwg Mono', style='oblique', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/noto/NotoSerifNyiakengPuachueHmong-Regular.ttf', name='Noto Serif Hmong
Nyiakeng', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentium/GentiumAlt-R.ttf',
name='GentiumAlt', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyreheros-regular.otf', name='TeX Gyre Heros', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation/LiberationMono-
BoldItalic.ttf', name='Liberation Mono', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-extra/UnPenheulim.ttf',
name='UnPenheulim', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMarchen-
Regular.ttf', name='Noto Sans Marchen', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/croscore/Cousine-Regular.ttf',
name='Cousine', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoLoopedLao-Bold.ttf',
name='Noto Looped Lao', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/baekmuk/gulim.ttf',
name='Baekmuk Gulim', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/font-awesome/FontAwesome.otf',
name='FontAwesome', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyrepagella-italic.otf', name='TeX Gyre Pagella', style='italic',
variant='normal', weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Umpush-Oblique.otf',
name='Umpush', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifMyanmar-
Regular.ttf', name='Noto Serif Myanmar', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansAvestan-
Regular.ttf', name='Noto Sans Avestan', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lohit-telugu/Lohit-Telugu.ttf',
name='Lohit Telugu', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/fonts-go/Go-Regular.ttf', name='Go',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmromandunh10-oblique.otf', name='Latin Modern Roman
Dunhill', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/fonts-go/Go-Bold-Italic.ttf', name='Go',
style='italic', variant='normal', weight=600, stretch='normal',
size='scalable')) = 11.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifHebrew-
Regular.ttf', name='Noto Serif Hebrew', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansGujarati-
Regular.ttf', name='Noto Sans Gujarati', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoCondensed-MediumItalic.ttf', name='Roboto
Condensed', style='italic', variant='normal', weight=500, stretch='condensed',
size='scalable')) = 11.344999999999999
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Purisa.otf',
name='Purisa', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentium-basic/GenBkBasB.ttf',
name='Gentium Book Basic', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTifinaghAir-
Regular.ttf', name='Noto Sans Tifinagh Air', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-yrsa-rasa/Rasa-Bold.ttf',
name='Rasa', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/junicode/Junicode.ttf',
name='Junicode', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSansMono-
Oblique.ttf', name='DejaVu Sans Mono', style='oblique', variant='normal',
weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTifinaghHawad-
Regular.ttf', name='Noto Sans Tifinagh Hawad', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation/LiberationSerif-
Regular.ttf', name='Liberation Serif', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/liberation2/LiberationSans-
Bold.ttf', name='Liberation Sans', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-Hairline.ttf',
name='Lato', style='normal', variant='normal', weight=100, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/croscore/Arimo-Bold.ttf',
name='Arimo', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansHanifiRohingya-
Regular.ttf', name='Noto Sans Hanifi Rohingya', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Waree.otf', name='Waree',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/TlwgTypewriter-Bold.ttf',
name='Tlwg Typewriter', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTamil-
Regular.ttf', name='Noto Sans Tamil', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansKaithi-
Regular.ttf', name='Noto Sans Kaithi', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/freefont/FreeSerifBold.otf',
name='FreeSerif', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXIntegralsUp-
Regular.otf', name='STIXIntegralsUp', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Umpush.otf',
name='Umpush', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Norasi-Bold.otf',
name='Norasi', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSerif-Bold.ttf',
name='DejaVu Serif', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/teluguvijayam/Gurajada.ttf',
name='Gurajada', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/teluguvijayam/SyamalaRamana.ttf', name='Syamala Ramana',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/cantarell/Cantarell-Thin.otf',
name='Cantarell', style='normal', variant='normal', weight=100,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMultani-
Regular.ttf', name='Noto Sans Multani', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Umpush.ttf',
name='Umpush', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/crosextra/Caladea-Regular.ttf',
name='Caladea', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Laksaman-Italic.ttf',
name='Laksaman', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/arphic-bsmi00lp/bsmi00lp.ttf',
name='AR PL Mingti2L Big5', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsans10-bold.otf', name='Latin Modern Sans',
style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansGlagolitic-
Regular.ttf', name='Noto Sans Glagolitic', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-core/UnBatangBold.ttf',
name='UnBatang', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/open-sans/OpenSans-
Regular.ttf', name='Open Sans', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/cabin/Cabin-Italic.otf',
name='Cabin', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/padauk/Padauk-Bold.ttf',
name='Padauk', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation/LiberationMono-
Bold.ttf', name='Liberation Mono', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSansCondensed-
Bold.ttf', name='DejaVu Sans', style='normal', variant='normal', weight=700,
stretch='condensed', size='scalable')) = 0.5349999999999999
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansOldSogdian-
Regular.ttf', name='Noto Sans Old Sogdian', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-extra/UnShinmun.ttf',
name='UnShinmun', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/baekmuk/hline.ttf',
name='Baekmuk Headline', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMeeteiMayek-
Bold.ttf', name='Noto Sans Meetei Mayek', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Sawasdee-Bold.ttf',
name='Sawasdee', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansBamum-
Regular.ttf', name='Noto Sans Bamum', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoLoopedThai-Bold.ttf',
name='Noto Looped Thai', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMayanNumerals-
Regular.ttf', name='Noto Sans Mayan Numerals', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lohit-tamil/Lohit-Tamil.ttf',
name='Lohit Tamil', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmromanslant9-regular.otf', name='Latin Modern Roman
Slanted', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansBuginese-
Regular.ttf', name='Noto Sans Buginese', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsans17-regular.otf', name='Latin Modern Sans',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman9-bold.otf', name='Latin Modern Roman',
style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuMathTeXGyre.ttf',
name='DejaVu Math TeX Gyre', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentiumplus/GentiumBookPlus-
Italic.ttf', name='Gentium Book Plus', style='italic', variant='normal',
weight=500, stretch='normal', size='scalable')) = 11.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifThai-
Regular.ttf', name='Noto Serif Thai', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyreadventor-regular.otf', name='TeX Gyre Adventor', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTifinaghAPT-
Regular.ttf', name='Noto Sans Tifinagh APT', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansSinhala-Bold.ttf',
name='Noto Sans Sinhala', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/TlwgTypewriter-
Oblique.otf', name='Tlwg Typewriter', style='oblique', variant='normal',
weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/linux-
libertine/LinBiolinum_RB.otf', name='Linux Biolinum O', style='normal',
variant='normal', weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXNonUnicode-
Regular.otf', name='STIXNonUnicode', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/TlwgMono-BoldOblique.otf',
name='Tlwg Mono', style='oblique', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansSignWriting-
Regular.ttf', name='Noto Sans SignWriting', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansSundanese-
Regular.ttf', name='Noto Sans Sundanese', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentium-basic/GenBasBI.ttf',
name='Gentium Basic', style='italic', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifDevanagari-
Bold.ttf', name='Noto Serif Devanagari', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/comfortaa/Comfortaa-Bold.ttf',
name='Comfortaa', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmromancaps10-oblique.otf', name='Latin Modern Roman
Caps', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansOldPermic-
Regular.ttf', name='Noto Sans Old Permic', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/TlwgTypo.ttf', name='Tlwg
Typo', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansOlChiki-Bold.ttf',
name='Noto Sans Ol Chiki', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/URWGothic-Book.otf',
name='URW Gothic', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansPhoenician-
Regular.ttf', name='Noto Sans Phoenician', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansSyriac-
Regular.ttf', name='Noto Sans Syriac', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsans10-regular.otf', name='Latin Modern Sans',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/TlwgTypo-BoldOblique.otf',
name='Tlwg Typo', style='oblique', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/cantarell/Cantarell-
Regular.otf', name='Cantarell', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/TlwgTypo-Bold.otf',
name='Tlwg Typo', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/malayalam/Karumbi-Regular.ttf',
name='Karumbi', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
opentype/artemisia/GFSArtemisiaBoldIt.otf', name='GFS Didot', style='italic',
variant='normal', weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyretermes-italic.otf', name='TeX Gyre Termes', style='italic',
variant='normal', weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/cantarell/Cantarell-
ExtraBold.otf', name='Cantarell', style='normal', variant='normal', weight=800,
stretch='normal', size='scalable')) = 10.43
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoCondensed-Italic.ttf', name='Roboto Condensed',
```

```
style='italic', variant='normal', weight=400, stretch='condensed',
size='scalable')) = 11.25
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsansquot8-regular.otf', name='Latin Modern Sans
Quotation', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation/LiberationSerif-
BoldItalic.ttf', name='Liberation Serif', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Waree-Bold.otf',
name='Waree', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/P052-Roman.otf',
name='P052', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifGeorgian-
Regular.ttf', name='Noto Serif Georgian', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/malayalam/AnjaliOldLipi-
Regular.ttf', name='AnjaliOldLipi', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansSoraSompeng-
Bold.ttf', name='Noto Sans Sora Sompeng', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ubuntu/UbuntuMono-RI.ttf',
name='Ubuntu Mono', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXSizeFourSym-Bold.otf',
name='STIXSizeFourSym', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/complutum/GFSPolyglot.otf',
name='GFS Complutum', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentiumplus/GentiumBookPlus-
Regular.ttf', name='Gentium Book Plus', style='normal', variant='normal',
weight=500, stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/UniversalisADFStd-
```

```
BoldCondIt.otf', name='Universalis ADF Std', style='italic', variant='normal',
weight=700, stretch='condensed', size='scalable')) = 11.535
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifBengali-
Bold.ttf', name='Noto Serif Bengali', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/adf/AccanthisADFStdNo2-Bold.otf', name='Accanthis ADF Std No2',
style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tibetan-
machine/TibetanMachineUni.ttf', name='Tibetan Machine Uni', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-yrsa-rasa/Yrsa-Bold.ttf',
name='Yrsa', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Norasi-Oblique.ttf',
name='Norasi', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMendeKikakui-
Regular.ttf', name='Noto Sans Mende Kikakui', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifYezidi-Bold.ttf',
name='Noto Serif Yezidi', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-gyre-
math/texgyredejavu-math.otf', name='TeX Gyre DejaVu Math', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansEthiopic-
Bold.ttf', name='Noto Sans Ethiopic', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lohit-kannada/Lohit-
Kannada.ttf', name='Lohit Kannada', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifLao-Bold.ttf',
name='Noto Serif Lao', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Garuda-Bold.ttf',
```

```
name='Garuda', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansSymbols-Bold.ttf',
name='Noto Sans Symbols', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentiumplus/GentiumPlus-
Regular.ttf', name='Gentium Plus', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyrepagella-regular.otf', name='TeX Gyre Pagella', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/bodoni-
classic/GFSBodoniClassic.otf', name='GFS BodoniClassic', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/malayalam/Manjari-Bold.otf',
name='Manjari', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
opentype/neohellenic/GFSNeohellenic.otf', name='GFS Neohellenic',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-kalapi/Kalapi.ttf',
name='Kalapi', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/linux-
libertine/LinBiolinum_K.otf', name='Linux Biolinum Keyboard O', style='normal',
variant='normal', weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/malayalam/Meera-Regular.ttf',
name='Meera', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsans8-regular.otf', name='Latin Modern Sans',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/comfortaa/Comfortaa-Light.ttf',
name='Comfortaa', style='normal', variant='normal', weight=300,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation2/LiberationSans-
```

```
Italic.ttf', name='Liberation Sans', style='italic', variant='normal',
weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyreheroscn-bold.otf', name='TeX Gyre Heros Cn', style='normal',
variant='normal', weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation2/LiberationSerif-
Italic.ttf', name='Liberation Serif', style='italic', variant='normal',
weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXSizeTwoSym-Bold.otf',
name='STIXSizeTwoSym', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/malayalam/Keraleeyam-
Regular.ttf', name='Keraleeyam', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXSizeOneSym-Bold.otf',
name='STIXSizeOneSym', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-gyre-
math/texgyreschola-math.otf', name='TeX Gyre Schola Math', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Sawasdee-Bold.otf',
name='Sawasdee', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmonoltcond10-oblique.otf', name='Latin Modern Mono
Light Cond', style='oblique', variant='normal', weight=400, stretch='condensed',
size='scalable')) = 11.25
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/C059-BdIta.otf',
name='C059', style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/teluguvijayam/Ramaraja-
Regular.ttf', name='Ramaraja', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/teluguvijayam/PottiSreeramulu.ttf', name='Potti Sreeramulu',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansOldPersian-
```

```
Regular.ttf', name='Noto Sans Old Persian', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansSylotiNagri-
Regular.ttf', name='Noto Sans Syloti Nagri', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansJavanese-
Regular.ttf', name='Noto Sans Javanese', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/cabin/Cabin-Medium.otf',
name='Cabin', style='normal', variant='normal', weight=500, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifKannada-
Bold.ttf', name='Noto Serif Kannada', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/adf/AccanthisADFStdNo3-Italic.otf', name='Accanthis ADF Std No3',
style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-core/UnPilgi.ttf',
name='UnPilgi', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation2/LiberationMono-
Italic.ttf', name='Liberation Mono', style='italic', variant='normal',
weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/inconsolata/Inconsolata.otf',
name='Inconsolata', style='normal', variant='normal', weight=500,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifArmenian-
Regular.ttf', name='Noto Serif Armenian', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-beng-
extra/MitraMono.ttf', name='Mitra ', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansDisplay-
BoldItalic.ttf', name='Noto Sans Display', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMalayalam-
```

```
Bold.ttf', name='Noto Sans Malayalam', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifTamilSlanted-
Bold.ttf', name='Noto Serif Tamil Slanted', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Garuda-Bold.otf',
name='Garuda', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/UniversalisADFStd-
CondItalic.otf', name='Universalis ADF Std', style='italic', variant='normal',
weight=400, stretch='condensed', size='scalable')) = 11.25
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmonoproplt10-boldoblique.otf', name='Latin Modern
Mono Prop Light', style='oblique', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXIntegralsUpSm-
Regular.otf', name='STIXIntegralsUpSm', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-orya-extra/utkal.ttf',
name='ori1Uni', style='normal', variant='normal', weight=500, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansJavanese-
Bold.ttf', name='Noto Sans Javanese', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoCondensed-LightItalic.ttf', name='Roboto
Condensed', style='italic', variant='normal', weight=300, stretch='condensed',
size='scalable')) = 11.344999999999999
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-SemiboldItalic.ttf',
name='Lato', style='italic', variant='normal', weight=600, stretch='normal',
size='scalable')) = 11.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyrecursor-bold.otf', name='TeX Gyre Cursor', style='normal',
variant='normal', weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansUgaritic-
Regular.ttf', name='Noto Sans Ugaritic', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Kinnari-BoldOblique.otf',
```

```
name='Kinnari', style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman6-regular.otf', name='Latin Modern Roman',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansOldItalic-
Regular.ttf', name='Noto Sans Old Italic', style='italic', variant='normal',
weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/TlwgTypewriter-
Oblique.ttf', name='Tlwg Typewriter', style='oblique', variant='normal',
weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoTTF/Roboto-Bold.ttf', name='Roboto',
style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix-word/STIX-BoldItalic.otf',
name='STIX', style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Umpush-Oblique.ttf',
name='Umpush', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman10-bolditalic.otf', name='Latin Modern Roman',
style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmono8-regular.otf', name='Latin Modern Mono',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/noto/NotoSansCanadianAboriginal-Regular.ttf', name='Noto Sans Canadian
Aboriginal', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/UniversalisADFStd-
BoldCond.otf', name='Universalis ADF Std', style='normal', variant='normal',
weight=700, stretch='condensed', size='scalable')) = 10.535
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation/LiberationMono-
Regular.ttf', name='Liberation Mono', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifTangut-
```

```
Regular.ttf', name='Noto Serif Tangut', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/fonts-go/Go-Medium.ttf', name='Go
Medium', style='normal', variant='normal', weight=500, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Laksaman.ttf',
name='Laksaman', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansOsmanya-
Regular.ttf', name='Noto Sans Osmanya', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-guru-extra/Saab.ttf',
name='Saab', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifAhom-
Regular.ttf', name='Noto Serif Ahom', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTaiTham-
Regular.ttf', name='Noto Sans Tai Tham', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansOldHungarian-
Regular.ttf', name='Noto Sans Old Hungarian', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifLao-Regular.ttf',
name='Noto Serif Lao', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifThai-Bold.ttf',
name='Noto Serif Thai', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifGeorgian-
Bold.ttf', name='Noto Serif Georgian', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoCondensed-Regular.ttf', name='Roboto Condensed',
style='normal', variant='normal', weight=400, stretch='condensed',
size='scalable')) = 10.25
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
```

```
gyre/texgyreadventor-bold.otf', name='TeX Gyre Adventor', style='normal',
variant='normal', weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/NimbusRoman-
Bold.otf', name='Nimbus Roman', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/GilliusADFNo2-Regular.otf',
name='Gillius ADF No2', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation2/LiberationSans-
BoldItalic.ttf', name='Liberation Sans', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
opentype/ebgaramond/EBGaramondSC12-Regular.otf', name='EB Garamond SC',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansBengali-Bold.ttf',
name='Noto Sans Bengali', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/arphic-gkai00mp/gkai00mp.ttf',
name='AR PL KaitiM GB', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-extra/UnYetgul.ttf',
name='UnYetgul', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifEthiopic-
Bold.ttf', name='Noto Serif Ethiopic', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation/LiberationSans-
Bold.ttf', name='Liberation Sans', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentium/GentiumAlt-I.ttf',
name='GentiumAlt', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/TlwgMono-Bold.otf',
name='Tlwg Mono', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-deva-
```

```
extra/chandas1-2.ttf', name='Chandas', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansRejang-
Regular.ttf', name='Noto Sans Rejang', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/freefont/FreeSerifItalic.ttf',
name='FreeSerif', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansDevanagari-
Bold.ttf', name='Noto Sans Devanagari', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-extra/UnJamoSora.ttf',
name='UnJamoSora', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMalayalam-
Regular.ttf', name='Noto Sans Malayalam', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
opentype/ebgaramond/EBGaramond12-Italic.otf', name='EB Garamond',
style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentiumplus-
compact/GentiumPlusCompact-R.ttf', name='Gentium Plus Compact', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/liberation/LiberationSansNarrow-BoldItalic.ttf', name='Liberation Sans
Narrow', style='italic', variant='normal', weight=700, stretch='condensed',
size='scalable')) = 11.535
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-extra/UnJamoDotum.ttf',
name='UnJamoDotum', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ttf-khmeros-core/KhmerOS.ttf',
name='Khmer OS', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansPsalterPahlavi-
Regular.ttf', name='Noto Sans Psalter Pahlavi', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/cabin/Cabin-Bold.otf',
```

```
name='Cabin', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/solomos/GFSSolomos.otf',
name='GFS Solomos', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation2/LiberationSerif-
BoldItalic.ttf', name='Liberation Serif', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentium/Gentium-R.ttf',
name='Gentium', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation/LiberationSerif-
Bold.ttf', name='Liberation Serif', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansNewa-Regular.ttf',
name='Noto Sans Newa', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-extra/UnJamoNovel.ttf',
name='UnJamoNovel', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/Sahadeva/sahadeva.ttf',
name='Sahadeva', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmonolt10-bold.otf', name='Latin Modern Mono Light',
style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lohit-devanagari/Lohit-
Devanagari.ttf', name='Lohit Devanagari', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Norasi-BoldItalic.otf',
name='Norasi', style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Kinnari-BoldOblique.ttf',
name='Kinnari', style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentium-basic/GenBasI.ttf',
```

```
name='Gentium Basic', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Laksaman-Bold.ttf',
name='Laksaman', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Waree-Oblique.ttf',
name='Waree', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/NimbusSansNarrow-
Bold.otf', name='Nimbus Sans Narrow', style='normal', variant='normal',
weight=700, stretch='condensed', size='scalable')) = 10.535
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansLinearB-
Regular.ttf', name='Noto Sans Linear B', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/BerenisADFPro-Regular.otf',
name='Berenis ADF Pro', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/ipafont-gothic/ipagp.ttf',
name='IPAPGothic', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansVai-Regular.ttf',
name='Noto Sans Vai', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-japanese-gothic.ttf',
name='IPAexGothic', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSansCondensed-
BoldOblique.ttf', name='DejaVu Sans', style='oblique', variant='normal',
weight=700, stretch='condensed', size='scalable')) = 1.535
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Loma.ttf', name='Loma',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/Sarai/Sarai.ttf', name='Sarai',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/asana-math/Asana-Math.otf',
```

```
name='Asana Math', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansOriya-
Regular.ttf', name='Noto Sans Oriya', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-beng-
extra/Muktibold.ttf', name='Mukti', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/fonts-hosny-
amiri/AmiriQuran.ttf', name='Amiri Quran', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/noto/NotoSansTifinaghTawellemmet-Regular.ttf', name='Noto Sans Tifinagh
Tawellemmet', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Garuda.ttf',
name='Garuda', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansDeseret-
Regular.ttf', name='Noto Sans Deseret', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ebgaramond/EBGaramond-
InitialsF2.ttf', name='EB Garamond Initials Fill2', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/adf/AccanthisADFStdNo2-BoldItalic.otf', name='Accanthis ADF Std No2',
style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifGurmukhi-
Regular.ttf', name='Noto Serif Gurmukhi', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansBamum-Bold.ttf',
name='Noto Sans Bamum', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansHebrew-
Regular.ttf', name='Noto Sans Hebrew', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ebgaramond/EBGaramond-
```

```
Initials.ttf', name='EB Garamond Initials', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/teluguvijayam/NTR.ttf',
name='NTR', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoCondensed-BoldItalic.ttf', name='Roboto
Condensed', style='italic', variant='normal', weight=700, stretch='condensed',
size='scalable')) = 11.535
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/freefont/FreeMono.ttf',
name='FreeMono', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/padauk/PadaukBook-Bold.ttf',
name='Padauk Book', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Kinnari-Italic.otf',
name='Kinnari', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansNabataean-
Regular.ttf', name='Noto Sans Nabataean', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoTTF/Roboto-ThinItalic.ttf', name='Roboto',
style='italic', variant='normal', weight=250, stretch='normal',
size='scalable')) = 11.1925
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/padauk/PadaukBook-Regular.ttf',
name='Padauk Book', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Garuda-Oblique.ttf',
name='Garuda', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmromancaps10-regular.otf', name='Latin Modern Roman
Caps', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifGrantha-
Regular.ttf', name='Noto Serif Grantha', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/noto/NotoSerifNyiakengPuachueHmong-Bold.ttf', name='Noto Serif Hmong
```

```
Nyiakeng', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-Semibold.ttf',
name='Lato', style='normal', variant='normal', weight=600, stretch='normal',
size='scalable')) = 10.24
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman8-italic.otf', name='Latin Modern Roman',
style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/P052-Italic.otf',
name='P052', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSerif.ttf',
name='DejaVu Serif', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/fonts-go/Go-Smallcaps-Italic.ttf',
name='Go Smallcaps', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifDisplay-
BoldItalic.ttf', name='Noto Serif Display', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMahajani-
Regular.ttf', name='Noto Sans Mahajani', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/crosextra/Carlito-Bold.ttf',
name='Carlito', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerif-Italic.ttf',
name='Noto Serif', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMono-Bold.ttf',
name='Noto Sans Mono', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansBhaiksuki-
Regular.ttf', name='Noto Sans Bhaiksuki', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/BerenisADFPro-Italic.otf',
```

```
name='Berenis ADF Pro', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/freefont/FreeSerifItalic.otf',
name='FreeSerif', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsans12-oblique.otf', name='Latin Modern Sans',
style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsans10-boldoblique.otf', name='Latin Modern Sans',
style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/teluguvijayam/LakkiReddy.ttf',
name='LakkiReddy', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansKannada-Bold.ttf',
name='Noto Sans Kannada', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/freefont/FreeSansOblique.ttf',
name='FreeSans', style='oblique', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/TlwgTypist-Bold.otf',
name='Tlwg Typist', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/adf/AccanthisADFStdNo3-Bold.otf', name='Accanthis ADF Std No3',
style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/TlwgTypewriter-
BoldOblique.ttf', name='Tlwg Typewriter', style='oblique', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lohit-bengali/Lohit-
Bengali.ttf', name='Lohit Bengali', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/freefont/FreeSansBold.otf',
name='FreeSans', style='normal', variant='normal', weight=600, stretch='normal',
size='scalable')) = 10.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/open-sans/OpenSans-
```

```
BoldItalic.ttf', name='Open Sans', style='italic', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansRunic-
Regular.ttf', name='Noto Sans Runic', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/malayalam/Rachana-Regular.ttf',
name='Rachana', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ubuntu/UbuntuMono-BI.ttf',
name='Ubuntu Mono', style='italic', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/TlwgTypo.otf', name='Tlwg
Typo', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/malayalam/RaghuMalayalamSans-
Regular.ttf', name='RaghuMalayalamSans', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTaiTham-Bold.ttf',
name='Noto Sans Tai Tham', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifMyanmar-
Bold.ttf', name='Noto Serif Myanmar', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Kinnari.ttf',
name='Kinnari', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ubuntu/Ubuntu-C.ttf',
name='Ubuntu Condensed', style='normal', variant='normal', weight=400,
stretch='condensed', size='scalable')) = 10.25
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTifinaghAzawagh-
Regular.ttf', name='Noto Sans Tifinagh Azawagh', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoLoopedThai-
Regular.ttf', name='Noto Looped Thai', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsans10-oblique.otf', name='Latin Modern Sans',
```

```
style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/linux-
libertine/LinBiolinum_R.otf', name='Linux Biolinum O', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyrecursor-regular.otf', name='TeX Gyre Cursor', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/TlwgTypo-Oblique.ttf',
name='Tlwg Typo', style='oblique', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Norasi-Bold.ttf',
name='Norasi', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-extra/UnPilgia.ttf',
name='UnPilgia', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmonocaps10-oblique.otf', name='Latin Modern Mono
Caps', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTifinagh-
Regular.ttf', name='Noto Sans Tifinagh', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/linux-
libertine/LinLibertine_RI.otf', name='Linux Libertine O', style='italic',
variant='normal', weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMasaramGondi-
Regular.ttf', name='Noto Sans Masaram Gondi', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMath-Regular.ttf',
name='Noto Sans Math', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/TlwgTypewriter.otf',
name='Tlwg Typewriter', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Kinnari-Oblique.ttf',
```

```
name='Kinnari', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/teluguvijayam/TenaliRamakrishna-Regular.ttf', name='TenaliRamakrishna',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/crosextra/Carlito-Italic.ttf',
name='Carlito', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentium/Gentium-I.ttf',
name='Gentium', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-Italic.ttf',
name='Lato', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/lobstertwo/LobsterTwo-
Italic.otf', name='Lobster Two', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMyanmar-Bold.ttf',
name='Noto Sans Myanmar', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Loma.otf', name='Loma',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/fonts-hosny-
amiri/AmiriQuranColored.ttf', name='Amiri Quran Colored', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Purisa-Bold.ttf',
name='Purisa', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSans-BoldItalic.ttf',
name='Noto Sans', style='italic', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman10-bold.otf', name='Latin Modern Roman',
style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Kinnari-BoldItalic.ttf',
```

```
name='Kinnari', style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix-word/STIX-Bold.otf',
name='STIX', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/crosextra/Caladea-
BoldItalic.ttf', name='Caladea', style='italic', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansKharoshthi-
Regular.ttf', name='Noto Sans Kharoshthi', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/noto/NotoSansCJK-Bold.ttc',
name='Noto Sans CJK JP', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXIntegralsUpD-
Bold.otf', name='STIXIntegralsUpD', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/crosextra/Caladea-Italic.ttf',
name='Caladea', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/TlwgTypo-Bold.ttf',
name='Tlwg Typo', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman7-italic.otf', name='Latin Modern Roman',
style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTaiViet-
Regular.ttf', name='Noto Sans Tai Viet', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansGeorgian-
Bold.ttf', name='Noto Sans Georgian', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix-word/STIX-Italic.otf',
name='STIX', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoTTF/Roboto-Italic.ttf', name='Roboto',
```

```
style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentiumplus-
compact/GentiumPlusCompact-I.ttf', name='Gentium Plus Compact', style='italic',
variant='normal', weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/arphic-gbsn00lp/gbsn00lp.ttf',
name='AR PL SungtiL GB', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/Navilu/Navilu.ttf',
name='Navilu', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXIntegralsUpD-
Regular.otf', name='STIXIntegralsUpD', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/NimbusSans-
Italic.otf', name='Nimbus Sans', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/ipafont-mincho/ipamp.ttf',
name='IPAPMincho', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansLimbu-
Regular.ttf', name='Noto Sans Limbu', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/kacst/KacstDigital.ttf',
name='KacstDigital', style='normal', variant='normal', weight=500,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Loma-BoldOblique.ttf',
name='Loma', style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXNonUnicode-
Italic.otf', name='STIXNonUnicode', style='italic', variant='normal',
weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifSinhala-
Bold.ttf', name='Noto Serif Sinhala', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
```

```
gyre/texgyreschola-bolditalic.otf', name='TeX Gyre Schola', style='italic',
variant='normal', weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansKayahLi-Bold.ttf',
name='Noto Sans Kayah Li', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/croscore/Cousine-
BoldItalic.ttf', name='Cousine', style='italic', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-HairlineItalic.ttf',
name='Lato', style='italic', variant='normal', weight=100, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansKhmer-
Regular.ttf', name='Noto Sans Khmer', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-beng-
extra/JamrulNormal.ttf', name='Jamrul', style='normal', variant='normal',
weight=500, stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/URWBookman-
DemiItalic.otf', name='URW Bookman', style='italic', variant='normal',
weight=600, stretch='normal', size='scalable')) = 11.24
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmromanslant8-regular.otf', name='Latin Modern Roman
Slanted', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsans12-regular.otf', name='Latin Modern Sans',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/kacst-one/KacstOne.ttf',
name='KacstOne', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansLao-Bold.ttf',
name='Noto Sans Lao', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/noto/NotoSansInscriptionalParthian-Regular.ttf', name='Noto Sans
Inscriptional Parthian', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/kacst/KacstTitleL.ttf',
```

```
name='KacstTitleL', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoNastaliqUrdu-
Regular.ttf', name='Noto Nastaliq Urdu', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/croscore/Cousine-Italic.ttf',
name='Cousine', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-Thin.ttf',
name='Lato', style='normal', variant='normal', weight=200, stretch='normal',
size='scalable')) = 10.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansDuployan-
Regular.ttf', name='Noto Sans Duployan', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-yrsa-rasa/Rasa-
Light.ttf', name='Rasa', style='normal', variant='normal', weight=300,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/liberation/LiberationSansNarrow-Regular.ttf', name='Liberation Sans
Narrow', style='normal', variant='normal', weight=400, stretch='condensed',
size='scalable')) = 10.25
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
opentype/ebgaramond/EBGaramond12-AllSC.otf', name='EB Garamond 12 All SC',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/adf/GilliusADFNo2-BoldCondItalic.otf', name='Gillius ADF No2',
style='italic', variant='normal', weight=700, stretch='condensed',
size='scalable')) = 11.535
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/adf/AccanthisADFStdNo2-Regular.otf', name='Accanthis ADF Std No2',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/TlwgTypist-Bold.ttf',
name='Tlwg Typist', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifHebrew-Bold.ttf',
name='Noto Serif Hebrew', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifBengali-
```

```
Regular.ttf', name='Noto Serif Bengali', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/TlwgTypewriter.ttf',
name='Tlwg Typewriter', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/noto/NotoSansTifinaghAgrawImazighen-Regular.ttf', name='Noto Sans
Tifinagh Agraw Imazighen', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/GilliusADFNo2-Cond.otf',
name='Gillius ADF No2', style='normal', variant='normal', weight=400,
stretch='condensed', size='scalable')) = 10.25
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansSharada-
Regular.ttf', name='Noto Sans Sharada', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Umpush-LightOblique.ttf',
name='Umpush', style='oblique', variant='normal', weight=300, stretch='normal',
size='scalable')) = 11.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/open-sans/OpenSans-
ExtraBoldItalic.ttf', name='Open Sans', style='italic', variant='normal',
weight=800, stretch='normal', size='scalable')) = 11.43
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmonoproplt10-bold.otf', name='Latin Modern Mono Prop
Light', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation2/LiberationMono-
BoldItalic.ttf', name='Liberation Mono', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmonoltcond10-regular.otf', name='Latin Modern Mono
Light Cond', style='normal', variant='normal', weight=400, stretch='condensed',
size='scalable')) = 10.25
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/ebgaramond/EBGaramond08-Italic.ttf', name='EB Garamond',
style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansHebrew-Bold.ttf',
name='Noto Sans Hebrew', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/didot/GFSDidotBoldItalic.otf',
```

```
name='GFS Didot', style='italic', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansBatak-
Regular.ttf', name='Noto Sans Batak', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifTibetan-
Bold.ttf', name='Noto Serif Tibetan', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/open-sans/OpenSans-
Semibold.ttf', name='Open Sans', style='normal', variant='normal', weight=600,
stretch='normal', size='scalable')) = 10.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-
base35/P052-BoldItalic.otf', name='P052', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/ipafont-mincho/ipam.ttf',
name='IPAMincho', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman5-bold.otf', name='Latin Modern Roman',
style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansThaana-Bold.ttf',
name='Noto Sans Thaana', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/TlwgMono-Bold.ttf',
name='Tlwg Mono', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/croscore/Arimo-Regular.ttf',
name='Arimo', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/TlwgMono-BoldOblique.ttf',
name='Tlwg Mono', style='oblique', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSerifCondensed-
BoldItalic.ttf', name='DejaVu Serif', style='italic', variant='normal',
weight=700, stretch='condensed', size='scalable')) = 11.535
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/malayalam/Dyuthi-Regular.ttf',
```

```
name='Dyuthi', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/fonts-go/Go-Medium-Italic.ttf', name='Go
Medium', style='italic', variant='normal', weight=500, stretch='normal',
size='scalable')) = 11.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/malayalam/Suruma.ttf',
name='Suruma', style='normal', variant='normal', weight=500, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentium-basic/GenBkBasBI.ttf',
name='Gentium Book Basic', style='italic', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/ipaexfont-mincho/ipaexm.ttf',
name='IPAexMincho', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/cantarell/Cantarell-Light.otf',
name='Cantarell', style='normal', variant='normal', weight=300,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansKhudawadi-
Regular.ttf', name='Noto Sans Khudawadi', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Laksaman-BoldItalic.otf',
name='Laksaman', style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/GilliusADF-Bold.otf',
name='Gillius ADF', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Umpush-BoldOblique.otf',
name='Umpush', style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Umpush-LightOblique.otf',
name='Umpush', style='oblique', variant='normal', weight=300, stretch='normal',
size='scalable')) = 11.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansDisplay-
Regular.ttf', name='Noto Sans Display', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-extra/UnPen.ttf',
```

```
name='UnPen', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifTamil-Bold.ttf',
name='Noto Serif Tamil', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmromanslant10-bold.otf', name='Latin Modern Roman
Slanted', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/C059-Roman.otf',
name='C059', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/teluguvijayam/dhurjati.ttf',
name='Dhurjati', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Loma-Oblique.ttf',
name='Loma', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyreheroscn-italic.otf', name='TeX Gyre Heros Cn', style='italic',
variant='normal', weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansBalinese-
Regular.ttf', name='Noto Sans Balinese', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansLinearA-
Regular.ttf', name='Noto Sans Linear A', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Sawasdee-Oblique.otf',
name='Sawasdee', style='oblique', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-gujr-extra/padmaa-
Bold.1.1.ttf', name='padmaa-Bold.1.1', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMeeteiMayek-
Regular.ttf', name='Noto Sans Meetei Mayek', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansBengali-
```

```
Regular.ttf', name='Noto Sans Bengali', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation/LiberationSans-
Regular.ttf', name='Liberation Sans', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-gujr-extra/aakar-
medium.ttf', name='aakar', style='normal', variant='normal', weight=500,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMro-Regular.ttf',
name='Noto Sans Mro', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-deva-extra/samanata.ttf',
name='Samanata', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/AccanthisADFStd-
Italic.otf', name='Accanthis ADF Std', style='italic', variant='normal',
weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/freefont/FreeSerifBold.ttf',
name='FreeSerif', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifTamil-
Regular.ttf', name='Noto Serif Tamil', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/GilliusADFNo2-Italic.otf',
name='Gillius ADF No2', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/NimbusSans-
Bold.otf', name='Nimbus Sans', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Garuda.otf',
name='Garuda', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmono12-regular.otf', name='Latin Modern Mono',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsansdemicond10-oblique.otf', name='Latin Modern Sans
```

```
Demi Cond', style='oblique', variant='normal', weight=600, stretch='condensed',
size='scalable')) = 11.44
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-Medium.ttf',
name='Lato', style='normal', variant='normal', weight=500, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMongolian-
Regular.ttf', name='Noto Sans Mongolian', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-yrsa-rasa/Yrsa-
BoldItalic.ttf', name='Yrsa', style='italic', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansManichaean-
Regular.ttf', name='Noto Sans Manichaean', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/URWBookman-
LightItalic.otf', name='URW Bookman', style='italic', variant='normal',
weight=300, stretch='normal', size='scalable')) = 11.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansLydian-
Regular.ttf', name='Noto Sans Lydian', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/Gargi/Gargi.ttf', name='Gargi',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTakri-
Regular.ttf', name='Noto Sans Takri', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTifinaghGhat-
Regular.ttf', name='Noto Sans Tifinagh Ghat', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-beng-extra/Ani.ttf',
name='Ani', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansCuneiform-
Regular.ttf', name='Noto Sans Cuneiform', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/fonts-go/Go-Mono-Bold.ttf', name='Go
```

```
Mono', style='normal', variant='normal', weight=600, stretch='normal',
size='scalable')) = 10.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Umpush-Light.otf',
name='Umpush', style='normal', variant='normal', weight=300, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Garuda-BoldOblique.otf',
name='Garuda', style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTagalog-
Regular.ttf', name='Noto Sans Tagalog', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/GilliusADF-BoldItalic.otf',
name='Gillius ADF', style='italic', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-BlackItalic.ttf',
name='Lato', style='italic', variant='normal', weight=900, stretch='normal',
size='scalable')) = 11.525
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Sawasdee-BoldOblique.otf',
name='Sawasdee', style='oblique', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansSiddham-
Regular.ttf', name='Noto Sans Siddham', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lohit-gujarati/Lohit-
Gujarati.ttf', name='Lohit Gujarati', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Laksaman-Italic.otf',
name='Laksaman', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyrepagella-bolditalic.otf', name='TeX Gyre Pagella', style='italic',
variant='normal', weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman12-italic.otf', name='Latin Modern Roman',
style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/malayalam/Manjari-Thin.otf',
```

```
name='Manjari', style='normal', variant='normal', weight=100, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansCherokee-
Regular.ttf', name='Noto Sans Cherokee', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/didot/GFSDidotItalic.otf',
name='GFS Didot', style='italic', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/cabin/Cabin-
SemiBoldItalic.otf', name='Cabin', style='italic', variant='normal', weight=600,
stretch='normal', size='scalable')) = 11.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansBassaVah-
Regular.ttf', name='Noto Sans Bassa Vah', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyreheros-bold.otf', name='TeX Gyre Heros', style='normal',
variant='normal', weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
opentype/ebgaramond/EBGaramond12-Regular.otf', name='EB Garamond',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifDisplay-
Regular.ttf', name='Noto Serif Display', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMiao-Regular.ttf',
name='Noto Sans Miao', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansDisplay-
Italic.ttf', name='Noto Sans Display', style='italic', variant='normal',
weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/lohit-oriya/Lohit-Odia.ttf',
name='Lohit Odia', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/croscore/Arimo-BoldItalic.ttf',
name='Arimo', style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmono10-regular.otf', name='Latin Modern Mono',
```

```
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/freefont/FreeMonoBoldOblique.ttf', name='FreeMono', style='oblique',
variant='normal', weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoKufiArabic-
Regular.ttf', name='Noto Kufi Arabic', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/crosextra/Carlito-
BoldItalic.ttf', name='Carlito', style='italic', variant='normal', weight=700,
stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/kacst/KacstQurn.ttf',
name='KacstQurn', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifGujarati-
Regular.ttf', name='Noto Serif Gujarati', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsans9-oblique.otf', name='Latin Modern Sans',
style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansAdlam-Bold.ttf',
name='Noto Sans Adlam', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentiumplus/GentiumBookPlus-
Bold.ttf', name='Gentium Book Plus', style='normal', variant='normal',
weight=800, stretch='normal', size='scalable')) = 10.43
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansOgham-
Regular.ttf', name='Noto Sans Ogham', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/abyssinica/AbyssinicaSIL-
Regular.ttf', name='Abyssinica SIL', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMono-Regular.ttf',
name='Noto Sans Mono', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/TlwgTypist-Oblique.ttf',
name='Tlwg Typist', style='oblique', variant='normal', weight=400,
```

```
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXIntegralsD-
Regular.otf', name='STIXIntegralsD', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXIntegralsSm-
Regular.otf', name='STIXIntegralsSm', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifKannada-
Regular.ttf', name='Noto Serif Kannada', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
opentype/freefont/FreeSerifBoldItalic.otf', name='FreeSerif', style='italic',
variant='normal', weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsans8-oblique.otf', name='Latin Modern Sans',
style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix-word/STIXMath-
Regular.otf', name='STIX Math', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Waree-BoldOblique.otf',
name='Waree', style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifGurmukhi-
Bold.ttf', name='Noto Serif Gurmukhi', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/olga/GFSOlga.otf', name='GFS
Olga', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/teluguvijayam/Peddana-
Regular.ttf', name='Peddana', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/GilliusADF-
BoldCondItalic.otf', name='Gillius ADF', style='italic', variant='normal',
weight=700, stretch='condensed', size='scalable')) = 11.535
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMedefaidrin-
Regular.ttf', name='Noto Sans Medefaidrin', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
```

```
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/fonts-go/Go-Smallcaps.ttf', name='Go
Smallcaps', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/noto/NotoSansCanadianAboriginal-Bold.ttf', name='Noto Sans Canadian
Aboriginal', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansNKo-Regular.ttf',
name='Noto Sans NKo', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmono9-regular.otf', name='Latin Modern Mono',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation2/LiberationMono-
Regular.ttf', name='Liberation Mono', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/teluguvijayam/Suravaram.ttf',
name='Suravaram', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTifinaghSIL-
Regular.ttf', name='Noto Sans Tifinagh SIL', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyreadventor-bolditalic.otf', name='TeX Gyre Adventor', style='italic',
variant='normal', weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifKhojki-
Regular.ttf', name='Noto Serif Khojki', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSerif-
BoldItalic.ttf', name='DejaVu Serif', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/P052-Bold.otf',
name='P052', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/malayalam/Gayathri-Thin.otf',
name='Gayathri', style='normal', variant='normal', weight=100, stretch='normal',
size='scalable')) = 10.335
```

```
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
opentype/freefont/FreeSansBoldOblique.otf', name='FreeSans', style='oblique',
variant='normal', weight=600, stretch='normal', size='scalable')) = 11.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifKhmer-
Regular.ttf', name='Noto Serif Khmer', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/ebgaramond/EBGaramond-
InitialsF1.otf', name='EB Garamond Initials Fill1', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/URWGothic-
DemiOblique.otf', name='URW Gothic', style='oblique', variant='normal',
weight=600, stretch='normal', size='scalable')) = 11.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSansMono-
Bold.ttf', name='DejaVu Sans Mono', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/junicode/Junicode-
BoldItalic.ttf', name='Junicode', style='italic', variant='normal', weight=600,
stretch='normal', size='scalable')) = 11.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansBuhid-
Regular.ttf', name='Noto Sans Buhid', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/adf/GilliusADFNo2-CondItalic.otf', name='Gillius ADF No2',
style='italic', variant='normal', weight=400, stretch='condensed',
size='scalable')) = 11.25
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-
core/UnDinaruLight.ttf', name='UnDinaru', style='normal', variant='normal',
weight=300, stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/fonts-go/Go-Mono-Bold-Italic.ttf',
name='Go Mono', style='italic', variant='normal', weight=600, stretch='normal',
size='scalable')) = 11.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/kacst/KacstTitle.ttf',
name='KacstTitle', style='normal', variant='normal', weight=500,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman8-regular.otf', name='Latin Modern Roman',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
```

```
truetype/roboto/unhinted/RobotoTTF/Roboto-BlackItalic.ttf', name='Roboto',
style='italic', variant='normal', weight=900, stretch='normal',
size='scalable')) = 11.525
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-gyre-
math/texgyrepagella-math.otf', name='TeX Gyre Pagella Math', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmonoprop10-oblique.otf', name='Latin Modern Mono
Prop', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmromanunsl10-regular.otf', name='Latin Modern Roman
Unslanted', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXGeneral-
BoldItalic.otf', name='STIXGeneral', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansLepcha-
Regular.ttf', name='Noto Sans Lepcha', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-extra/UnVada.ttf',
name='UnVada', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-yrsa-rasa/Yrsa-
Medium.ttf', name='Yrsa', style='normal', variant='normal', weight=500,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/liberation/LiberationSerif-
Italic.ttf', name='Liberation Serif', style='italic', variant='normal',
weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansKhojki-
Regular.ttf', name='Noto Sans Khojki', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Norasi-Italic.ttf',
name='Norasi', style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansSinhala-
Regular.ttf', name='Noto Sans Sinhala', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/gentium-basic/GenBasR.ttf',
name='Gentium Basic', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/tlwg/Purisa.ttf',
name='Purisa', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoTTF/Roboto-BoldItalic.ttf', name='Roboto',
style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/kacst/KacstPen.ttf',
name='KacstPen', style='normal', variant='normal', weight=500, stretch='normal',
size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/freefont/FreeMonoOblique.otf',
name='FreeMono', style='oblique', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifTelugu-Bold.ttf',
name='Noto Serif Telugu', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/stix/STIXSizeThreeSym-
Bold.otf', name='STIXSizeThreeSym', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/BerenisADFPro-
BoldItalic.otf', name='Berenis ADF Pro', style='italic', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansElymaic-
Regular.ttf', name='Noto Sans Elymaic', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/comfortaa/Comfortaa-
Regular.ttf', name='Comfortaa', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman8-bold.otf', name='Latin Modern Roman',
style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/TlwgMono-Oblique.otf',
name='Tlwg Mono', style='oblique', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansNushu-
Regular.ttf', name='Noto Sans Nushu', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-core/UnGungseo.ttf',
name='UnGungseo', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/kacst/KacstLetter.ttf',
name='KacstLetter', style='normal', variant='normal', weight=500,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/noto/NotoSansSymbols2-Regular.ttf', name='Noto Sans Symbols2',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/AccanthisADFStd-Bold.otf',
name='Accanthis ADF Std', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSans-Bold.ttf',
name='Noto Sans', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/gentium-basic/GenBkBasR.ttf',
name='Gentium Book Basic', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/TlwgMono.otf', name='Tlwg
Mono', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansArabic-
Regular.ttf', name='Noto Sans Arabic', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-yrsa-rasa/Yrsa-
Light.ttf', name='Yrsa', style='normal', variant='normal', weight=300,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/urw-base35/URWBookman-
Light.otf', name='URW Bookman', style='normal', variant='normal', weight=300,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-yrsa-rasa/Rasa-
SemiBold.ttf', name='Rasa', style='normal', variant='normal', weight=600,
stretch='normal', size='scalable')) = 10.24
DEBUG:matplotlib.font_manager:findfont:
```


```
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyrebonum-bold.otf', name='TeX Gyre Bonum', style='normal',
variant='normal', weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/unfonts-core/UnDotum.ttf',
name='UnDotum', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman7-regular.otf', name='Latin Modern Roman',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Umpush-Bold.otf',
name='Umpush', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansGurmukhi-
Bold.ttf', name='Noto Sans Gurmukhi', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansAdlamUnjoined-
Bold.ttf', name='Noto Sans Adlam Unjoined', style='normal', variant='normal',
weight=700, stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Kinnari-BoldItalic.otf',
name='Kinnari', style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
opentype/ebgaramond/EBGaramond08-Regular.otf', name='EB Garamond',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansCham-Regular.ttf',
name='Noto Sans Cham', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmonoproplt10-regular.otf', name='Latin Modern Mono
Prop Light', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/adf/UniversalisADFStd-
Regular.otf', name='Universalis ADF Std', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansZanabazarSquare-
Regular.ttf', name='Noto Sans Zanabazar Square', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/lato/Lato-ThinItalic.ttf',
name='Lato', style='italic', variant='normal', weight=200, stretch='normal',
size='scalable')) = 11.24
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansIndicSiyaqNumbers-
Regular.ttf', name='Noto Sans Indic Siyaq Numbers', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/malayalam/Rachana-Bold.ttf',
name='Rachana', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman9-regular.otf', name='Latin Modern Roman',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansTifinaghAdrar-
Regular.ttf', name='Noto Sans Tifinagh Adrar', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifYezidi-
Regular.ttf', name='Noto Serif Yezidi', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmmonoproplt10-oblique.otf', name='Latin Modern Mono
Prop Light', style='oblique', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoCondensed-Medium.ttf', name='Roboto Condensed',
style='normal', variant='normal', weight=500, stretch='condensed',
size='scalable')) = 10.344999999999999
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansGeorgian-
Regular.ttf', name='Noto Sans Georgian', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/teluguvijayam/RaviPrakash.ttf',
name='RaviPrakash', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyretermes-bolditalic.otf', name='TeX Gyre Termes', style='italic',
variant='normal', weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/croscore/Tinos-Bold.ttf',
name='Tinos', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansGrantha-
Regular.ttf', name='Noto Sans Grantha', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSerifTamilSlanted-
Regular.ttf', name='Noto Serif Tamil Slanted', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/artemisia/GFSArtemisia.otf',
name='GFS Artemisia', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmroman7-bold.otf', name='Latin Modern Roman',
style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/fonts-telu-
extra/vemana2000.ttf', name='Vemana2000', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/cabin/Cabin-BoldItalic.otf',
name='Cabin', style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoTraditionalNushu-
Regular.ttf', name='Noto Traditional Nushu', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/noto/NotoSerifCJK-Regular.ttc',
name='Noto Serif CJK JP', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyrechorus-mediumitalic.otf', name='TeX Gyre Chorus', style='normal',
variant='normal', weight=500, stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/linux-
libertine/LinLibertine_RZI.otf', name='Linux Libertine O', style='italic',
variant='normal', weight=600, stretch='normal', size='scalable')) = 11.24
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
truetype/roboto/unhinted/RobotoTTF/Roboto-Black.ttf', name='Roboto',
style='normal', variant='normal', weight=900, stretch='normal',
size='scalable')) = 10.525
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/croscore/Tinos-BoldItalic.ttf',
name='Tinos', style='italic', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/opentype/lobstertwo/LobsterTwo-
Bold.otf', name='Lobster Two', style='normal', variant='normal', weight=700,
stretch='normal', size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/fonts/
opentype/neohellenic/GFSNeohellenicBold.otf', name='GFS Neohellenic',
style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/TlwgTypewriter-
BoldOblique.otf', name='Tlwg Typewriter', style='oblique', variant='normal',
weight=700, stretch='normal', size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/freefont/FreeMono.otf',
name='FreeMono', style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyrebonum-regular.otf', name='TeX Gyre Bonum', style='normal',
variant='normal', weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsansquot8-boldoblique.otf', name='Latin Modern Sans
Quotation', style='oblique', variant='normal', weight=700, stretch='normal',
size='scalable')) = 11.335
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/dejavu/DejaVuSerifCondensed-
Bold.ttf', name='DejaVu Serif', style='normal', variant='normal', weight=700,
stretch='condensed', size='scalable')) = 10.535
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansYi-Regular.ttf',
name='Noto Sans Yi', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/fonts-go/Go-Italic.ttf', name='Go',
style='italic', variant='normal', weight=400, stretch='normal',
size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/noto/NotoSansMyanmar-
Regular.ttf', name='Noto Sans Myanmar', style='normal', variant='normal',
weight=400, stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/kacst/KacstOffice.ttf',
name='KacstOffice', style='normal', variant='normal', weight=500,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/tlwg/Kinnari-Bold.otf',
name='Kinnari', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont:
```

```
score(FontEntry(fname='/usr/share/fonts/truetype/junicode/Junicode-Bold.ttf',
name='Junicode', style='normal', variant='normal', weight=600, stretch='normal',
size='scalable')) = 10.24
DEBUG:matplotlib.font_manager:findfont: score(FontEntry(fname='/usr/share/texmf/
fonts/opentype/public/lm/lmsans9-regular.otf', name='Latin Modern Sans',
style='normal', variant='normal', weight=400, stretch='normal',
size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/opentype/ipaexfont-gothic/ipaexg.ttf',
name='IPAexGothic', style='normal', variant='normal', weight=400,
stretch='normal', size='scalable')) = 10.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/texmf/fonts/opentype/public/tex-
gyre/texgyrebonum-italic.otf', name='TeX Gyre Bonum', style='italic',
variant='normal', weight=400, stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/open-sans/OpenSans-Light.ttf',
name='Open Sans', style='normal', variant='normal', weight=300,
stretch='normal', size='scalable')) = 10.145
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/freefont/FreeMonoOblique.ttf',
name='FreeMono', style='oblique', variant='normal', weight=400,
stretch='normal', size='scalable')) = 11.05
DEBUG:matplotlib.font_manager:findfont:
score(FontEntry(fname='/usr/share/fonts/truetype/ubuntu/Ubuntu-B.ttf',
name='Ubuntu', style='normal', variant='normal', weight=700, stretch='normal',
size='scalable')) = 10.335
DEBUG:matplotlib.font_manager:findfont: Matching
sans\-serif:style=normal:variant=normal:weight=normal:stretch=normal:size=12.0
to DejaVu Sans ('/home/heydari/miniconda3/lib/python3.13/site-
packages/matplotlib/mpl-data/fonts/ttf/DejaVuSans.ttf') with score of 0.050000.
```

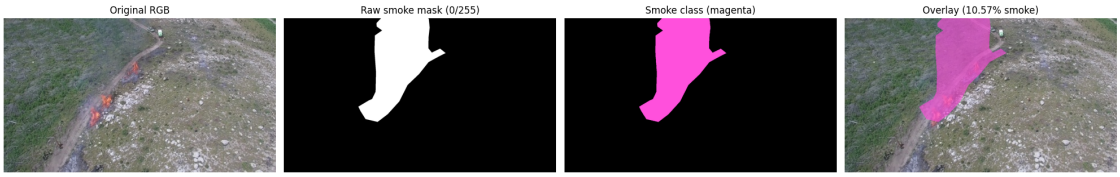

[4]:
```
# Strictly load the supplied smoke checkpoint
model_name = "pidnet"
ckpt_path = REPO_ROOT / "models/smokemodel_pidnet.pth"
model = get_model(model_name=model_name, device="cpu", classes=2,␣
  ↪ckpt_path=str(ckpt_path))
model = model.to(device).eval()
model.augment = False
```


```
assert model.conv1[0].in_channels == 3
assert model.final_layer.conv2.out_channels == 2
print('Checkpoint:', ckpt_path)
print('Loaded tensors:', len(model.state_dict()))
print('Model ready on', next(model.parameters()).device)
```

```
Loading checkpoint from: /home/heydari/FHHI-XAI_RAS/models/smokemodel_pidnet.pth
Checkpoint: /home/heydari/FHHI-XAI_RAS/models/smokemodel_pidnet.pth
Loaded tensors: 479
Model ready on cuda:0
```

[5]:
```
# Preview the PIDNet prediction (no annotation is used). Run after loading the␣
 ↪checkpoint.
import torch.nn.functional as F
PREVIEW_IMAGE_PATH = None  # set to '/path/to/new_image.jpg' for an unlabelled␣
 ↪image
PREVIEW_SAMPLE_ID = sample_id    # used only when PREVIEW_IMAGE_PATH is None
if PREVIEW_IMAGE_PATH is None:
    preview_tensor = dataset[PREVIEW_SAMPLE_ID][0]
else:
    preview_rgb = np.asarray(Image.open(PREVIEW_IMAGE_PATH).convert('RGB'))
    preview_x = (preview_rgb.astype(np.float32) / 255.0 - MEAN) / STD
    preview_x = cv2.resize(preview_x, (TARGET_SIZE[1], TARGET_SIZE[0]),␣
 ↪interpolation=cv2.INTER_LINEAR)
    preview_tensor = torch.from_numpy(np.ascontiguousarray(preview_x.
 ↪transpose(2, 0, 1))).float()
model.eval()
model.augment = False
with torch.inference_mode():
    preview_logits = model(preview_tensor.unsqueeze(0).to(device))
    if isinstance(preview_logits, (tuple, list)):
        preview_logits = preview_logits[-1]
    preview_logits = F.interpolate(preview_logits, size=TARGET_SIZE,␣
 ↪mode='bilinear', align_corners=True)
    preview_mask = (preview_logits.argmax(dim=1)[0].cpu().numpy() == 1)
preview_rgb = dataset.reverse_augmentation(preview_tensor).permute(1, 2, 0).
 ↪numpy().astype(np.uint8)
print(f'Predicted smoke coverage: {preview_mask.mean():.2%}')
fig, axes = plt.subplots(1, 3, figsize=(16, 4))
axes[0].imshow(preview_rgb); axes[0].set_title('Input RGB')
axes[1].imshow(preview_mask, cmap='gray', vmin=0, vmax=1); axes[1].
 ↪set_title('PIDNet predicted smoke mask')
axes[2].imshow(preview_rgb)
axes[2].imshow(np.ma.masked_where(~preview_mask, preview_mask), cmap='spring',␣
 ↪alpha=0.65, vmin=0, vmax=1)
axes[2].set_title('PIDNet prediction overlay')
```

```
for ax in axes: ax.axis('off')
plt.show()
```

```
Predicted smoke coverage: 0.70%
```

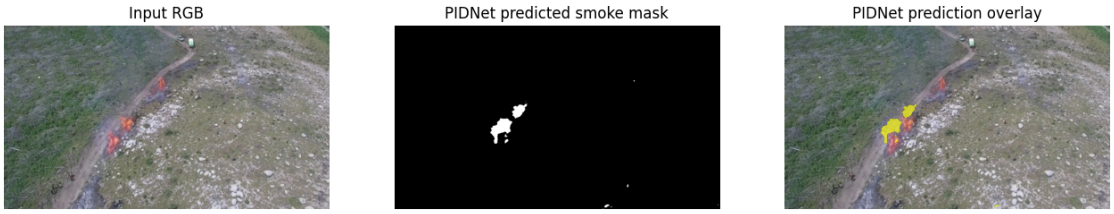

1.1 Resumable CRP generation

Existing complete layers are skipped. Missing layers are handled together, in bounded groups to avoid CUDA OOM.

[6]:
```
# Build only missing CRP layers; skip the run when everything is complete
'''
CRP_LAYERS_PER_PASS = 4  # reduce to 2 or 1 if GPU memory is tight
CRP_DIR = REPO_ROOT / "examples/output/crp/CRP_SMOKE"
crp_layers = get_layer_names(model, [torch.nn.Conv2d])
required = [CRP_DIR/folder/f"{layer}_data.npy" for layer in crp_layers
            for folder in ("RelMax_sum_normed", "ActMax_max_normed")]
missing_layers = [layer for layer in crp_layers if any(
    not (CRP_DIR/folder/f"{layer}_data.npy").is_file() or
    (CRP_DIR/folder/f"{layer}_data.npy").stat().st_size <= 128
    for folder in ("RelMax_sum_normed", "ActMax_max_normed"))]
if not missing_layers:
    print(f'CRP complete for all {len(crp_layers)} convolutional layers; skipped.')
else:
    print(f'CRP missing {len(missing_layers)} layers:', missing_layers)
    run_analysis(model_name, model, dataset, output_dir=str(CRP_DIR), device=device,
                 record_layers=missing_layers,
                 layer_chunk_size=min(CRP_LAYERS_PER_PASS, len(missing_layers)))
'''
```

[6]:
```
'\nCRP_LAYERS_PER_PASS = 4  # reduce to 2 or 1 if GPU memory is tight\nCRP_DIR =
REPO_ROOT / "examples/output/crp/CRP_SMOKE"\ncrp_layers = get_layer_names(model,
[torch.nn.Conv2d])\nrequired = [CRP_DIR/folder/f"{layer}_data.npy" for layer in
crp_layers\n            for folder in ("RelMax_sum_normed",
"ActMax_max_normed")]\nmissing_layers = [layer for layer in crp_layers if any(\n
not (CRP_DIR/folder/f"{layer}_data.npy").is_file() or\n
```

```
(CRP_DIR/folder/f"{layer}_data.npy").stat().st_size <= 128\n    for folder in
("RelMax_sum_normed", "ActMax_max_normed"))]\nif not missing_layers:\n
print(f\'CRP complete for all {len(crp_layers)} convolutional layers;
skipped.\')\nelse:\n    print(f\'CRP missing {len(missing_layers)} layers:\',
missing_layers)\n    run_analysis(model_name, model, dataset,
output_dir=str(CRP_DIR), device=device,\n
record_layers=missing_layers,\n
layer_chunk_size=min(CRP_LAYERS_PER_PASS, len(missing_layers)))\n'
```

1.2 Resumable all-layer PCX banks

[7]:
```
"""Fast, resumable, memory-conscious PCX attribution-bank generation."""
'''
import gc
import logging
from collections import defaultdict
from pathlib import Path

import h5py
import numpy as np
import torch
from torch.utils.data import DataLoader, Subset
from tqdm.auto import tqdm

from crp.concepts import ChannelConcept
from crp.helper import get_layer_names
from LCRP.utils.crp_configs import ATTRIBUTORS, CANONIZERS, COMPOSITES

# LCRP emits normal timing information at ERROR level; hide that noise.
logging.getLogger("LCRP.utils.crp").setLevel(logging.CRITICAL)


def _open_bank(path, channels, dataset_size):
    path.parent.mkdir(parents=True, exist_ok=True)
    try:
        bank = h5py.File(path, "a")
    except OSError:
        path.unlink(missing_ok=True)
        bank = h5py.File(path, "w")

    incompatible = any(
        name in bank and bank[name].shape[1] != channels
        for name in ("activations", "attributions")
    )
    recorded_size = bank.attrs.get("dataset_size")
    if recorded_size is not None and int(recorded_size) != dataset_size:
        incompatible = True
```

```
    if incompatible:
        bank.close()
        path.unlink(missing_ok=True)
        bank = h5py.File(path, "w")

    for name in ("activations", "attributions"):
        if name not in bank:
            bank.create_dataset(
                name, shape=(0, channels), maxshape=(None, channels),
                dtype="float16", chunks=True,
            )
    safe_rows = min(
        bank["activations"].shape[0], bank["attributions"].shape[0],␣
 ↪dataset_size
    )
    for name in ("activations", "attributions"):
        bank[name].resize((safe_rows, channels))
    bank.attrs["dataset_size"] = dataset_size
    bank.flush()
    return bank, safe_rows


def _append(target, values):
    start = target.shape[0]
    target.resize((start + values.shape[0], values.shape[1]))
    target[start:] = values


def _export_numpy(bank_path):
    with h5py.File(bank_path, "r") as bank:
        np.save(bank_path.parent / "activations.npy", bank["activations"][:])
        np.save(bank_path.parent / "attributions.npy", bank["attributions"][:])


def _chunks(items, size):
    for index in range(0, len(items), size):
        yield items[index:index + size]


def build_all_layer_banks_fast(
    model_name,
    model,
    dataset,
    output_base,
    device="cuda:0",
    class_id=1,
    layer_names=None,
```

```
    layers_per_pass=4,
    num_workers=2,
    flush_every=25,
):
    """Generate several layer banks per model pass and resume safely."""
    output_base = Path(output_base)
    output_base.mkdir(parents=True, exist_ok=True)
    device = torch.device(device)
    model = model.to(device).eval()
    layers = layer_names or get_layer_names(model, [torch.nn.Conv2d])
    modules = dict(model.named_modules())
    concept = ChannelConcept()
    total = len(dataset)

    if layers_per_pass < 1:
        raise ValueError("layers_per_pass must be at least 1")

    # Group layers by resume position so each chunk can advance in lockstep.
    resume_groups = defaultdict(list)
    for layer in layers:
        path = output_base / layer / "pcx_bank.h5"
        unsupported_marker = path.parent / "unsupported_layer.txt"
        if unsupported_marker.is_file():
            print(f"[unsupported; skipped] {layer}")
            continue
        bank, start = _open_bank(path, modules[layer].out_channels, total)
        bank.close()
        if start == total:
            _export_numpy(path)
            print(f"[complete] {layer}")
        else:
            resume_groups[start].append(layer)

    print(
        f"PCX dataset={total}, layers={len(layers)}, layers/
↪pass={layers_per_pass}, "
        f"workers={num_workers}, device={device}"
    )
    for start, pending_layers in sorted(resume_groups.items()):
        for layer_chunk in _chunks(pending_layers, layers_per_pass):
            label = ", ".join(layer_chunk)
            print(f"[resume {start}/{total}] {label}")
            # Start workers before HDF5 files are opened. Forked workers must
            # not inherit bank handles, otherwise export sees a file lock.
            remaining = Subset(dataset, range(start, total))
            loader_kwargs = dict(
                batch_size=1, shuffle=False, num_workers=num_workers,
```

```
                pin_memory=(device.type == "cuda"),
            )
            if num_workers > 0:
                loader_kwargs.update(persistent_workers=True, prefetch_factor=2)
            loader = DataLoader(remaining, **loader_kwargs)
            loader_iterator = iter(loader)

            banks = {}
            for layer in layer_chunk:
                path = output_base / layer / "pcx_bank.h5"
                banks[layer], confirmed = _open_bank(
                    path, modules[layer].out_channels, total
                )
                if confirmed != start:
                    raise RuntimeError(f"Resume position changed for {layer}")

            # These objects are reusable; constructing them per image was very␣
↪slow.
            attribution = ATTRIBUTORS[model_name](model)
            composite =␣
↪COMPOSITES[model_name](canonizers=[CANONIZERS[model_name]()])
            unsupported_in_chunk = set()
            progress = tqdm(loader_iterator, total=total - start,␣
↪desc=layer_chunk[0], leave=False)
            try:
                for offset, (images, _) in enumerate(progress, start + 1):
                    images = images.to(device, non_blocking=True).
↪requires_grad_()
                    result = attribution(
                        images,
                        [{attribution.MODEL_OUTPUT_NAME: [int(class_id)]}],
                        composite,
                        record_layer=layer_chunk,
                        exclude_parallel=False,
                    )
                    for layer in layer_chunk:
                        if layer in unsupported_in_chunk:
                            continue
                        if layer not in result.activations or layer not in␣
↪result.relevances:
                            unsupported_in_chunk.add(layer)
                            marker = output_base / layer / "unsupported_layer.
↪txt"
                            marker.write_text("Attribution returned no␣
↪activation or relevance for this layer.\n")
                            print(f"[unsupported; skipping bank] {layer}")
```

```
                            continue
                        activations = result.activations[layer].amax((-2, -1)).
↪detach().cpu()
                        relevances = concept.attribute(
                            result.relevances[layer], abs_norm=True
                        ).detach().cpu()
                        activations = torch.nan_to_num(
                            activations, nan=0.0, posinf=0.0, neginf=0.0
                        ).numpy().astype(np.float16)
                        relevances = torch.nan_to_num(
                            relevances, nan=0.0, posinf=0.0, neginf=0.0
                        ).numpy().astype(np.float16)
                        _append(banks[layer]["activations"], activations)
                        _append(banks[layer]["attributions"], relevances)
                    if offset % flush_every == 0:
                        for bank in banks.values():
                            bank.flush()
                        gc.collect()
                        if device.type == "cuda":
                            torch.cuda.empty_cache()
                    del result, images
            except torch.cuda.OutOfMemoryError as error:
                raise RuntimeError(
                    f"CUDA OOM with layers_per_pass={layers_per_pass}. "
                    "Restart the kernel and retry with layers_per_pass=2 or 1."
                ) from error
            finally:
                for bank in banks.values():
                    bank.flush()
                    bank.close()
                # Explicitly stop persistent workers before reopening HDF5.
                shutdown = getattr(loader_iterator, "_shutdown_workers", None)
                if shutdown is not None:
                    shutdown()
                del attribution, composite, progress, loader_iterator, loader
                gc.collect()
                if device.type == "cuda":
                    torch.cuda.empty_cache()

            for layer in layer_chunk:
                path = output_base / layer / "pcx_bank.h5"
                if layer in unsupported_in_chunk:
                    for stale_export in (path.parent / "activations.npy", path.
↪parent / "attributions.npy"):
                        stale_export.unlink(missing_ok=True)
                    print(f"[unsupported; no export] {layer}")
                else:
```

```
                    _export_numpy(path)
                    print(f"[exported] {path.parent}")

    print("Done:", output_base)
    return layers


'''
```

[7]:
```
'\nimport gc\nimport logging\nfrom collections import defaultdict\nfrom pathlib
import Path\n\nimport h5py\nimport numpy as np\nimport torch\nfrom
torch.utils.data import DataLoader, Subset\nfrom tqdm.auto import tqdm\n\nfrom
crp.concepts import ChannelConcept\nfrom crp.helper import get_layer_names\nfrom
LCRP.utils.crp_configs import ATTRIBUTORS, CANONIZERS, COMPOSITES\n\n# LCRP
emits normal timing information at ERROR level; hide that
noise.\nlogging.getLogger("LCRP.utils.crp").setLevel(logging.CRITICAL)\n\n\ndef
_open_bank(path, channels, dataset_size):\n    path.parent.mkdir(parents=True,
exist_ok=True)\n    try:\n        bank = h5py.File(path, "a")\n    except
OSError:\n        path.unlink(missing_ok=True)\n        bank = h5py.File(path,
"w")\n\n    incompatible = any(\n        name in bank and bank[name].shape[1] !=
channels\n        for name in ("activations", "attributions")\n    )\n
recorded_size = bank.attrs.get("dataset_size")\n    if recorded_size is not None
and int(recorded_size) != dataset_size:\n        incompatible = True\n    if
incompatible:\n        bank.close()\n        path.unlink(missing_ok=True)\n
bank = h5py.File(path, "w")\n\n    for name in ("activations",
"attributions"):\n        if name not in bank:\n
bank.create_dataset(\n                name, shape=(0, channels), maxshape=(None,
channels),\n                dtype="float16", chunks=True,\n            )\n
safe_rows = min(\n        bank["activations"].shape[0],
bank["attributions"].shape[0], dataset_size\n    )\n    for name in
("activations", "attributions"):\n        bank[name].resize((safe_rows,
channels))\n    bank.attrs["dataset_size"] = dataset_size\n    bank.flush()\n
return bank, safe_rows\n\n\ndef _append(target, values):\n    start =
target.shape[0]\n    target.resize((start + values.shape[0], values.shape[1]))\n
target[start:] = values\n\n\ndef _export_numpy(bank_path):\n    with
h5py.File(bank_path, "r") as bank:\n        np.save(bank_path.parent /
"activations.npy", bank["activations"][:])\n        np.save(bank_path.parent /
"attributions.npy", bank["attributions"][:])\n\n\ndef _chunks(items, size):\n
for index in range(0, len(items), size):\n        yield items[index:index +
size]\n\n\ndef build_all_layer_banks_fast(\n    model_name,\n    model,\n
dataset,\n    output_base,\n    device="cuda:0",\n    class_id=1,\n
layer_names=None,\n    layers_per_pass=4,\n    num_workers=2,\n
flush_every=25,\n):\n    """Generate several layer banks per model pass and
resume safely."""\n    output_base = Path(output_base)\n
output_base.mkdir(parents=True, exist_ok=True)\n    device =
torch.device(device)\n    model = model.to(device).eval()\n    layers =
layer_names or get_layer_names(model, [torch.nn.Conv2d])\n    modules =
```

```
dict(model.named_modules())\n    concept = ChannelConcept()\n    total =
len(dataset)\n\n    if layers_per_pass < 1:\n        raise
ValueError("layers_per_pass must be at least 1")\n\n    # Group layers by resume
position so each chunk can advance in lockstep.\n    resume_groups =
defaultdict(list)\n    for layer in layers:\n        path = output_base / layer
/ "pcx_bank.h5"\n        unsupported_marker = path.parent /
"unsupported_layer.txt"\n        if unsupported_marker.is_file():\n
print(f"[unsupported; skipped] {layer}")\n            continue\n        bank,
start = _open_bank(path, modules[layer].out_channels, total)\n
bank.close()\n        if start == total:\n            _export_numpy(path)\n
print(f"[complete] {layer}")\n        else:\n
resume_groups[start].append(layer)\n\n    print(\n        f"PCX dataset={total},
layers={len(layers)}, layers/pass={layers_per_pass}, "\n
f"workers={num_workers}, device={device}"\n    )\n    for start, pending_layers
in sorted(resume_groups.items()):\n        for layer_chunk in
_chunks(pending_layers, layers_per_pass):\n            label = ",
".join(layer_chunk)\n            print(f"[resume {start}/{total}] {label}")\n
# Start workers before HDF5 files are opened. Forked workers must\n            #
not inherit bank handles, otherwise export sees a file lock.\n
remaining = Subset(dataset, range(start, total))\n            loader_kwargs =
dict(\n                batch_size=1, shuffle=False, num_workers=num_workers,\n
pin_memory=(device.type == "cuda"),\n            )\n            if num_workers >
0:\n                loader_kwargs.update(persistent_workers=True,
prefetch_factor=2)\n            loader = DataLoader(remaining,
**loader_kwargs)\n            loader_iterator = iter(loader)\n\n
banks = {}\n            for layer in layer_chunk:\n                path =
output_base / layer / "pcx_bank.h5"\n                banks[layer], confirmed =
_open_bank(\n                    path, modules[layer].out_channels, total\n
)\n                if confirmed != start:\n                    raise
RuntimeError(f"Resume position changed for {layer}")\n\n            # These
objects are reusable; constructing them per image was very slow.\n
attribution = ATTRIBUTORS[model_name](model)\n            composite =
COMPOSITES[model_name](canonizers=[CANONIZERS[model_name]()])\n
unsupported_in_chunk = set()\n            progress = tqdm(loader_iterator,
total=total - start, desc=layer_chunk[0], leave=False)\n            try:\n
for offset, (images, _) in enumerate(progress, start + 1):\n
images = images.to(device, non_blocking=True).requires_grad_()\n
result = attribution(\n                        images,\n
[{attribution.MODEL_OUTPUT_NAME: [int(class_id)]}],\n
composite,\n                        record_layer=layer_chunk,\n
exclude_parallel=False,\n                    )\n                    for layer in
layer_chunk:\n                        if layer in unsupported_in_chunk:\n
continue\n                        if layer not in result.activations or layer
not in result.relevances:\n
unsupported_in_chunk.add(layer)\n                            marker =
output_base / layer / "unsupported_layer.txt"\n
marker.write_text("Attribution returned no activation or relevance for this
```

```
layer.\n")\n                                print(f"[unsupported; skipping bank]
{layer}")\n                                continue\n
activations = result.activations[layer].amax((-2, -1)).detach().cpu()\n
relevances = concept.attribute(\n
result.relevances[layer], abs_norm=True\n
).detach().cpu()\n                            activations = torch.nan_to_num(\n
activations, nan=0.0, posinf=0.0, neginf=0.0\n
).numpy().astype(np.float16)\n                            relevances =
torch.nan_to_num(\n                                relevances, nan=0.0, posinf=0.0,
neginf=0.0\n                            ).numpy().astype(np.float16)\n
_append(banks[layer]["activations"], activations)\n
_append(banks[layer]["attributions"], relevances)\n                    if offset
% flush_every == 0:\n                            for bank in banks.values():\n
bank.flush()\n                            gc.collect()\n                            if
device.type == "cuda":\n                                torch.cuda.empty_cache()\n
del result, images\n            except torch.cuda.OutOfMemoryError as error:\n
raise RuntimeError(\n                        f"CUDA OOM with
layers_per_pass={layers_per_pass}. "\n                    "Restart the kernel
and retry with layers_per_pass=2 or 1."\n                ) from error\n
finally:\n                for bank in banks.values():\n
bank.flush()\n                        bank.close()\n                # Explicitly
stop persistent workers before reopening HDF5.\n                shutdown =
getattr(loader_iterator, "_shutdown_workers", None)\n                if shutdown
is not None:\n                        shutdown()\n                del attribution,
composite, progress, loader_iterator, loader\n                gc.collect()\n
if device.type == "cuda":\n                        torch.cuda.empty_cache()\n\n
for layer in layer_chunk:\n                path = output_base / layer /
"pcx_bank.h5"\n                if layer in unsupported_in_chunk:\n
for stale_export in (path.parent / "activations.npy", path.parent /
"attributions.npy"):\n
stale_export.unlink(missing_ok=True)\n                        print(f"[unsupported;
no export] {layer}")\n                else:\n
_export_numpy(path)\n                        print(f"[exported] {path.parent}")\n\n
print("Done:", output_base)\n    return layers\n\n\n'
```

[8]:
```
# Run/resume every convolutional layer. Lower layers_per_pass on CUDA OOM.
'''
PCX_DIR = REPO_ROOT / "examples/output/pcx/PCX-SMOKE-ALL"
class_id = 1
pcx_layers = build_all_layer_banks_fast(
    model_name=model_name, model=model, dataset=dataset,
    output_base=str(PCX_DIR), device=device, class_id=class_id,
    layer_names=None, layers_per_pass=4, num_workers=2,
)
print(f'Generated/resumed {len(pcx_layers)} layer banks')
'''
```

[8]:
```
'\nPCX_DIR = REPO_ROOT / "examples/output/pcx/PCX-SMOKE-ALL"\nclass_id =
1\npcx_layers = build_all_layer_banks_fast(\n    model_name=model_name,
model=model, dataset=dataset,\n    output_base=str(PCX_DIR), device=device,
class_id=class_id,\n    layer_names=None, layers_per_pass=4,
num_workers=2,\n)\nprint(f\'Generated/resumed {len(pcx_layers)} layer
banks\')\n'
```

1.3 PCX explanation and checks

[9]:
```
# Explain the model prediction; no annotation is needed for a new image.
import torch.nn.functional as F
import importlib
import src.plot_pcx_pidnet_new as pcx_plot_module
importlib.reload(pcx_plot_module)  # pick up plotter fixes in an existing␣
 ↪notebook kernel
plot_pcx_explanations = pcx_plot_module.plot_pcx_explanations
TEST_IMAGE_PATH = globals().get('PREVIEW_IMAGE_PATH', None)
PLOT_SAMPLE_ID = globals().get('PREVIEW_SAMPLE_ID', sample_id)
external_image_tensor = None
if TEST_IMAGE_PATH is not None:
    test_rgb = np.asarray(Image.open(TEST_IMAGE_PATH).convert('RGB'))
    normalized = (test_rgb.astype(np.float32) / 255.0 - MEAN) / STD
    normalized = cv2.resize(normalized, (TARGET_SIZE[1], TARGET_SIZE[0]),␣
 ↪interpolation=cv2.INTER_LINEAR)
    external_image_tensor = torch.from_numpy(np.ascontiguousarray(normalized.
 ↪transpose(2, 0, 1))).float()
image_tensor = external_image_tensor if external_image_tensor is not None else␣
 ↪dataset[PLOT_SAMPLE_ID][0]
model = model.to(device).eval()
model.augment = False
with torch.inference_mode():
    logits = model(image_tensor.unsqueeze(0).to(device))
    if isinstance(logits, (tuple, list)):
        logits = logits[-1]
    logits = F.interpolate(logits, size=TARGET_SIZE, mode='bilinear',␣
 ↪align_corners=True)
    predicted_smoke = (logits.argmax(dim=1)[0].cpu() == 1)
print(f'Predicted smoke coverage: {predicted_smoke.float().mean().item():.2%}')
fig, axes = plt.subplots(1, 2, figsize=(12, 4))
rgb = dataset.reverse_augmentation(image_tensor).permute(1, 2, 0).numpy().
 ↪astype(np.uint8)
axes[0].imshow(rgb); axes[0].set_title('Input RGB'); axes[0].axis('off')
axes[1].imshow(rgb)
axes[1].imshow(np.ma.masked_where(~predicted_smoke.numpy(), predicted_smoke.
 ↪numpy()), cmap='spring', alpha=0.65, vmin=0, vmax=1)
axes[1].set_title('PIDNet predicted smoke'); axes[1].axis('off')
```

```
plt.show()
LAYER = "layer5.0.conv1"
CRP_DIR = REPO_ROOT / "examples/output/crp/CRP_SMOKE"
PCX_DIR = REPO_ROOT / "examples/output/pcx/PCX-SMOKE-ALL"
REF_DIR = REPO_ROOT / "examples/new-ref-img-SMOKE"
ALLOW_SLOW_CPU = False
if next(model.parameters()).device.type != 'cuda' and not ALLOW_SLOW_CPU:
    raise RuntimeError('PCX attribution at 720x1280 needs CUDA for practical␣
 ↪speed. Select a GPU kernel, or set ALLOW_SLOW_CPU=True to run slowly on CPU.
 ↪')
plot_pcx_explanations(
    "pidnet", model, dataset, sample_id=PLOT_SAMPLE_ID,
    layer_name=LAYER, n_concepts=3, n_refimgs=3, num_prototypes=5,
    ref_imgs_path=str(REF_DIR), output_dir_crp=str(CRP_DIR),
    output_dir_pcx=str(PCX_DIR),
    image_tensor=external_image_tensor,
)
```

```
DEBUG:h5py._conv:Creating converter from 7 to 5
DEBUG:h5py._conv:Creating converter from 5 to 7
DEBUG:h5py._conv:Creating converter from 7 to 5
DEBUG:h5py._conv:Creating converter from 5 to 7
```

```
Predicted smoke coverage: 0.70%
```






```
[plot_pcx_explanations] starting
[plot_pcx_explanations] sample_id=110 img.shape=(3, 720, 1280)
[plot_one_image_pcx_explanation] device=cuda:0, layer=layer5.0.conv1
[attr] building attribution/composite/visualization
[attr] layer_map size=79
[data] x.shape=(1, 3, 720, 1280)
[attr] computing base attribution
[attr] base heatmap computed
[mask] reverse_augmentation available, target size=(720, 1280)
[mask] resized mask -> (720, 1280)
[mask] 13 near-boundary pixels differ after attribution; using the direct PIDNet
```

```
prediction for display
[concepts] computing channel relevances
[concepts] channel_rels shape=(1, 256)
[gmm] loading attributions @ /home/heydari/FHHI-XAI_RAS/examples/output/pcx/PCX-
SMOKE-ALL/layer5.0.conv1/attributions.npy
[gmm] attributions shape=(497, 256)
[gmm] INFO: dropping 90 constant rows from attribution bank.
[concepts] selected_ind=[127, 124, 216] selected_rel=[0.04800000041723251,
0.03799999877810478, 0.035999998450279236]
[attr] computing conditional heatmaps
[refs] computing/loading reference images
[get_ref_images] start; layer=layer5.0.conv1, n_ref=3, cache=/home/heydari/FHHI-
XAI_RAS/examples/new-ref-img-SMOKE/layer5.0.conv1.h5
[get_ref_images] cache exists -> reading known keys
[get_ref_images] loaded key=127 count=3
[get_ref_images] computing missing=['124', '216']
[get_ref_images] saved key=124 count=3
[get_ref_images] saved key=216 count=3
[get_ref_images] done in 2.43s; keys=[127, 124, 216]
[gmm] fitting GMM for current run
[gmm] building prototype component GMMs
[gmm] scoring full dataset and current sample
[gmm] sample score=1173.8166, best_proto=4
[gmm] finding closest sample to prototype mean
[gmm] closest_idx=204
[proto] computing prototype attributions
[proto] building prototype mask
[plot] assembling figure
[plot] flood_segment_ratio=0.007037, flood_segment_ratio_proto=0.049287,
flood_segment_too_small=False, flood_segment_too_small_proto=False,
relevance_too_small_thr=0.001000
[plot_pcx_explanations] finished

/home/heydari/FHHI-XAI_RAS/src/plot_pcx_pidnet_new.py:798: UserWarning: This
figure includes Axes that are not compatible with tight_layout, so results might
be incorrect.
  plt.tight_layout()
/home/heydari/FHHI-XAI_RAS/src/plot_pcx_pidnet_new.py:856: UserWarning: This
figure includes Axes that are not compatible with tight_layout, so results might
be incorrect.
  plt.tight_layout()
```

[9]:

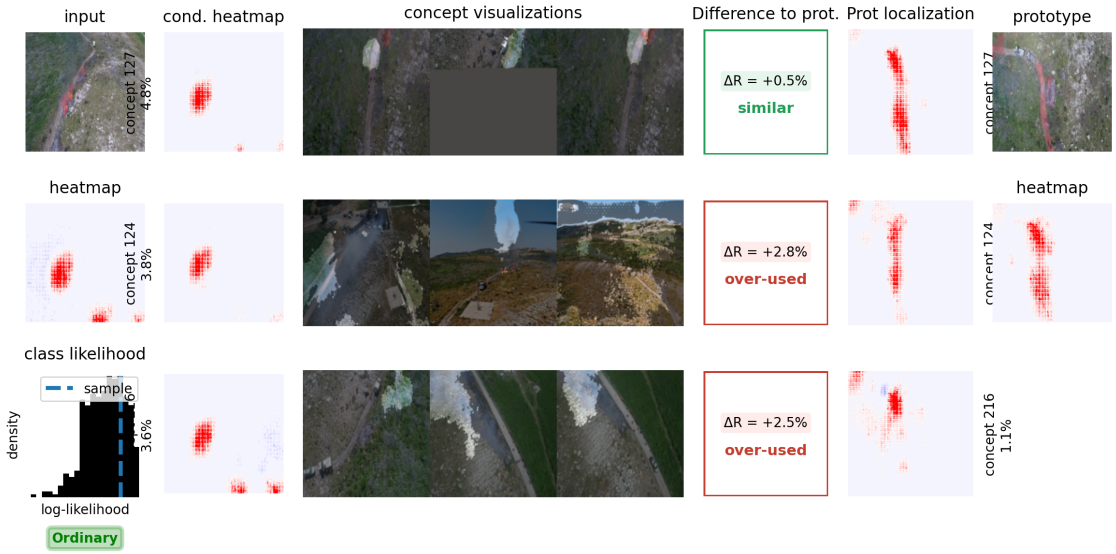

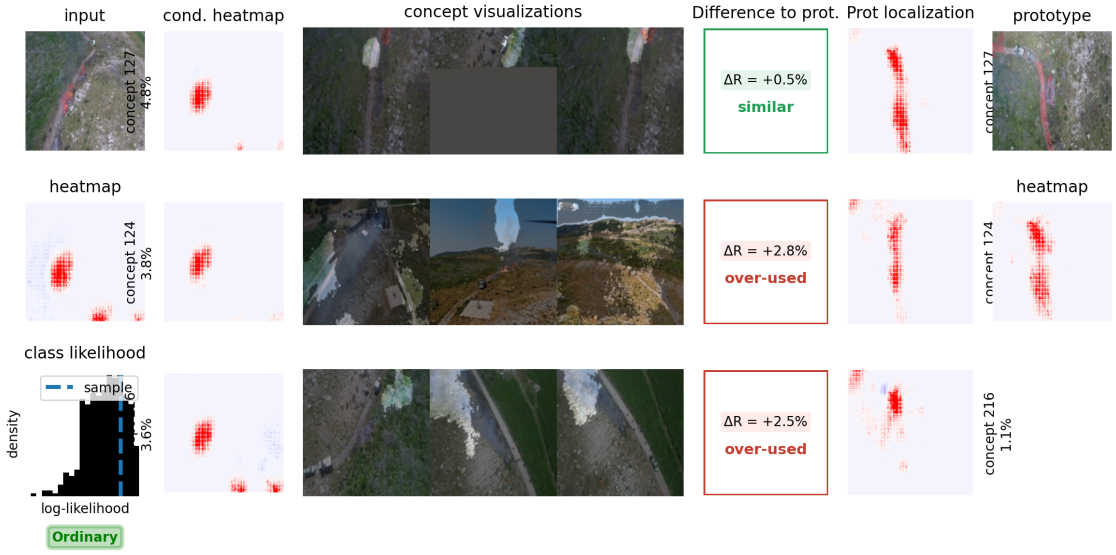

[10]:
```
# Inspect bank completeness and sample ordering
for layer in ("layer5.0.conv1", "final_layer.conv1"):
    path = PCX_DIR / layer / "attributions.npy"
```

```
    if path.is_file():
        bank = np.load(path, mmap_mode='r')
        print(layer, bank.shape, bank.dtype, 'finite=', bool(np.isfinite(bank).
 ↪all()))
    else:
        print(layer, 'not generated yet')
for i in range(min(10, len(dataset))):
    print(i, dataset.files[i]['name'], f"coverage={dataset.
 ↪files[i]['smoke_coverage']:.4f}")
```

```
layer5.0.conv1 (497, 256) float16 finite= True
final_layer.conv1 (497, 128) float16 finite= True
0 set00_dji_20250619113314_0001_w coverage=0.0315
1 set00_dji_20250619113316_0002_w coverage=0.0227
2 set00_dji_20250619113318_0003_w coverage=0.0155
3 set00_dji_20250619113320_0004_w coverage=0.0185
4 set00_dji_20250619113322_0005_w coverage=0.0308
5 set00_dji_20250619113324_0006_w coverage=0.0296
6 set00_dji_20250619113326_0007_w coverage=0.0255
7 set00_dji_20250619113328_0008_w coverage=0.0411
8 set00_dji_20250619113330_0009_w coverage=0.0301
9 set00_dji_20250619113332_0010_w coverage=0.0429
```