

# Liquid Democracy for Rating Systems

**Hemanath Peddireddi**

Department of Computer Science

University of Warwick

Supervised by Markus Brill

7 April 2025



## **Abstract**

### **WILL BE CHANGED**

A project to enhance rating systems with liquid democracy features, focusing on implementing and analyzing various delegation mechanisms within the Votle decision making system.

# Contents

<b>1</b>	<b>Introduction</b>	<b>3</b>
1.1	Vodle . . . . .	3
1.2	Liquid Democracy . . . . .	3
1.3	Motivation . . . . .	4
1.4	Project Goal . . . . .	5
1.5	Project Outline . . . . .	5
<b>2</b>	<b>Research</b>	<b>6</b>
2.1	Liquid Democracy . . . . .	6
2.1.1	Issues with Liquid Democracy . . . . .	7
2.1.2	Variations of Liquid Democracy . . . . .	9
2.2	Implementations of Liquid Democracy . . . . .	12
2.2.1	LiquidFeedback . . . . .	12
2.2.2	Google Votes . . . . .	12
2.3	vodle . . . . .	12
2.3.1	MaxParC . . . . .	12
2.3.2	Technologies Used . . . . .	13
2.3.3	Design Philosophy . . . . .	14

<i>Liquid Democracy for Rating Systems</i>	2
2.4 Agent Based Modelling . . . . .	14
2.5 Summary . . . . .	14
<b>3 System Specifications</b>	<b>15</b>
<b>4 Design and Implementation (can split into separate chapters)</b>	<b>17</b>
<b>5 Evaluation</b>	<b>18</b>
<b>6 Conclusions</b>	<b>19</b>

# Chapter 1

## Introduction

### 1.1 Vodle

Vodle is an online platform where users participate in polls to vote on subjects through user created polls. Each poll contains a set of options, and users provide ratings for each option from 0 to 100, where a larger number means that they prefer the option more, using a slider (below). When the poll ends, the ratings submitted by voters are then aggregated and a result is calculated.

**INSERT IMAGE OF SLIDERS**

### 1.2 Liquid Democracy

Liquid democracy is a decision-making system that combines elements of both direct and representative democracy that offers a voter more flexibility than traditional voting models.

In direct democracy, every participant votes individually on each issue. This model offers the most individual input but can become impractical for large-scale decision-making due to the high level of participation required from each individual. As Ford (2002) states, direct democracy assumes that all individuals are both willing and

able to engage meaningfully with every decision, which is often not the case in large groups due to the variance in both the interest and knowledge of voters. The cognitive demand of staying informed on all matters, combined with the time commitment necessary for constant participation, makes direct democracy unmanageable at scale.

In a representative democracy, citizens elect officials who make decisions on their behalf for the duration of a fixed term. While this model is scalable and practical for large populations, it introduces several limitations. Elected representatives often make decisions based on party lines, personal convictions, or external influences such as lobbying groups, which may not accurately reflect the preferences of their constituents (Blum and Zuber, 2016). In addition, because elections are infrequent, this system tends to be unresponsive to shifts in public opinion. Citizens are unable to easily adjust or retract their delegation, which limits their ability to influence decisions once representatives are in office (Blum and Zuber, 2016). As a result, participation is both indirect and inflexible, which can lead to disengagement and dissatisfaction among voters.

Liquid democracy addresses these limitations by allowing voters to either cast their votes directly or delegate them to someone that they trust or to abstain from voting entirely (Blum and Zuber, 2016). **Talk about lowering bar for participation** These delegations can be updated or revoked at any time, giving users control over how their vote is used. Delegations are also transitive, meaning a vote can be passed through multiple levels of trusted participants. For example, if Alice delegates to Bob who in turn delegates to Charlie, Charlie's vote would then represent three individuals (Alice, Bob and Charlie).

### 1.3 Motivation

Liquid democracy has strong theoretical appeal as a flexible and participatory decision-making model, but practical implementations remain rare and underexplored. Most existing research assumes idealised conditions, while real-world systems must con-

tend with asynchronous participation, limited user engagement, and the potential for structural issues like delegation cycles or vote loss.

Vodle, as a platform for collective decision-making, presents an opportunity to explore how liquid democracy can be adapted to work in practice. This project is motivated by the need to understand and resolve the challenges of integrating delegation-based voting into an existing system, while improving the platform's fairness, expressiveness, and overall user experience.

## 1.4 Project Goal

The project's main goal is to integrate liquid democracy into the vodle platform.

Key features include ranked delegation and weighted voting ...

## 1.5 Project Outline

This report is structured as follows: *will add when done*

## Chapter 2

# Research

This chapter provides background context for the development of a liquid democracy system within Vodle. It builds on the concepts introduced earlier, focusing on more detailed research into known limitations of liquid democracy and potential solutions proposed in academic literature. Additionally, the technical foundations and design philosophy of Vodle as a platform are explored.

Throughout this chapter, several diagrams are used to illustrate how votes move through a liquid democracy system. To clarify the roles of different voters, the following symbols are used:

- **Circles** indicate voters who delegate their vote to someone else.
- **Squares** represent voters who cast their own vote and do not delegate - casting voters.
- **Triangles** show voters who abstain - neither voting directly nor delegating to others.

### 2.1 Liquid Democracy

Liquid democracy, or delegative voting, allows voters to either cast a vote directly, delegate it to someone they trust, or abstain (Blum and Zuber, 2016). A key feature



is that delegations are transitive - a chain of users that all delegate to each other sequentially ends with a single final voter who casts their vote on behalf of all those in the chain.

Whilst the transitivity property enables concentration of voting power with trusted individuals, it can also lead to unintended consequences. Chains of delegations may result in cycles that prevent votes from being cast, or allow certain individuals to accumulate an excessive share of influence, creating so-called super-voters. These problems amongst others motivate the need for alternative delegation mechanisms, as discussed in the following subsections.

### 2.1.1 Issues with Liquid Democracy

#### Delegation cycles




Figure 2.1: Delegation cycle: A delegates to B, B to C, and C back to A.

Delegation cycles occur when a vote is delegated in such a way that it ends up forming a loop (Brill et al., 2022), preventing the vote from reaching a final, resolvable destination. For example, if Alice delegates her vote to Bob, Bob delegates to Charlie, and Charlie delegates back to Alice, the votes become trapped in a cycle (seen above) and can be treated as a loss of representation (Christoff and Grossi, 2017).

This issue is particularly problematic because it can nullify votes without the affected users ever realising. In systems where cycles are not explicitly detected and handled, these votes are discarded silently, potentially changing the final outcome of the votes.

Delegation cycles are increasingly likely to emerge in dynamic voting systems, where delegations can be added, removed, or modified at any point in time. Delegations

that initially did not form part of a cycle may later contribute to one as other voters add a new delegation or alter an existing one.

*Paragraph on how size of the system affects the possibility of cycles?*

## Abstentions




Figure 2.2: Delegation chain ending in abstention: A delegates to B, B to C. C abstains, causing the votes of A and B to be lost.

In liquid democracy, abstention is where a voter neither casts a vote nor delegates their vote to another user (Brill et al., 2022). This includes both deliberate abstention, where a voter knowingly chooses not to participate, and passive abstention, where a voter may be unaware of an ongoing poll or are unable to engage with it.

Abstentions are especially impactful when they occur at the end of a larger delegation chain, as all votes passed along the chain to that voter are effectively lost (Brill et al., 2022). The voters whose decisions were passed along the chain may also be unaware that their votes have been nullified, worsening the effect of the abstention.

## Super-voters

In liquid democracy, a super-voter is an individual who receives a large number of delegated votes, therefore gaining disproportionate influence over decisions (Kling et al., 2015). While this behaviour may reflect voters' genuine preferences, it can lead to a concentration of power that goes against the intended egalitarianism and democratic ideals of liquid democracy.

Although liquid democracy allows users to alter their delegation at any time, in practice, many voters may not actively monitor or even know how their vote is being used. This can allow a small number of super-voters to dominate outcomes, especially in systems with large delegation chains.

Real-world examples of this phenomenon have been documented. In the German Pirate Party's use of LiquidFeedback, certain users received so many delegations that their votes were like "decrees" (Sven Becker, 2012; Kling et al., 2015) even though they were not elected officials. Kling et al. (2015) noted that the super-voters generally voted in line with the majority, therefore not drastically affecting the outcome of the votes and contributed to the stability of the system. However, the potential for individuals to single-handedly influence the results remained a concern.

This pattern is not limited to traditional online voting platforms. It can also be seen within decentralised autonomous organisations (DAOs) - blockchain-based entities where decisions are made collectively by token holders without central leadership. These organisations use token-based voting to decide on critical issues like protocol upgrades and funding allocations. Hall and Miyazaki (2024) studied 18 decentralised autonomous organisations (DAOs) and found that voting power was often concentrated in the hands of a few delegates. While most did not control a large share of all available tokens, low participation meant that their share of actual votes cast was disproportionately high. In several DAOs, the top five delegates accounted for over 50% of all votes cast, and in the DAO Gitcoin, this figure exceeded 90%.

### **2.1.2 Variations of Liquid Democracy**

The challenges discussed in the previous section, such as delegation cycles, vote loss due to abstentions, and the emergence of super-voters, highlight inherent vulnerabilities in the standard liquid democracy model. To mitigate these issues, a range of enhancements have been proposed that modify how delegations are expressed, resolved, or overridden. These include techniques that allow voters to specify multiple delegates or distribute their vote to multiple casting voters. Each approach introduces different trade-offs and requires algorithmic support to ensure sound and interpretable outcomes.

The following subsections present several such variations, along with the algorithms

that support them.

## Ranked Delegation

Ranked delegation improves liquid democracy by allowing voters to list several trusted delegates in order of preference. Instead of choosing just one delegate, a voter can specify a ranked list so that if their top choice is unavailable (due to abstention, involvement in a cycle, or other reasons) the system can use the next delegate specified. This method reduces the risk of losing votes while keeping voters actively involved in the decision making process (Brill et al., 2022).

Implementing ranked delegation requires a mechanism to decide among multiple possible delegation paths. This is done through a *delegation rule*, a function that, given a ranked delegation instance and a delegating voter, selects a unique path leading to a *casting voter* (Brill et al., 2022).

Several key properties help evaluate these delegation rules:

- **Guru Participation:** Ensures that a voter accepting delegated votes (a “guru”) is never worse off by doing so. Receiving additional delegations should not decrease their influence over the final outcome (Kotsialou and Riley, 2020).
- **Confluence:** Guarantees that each delegating voter ends up with one clear and unambiguous delegation path. This property simplifies vote resolution and enhances transparency (Brill et al., 2022).
- **Copy Robustness:** Prevents strategic manipulation where a voter might mimic another’s vote outside the system to gain extra influence. A copy-robust rule makes sure that duplicating a vote externally does not yield more combined power than a proper delegation (Brill et al., 2022; Behrens and Swierczek, 2015).

The literature considers several delegation rules, each with distinct trade-offs:

**Depth-First Delegation (DFD):** Selects the path beginning with the highest-ranked delegate, even if the resulting chain is long. Although it prioritizes individual trust preferences, DFD can violate guru participation (Kotsialou and Riley, 2020).

**Breadth-First Delegation (BFD):** Chooses the shortest available delegation path and uses rankings only to resolve ties. This approach usually produces direct, predictable chains and satisfies guru participation, although it might sometimes assign a vote to a lower-ranked delegate (Kotsialou and Riley, 2020; Brill et al., 2022).

**MinSum:** Balances path length and delegation quality by selecting the path with the lowest total sum of edge ranks. Being confluent, MinSum avoids both unnecessarily long chains and poorly ranked delegations (Brill et al., 2022).

**Diffusion:** Constructs delegation paths in stages by assigning votes layer by layer based on the lowest available rank at each step. This method tends to avoid poor delegations but can sometimes produce unintuitive outcomes due to its tie-breaking procedure (Brill et al., 2022).

**Leximax:** Compares paths based on their worst-ranked edge. This ensures that especially low-ranked delegations are avoided early in the path while maintaining confluence (Brill et al., 2022).

**BordaBranching:** Takes a global view of the delegation graph by selecting a branching that minimizes the total rank across all delegation edges. It satisfies both guru participation and copy robustness, though it is more computationally intensive (Brill et al., 2022).

In summary, ranked delegation enhances liquid democracy by reducing the risk of lost votes. The choice of delegation rule not only affects system efficiency but also influences fairness and robustness. While simpler methods such as DFD and BFD are easier to implement, advanced rules like MinSum, Leximax, and BordaBranching offer stronger guarantees and are better suited for practical deployment in platforms such as votle.

For our implementation, MinSum will be chosen as ...

## Vote Splitting

## 2.2 Implementations of Liquid Democracy

### 2.2.1 LiquidFeedback

### 2.2.2 Google Votes

## 2.3 vodle

Vodle is a web-based platform for participatory group decision-making. Users participate in polls that allow them to rate a set of options using sliders. When the poll ends, these ratings are aggregated and the MaxParC rating system is used to determine the final result of the poll.

### 2.3.1 MaxParC

Understanding MaxParC is important for this project because it forms the core of how vodle interprets group preferences. Since this work involves modifying vodle's voting behaviour through the integration of liquid democracy, it is essential to understand how MaxParC processes input ratings. In particular, understanding how changes in individual ratings influence the final outcome of a poll helps to frame the implications of delegating or reweighting votes.

Maximum Partial Consensus (MaxParC), the rating system used by vodle, was introduced by Heitzig et al. (2024). It is a decision-making method designed to address the limitations of traditional voting systems, in particular the potential for majority rule to suppress minority viewpoints. The primary objective of MaxParC is to achieve a balance between fairness, consensus, and efficiency in group decision-making.

Each voter rates an option from 0 to 100 ( $x$ ), representing their willingness to approve that option if and only if  $< x\%$  of users do not approve that option. Therefore, a rating

of 0 means “do not approve no matter what” and a rating of 100 means “approve no matter what” or “always approve”. This can be seen visualised in the illustration below.

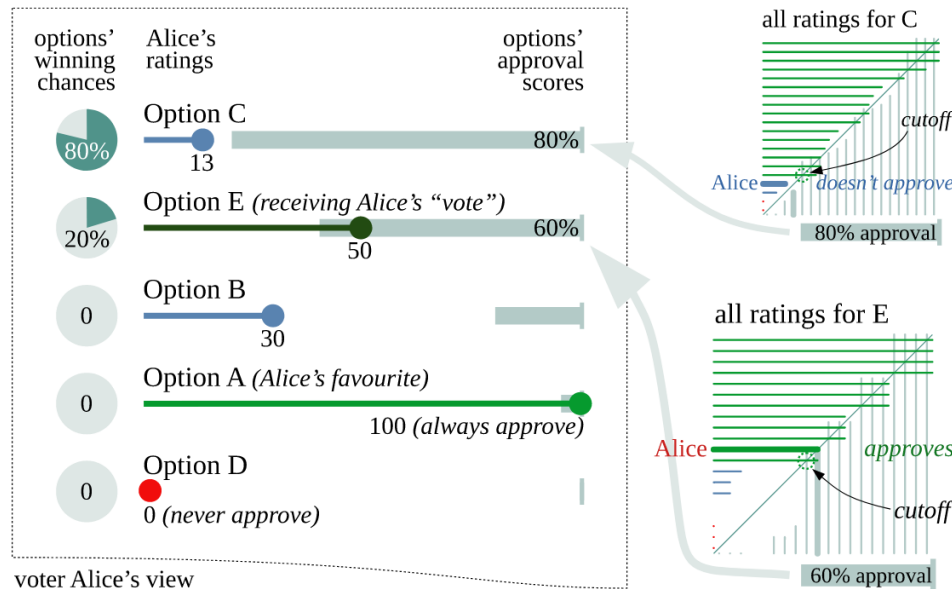


Figure 2.3: Graphic from Heitzig et al. (2024) representing MaxParC from the view of some voter Alice. Each rating value represents a conditional commitment by Alice to approve the respective option. Approval scores, number of voters that approve the option, are represented by light bars coming in from the right, options are sorted by descending approval score. Alice is counted as approving an option if her rating needle overlaps with the approval score bar.

*TODO: Make summary better* To summarise, any delegation or vote splitting mechanism must be designed so that it only adds to an option's overall rating and never reduces it. This ensures that delegated input remains consistent with MaxParC's conditional approval model and preserves the original intent of the voter.

### 2.3.2 Technologies Used

why info is relevant to the project - e.g. need to jsonify data. what makes angular different etc

### **2.3.3 Design Philosophy**

## **2.4 Agent Based Modelling**

## **2.5 Summary**



## Chapter 3

# System Specifications

Through the background research, we identified several key limitations in traditional liquid democracy systems such as delegation cycles, vote loss through abstentions, and the disproportionate influence of super-voters. We also explored a number of proposed enhancements, including ranked delegation and vote splitting, which offer practical ways to improve the robustness and fairness of delegative voting.

Based on these findings, we propose a set of features that would improve vodle and make the integration of liquid democracy within it more beneficial. These can be formalised into the following core objectives:

1. Design and implement a foundational delegation framework for the vodle platform, enabling users to delegate their votes to other participants.
2. Extend the core delegation model to support ranked delegation, allowing users to specify an ordered list of preferred delegates.
3. Implement a vote splitting mechanism to enable users to distribute their voting power among multiple delegates.
4. Introduce option-specific delegation, allowing users to assign different delegates for different options within a poll.

In addition, the following extension objective can be identified as it is not completely aligned to the project goal ...

1. Perform offline agent based simulations to analyse the effectiveness of various delegation system, including those implemented in the project.

## **Chapter 4**

**Design and Implementation (can split  
into separate chapters)**

## **Chapter 5**

# **Evaluation**

## **Chapter 6**

## **Conclusions**

# Bibliography

- Behrens, Jan & Swierczek, Björn. Preferential delegation and the problem of negative voting weight. *The Liquid Democracy Journal*, 3:6–34, 2015.
- Blum, Christian & Zuber, Christina Isabel. Liquid Democracy: Potentials, Problems, and Perspectives. *Journal of Political Philosophy*, 24(2):162–182, June 2016. ISSN 0963-8016, 1467-9760. doi: 10.1111/jopp.12065. URL <https://onlinelibrary.wiley.com/doi/10.1111/jopp.12065>.
- Brill, Markus & Delemazure, Théo & George, Anne-Marie & Lackner, Martin & Schmidt-Kraepelin, Ulrike. Liquid Democracy with Ranked Delegations. *Proceedings of the AAAI Conference on Artificial Intelligence*, 36(5):4884–4891, June 2022. ISSN 2374-3468. doi: 10.1609/aaai.v36i5.20417. URL <https://ojs.aaai.org/index.php/AAAI/article/view/20417>. Number: 5.
- Christoff, Zoé & Grossi, Davide. Liquid democracy: An analysis in binary aggregation and diffusion, 2017. URL <https://arxiv.org/abs/1612.08048>.
- Ford, Bryan Alexander. Delegative Democracy. May 2002. URL <https://infoscience.epfl.ch/handle/20.500.14299/156450>.
- Hall, Andrew B. & Miyazaki, Sho. What Happens When Anyone Can Be Your Representative? Studying the Use of Liquid Democracy for High-Stakes Decisions in Online Platforms. Technical report, 2024.
- Heitzig, Jobst & Simmons, Forest W. & Constantino, Sara M. Fair group decisions via non-deterministic proportional consensus. *Social Choice and Welfare*, May 2024.

ISSN 1432-217X. doi: 10.1007/s00355-024-01524-3. URL <http://dx.doi.org/10.1007/s00355-024-01524-3>. Publisher: Springer Science and Business Media LLC.

Kling, Christoph Carl & Kunegis, Jerome & Hartmann, Heinrich & Strohmaier, Markus & Staab, Steffen. Voting behaviour and power in online democracy: A study of liquidfeedback in germany's pirate party, 2015. URL <https://arxiv.org/abs/1503.07723>.

Kotsialou, Grammateia & Riley, Luke. Incentivising Participation in Liquid Democracy with Breadth-First Delegation. *New Zealand*, 2020.

Sven Becker, DER SPIEGEL. Liquid Democracy: Web Platform Makes Professor Most Powerful Pirate - [spiegel.de](https://www.spiegel.de/international/germany/liquid-democracy-web-platform-makes-professor-most-powerful-pirate-a-818683.html), 2012. URL <https://www.spiegel.de/international/germany/liquid-democracy-web-platform-makes-professor-most-powerful-pirate-a-818683.html>.