

1 DENGUEWATCH: A SYSTEM FOR REAL-TIME
2 DENGUE MONITORING AND FORECASTING IN ILOILO
3 PROVINCE

4 A Special Problem Proposal
5 Presented to
6 the Faculty of the Division of Physical Sciences and Mathematics
7 College of Arts and Sciences
8 University of the Philippines Visayas
9 Miag-ao, Iloilo

10 In Partial Fulfillment
11 of the Requirements for the Degree of
12 Bachelor of Science in Computer Science by

13 AMODIA, Kurt Matthew A.
14 BULAONG, Glen Andrew C.
15 ELIPAN, Carl Benedict L.

16 Francis D. DIMZON
17 Adviser

18 April 26, 2025

Abstract

Dengue fever remains a significant public health concern in the Philippines, with cases rising dramatically in recent years. Nationwide outbreaks have placed immense strain on healthcare systems, underscoring the need for innovative approaches to surveillance and response. In Iloilo City, this national trend was reflected in a significant surge, with the Iloilo Provincial Health Office reporting 4,585 cases and 10 fatalities as of August 10, 2023—a 319% increase from the previous year’s 1,095 cases and one death. This research focused on developing a centralized system for monitoring and forecasting dengue trends in Iloilo City, incorporating graphical visualizations such as heatmaps, trends, and historical graphs. The study explored the application of artificial intelligence (AI) in dengue prediction, utilizing deep learning models. The performance of the Long Short-Term Memory (LSTM) model was compared with traditional statistical methods, including non-seasonal and seasonal Autoregressive Integrated Moving Average (ARIMA) models and the Kalman Filter. Evaluation metrics such as Mean Absolute Error (MAE), Mean Squared Error (MSE), and Root Mean Square Error (RMSE) were used to identify the most effective model for integration into the system. Forecasting was based on climate variables such as temperature, rainfall, relative humidity, and previous monthly case counts. The LSTM model emerged as the best performer with an RMSE of 16.15, demonstrating its suitability for time-series predictions, while the Kalman Filter showed the poorest performance with an RMSE of 38.40. By integrating predictive analytics with real-time data visualization, the proposed system aims to support public health agencies, such as the Department of Health (DOH), by providing actionable insights for proactive intervention strategies. This AI-driven solution enhances traditional outbreak reporting systems by enabling timely, data-informed decisions to mitigate the impact of dengue in the region.

Keywords: ARIMA, artificial intelligence, dengue prediction, LSTM, Kalman Filter, deep learning, climate variables, public health, outbreak mitigation

Contents

48	1 Introduction	1
49	1.1 Overview	1
50	1.2 Problem Statement	2
51	1.3 Research Objectives	2
52	1.3.1 General Objective	2
53	1.3.2 Specific Objectives	2
54	1.4 Scope and Limitations of the Research	3
55	1.5 Significance of the Research	4
56	2 Review of Related Literature	6
57	2.1 Dengue	6
58	2.2 Outbreak Definition	6
59	2.3 Existing System: RabDash DC	7
60	2.4 Deep Learning	8
61	2.5 Kalman Filter	8
62	2.6 Weather Data	9
63	2.7 Chapter Summary	9

64	3	Research Methodology	10
65	3.1	Research Activities	11
66	3.1.1	Gather Dengue Data and Climate Data to Create a Com-	
67		plete Dataset for Forecasting	11
68	3.1.2	Develop and Evaluate Deep Learning Models for Dengue	
69		Case Forecasting	13
70	3.1.3	Integrate the Predictive Model into a Web-Based Data An-	
71		alytics Dashboard	18
72	3.1.4	System Development Framework	19
73	3.1.5	Design, Building, Testing, and Integration	19
74	3.2	Development Tools	20
75	3.2.1	Software	20
76	3.2.2	Hardware	21
77	3.2.3	Packages	21
78	3.3	Application Requirements	23
79	3.3.1	Backend Requirements	23
80	3.3.2	User Interface Requirements	24
81	3.3.3	Security and Validation Requirements	27
82	3.3.4	Testing Process	28
83	3.4	Calendar of Activities	29
84	4	Results and Discussion/System Prototype	30
85	4.1	Data Gathering	30
86	4.2	Exploratory Data Analysis	31
87	4.3	Outbreak Detection	35

88	4.4	Model Training Results	36
89	4.4.1	LSTM Model	36
90	4.4.2	ARIMA Model	38
91	4.4.3	Seasonal ARIMA (SARIMA) Model	39
92	4.4.4	Kalman Filter Model	40
93	4.5	Preliminary System Requirements	42
94	4.6	System Prototype	42
95	4.6.1	Guest Interface	42
96	4.6.2	Personnel Interface	43
97		References	47
98		A Appendix Title	50
99		B Resource Persons	51

100 List of Figures

101	3.1	Workflow for forecasting the number of weekly dengue cases . . .	10
102	3.2	Entity-Relationship Database Schema Hybrid Diagram for DengueDash	
103		Database Structure	23
104	3.3	Use Case Diagram for DRU Admin	24
105	3.4	Use Case Diagram for Surveillance Unit Admin	25
106	3.5	Use Case Diagram for Encoder	26
107	3.6	Testing Process for DengueWatch	28
108	4.1	Snippet of the Combined Dataset	31
109	4.2	Data Contents	31
110	4.3	Dataset Statistics	32
111	4.4	Distribution of Dengue Cases	32
112	4.5	Frequency of Dengue Cases in Different Intervals	33
113	4.6	Trend of Dengue Cases	34
114	4.7	Ranking of Correlations	34
115	4.8	Ranking of Correlations (with lagged effects)	35
116	4.9	Comparison of Window Sizes	37
117	4.10	ARIMA Prediction Results for Test Set	38

118	4.11 Seasonal ARIMA Prediction Results for Test Set	39
119	4.12 Kalman Filter Prediction Results for Test Set	40
120	4.13 Dashboard for Guests	42
121	4.14 Login Page for Users	43
122	4.15 First Part of Case Report Form	44
123	4.16 Second Part of Case Report Form	44
124	4.17 Dengue Reports	45
125	4.18 Detailed Case Report	46
126	A.1 LSTM Prediction Results for Test Set	50

127 **List of Tables**

128	3.1	Timetable of Activities for 2024	29
129	3.2	Timetable of Activities for 2025	29
130	4.1	Comparison of Models	36
131	4.2	Comparison of Window Sizes	36

Chapter 1

Introduction

1.1 Overview

From 2020 to 2022, dengue cases declined due to reduced surveillance during the COVID-19 pandemic (WHO, 2023), but cases surged in 2023 as restrictions were lifted. This year saw an increase in dengue outbreaks worldwide, with over five million cases and more than 5,000 deaths reported in over 80 countries (Bosano, 2023). Dengue is endemic in the Philippines, leading to longer and more widespread seasonal outbreaks. Globally, dengue infections have increased significantly, posing a major public health challenge. The World Health Organization reported a ten-fold rise in cases between 2000 and 2019, with a peak in 2019 when the disease spread across 129 countries (WHO, 2024).

Iloilo City and Province are intensifying efforts to curb the rising dengue cases (Lena, 2024). As of August 10, 2023, the Iloilo Provincial Health Office recorded 4,585 cases and 10 deaths, a 319% increase from last year's 1,095 cases and one death. Governor Arthur Defensor Jr. confirmed that the province has reached the dengue outbreak threshold based on Department of Health (DOH). Local government units (LGUs) have been informed, and the province's disaster management office is on blue alert, indicating disaster mode. (Perla, 2024)

In Iloilo City, 649 dengue cases were recorded this year 2024, with two deaths. Cases cluster in 40 out of 180 barangays, meaning multiple cases are being reported in these areas over several weeks. The city's health officer, Dr. Roland Jay Fortuna, reported high utilization of non-COVID-19 hospital beds, reaching over 76%, prompting concerns about hospital capacity.

156 This study explores the monitoring and forecasting of dengue outbreaks by an-
157 alyzing key factors such as temperature, relative humidity, and historical dengue
158 cases, using different models. The findings aim to provide an advanced, AI-driven
159 alternative for dengue prevention and control, targeting agencies like the Depart-
160 ment of Health (DOH). By aligning with the national AI Roadmap, particularly
161 in Iloilo City, this research aspires to improve outbreak responses through cutting-
162 edge technology rather than traditional reporting methods.

163 1.2 Problem Statement

164 Dengue remains a critical public health challenge worldwide, with cases increasing
165 due to the easing of COVID-19 restrictions and heightened global mobility. While
166 a temporary decline in cases was observed during the pandemic (2020–2022) due
167 to reduced surveillance efforts, 2023 marked a resurgence, with over five million
168 cases and more than 5,000 deaths reported across 80 countries. In dengue-endemic
169 regions like the Philippines, the threat is particularly severe. In Iloilo City and
170 Province, dengue cases rose by 319% as of August 2023, overwhelming local health-
171 care systems. This surge strained resources, with over 76% of non-COVID-19 hos-
172 pital beds occupied by dengue patients, highlighting the urgent need for effective
173 predictive tools. The lack of a reliable system to monitor and forecast dengue
174 outbreaks contributes to delayed interventions, exacerbating public health risks
175 and healthcare burdens in the region.

176 1.3 Research Objectives

177 1.3.1 General Objective

178 This study aims to develop an AI-based dengue forecasting and monitoring system
179 for Iloilo City and Province. The researchers will train and compare multiple deep
180 learning models to predict dengue case trends based on climate data and historical
181 dengue cases to help public health officials in possible dengue case outbreaks.

182 1.3.2 Specific Objectives

183 Specifically, this study aims to:

- 184 1. Gather dengue data from the Iloilo Provincial Health Office and climate data
185 (including temperature, rainfall, wind, and humidity) from online sources.
186 Combine and aggregate these data into a unified dataset to facilitate com-
187 prehensive dengue case forecasting.
- 188 2. Evaluate deep learning models for predicting dengue cases using metrics
189 such as Mean Absolute Error (MAE), Root Mean Squared Error (RMSE),
190 and Mean Squared Error (MSE). Compare the performance of these models
191 to determine the most accurate forecasting approach.
- 192 3. Develop a web-based analytics dashboard that integrates a predictive model
193 and provides data management system for dengue cases in Iloilo City and
194 the Province.
- 195 4. Assess the usability and effectiveness of the analytics dashboard through
196 structured feedback and surveys involving health professionals and policy-
197 makers.

198 1.4 Scope and Limitations of the Research

199 This study aims to gather dengue data from the Iloilo Provincial Health Office
200 and climate data from online sources such as PAGASA or weatherandclimate.com.
201 These data will be preprocessed, cleaned, and combined into a unified dataset to
202 facilitate comprehensive dengue case forecasting. However, the study is limited by
203 the availability and completeness of historical data. Inconsistent or missing data
204 points may introduce biases and reduce the quality of predictions. Furthermore,
205 the granularity of the data will be in a weekly format.

206 To evaluate deep learning models for predicting dengue cases, the study will
207 train and compare the performance of various models, using metrics like Mean
208 Absolute Error (MAE) and Root Mean Square Error (RMSE). While these models
209 aim to provide accurate forecasts, their performance is heavily influenced by the
210 quality and size of the dataset. Limited or low-quality data may lead to suboptimal
211 predictions. Additionally, the models cannot fully account for external factors
212 such as public health interventions or socio-economic conditions which may impact
213 dengue transmission dynamics.

214 The study also involves developing a web-based analytics dashboard that in-
215 tegrates predictive models and provides a data management system for dengue
216 cases in Iloilo City and the Province. This dashboard will offer public health
217 officials an interactive interface to visualize dengue trends, input new data, and

218 identify risk areas. However, its usability depends on feedback from stakeholders,
219 which may vary based on their familiarity with analytics tools. Moreover, exter-
220 nal factors such as limited internet connectivity or device availability in remote
221 areas may affect the system’s adoption and effectiveness. While the dashboard
222 provides valuable insights, it cannot incorporate all factors influencing dengue
223 transmission, emphasizing the need for ongoing validation and refinement.

224 1.5 Significance of the Research

225 This study’s development of an AI-based dengue forecasting and monitoring sys-
226 tem has wide-reaching significance for various stakeholders in Iloilo City:

- 227 • **Public Health Agencies:** Organizations like the Department of Health (DOH)
228 and local health units in Iloilo City and Province stand to benefit greatly
229 from the system. With dengue predictions, we can help these agencies opti-
230 mize their response strategies and implement targeted prevention measures
231 in high-risk areas before cases escalate.
- 232 • **Local Government Units (LGUs):** LGUs can use the system to support
233 their disaster management and health initiatives by proactively addressing
234 dengue outbreaks. The predictive insights allow for more efficient planning
235 and resource deployment in barangays and communities most vulnerable to
236 outbreaks, improving overall public health outcomes.
- 237 • **Healthcare Facilities:** Hospitals and clinics, which currently face high bed
238 occupancy rates during dengue season will benefit from early outbreak fore-
239 casts that can help in managing patient inflow and ensuring adequate hos-
240 pital capacity.
- 241 • **Researchers and Policymakers:** This AI-driven approach contributes valu-
242 able insights for researchers studying infectious disease patterns and policy-
243 makers focused on strengthening the national AI Roadmap. The system’s
244 data can support broader initiatives for sustainable health infrastructure
245 and inform policy decisions on resource allocation for dengue control.
- 246 • **Community Members:** By reducing the frequency and severity of outbreaks,
247 this study ultimately benefits the community at large. This allows for timely

248 awareness campaigns and community engagement initiatives, empowering
249 residents with knowledge and preventative measures to protect themselves
250 and reduce the spread of dengue.

Chapter 2

Review of Related Literature

2.1 Dengue

Dengue disease is a tropical and subtropical mosquito-borne viral illness and is a major health concern in the Philippines (Bravo, Roque, Brett, Dizon, & L’Azou, 2014). The majority of individuals with dengue experience no symptoms. Fever is the most common symptom, typically 4 to 7 days after being bitten by an infected mosquito (Zhou & Malani, 2024). In recent years, the trend of dengue cases in the Philippines has shown notable fluctuations, with periodic outbreaks occurring every 3 to 5 years, often influenced by climatic and environmental changes. According to the Department of Health (DOH), the number of reported cases has steadily increased over the past decades, attributed to urbanization, population growth, and inadequate vector control measures (World Health Organization (WHO), 2018). Moreover, studies suggest that El Niño and La Niña events have significant effects on dengue incidence, with warmer temperatures and increased rainfall providing favorable breeding conditions for mosquitoes (Watts, Burke, Harrison, Whitmire, & Nisalak, 2020). The study of Carvajal et. al. highlights the temporal pattern of dengue cases in Metropolitan Manila and emphasizes the significance of relative humidity as a key meteorological factor, alongside rainfall and temperature, in influencing this pattern (Carvajal et al., 2018).

2.2 Outbreak Definition

The definition of an outbreak is a critical factor in disease surveillance, as it determines the threshold at which an unusual increase in cases is considered a

274 public health concern. Studies suggest that outbreak thresholds should be context-
275 specific, given the variability in transmission dynamics across different locations
276 (Runge-Ranzinger et al., 2016). Outbreak definitions defined using the Endemic
277 Channel often base thresholds on 2 standard deviations (SD) above the mean
278 number of historic dengue cases. Other studies (Hemisphere, 2015) also used an
279 alert threshold of a 5-year mean plus 2 standard deviations. A study by (Brady,
280 Smith, Scott, & Hay, 2015) discussed that definitions of dengue outbreaks differ
281 significantly across regions and time, making them inconsistent and incomparable.

282 From the studies above, this research implements an outbreak definition basing
283 the threshold on 2 standard deviations (SD) above the mean number of historic
284 dengue cases. It is important to note that for future outbreak definitions, addi-
285 tional local context like available hospital space etc., must be taken into account
286 for a more effective outbreak definition.

287 **2.3 Existing System: RabDash DC**

288 RabDash, developed by the University of the Philippines Mindanao, is a web-
289 based dashboard for rabies data analytics. It combines predictive modeling with
290 genomic data, enabling local health authorities to optimize interventions and al-
291 locate resources more effectively. RabDash’s modules include trend visualization,
292 geographic hotspot mapping, and predictive forecasting, utilizing Long Short-
293 Term Memory (LSTM) models for time-series forecasting (RabDashDC, 2024).

294 For DengueWatch, RabDash serves as a strong inspiration, particularly in
295 its monitoring, historical trend visualization, and forecasting capabilities. These
296 features align well with the needs of dengue control efforts, providing real-time
297 insights into outbreak trends and enabling more effective, data-driven decision-
298 making. RabDash’s architecture is relevant to the DengueDash, as dengue out-
299 breaks similarly require time-series forecasting models. By using LSTM, RabDash
300 effectively models trends in outbreak data, which provides a framework for adapt-
301 ing LSTM to dengue forecasting. Research indicates that LSTM models outper-
302 form traditional methods, such as ARIMA and MLP, in handling the complexities
303 of time-dependent epidemiological data (Ligue & Ligue, 2022).

304 2.4 Deep Learning

305 The study of (Ligue & Ligue, 2022) highlights how data-driven models can help
306 predict dengue outbreaks. The authors compared traditional statistical meth-
307 ods, such as non-seasonal and seasonal autoregressive integrated moving average
308 (ARIMA), and traditional feed-forward network approach using a multilayer per-
309 ceptron (MLP) model with a deep learning approach using the long short-term
310 memory (LSTM) architecture in their prediction model. They found that the
311 LSTM model performs better in terms of accuracy. The LSTM model achieved a
312 much lower root mean square error (RMSE) compared to both MLP and ARIMA
313 models, proving its ability to capture complex patterns in time-series data (Ligue
314 & Ligue, 2022). This superior performance is attributed to LSTM’s capacity
315 to capture complex, time-dependent relationships within the data, such as those
316 between temperature, rainfall, humidity, and mosquito populations, all of which
317 contribute to dengue incidence (Ligue & Ligue, 2022).

318 2.5 Kalman Filter

319 The Kalman Filter is another powerful tool for time-series forecasting that can be
320 integrated into our analysis. It provides a recursive solution to estimating the state
321 of a linear dynamic system from a series of noisy measurements. Its application
322 in epidemiological modeling can enhance prediction accuracy by accounting for
323 uncertainties in the data (Li et al., 2022). Studies have shown that Kalman filters
324 are effective in predicting infectious disease outbreaks by refining estimates based
325 on observed data. A study published in *Frontiers in Physics* utilized the Kalman
326 filter to predict COVID-19 deaths in Ceará, Brazil. They found that the Kalman
327 filter effectively tracked the progression of deaths and cases, providing critical in-
328 sights for public health decision-making (Ahmadini et al., 2021). Another research
329 article in *PLOS ONE* focused on tracking the effective reproduction number (R_t)
330 of COVID-19 using a Kalman filter. This method estimated the growth rate of
331 new infections from noisy data, demonstrating that the Kalman filter could main-
332 tain accurate estimates even when case reporting was inconsistent (Arroyo-Marioli,
333 Bullano, Kucinskas, & Rondón-Moreno, 2021).

334 Our study will compare ARIMA, seasonal ARIMA, Kalman Filter, and LSTM
335 models using our own collected dengue case data along with weather data to
336 identify the most effective model for real-time forecasting.

2.6 Weather Data

The relationship between weather patterns and mosquito-borne diseases is inherently nonlinear, meaning that fluctuations in disease cases do not respond proportionally to changes in climate variables (Colón-González, Fezzi, Lake, & Hunter, 2013). Weather data, such as minimum temperature and accumulated rainfall, are strongly linked to dengue case fluctuations, with effects observed after several weeks due to mosquito breeding and virus incubation cycles. Integrating these lagged weather effects into predictive models can improve early warning systems for dengue control (Cheong, Burkart, Leitão, & Lakes, 2013). A study also suggests that weather-based forecasting models using variables like mean temperature and cumulative rainfall can provide early warnings of dengue outbreaks with high sensitivity and specificity, enabling predictions up to 16 weeks in advance (Hii, Zhu, Ng, Ng, & Rocklöv, 2012).

We will utilize weather data, including variables such as temperature, rainfall, and humidity, as inputs for our dengue forecasting model. Given the strong, nonlinear relationship between climate patterns and dengue incidence, these weather variables, along with their lagged effects, are essential for enhancing prediction accuracy and providing timely early warnings for dengue outbreaks.

2.7 Chapter Summary

This chapter reviewed key literature relevant to our study, focusing on existing systems, predictive modeling techniques and the role of weather data in forecasting dengue outbreaks. We examined systems like RabDash DC, which integrates predictive modeling with real-time data to inform public health decisions, providing a foundational structure for our Dengue Watch System. Additionally, deep learning approaches, particularly Long Short-Term Memory (LSTM) networks, were highlighted for their effectiveness in time-series forecasting, while alternative methods such as ARIMA and Kalman Filters were considered for their ability to model complex temporal patterns and handle noisy data.

The literature further underscores the significance of weather variables—such as temperature and rainfall—in forecasting dengue cases. Studies demonstrate that these variables contribute to accurate outbreak prediction models. Leveraging these insights, our study will incorporate both weather data and historical dengue case counts to build a reliable forecasting model.

Chapter 3

Research Methodology

This chapter lists and discusses the specific steps and activities that will be performed to accomplish the project. The discussion covers the activities from pre-proposal to Final SP Writing.

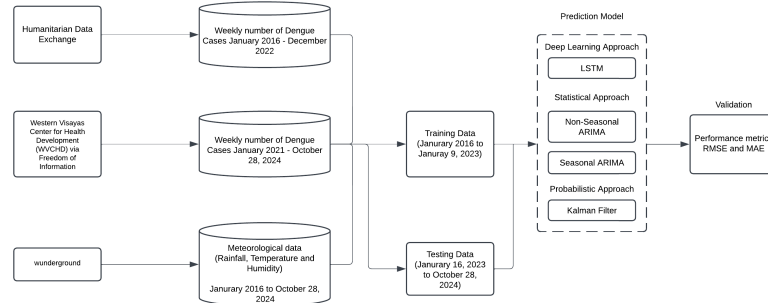


Figure 3.1: Workflow for forecasting the number of weekly dengue cases

This summarizes the workflow for forecasting the number of weekly dengue cases. This workflow focuses on using statistical, deep learning, and probabilistic models to forecast the number of reported dengue cases. The approach involves deploying several models for prediction, including ARIMA and Seasonal ARIMA as statistical approaches, LSTM as a deep learning approach, and the Kalman Filter as a probabilistic approach. These methods are compared with each other to determine the most accurate model.

3.1 Research Activities

3.1.1 Gather Dengue Data and Climate Data to Create a Complete Dataset for Forecasting

Acquisition of Dengue Case Data

The historical dengue case dataset used in this study was obtained from the Humanitarian Data Exchange and the Western Visayas Center for Health Development (WVCHD) via Freedom of Information (FOI) requests. The decision to use weekly intervals was driven by the need for precision and timeliness in capturing fluctuations in dengue cases and weather conditions. Dengue transmission is influenced by short-term changes in weather variables such as rainfall and temperature, which impact mosquito breeding and virus transmission cycles. A weekly granularity allowed the model to better capture these short-term trends, enabling more accurate predictions and responsive public health interventions.

Moreover, using a weekly interval provided more data points for training the models compared to a monthly format. This is particularly critical in time series modeling, where larger datasets help improve the robustness of the model and its ability to generalize to new data. Also, the collection of weather data was done by utilizing web scraping techniques to extract weekly weather data (e.g., rainfall, temperature, and humidity) from Weather Underground (wunderground.com).

Data Fields

- **Time.** Represents the specific year and week corresponding to each entry in the dataset.
- **Rainfall.** Denotes the observed average rainfall, measured in millimeters, for a specific week.
- **Humidity.** Refers to the observed average relative humidity, expressed as a percentage, for a specific week.
- **Max Temperature.** Represents the observed maximum temperature, measured in degrees Celsius, for a specific week.
- **Average Temperature.** Represents the observed average temperature, measured in degrees Celsius, for a specific week.

- 413 • **Min Temperature.** Represents the observed minimum temperature, mea-
414 sured in degrees Celsius, for a specific week.
- 415 • **Wind.** Represents the observed wind speed, measured in miles per hour
416 (mph), for a specific week.
- 417 • **Cases.** Refers to the number of reported dengue cases during a specific
418 week.

419 **Data Integration and Preprocessing**

420 The dengue case data was integrated with the weather data to create a com-
421 prehensive dataset, aligning the data based on corresponding timeframes. The
422 dataset underwent a cleaning process to address any missing values, outliers, and
423 inconsistencies to ensure its accuracy and reliability. To ensure that all features
424 and the target variable were on the same scale, a MinMaxScaler was applied to
425 normalize both the input features (climate data) and the target variable (dengue
426 cases).

427 **Exploratory Data Analysis (EDA)**

- 428 • Analyzed trends, seasonality, and correlations between dengue cases and
429 weather factors.
- 430 • Created visualizations like time series plots and scatterplots to highlight
431 relationships and patterns in the data.

432 **Outbreak Detection**

433 To detect outbreaks, we computed the outbreak threshold value of dengue cases
434 using the formula,

$$\text{Outbreak Threshold Value} = \mu + 2\sigma \quad (3.1)$$

435 where μ is the historical mean and σ is the standard deviation.

436 3.1.2 Develop and Evaluate Deep Learning Models for 437 Dengue Case Forecasting

438 The deep learning models were developed and trained to forecast weekly dengue
439 cases using historical weather data (rainfall, temperature, wind, and humidity)
440 and dengue case counts. The dataset was normalized and divided into training and
441 testing sets, ensuring temporal continuity to avoid data leakage. The methodology
442 for preparing and training the model are outlined below.

443 Data Preprocessing

444 The raw dataset included weekly aggregated weather variables (rainfall, tempera-
445 ture, wind, humidity) and dengue case counts. The "Time" column was converted
446 to a datetime format to ensure proper temporal indexing. To standardize the data
447 for training, MinMaxScaler was employed, normalizing the feature values and tar-
448 get variable to a range of 0 to 1. This step ensured that the models could efficiently
449 process the data without being biased by feature scaling differences.

450 LSTM Model

451 The dataset was split into training and test sets to evaluate the model's perfor-
452 mance and generalizability:

- 453 • **Training Set:** 80% of the data (572 sequences) was used for model training,
454 enabling the LSTM to learn underlying patterns in historical dengue case
455 trends and their relationship with weather variables.
- 456 • **Test Set:** The remaining 20% of the data (148 sequences) was reserved for
457 testing

458 To prepare the data for LSTM, a sliding window approach was utilized. Se-
459 quences of weeks of normalized features were constructed as input, while the
460 dengue case count for the subsequent week was set as the target variable. This
461 approach ensured that the model leveraged temporal dependencies in the data for
462 forecasting. To enhance the performance of the LSTM model in predicting dengue
463 cases, Bayesian Optimization was employed using the Keras Tuner library. The
464 tuning process aimed to minimize the validation loss (mean squared error) by
465 adjusting key model hyper-parameters. The search space is summarized below:

466 **LSTM units:**

- 467 • min value: 32
- 468 • max value: 128
- 469 • step: 16
- 470 • sampling: linear

471 **Learning Rate:**

- 472 • min value: 0.0001
- 473 • max value: 0.01
- 474 • step: None
- 475 • sampling: log

476 The tuner was instantiated with:

- 477 • **max trials = 10:** Limiting the search to 10 different configurations
- 478 • **executions per trial = 3:** Running each configuration thrice to reduce
479 variance
- 480 • **validation split = 0.2:** Reserving 20% of the training data for validation

481 The hyperparameter tuning was conducted for three different window sizes of
482 data: 5, 10, and 20. This allows the model to have the optimal hyperparameters
483 used for each window size. Training was conducted over 100 epochs with early
484 stopping to prevent overfitting while maintaining computational efficiency. A
485 batch size of 1 was used, enabling the model to process individual sequences,
486 which is suitable for smaller datasets but results in longer training times. The
487 Adam optimizer, known for its adaptive learning capabilities and stability was
488 employed.

489 To validate the effectiveness of the model, cross-validation was implemented.
490 However, standard k-fold cross-validation randomly shuffles the data, which isn't
491 suitable for time series since the order of observations is important. To address
492 this, a time series-specific cross-validation strategy was used with TimeSeriesS-
493 plit from the scikit-learn library. This method creates multiple train-test splits

494 where each training set expands over time and each test set follows sequentially.
495 This approach preserves the temporal structure of the data while helping reduce
496 overfitting by validating the model across different time segments.

497 After training, predictions on both the training and test datasets were rescaled
498 to their original scale using the inverse transformation of MinMaxScaler. Model
499 performance was evaluated using the mean squared error (MSE), root mean
500 squared error (RMSE) and mean absolute error (MAE).

501 ARIMA

502 The ARIMA model was employed to forecast weekly dengue cases using historical
503 weather data (rainfall, max temperature, and humidity) as exogenous variables
504 and historical case counts as the primary dependent variable. The dataset was
505 split into training (80%) and testing (20%) sets. To determine the optimal con-
506 figuration for the ARIMA model, a grid search was conducted over the following
507 parameter ranges:

- 508 • p (autoregressive order): 0 to 3
- 509 • d (differencing order): 0 to 2
- 510 • q (moving average order): 0 to 3

511 The combinations of these parameters were evaluated by fitting an ARIMA model
512 for each set of (p , d , q) values. The model's performance was assessed using the
513 mean squared error (MSE) between the predicted and actual dengue cases in the
514 test set. The combination yielding the lowest MSE was selected as the optimal
515 parameter configuration.

516 The fitted ARIMA model was used to forecast weekly dengue cases for the
517 test dataset. Predictions were directly assigned to the PredictedCases column in
518 the test dataset.

519 Steps to Create the ARIMA Model:

- 520 1. **Data Preprocessing:** Prepare the dataset by handling any missing values
521 and scaling the data if necessary to improve model convergence and stability.
- 522 2. **Hyperparameter Tuning:** Use a grid search on potential ARIMA param-
523 eters (p , d , q) to identify the configuration that minimizes error. The optimal
524 parameters were found to be **(1, 2, 2)**.

525 **3. Model Training:**

- 526 • Set the number of iterations to 400 to ensure thorough training and
527 convergence.
- 528 • Train the ARIMA model on 80% of the data and reserve 20% for test-
529 ing.

530 **Seasonal ARIMA (SARIMA)**

531 **1. Data Preprocessing**

- 532 • Handle missing values through interpolation or imputation.
- 533 • Normalize or standardize features to ensure stable training.
- 534 • Split data into training (80%) and testing (20%) sets while maintaining
535 temporal continuity.

536 **2. Seasonality Analysis**

- 537 • Perform time series decomposition to examine trend, seasonality, and
538 residual components.
- 539 • Identify seasonality using autocorrelation plots and spectral analysis.
- 540 • A periodicity of **52 weeks** was detected, justifying the use of a seasonal
541 model.

542 **3. Hyperparameter Tuning**

- 543 • Conduct a grid search to optimize SARIMA parameters $(p, d, q)(P, D, Q)[S]$.
- 544 • Determine optimal configuration for seasonal and non-seasonal compo-
545 nents.
- 546 • Verify stationarity through Augmented Dickey-Fuller (ADF) test.

547 **4. Model Training**

- 548 • Fit the SARIMA model on the training dataset, incorporating exoge-
549 nous variables such as rainfall, temperature, and humidity.
- 550 • Set a maximum number of iterations to ensure convergence.
- 551 • Monitor model diagnostics (residual analysis) to confirm the absence
552 of autocorrelation in residuals.

553 **5. Forecasting and Validation**

- 554 • Generate out-of-sample forecasts for future dengue cases.

- 555 • Compare predicted values against actual data to assess real-world ap-
556 plicability.
- 557 • Visualize results with line plots and confidence intervals.

558 **Kalman Filter:**

- 559 • **Input Variables:** The target variable (Cases) was modeled using three re-
560 gressors: rainfall, max temperature, and humidity.
- 561 • **Training and Testing Split:** The dataset was split into 80% training and
562 20% testing to evaluate model performance.
- 563 • **Observation Matrix:** The Kalman Filter requires an observation matrix,
564 which was constructed by adding an intercept (column of ones) to the re-
565 gressors.

566 The Kalman Filter’s EM method was employed for training, iteratively esti-
567 mating model parameters over 10 iterations. The smooth method was used to
568 compute the smoothed state estimates for the training data. Observation matri-
569 ces for the test data were constructed similarly, ensuring compatibility with the
570 trained model.

571 **Kalman Filter Methodology with Matrix Calculations**

572 **Measurement Acquisition:** Obtain the measurement: (z_k) of the system’s state
573 with associated confidence. This measurement matrix provides a noisy observation
574 of the true state.

575 The dataset was split into training and test sets to evaluate the Kalman Filter’s
576 performance and generalizability:

- 577 • **Training Set:** 80% of the data was used for training, enabling the Kalman
578 Filter model to capture key patterns.
- 579 • **Test Set:** The remaining 20% of the data was reserved for testing.

580 **Prediction Step:**

- 581 • Predict the next state:

$$\hat{x}_{k|k-1} = A\hat{x}_{k-1|k-1} + Bu_k$$

- 582 • Update the state covariance:

$$P_{k|k-1} = AP_{k-1|k-1}A^T + Q$$

583 where Q is the process noise covariance matrix.

584 **Compute Residual:** Calculate the residual:

$$y_k = z_k - H\hat{x}_{k|k-1}$$

585 where H is the observation matrix. This residual represents the new information
586 from the measurement.

587 **Scaling Factor (Kalman Gain):**

- 588 • Compute the Kalman Gain:

$$K_k = P_{k|k-1}H^T (HP_{k|k-1}H^T + R)^{-1}$$

589 where R is the measurement noise covariance matrix.

- 590 • The Kalman Gain determines the weight of the measurement relative to the
591 prediction.

592 **State Update:**

- 593 • Update the state estimate:

$$\hat{x}_{k|k} = \hat{x}_{k|k-1} + K_k y_k$$

594 blending the prediction and measurement.

595 **Uncertainty Update:**

- 596 • Update the state covariance:

$$P_{k|k} = (I - K_k H)P_{k|k-1}$$

597 where I is the identity matrix.

598 **3.1.3 Integrate the Predictive Model into a Web-Based** 599 **Data Analytics Dashboard**

600 **Dashboard Design and Development**

- 601 • Design an intuitive, user-friendly web-based dashboard incorporating:
 - 602 – Interactive visualizations of yearly dengue case trends.
 - 603 – Data input and update forms for dengue and weather data.
 - 604 – Map display of dengue cases in each district in Iloilo City

605 **Model Integration and Deployment**

- 606 • Deploy the best-performing model within the dashboard as a backend service
607 to enable real-time or periodic forecasting.

608 **3.1.4 System Development Framework**

609 The Agile Model is the birthchild of both iterative and incremental approaches
610 in Software Engineering. It aims to be flexible and effective at the same time by
611 being adaptable to change. It's also important to note that small teams looking
612 to construct and develop projects quickly can benefit from this kind of method-
613 ology. As the Agile Method focuses on continuous testing, quality assurance is a
614 guarantee since bugs and errors are quickly identified and patched.

615 **3.1.5 Design, Building, Testing, and Integration**

616 **Design and Development**

617 After brainstorming and researching the most appropriate type of application to
618 accommodate both the prospected users and the proposed solutions, the team
619 has decided to proceed with a web application. Given the time constraints and
620 available resources, it has been decided that the said means is the most pragmatic
621 and practical move. The next step is to select modern and stable frameworks
622 that align with the fundamental ideas learned by the developers in the university.
623 The template obtained from WVCHD and Iloilo Provincial Epidemiology and
624 Surveillance Unit was meticulously analyzed to create use cases and develop a

625 preliminary well-structured database that adheres to the requirements needed
626 to produce a quality application. The said use cases serve as the basis of general
627 features. Part by part, these are converted into code, and with the help of selected
628 libraries and packages, it resulted in the desired outcome that may still modified
629 and extended to achieve scalability.

630 **Testing and Integration**

631 Each feature was user-tested to ensure quality assurance, with particular empha-
632 sis on prerequisite features, as development cannot progress properly if these fail.
633 Moreover, integration between each feature serves as a pillar for a cohesive user
634 experience. Presently, we have not been able to use performance metrics to mea-
635 sure the system’s performance, as developing and connecting the core features is
636 the utmost priority.

637 **3.2 Development Tools**

638 **3.2.1 Software**

639 **Github**

640 GitHub is a cloud-based platform that tracks file changes using Git, an open-
641 source version control system (*About GitHub and Git - GitHub Docs*, n.d.). It is
642 used in the project to store the application’s source code, manage the system’s
643 source version control, and serve as a repository for the Latex files used in the
644 actual research.

645 **Visual Studio Code**

646 Visual Studio Code is a free, lightweight, and cross-platform source code editor
647 developed by Microsoft (*Why Visual Studio Code?*, 2021). As VS Code supports
648 this project’s programming and scripting languages, it was chosen as the primary
649 source code editor.

650 Django

651 Django is a free and open-sourced Python-based web framework that offers an
652 abstraction to develop and maintain a secure web application. As this research
653 aims to create a well-developed and maintainable application, it is in the best
654 interest to follow an architectural pattern that developers and contributors in the
655 future can understand. Since Django adheres to Model-View-Template (MVT)
656 that promotes a clean codebase by separating data models, business logic, and
657 presentation layers, it became the primary candidate for the application's back-
658 bone.

659 Next.js

660 A report by Statista (2024) claims that React is the most popular front-end frame-
661 work among web developers. However, React has limitations that can be a nui-
662 sance in rapid software development, which includes routing and performance op-
663 timizations. This is where Next.js comes in—a framework built on top of React.
664 It offers solutions for React's deficiency, making it a rising star in the framework
665 race.

666 Postman

667 As the application heavily relies on the Application Programming Interface (API)
668 being thrown by the backend, it is a must to use a development tool that facilitates
669 the development and testing of the API. Postman is a freemium API platform
670 that offers a user-friendly interface to create and manage API requests (*What is*
671 *Postman? Postman API Platform*, n.d.).

672 3.2.2 Hardware

673 The web application is continuously being developed on laptop computers with
674 minimum specifications of an 11th-generation Intel i5 CPU and 16 gigabytes of
675 RAM.

676 3.2.3 Packages

677 Django REST Framework

678 Django Rest Framework (DRF) is a third-party package for Django that provides a
679 comprehensive suite of features to simplify the development of robust and scalable
680 Web APIs (Christie, n.d.). These services include Serialization, Authentication
681 and Permissions, Viewsets and Routers, and a browsable API .

682 Leaflet

683 One of the features of the web application is the ability to map the number
684 of cases using a Choropleth Map. Leaflet is the only free, open-sourced, and
685 most importantly, stable JavaScript package that can do the job. With its ultra-
686 lightweight size, it offers a comprehensive set of features that does not trade
687 off performance and usability (*Leaflet — an open-source JavaScript library for*
688 *interactive maps*, n.d.).

689 Chart.js

690 Another feature of the application is to provide users with informative, approach-
691 able data storytelling that is easy for everyone to understand. The transformation
692 of pure data points and statistics into figures such as charts is a big factor. Thus,
693 there is a need for a package that can handle this feature without compromising
694 the performance of the application. Chart.js is a free and open-source JavaScript
695 package that is made to meet this criteria as it supports various types of charts
696 (*Chart.js*, n.d.).

697 Tailwind CSS

698 Using plain CSS in production-quality applications can be counterproductive.
699 Therefore, CSS frameworks were developed to promote consistency and accelerate
700 the rapid development of web applications (Joel, 2021). One of these is Tailwind,
701 which offers low-level utility classes that can be applied directly to each HTML
702 element to create a custom design (*Tailwind CSS - Rapidly build modern web-*
703 *sites without ever leaving your HTML.*, n.d.). Given the limited timeline for this
704 project, using this framework is a wise choice due to its stability and popularity
705 among developers.

706 **Shadcn**

707 Shadcn offers a collection of open-source UI boilerplate components that can be
708 directly copied and pasted into one's project. With the flexibility of the provided
709 components, Shadcn allows developers to have full control over customization and
710 styling. Since this is built on top of Tailwind CSS and Radix UI, it is supported
711 by most modern frontend frameworks, including Next.js (Shadcn, n.d.).

712 **Zod**

713 Data validation is integral in this web application since it will handle crucial data
714 that will be used for analytical inferences and observations. Since Zod is primarily
715 used for validating and parsing data, it ensures proper communication between
716 the client and the server (Zod, n.d.).

717 **3.3 Application Requirements**

718 **3.3.1 Backend Requirements**

719 **Database Structure Design**

720 Determining how data flows and how it would be structured is crucial in creating
721 the system as it defines how extendible and flexible it would be for future features
722 and updates. Thus, creating a comprehensive map of data ensures proper nor-
723 malization that eliminates data redundancy and improves data integrity. Figure
724 3.2 depicts the designed database schema that showcases the relationship between
725 the application's entities.

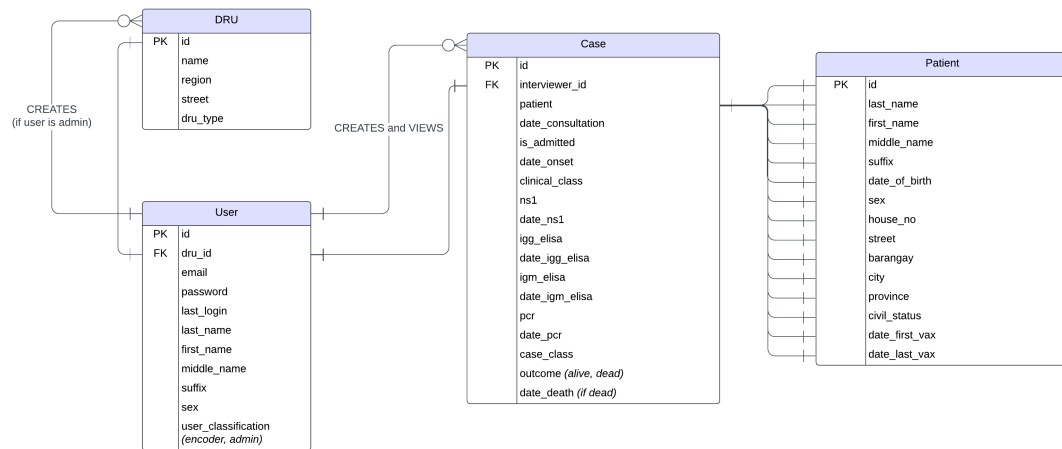


Figure 3.2: Entity-Relationship Database Schema Hybrid Diagram for DengueDash Database Structure

3.3.2 User Interface Requirements

Disease Reporting Unit Admin Interface

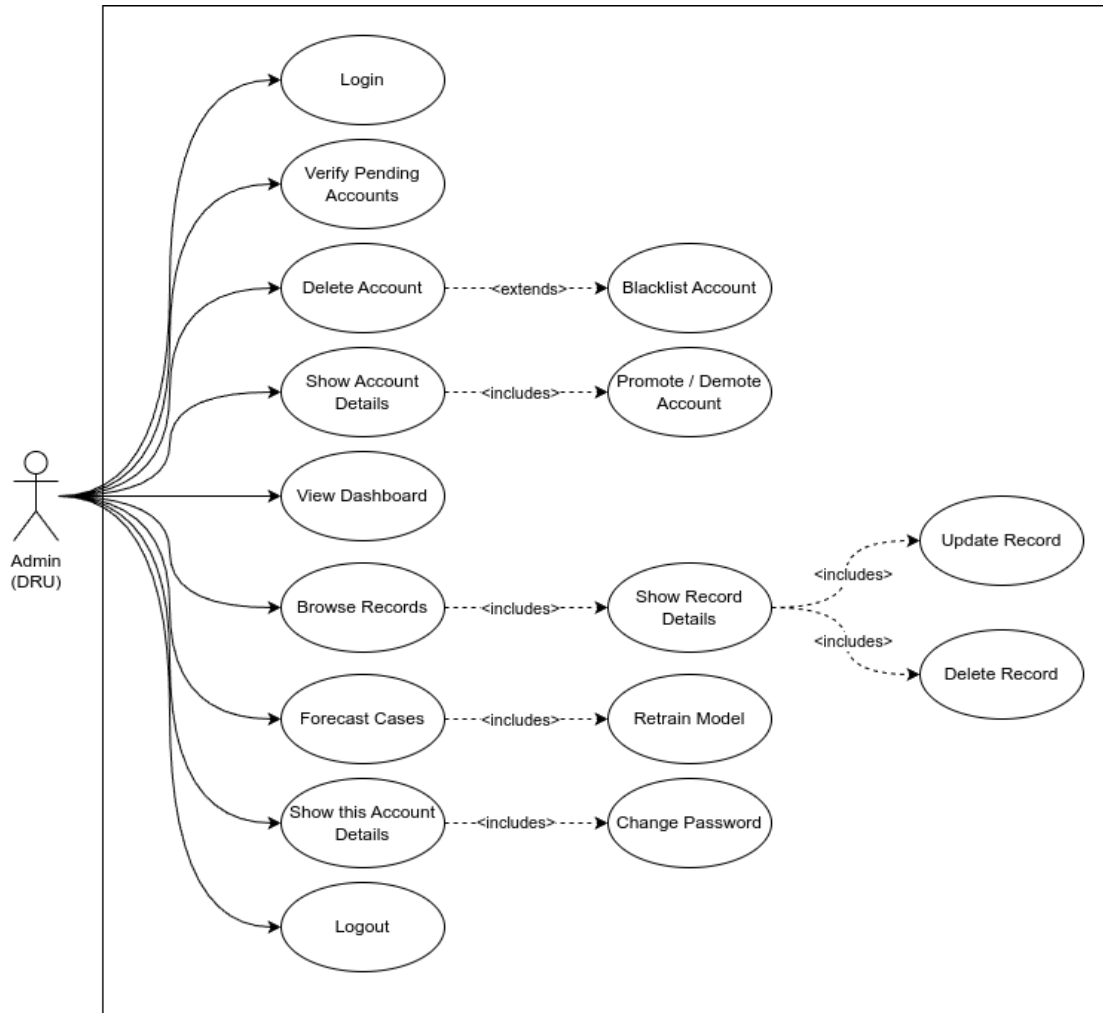


Figure 3.3: Use Case Diagram for DRU Admin

Surveillance Unit Admin Interface

Figure 3.3 shows the actions an admin for a specific Disease Reporting Unit (DRU) can take in the application. These include managing accounts, browsing records, and forecasting and retraining all the consolidated data under the unit. To protect the integrity of data, encoders that register to a DRU must first be verified by these users, and then the encoder's account can only be authorized to use the

734 application.

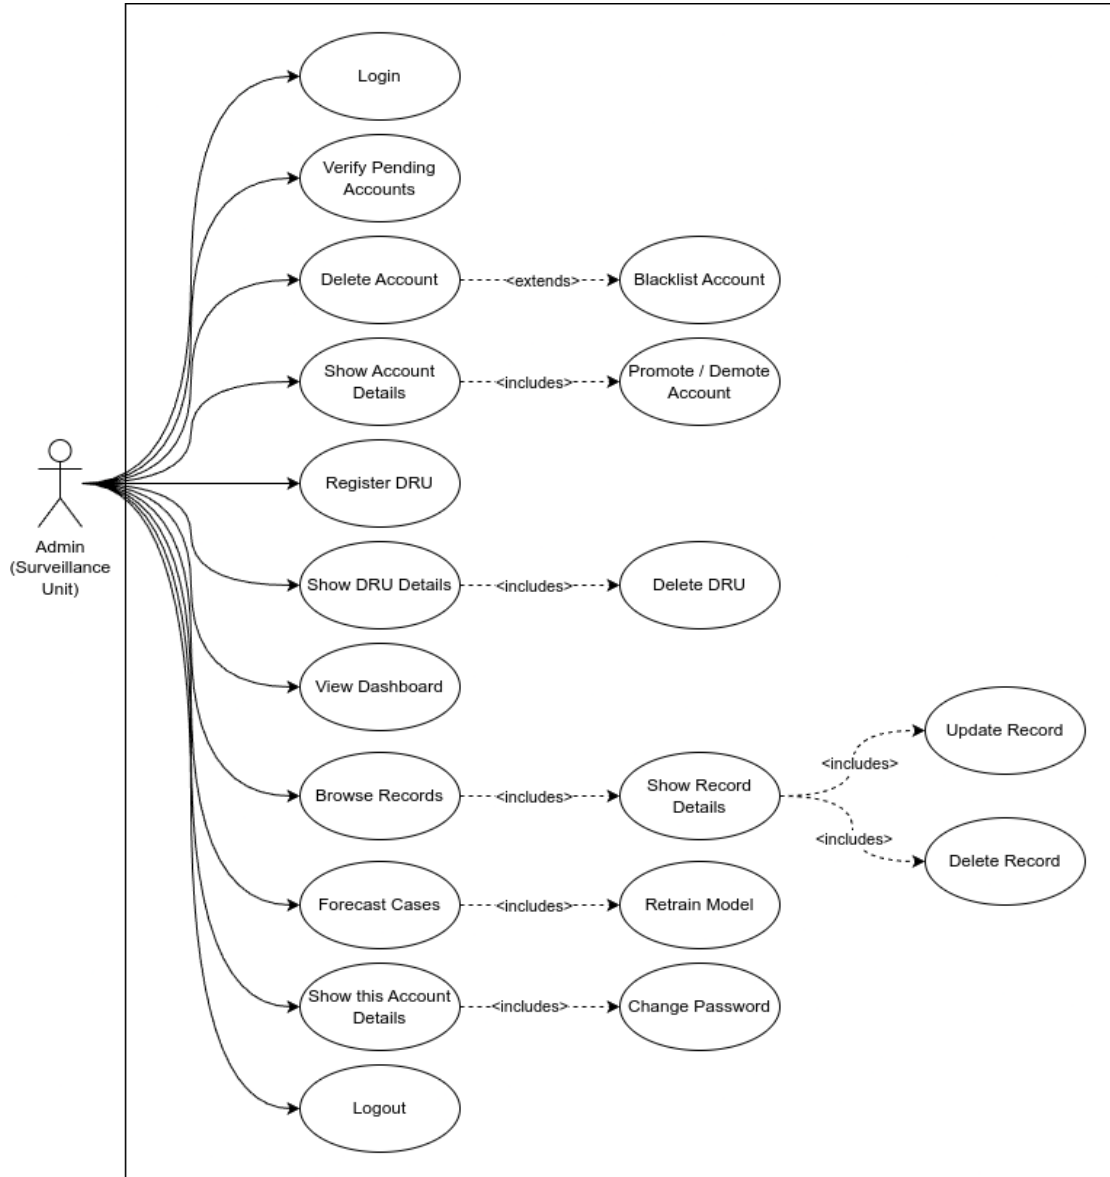


Figure 3.4: Use Case Diagram for Surveillance Unit Admin

735 While the previous use case focuses on hospitals, clinics, and other reporting
 736 units, the use case presented in Figure 3.4 has a one-step higher authorization as
 737 it manages these DRUs. It has the same features as the DRU admin but with
 738 extra management of the DRUs under a specific surveillance unit. At this point,
 739 only the authorized surveillance unit administrator can register and create a DRU
 740 to uphold transparency and accountability.

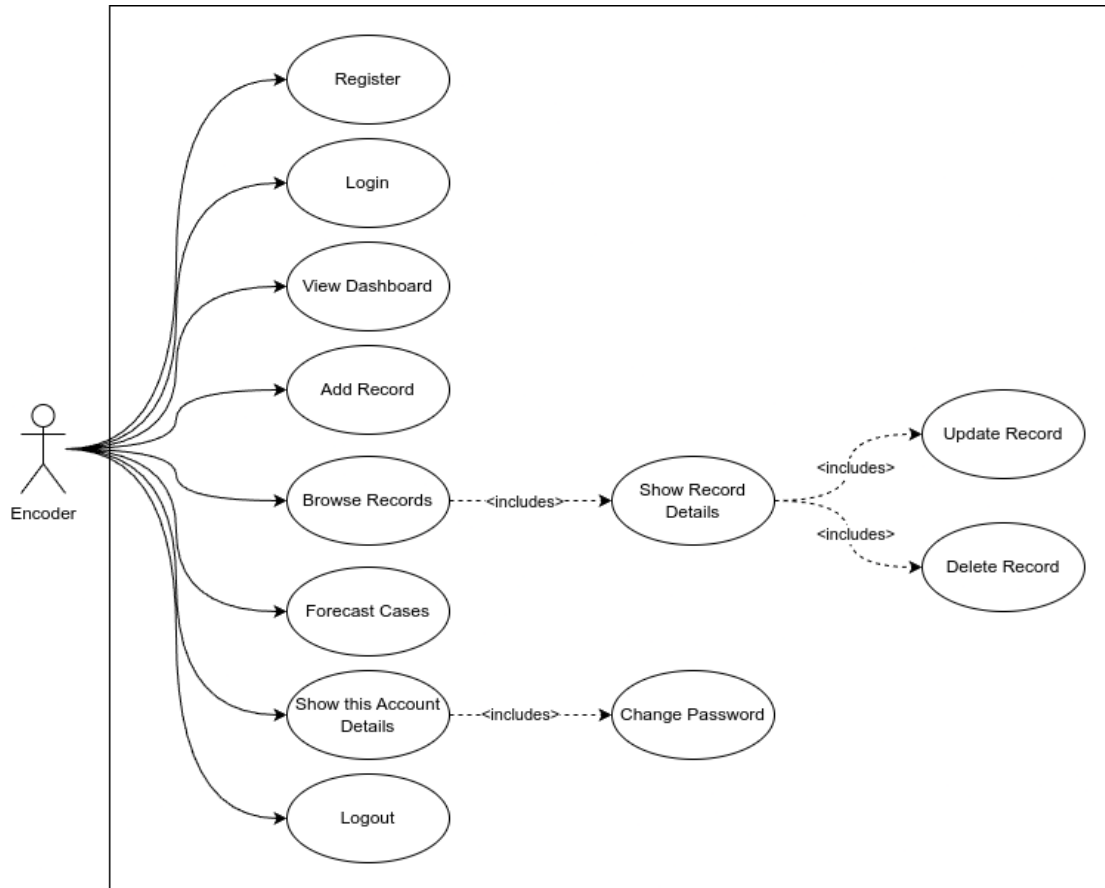


Figure 3.5: Use Case Diagram for Encoder

742 Figure 3.5, on the other hand, illustrates the use cases for the system's primary
 743 users. These users can register but must wait for further verification to access the
 744 application. Similar to the previous interfaces, encoders can browse and manage
 745 records, as well as forecast the consolidated cases under a specific surveillance or
 746 disease reporting unit, but they are not allowed to retrain the model. Lastly, they
 747 are the only type of user that can file and create dengue cases by filling out a form
 748 with the required details.

749 **3.3.3 Security and Validation Requirements**

750 **Password Encryption**

751 Storing passwords as plain text in the database is a disgrace and a mortal sin in
752 production. It is important to implement precautionary methods such as hashing
753 and salting, followed by encryption with a strong algorithm, to prevent bad actors
754 from using the accounts for malicious transactions. By default, Django generates
755 a unique random salt for each password and encrypts it with Password-Based Key
756 Derivation Function 2 (PBKDF2) with a SHA256 hash function. Utilizing these
757 techniques ensures that in the event of a data breach, cracking these passwords
758 would be time-consuming and useless for the attackers.

759 **Authentication**

760 DengueWatch utilizes JSON Web Tokens (JWT) to authenticate the user. Since
761 the mechanism operates in a stateless manner, tokens are served only after a
762 successful login, eliminating the need for the server to keep a record of the token,
763 which is vulnerable to session hijacking. In addition, these tokens are signed with
764 a secret key, ensuring they have not been tampered with.

765 **Data Validation**

766 Both the backend and frontend should validate the input from the user to preserve
767 data integrity. Thus, Zod is implemented in the latter to help catch invalid inputs
768 from the user. By doing this, the user can only send proper requests to the server
769 which streamlines the total workflow. On the other hand, Django has also a built-
770 in validator that checks the data type and ensures that the input matches the
771 expected format on the server side. These validation processes ensure that only
772 valid and properly formatted data is accepted, which reduces the risk of errors
773 and ensures consistency across the web application.

774 3.3.4 Testing Process

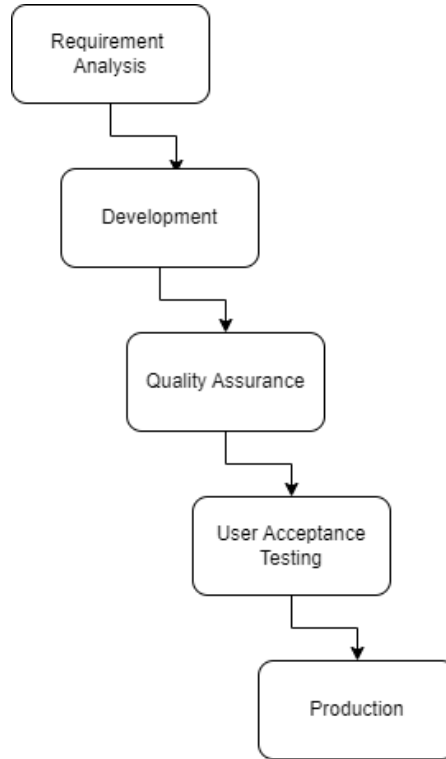


Figure 3.6: Testing Process for DengueWatch

775 As the system requirements and functionalities have been mentioned above, it
776 is important to implement testing to validate the system's performance and effi-
777 cacy. Since dengue reports include confidential information, anonymized historical
778 dengue reports were used to train the model and create the foundational archi-
779 tecture of the system. By using functional tests, data validation and visualization
780 can be ensured for further continual improvements. Security testing is also im-
781 portant as it is needed to safeguard confidential information when the system
782 is deployed. It includes proper authentication, permission views, and mitigating
783 common injection attacks. Finally, a user acceptance test from the prospected
784 users, in this case, doctors, nurses, and other health workers, is crucial to assess
785 its performance and user experience. It enables the developers to confirm if the
786 system meets the needs of the problem, and once confirmed, it will be deployed
787 and further evaluated to ensure stability and reliability in live operation.

3.4 Calendar of Activities

A Gantt chart showing the schedule of the activities is included below. Each bullet represents approximately one week of activity.

Table 3.1: Timetable of Activities for 2024

Activities	Aug	Sept	Oct	Nov	Dec
Project Initiation and Team Formation	••				
Literature Review and Data Gathering	••	••••			
Data Cleaning and Feature Selection		••		•	•
Creating System Dashboard		••	••••	•	
Analysis and Interpretation of Results			•		•
Documentation	••	••••	••••	••••	••••

Table 3.2: Timetable of Activities for 2025

Activities	Jan	Feb	Mar	Apr	May
Create Admin Dashboard	•	•••			
Integrate the Best Model to the System	•	••••			
Extend Features to Accommodate a National Setting		•	••		
User Testing			••	•	
System Deployment				•••	
Documentation	••	••••	••••	••••	••••

Chapter 4

Results and Discussion/System Prototype

4.1 Data Gathering

The data for dengue case prediction was gathered from a variety of reliable sources, enabling a comprehensive dataset spanning from January 2011 to October 2024. This dataset includes 720 rows of data, each containing weekly records of dengue cases along with corresponding meteorological variables, such as rainfall, temperature, and humidity.

1. **Dengue Case Data:** The primary source of historical dengue cases came from the Humanitarian Data Exchange and the Western Visayas Center for Health Development (WVCHD). The dataset, accessed through Freedom of Information (FOI) requests, provided robust case numbers for the Western Visayas region. The systematic collection of these data points was essential for establishing a reliable baseline for model training and evaluation.
2. **Weather Data:** Weekly weather data was obtained by web scraping from Weather Underground, allowing access to rainfall, temperature, wind, and humidity levels that correlate with dengue prevalence.

```
data.head()
```

	Time	Rainfall	MaxTemperature	AverageTemperature	MinTemperature	Wind	Humidity	Cases
0	2011-01-03	9.938571	29.444400	25.888890	23.888900	11.39	86.242857	5
1	2011-01-10	8.587143	30.000000	26.705556	24.444444	7.32	88.028571	4
2	2011-01-17	5.338571	30.000000	26.616667	25.000000	7.55	84.028571	2
3	2011-01-24	5.410000	30.555556	26.483333	20.555556	10.67	80.971429	7
4	2011-01-31	2.914286	28.333333	25.283333	18.650000	11.01	74.885714	2

Figure 4.1: Snippet of the Combined Dataset

#	Column	Non-Null	Count	Dtype
---	-----	-----	-----	-----
0	Time	720	non-null	datetime64[ns]
1	Rainfall	720	non-null	float64
2	MaxTemperature	720	non-null	float64
3	AverageTemperature	720	non-null	float64
4	MinTemperature	720	non-null	float64
5	Wind	720	non-null	float64
6	Humidity	720	non-null	float64
7	Cases	720	non-null	int64
dtypes: datetime64[ns](1), float64(6), int64(1)				
memory usage: 45.1 KB				

Figure 4.2: Data Contents

809 4.2 Exploratory Data Analysis

810 From the summary above, the dataset consists of 720 weekly records with 8
811 columns:

- 812 • **Time.** Weekly timestamps (e.g. "2011-w1")
- 813 • **Rainfall.** Weekly average rainfall (mm)
- 814 • **MaxTemperature, AverageTemperature, MinTemperature.** Weekly
815 temperature data (C)
- 816 • **Wind.** Wind speed (m/s)
- 817 • **Humidity.** Weekly average humidity (%)
- 818 • **Cases.** Reported dengue cases

	Time	Rainfall	MaxTemperature	AverageTemperature	MinTemperature	Wind	Humidity	Cases
count	720	720.000000	720.000000	720.000000	720.000000	720.000000	720.000000	720.000000
mean	2017-12-02 11:22:00	13.957499	32.191142	28.110319	25.038472	6.172417	81.609442	23.744444
min	2011-01-03 00:00:00	0.000000	-14.600000	24.494444	12.222222	1.910000	73.185714	0.000000
25%	2014-06-21 06:00:00	1.270000	31.666667	27.504167	25.000000	4.117500	79.885713	5.000000
50%	2017-12-07 12:00:00	4.318000	32.222222	28.161111	25.000000	5.725000	81.771429	12.000000
75%	2021-05-11 18:00:00	10.414000	32.777778	28.751389	25.555556	7.860000	83.503571	26.000000
max	2024-10-28 00:00:00	445.008000	58.333333	30.916667	32.222222	19.200000	89.571429	319.000000
std	NaN	35.448846	2.616379	0.999800	1.291659	2.446703	2.831674	37.144813

Figure 4.3: Dataset Statistics

From the statistics in figure 4.3, the number of cases ranges from 0 to 319. The average number of dengue cases per week is 23.74, with a median of 12 cases and a standard deviation of 37.14. The distribution is highly skewed, with some weeks experiencing significant number of cases (up to 319 cases). Rainfall shows a wide variation (0 to 445mm), while temperature remains relatively stable, with an average of 28.1 degree celsius. Humidity levels ranges from 73% to 89% with a mean of 81.6%.

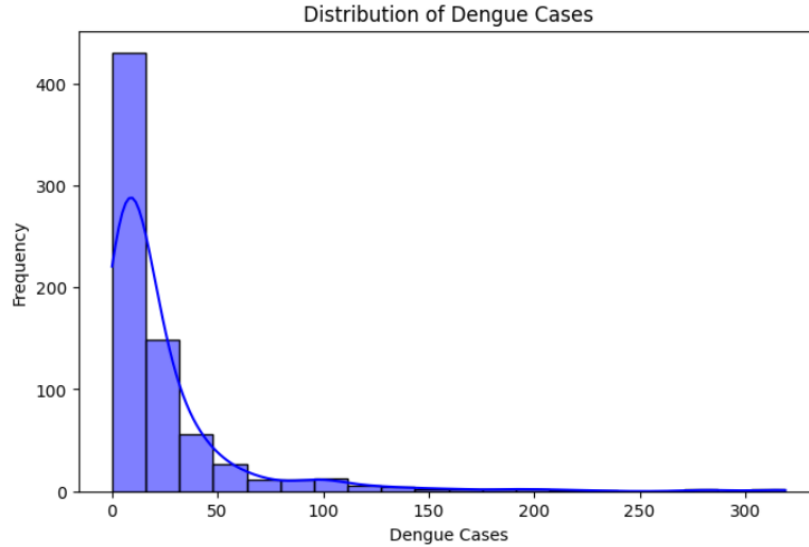


Figure 4.4: Distribution of Dengue Cases

In figure 4.4, a histogram of dengue cases shows a right-skewed distribution, indicating that most weeks experience low case counts, while a few weeks record outbreaks. To further analyze the distribution, dengue cases were categorized into different intervals (Figure 4.5): 0-5 cases, 6-15 cases, 16-30 cases, 31-100 cases and 101+

831 cases. The majority of weeks falls within the 0-5 cases and 6-15 cases categories,
 832 indicating that most weeks have low dengue cases. Meanwhile, weeks with 101+
 cases are rare, suggesting that extreme outbreaks are not frequent.

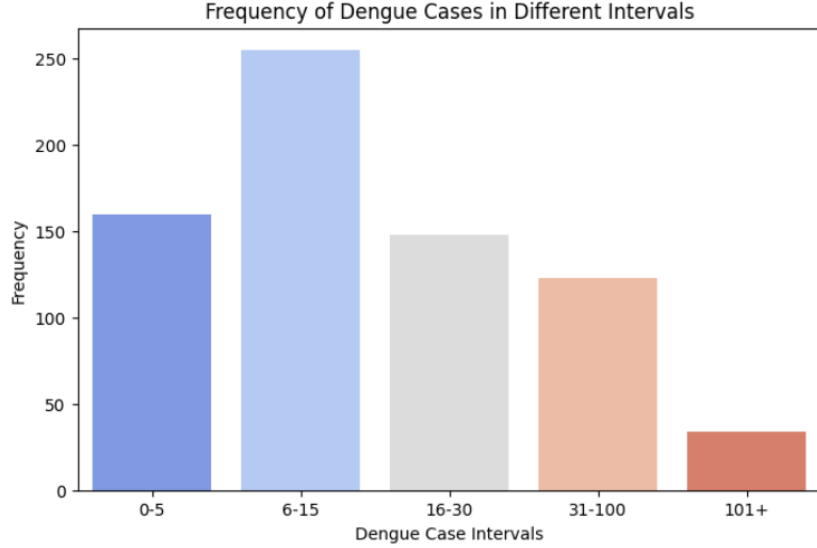


Figure 4.5: Frequency of Dengue Cases in Different Intervals

833

834 Figure 4.6 illustrates the trend of weekly dengue cases over time. The data
 835 reveals periodic spikes in the number of cases, suggesting a seasonal pattern in
 836 dengue cases. Notably, peak cases are observed during certain periods approx-
 837 imately 3 years, potentially aligning with specific climatic conditions such as
 838 increased rainfall or temperature changes. This underscores the importance of
 839 incorporating climate variables into the forecasting model.

840 Figure 4.7 shows the ranking of correlation coefficients between dengue cases
 841 and selected features, including rainfall, humidity, maximum temperature, aver-
 842 age temperature, minimum temperature, and wind speed. Among these, rainfall
 843 exhibits the highest positive correlation with dengue cases (correlation coefficient
 844 0.13), indicating that increased rainfall may contribute to higher cases counts.
 845 This aligns with existing studies suggesting that stagnant water from heavy rain-
 846 fall creates breeding grounds for mosquitos. It is followed by humidity (0.10),
 847 suggesting that higher humidity levels may enhance mosquito reproduction, lead-
 848 ing to more dengue cases. Temperature has a weak to moderate positive corre-
 849 lation with dengue cases, with maximum temperature (0.09) showing a stronger
 850 relationship than average and minimum temperature.

851 Figure 4.8 shows the ranking of correlation coefficients between dengue cases
 852 and selected features, with the addition of lagged effects. The analysis reveals no

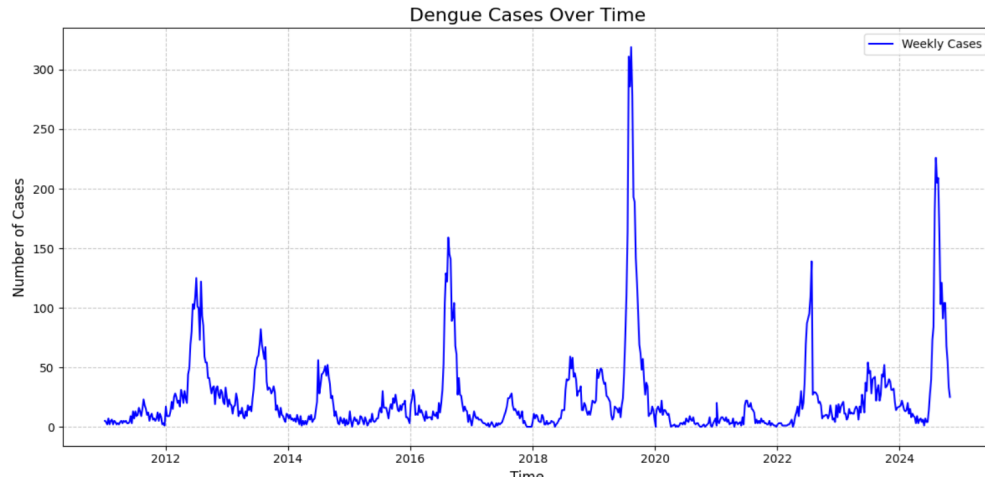


Figure 4.6: Trend of Dengue Cases

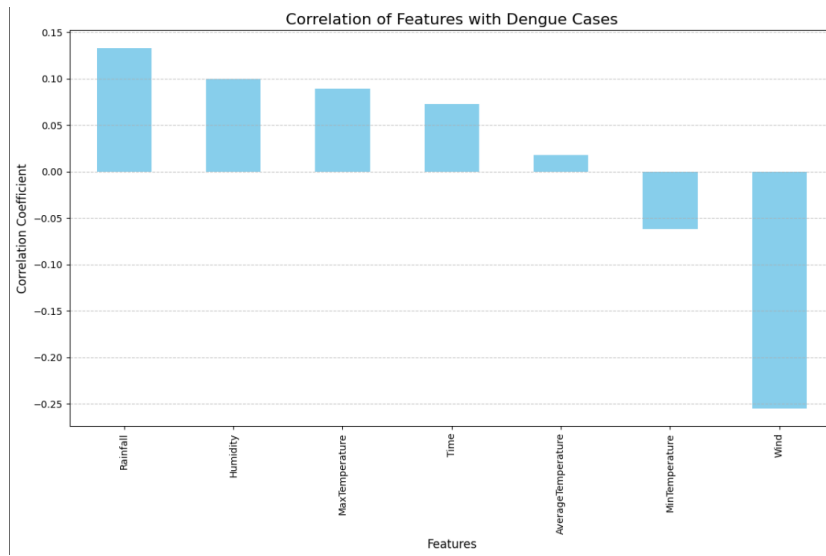


Figure 4.7: Ranking of Correlations

853 improvement in correlation when lagged variables are compared to direct observa-
 854 tions. This suggests that the observed values of rainfall, humidity, and maximum
 855 temperature remain the most significant predictors for dengue case forecasting.
 856 Overall, the exploratory data analysis highlights the significance of rainfall, hu-
 857 midity, and max temperature variables in dengue case forecasting.

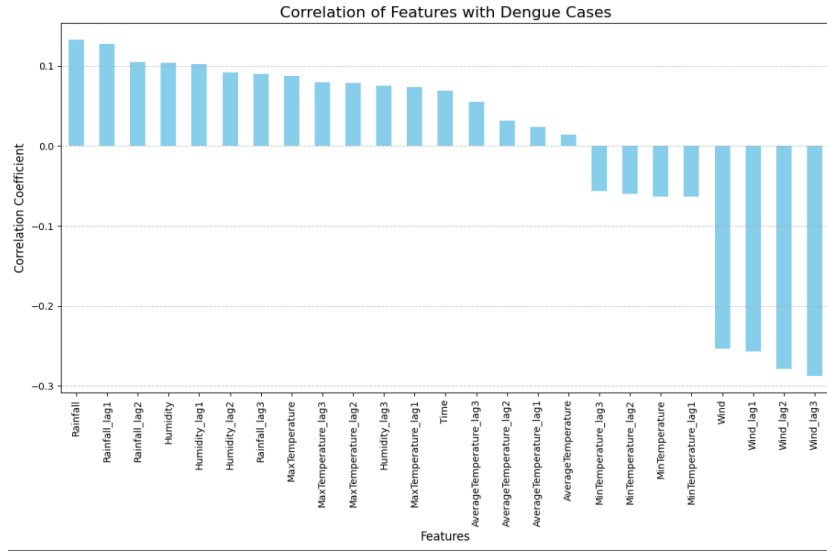


Figure 4.8: Ranking of Correlations (with lagged effects)

4.3 Outbreak Detection

To identify outbreaks, we calculated the outbreak threshold value using the historical mean as the endemic channel. The threshold is determined using the formula:

$$\text{Outbreak Threshold Value} = \mu + 2\sigma \quad (4.1)$$

$$= 23.744444 + 2(37.144813) \quad (4.2)$$

$$= 23.744444 + 74.289626 \quad (4.3)$$

$$= 98.03407 \quad (4.4)$$

where μ is the historical mean and σ is the standard deviation.

This result indicates that dengue cases exceeding 98 in Iloilo City can be considered an outbreak. However, it is important to note that this threshold serves only as a baseline. Additional parameters, such as the number of hospital beds available in the city, must be considered to compute a more effective threshold and develop an appropriate response strategy.

867 4.4 Model Training Results

868 The models were evaluated using three metrics: MSE, RMSE, and MAE. The
 869 table below provides a summary and comparative analysis of each model's results
 870 across these metrics, offering insights into the strengths and limitations of each
 871 forecasting technique for dengue case prediction in Iloilo City. The lower values
 872 of the three metrics indicate better forecasting performance. Table 4.1 shows that
 873 the models performed differently on testing data. LSTM outperformed the other
 874 models with the lowest RMSE, MSE, and MAE while the other three models had
 875 relatively higher values for the three metrics.

Method	LSTM	Seasonal ARIMA	ARIMA	Kalman Filter
Testing MSE	285.54	1109.69	1521.48	1474.82
Testing RMSE	16.90	33.31	39.00	38.40
Testing MAE	9.45	18.08	25.80	22.33
Best Parameters	Window Size: 5 Learning Rate: 0.01 Units: 64	(2, 0, 2)(0, 1, 1)	(1, 2, 2)	—

Table 4.1: Comparison of Models

876 4.4.1 LSTM Model

877 The LSTM model was tuned for the following parameters: learning rate and units.
 878 The hyperparameter tuning was conducted for each window size, finding the best
 879 parameters for each window size. Further evaluating which window size is most
 880 suitable for the prediction model, Table 4.2 shows the evaluation metrics for each
 window size used in the LSTM model training.

Window Size	MSE	RMSE	MAE	R ²
5	285.54	16.90	9.45	0.83
10	334.63	18.29	9.85	0.80
20	294.85	17.17	9.35	0.83

Table 4.2: Comparison of Window Sizes

881
 882 The results indicate that a window size of 5 weeks provides the most accurate
 883 predictions, as evidenced by the lowest MSE and RMSE values. Furthermore, the
 884 R² score of 0.83 indicates that 83% of the variability in the target variable (cases)
 885 is explained by the independent variables (the inputs) in the model, making it a
 886 reliable configuration overall.

Figure ?? illustrates the model's performance in predicting dengue cases for each fold using a window size of 5. As shown in the plot, the training set progressively increases with each fold, mimicking a real-world scenario where more data becomes available over time for dengue prediction. Figure ?? demonstrates that the predicted cases closely follow the trend of the actual cases, indicating that the LSTM model successfully captures the underlying patterns in the data. It is also evident that as the fold number increases and the training set grows, the accuracy of the predictions on the test set improves. Despite the test data being unseen, the model exhibits a strong ability to generalize, suggesting it effectively leverages past observations to predict future trends.

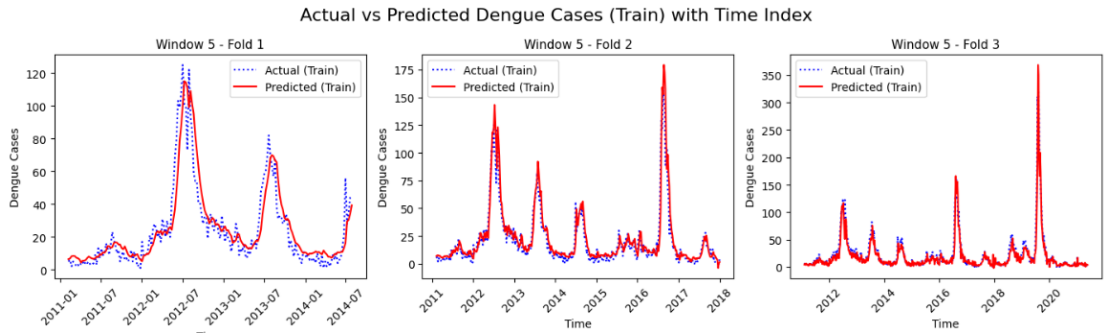


Figure 4.9: Training Folds - Window Size 5

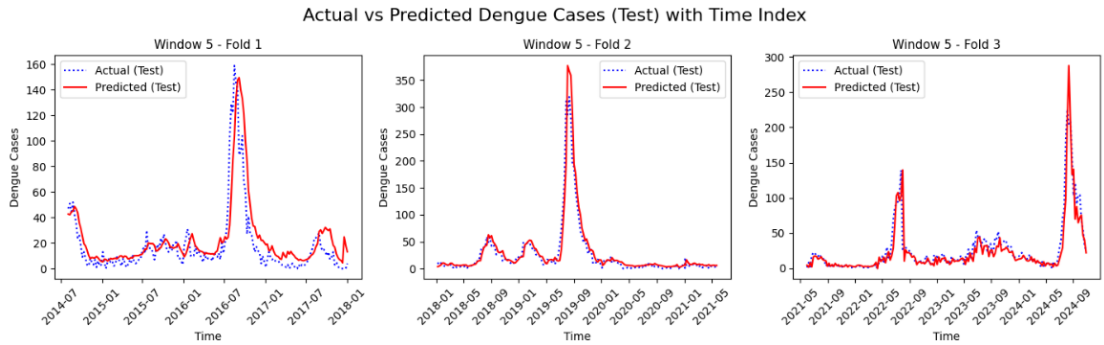


Figure 4.10: Testing Folds - Window Size 5

897 4.4.2 ARIMA Model

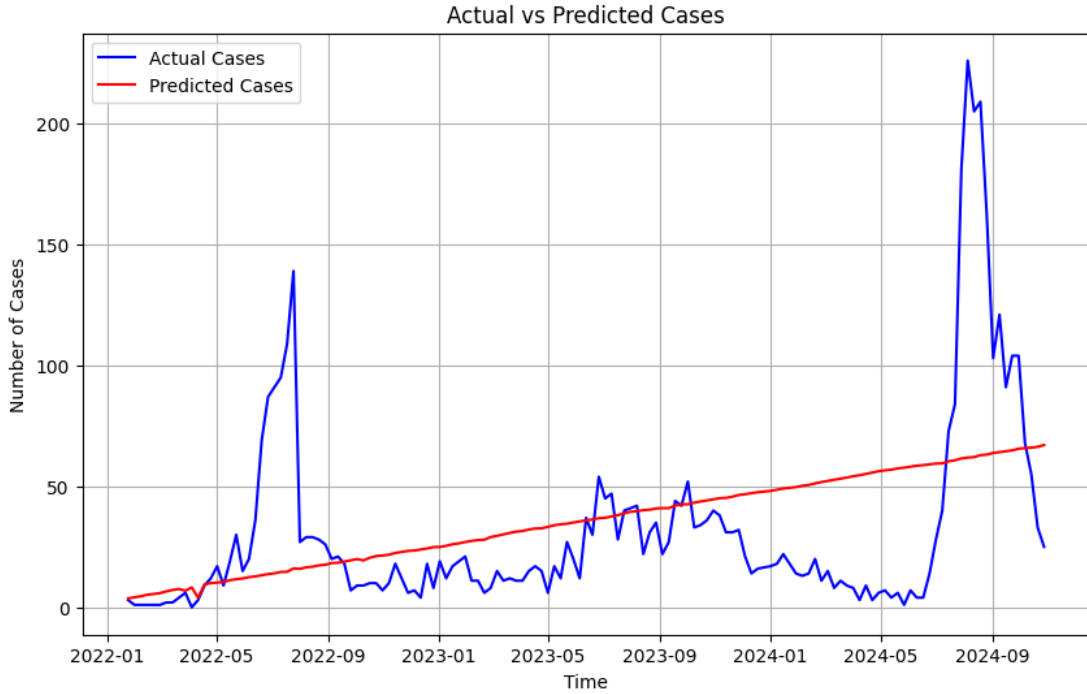


Figure 4.11: ARIMA Prediction Results for Test Set

898 The ARIMA model was developed to capture non-seasonal trends in the data.
 899 To determine the best model configuration, grid search was used to explore vari-
 900 ous combinations of ARIMA parameters, ultimately selecting **ARIMA(1, 2, 2)**.
 901 The model was iteratively refined over **400 iterations** to ensure convergence to
 902 an optimal solution. Figure 4.10 illustrates the comparison between actual and
 903 predicted dengue cases in the test set. As shown in the plot, the ARIMA model
 904 struggled to capture the non-linear characteristics and abrupt spikes in the data.
 905 Consequently, it failed to accurately reflect the fluctuations and outbreak patterns
 906 seen in the actual case counts.

907 The model's performance was assessed using regression metrics to evaluate its
 908 forecasting capability. The ARIMA model yielded the following error metrics:

- 909 • **MSE (Mean Squared Error):** 1521.48
- 910 • **RMSE (Root Mean Squared Error):** 39.01
- 911 • **MAE (Mean Absolute Error):** 25.80

4.4.3 Seasonal ARIMA (SARIMA) Model

To address the limitations of the ARIMA model, a Seasonal ARIMA (SARIMA) model was developed to capture both non-seasonal and seasonal variations in the data.

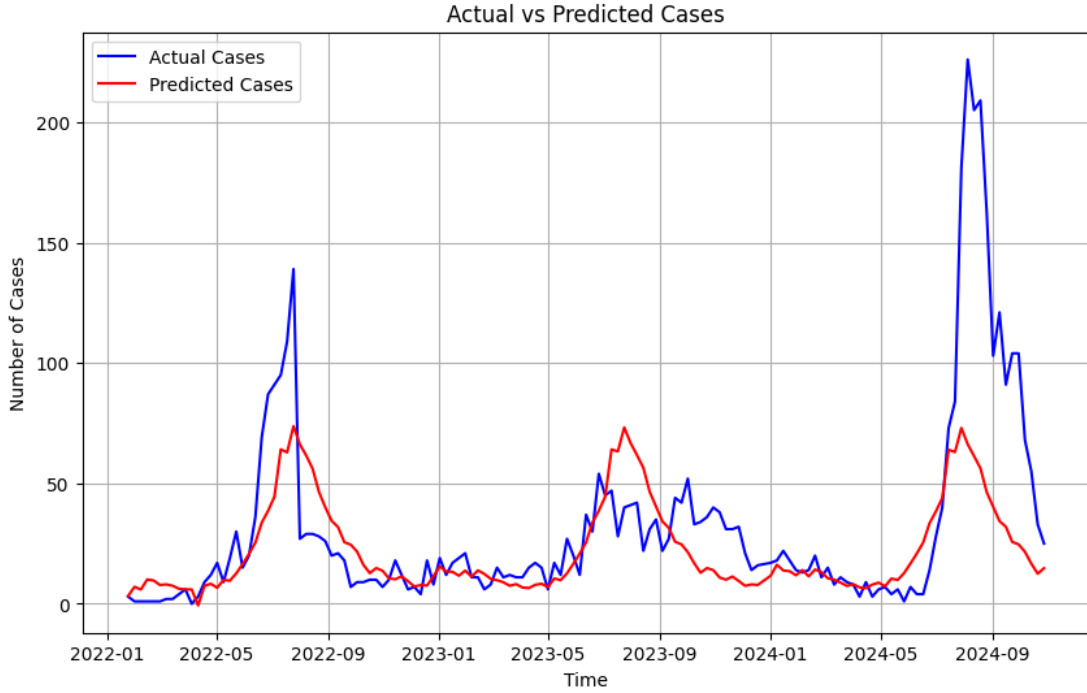


Figure 4.12: Seasonal ARIMA Prediction Results for Test Set

This model incorporates seasonal parameters, which were tuned using grid search to find the best configuration: **SARIMA(2, 0, 2)(0, 1, 1)[52]**. As with ARIMA, **400 iterations** were applied to ensure a robust fit. As shown in Figure 4.11, the SARIMA model demonstrates a notable improvement in performance. Unlike its non-seasonal counterpart, it effectively captures the general trend and aligns more closely with the peaks observed in the actual dengue cases, indicating its ability to model seasonal dynamics.

The model's performance was assessed using regression metrics to evaluate its forecasting capability. The SARIMA model yielded the following error metrics:

- **MSE:** 1109.69
- **RMSE:** 33.31

927

- MAE: 18.09

928

929

930

931

The lower error values, when compared to the ARIMA model, highlight the SARIMA model's superior capability in forecasting dengue cases. Its effectiveness in capturing seasonal patterns contributed to a more accurate representation of the actual cases.

932

4.4.4 Kalman Filter Model

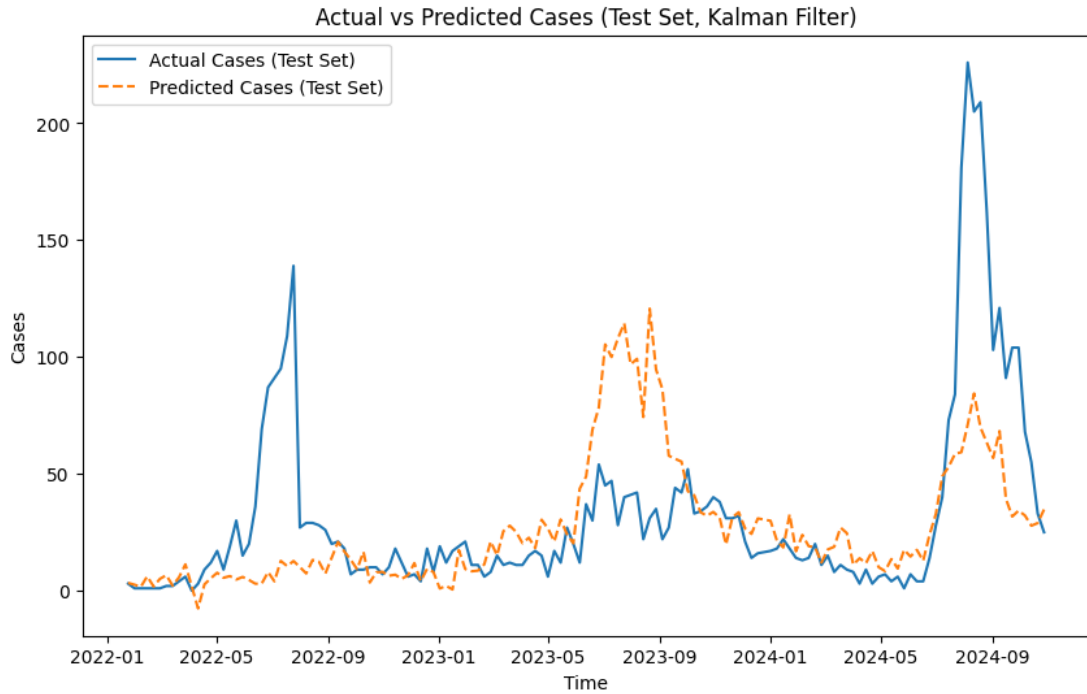


Figure 4.13: Kalman Filter Prediction Results for Test Set

933

934

935

936

937

938

939

940

Figure 4.12 shows the comparison between the actual dengue cases and the predicted values on the test set. As illustrated in the plot, the Kalman Filter model demonstrates a moderate ability to follow the general trend of the actual data. While it effectively captures some rising and falling patterns, it still struggles to accurately replicate the sharp peaks and extreme values found in the real case counts. This limitation is particularly noticeable during the large spikes in 2022 and 2024.

941 The model’s performance was evaluated using standard regression metrics.
942 The results are as follows:

$$\text{MSE} = 1474.82, \quad \text{RMSE} = 38.40, \quad \text{MAE} = 22.34$$

943 These metrics indicate that the Kalman Filter outperforms the ARIMA model
944 in terms of mean absolute error (MAE), suggesting better accuracy in captur-
945 ing day-to-day fluctuations. However, it still underperforms compared to the
946 SARIMA model, particularly in modeling seasonal trends and sharp outbreaks.
947 Despite its limitations, the Kalman Filter shows promise for short-term forecasting
948 due to its adaptability and real-time updating capability.

949 4.5 Preliminary System Requirements

950 4.6 System Prototype

951 4.6.1 Guest Interface

952 The Guest Interface is intended for all visitors of the web application. It shows
953 the related statistics for dengue cases in a particular area and time. As the system
954 is still in its testing phase, the data converted into charts shown in Figure 4.13
955 are generated from Python's Faker library.

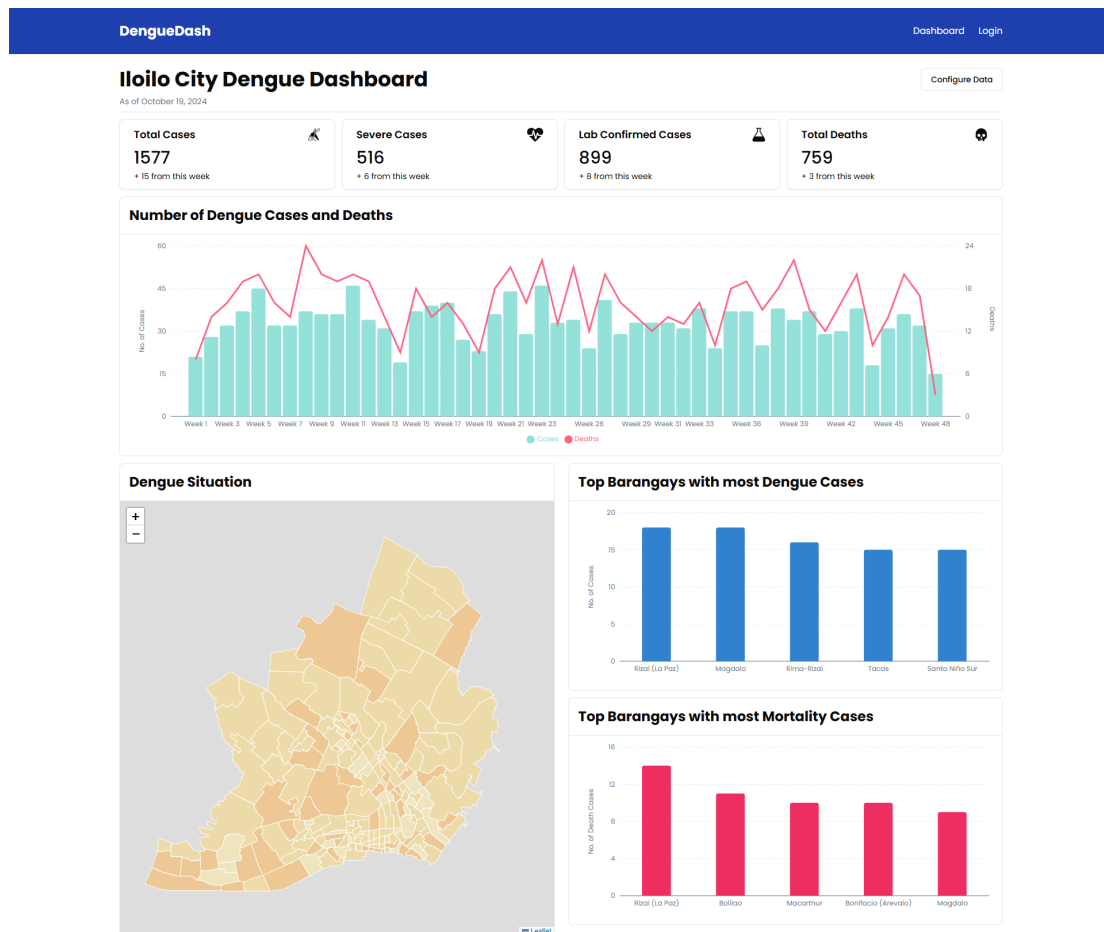


Figure 4.14: Dashboard for Guests

956 4.6.2 Personnel Interface

957 User Authentication, and Login

958 To protect the data's integrity in production, it has been decided that the registration process will not be visible. Instead, an admin must register a user using
959 a different interface. As of the moment, registering a user is done using API via
960 Postman. In the login process, the system implements HTTP-only cookies that
961 contains the JSON Web Tokens (JWT) to protect against XSS attacks. After
962 proper credentials have been provided, it will redirect to the user's home page.
963

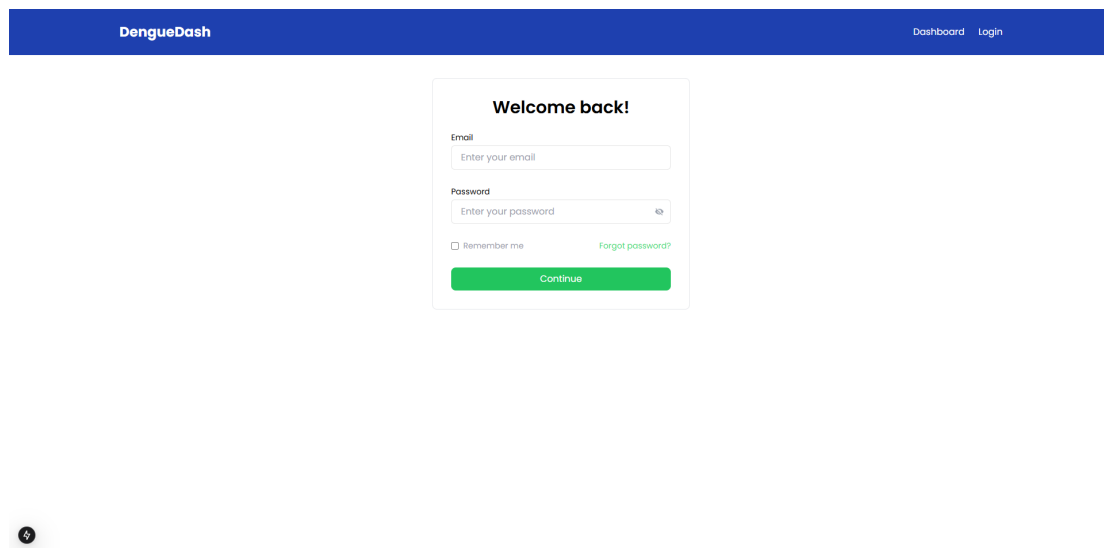


Figure 4.15: Login Page for Users

964 Encoder's View

965 Figures 4.15 and 4.16 show the digitized counterpart of the form obtained from the
966 Iloilo Provincial Epidemiology and Surveillance Unit. As the system aims to support
967 expandability for future features, some fields were modified to accommodate
968 more detailed input. It is worth noting that all of the included fields adhere to the
969 latest Philippine Integrated Disease and Surveillance Response (PIDSR) Dengue
970 Forms, which the referenced form was based on. By doing this, it is assumed
971 that the targeted users will have a familiarity when deployed on a national scale.
972 On a further note, the case form includes the patient's basic information, dengue
973 vaccination status, consultation details, laboratory results, and the outcome.

DengueDash

Modules

Analytics

Forms

Case Report Form

Data Tables

Settings

CN

shadcn

m@example.com

0

Building Your Application

Data Fetching

Personal Information

Clinical Status

Personal Detail

First Name

Middle Name

Last Name

Suffix

Sex

Civil Status

Date of Birth

Address

House No.

Street

Barangay

City

Province

Vaccination

Date of First Vaccination

Date of Last Vaccination

Back

Next

Figure 4.16: First Part of Case Report Form

DengueDash

Modules

Analytics

Forms

Case Report Form

Data Tables

Settings

CN

shadcn

m@example.com

0

Building Your Application

Data Fetching

Personal Information

Clinical Status

Consultation

Date Admitted/Consulted/Seen

Is Admitted?

Date Onset of Illness

Clinical Classification

Laboratory Results

NSI

Date done (NSI)

IgG ELISA

Date done (IgG ELISA)

IgM ELISA

Date done (IgM ELISA)

PCR

Date done (PCR)

Outcome

Case Classification

Outcome


Date of Death

Back

Submit

Figure 4.17: Second Part of Case Report Form


974 Once the data generated from the case report form is validated, it will be
 975 assigned as a new case and can be accessed through the Dengue Reports page, as
 976 shown in Figure 4.17. The said page displays basic information about the patient
 977 related to a specific case, including their name, address, date of consultation, and
 978 clinical and case classifications. It is also worth noting that it only shows cases
 979 the user is permitted to view. For example, in a local Disease Reporting Unit
 980 (DRU) setting, the user can only access records that came from the same DRU.
 981 On the other hand, in a consolidated surveillance unit such as a regional and
 982 provincial quarter, its users can view all the records that came from all the DRUs
 983 that report to them. Moving forward, Figure 4.18 shows the detailed case report
 984 of the patient on a particular consultation date.

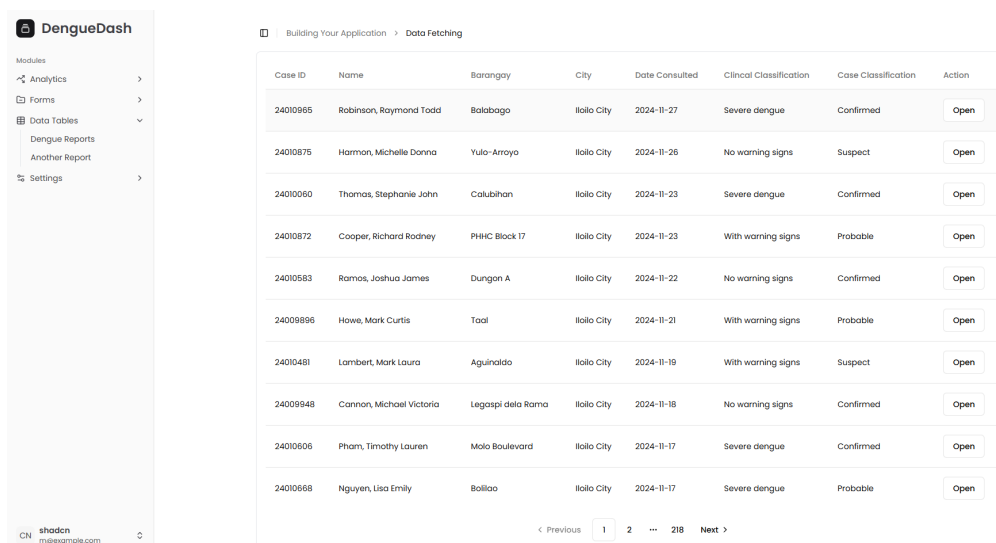

The screenshot displays the DengueDash application interface. On the left is a sidebar menu with the following items: Analytics, Forms, Data Tables (expanded), Dengue Reports, Another Report, and Settings. The main content area is titled 'Building Your Application > Data Fetching' and contains a table of dengue reports. The table has columns for Case ID, Name, Barangay, City, Date Consulted, Clinical Classification, Case Classification, and Action. There are 12 rows of data, each with an 'Open' button in the Action column. At the bottom of the table, there is a pagination control showing '1' of 218 items.

Case ID	Name	Barangay	City	Date Consulted	Clinical Classification	Case Classification	Action
24010965	Robinson, Raymond Todd	Balabago	Iloilo City	2024-11-27	Severe dengue	Confirmed	Open
24010975	Harmon, Michelle Donna	Yulo-Arayo	Iloilo City	2024-11-26	No warning signs	Suspect	Open
24010960	Thomas, Stephanie John	Calubihan	Iloilo City	2024-11-23	Severe dengue	Confirmed	Open
24010972	Cooper, Richard Rodney	PHHC Block 17	Iloilo City	2024-11-23	With warning signs	Probable	Open
24010583	Ramos, Joshua James	Dungan A	Iloilo City	2024-11-22	No warning signs	Confirmed	Open
24009896	Howe, Mark Curtis	Taal	Iloilo City	2024-11-21	With warning signs	Probable	Open
24010481	Lambert, Mark Laura	Aguinaldo	Iloilo City	2024-11-19	With warning signs	Suspect	Open
24009948	Cannon, Michael Victoria	Legaspi dela Rama	Iloilo City	2024-11-18	No warning signs	Confirmed	Open
24010606	Pham, Timothy Lauren	Molo Boulevard	Iloilo City	2024-11-17	Severe dengue	Confirmed	Open
24010668	Nguyen, Lisa Emily	Boilao	Iloilo City	2024-11-17	Severe dengue	Probable	Open

Figure 4.18: Dengue Reports

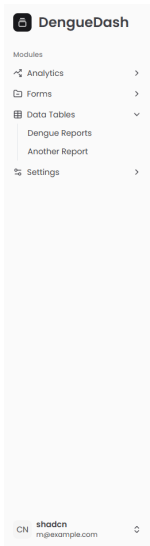

Building Your Application > Data Fetching

Personal Information

Full Name Thomas, Stephanie John	Date of Birth September 19, 2010
Sex Male	Civil Status Separated
Full Address 4189 Rice Coves, Calubihan, Iloilo City, Iloilo	

Vaccination Status

First Dose February 11, 2024	Last Dose April 10, 2024
----------------------------------------	------------------------------------

Case Record #24010060

Date of Consultation November 23, 2024	Patient Admitted? Yes
Date Onset of Illness November 22, 2024	Clinical Classification Severe dengue

Laboratory Results

NSI Pending Result	Date Done N/A
IgG Elisa Negative	Date Done November 29, 2024
IgM Elisa Equivocal	Date Done December 2, 2024
PCR Pending Result	Date Done N/A

Outcome

Case Classification Confirmed	Outcome Dead
Date of Death November 29, 2024	

Figure 4.19: Detailed Case Report

References

- 986 *About GitHub and Git - GitHub Docs.* (n.d.). Retrieved from
 987 [https://docs.github.com/en/get-started/start-your-journey/](https://docs.github.com/en/get-started/start-your-journey/about-github-and-git)
 988 [about-github-and-git](https://docs.github.com/en/get-started/start-your-journey/about-github-and-git)
- 989 Ahmadini, A. A. H., Naeem, M., Aamir, M., Dewan, R., Alshqaq, S. S. A., &
 990 Mashwani, W. K. (2021). Analysis and forecast of the number of deaths,
 991 recovered cases, and confirmed cases from covid-19 for the top four affected
 992 countries using kalman filter. *Frontiers in Physics*, 9, 629320.
- 993 Arroyo-Marioli, F., Bullano, F., Kucinskas, S., & Rondón-Moreno, C. (2021).
 994 Tracking r of covid-19: A new real-time estimation using the kalman filter.
 995 *PloS one*, 16(1), e0244474.
- 996 Bosano, R. (2023). *Who: Ph most affected by dengue in western pacific*. Retrieved
 997 Use the date of access, from [https://news.abs-cbn.com/spotlight/12/](https://news.abs-cbn.com/spotlight/12/22/23/who-ph-most-affected-by-dengue-in-western-pacific)
 998 [22/23/who-ph-most-affected-by-dengue-in-western-pacific](https://news.abs-cbn.com/spotlight/12/22/23/who-ph-most-affected-by-dengue-in-western-pacific)
- 999 Brady, O. J., Smith, D. L., Scott, T. W., & Hay, S. I. (2015). Dengue disease
 1000 outbreak definitions are implicitly variable. *Epidemics*, 11, 92–102.
- 1001 Bravo, L., Roque, V. G., Brett, J., Dizon, R., & L’Azou, M. (2014). Epidemiology
 1002 of dengue disease in the philippines (2000–2011): a systematic literature
 1003 review. *PLoS neglected tropical diseases*, 8(11), e3027.
- 1004 Carvajal, T. M., Viacrusis, K. M., Hernandez, L. F. T., Ho, H. T., Amalin, D. M.,
 1005 & Watanabe, K. (2018). Machine learning methods reveal the temporal
 1006 pattern of dengue incidence using meteorological factors in metropolitan
 1007 manila, philippines. *BMC infectious diseases*, 18, 1–15.
- 1008 *Chart.js.* (n.d.). Retrieved from <https://www.chartjs.org/>
- 1009 Cheong, Y. L., Burkart, K., Leitão, P. J., & Lakes, T. (2013). Assessing weather
 1010 effects on dengue disease in malaysia. *International journal of environmental*
 1011 *research and public health*, 10(12), 6319–6334.
- 1012 Christie, T. (n.d.). *Home - Django REST framework.* Retrieved from [https://](https://www.django-rest-framework.org/)
 1013 www.django-rest-framework.org/
- 1014 Colón-González, F. J., Fezzi, C., Lake, I. R., & Hunter, P. R. (2013). The effects
 1015 of weather and climate change on dengue. *PLoS neglected tropical diseases*,
 1016 7(11), e2503.

1017 Hemisphere, N. (2015). Update on the dengue situation in the western pacific
1018 region. *Update*.

1019 Hii, Y. L., Zhu, H., Ng, N., Ng, L. C., & Rocklöv, J. (2012). Forecast of dengue
1020 incidence using temperature and rainfall. *PLoS neglected tropical diseases*,
1021 6(11), e1908.

1022 Joel, C. (2021, 10). *6 reasons to use Tailwind over traditional CSS*. Re-
1023 trieved from [https://dev.to/charliejoel/6-reasons-to-use-tailwind](https://dev.to/charliejoel/6-reasons-to-use-tailwind-over-traditional-css-1nc3)
1024 [-over-traditional-css-1nc3](https://dev.to/charliejoel/6-reasons-to-use-tailwind-over-traditional-css-1nc3)

1025 *Leaflet — an open-source JavaScript library for interactive maps*. (n.d.). Retrieved
1026 from <https://leafletjs.com/>

1027 Lena, P. (2024). *Iloilo beefs up efforts amid hike in dengue cases*. Retrieved Use
1028 the date of access, from <https://www.pna.gov.ph/articles/1231208>

1029 Li, X., Feng, S., Hou, N., Li, H., Zhang, S., Jian, Z., & Zi, Q. (2022). Applications
1030 of kalman filtering in time series prediction. In *International conference on*
1031 *intelligent robotics and applications* (pp. 520–531).

1032 Ligue, K. D. B., & Ligue, K. J. B. (2022). Deep learning approach to forecasting
1033 dengue cases in davao city using long short-term memory (lstm). *Philippine*
1034 *Journal of Science*, 151(3).

1035 Perla. (2024). *Iloilo beefs up efforts amid hike in dengue cases*. Retrieved Use the
1036 date of access, from <https://www.pna.gov.ph/articles/1231208>

1037 RabDashDC. (2024). *Rabdash dc*. Retrieved Use the date of access, from [https://](https://rabdash.com)
1038 rabdash.com

1039 Runge-Ranzinger, S., Kroeger, A., Oliaro, P., McCall, P. J., Sánchez Tejeda, G.,
1040 Lloyd, L. S., ... Coelho, G. (2016). Dengue contingency planning: from
1041 research to policy and practice. *PLoS neglected tropical diseases*, 10(9),
1042 e0004916.

1043 Shadcn. (n.d.). *Introduction*. Retrieved from <https://ui.shadcn.com/docs>
1044 *Tailwind CSS - Rapidly build modern websites without ever leaving your HTML*.
1045 (n.d.). Retrieved from <https://tailwindcss.com/>

1046 Watts, D. M., Burke, D. S., Harrison, B. A., Whitmire, R. E., & Nisalak, A.
1047 (2020). Effect of temperature on the transmission of dengue virus by aedes
1048 aegypti. *The American Journal of Tropical Medicine and Hygiene*, 36(1),
1049 143–152.

1050 *What is Postman? Postman API Platform*. (n.d.). Retrieved from [https://](https://www.postman.com/product/what-is-postman/)
1051 www.postman.com/product/what-is-postman/

1052 WHO. (2023). *Dengue - global situation*. Retrieved Use the date of ac-
1053 cess, from [https://www.who.int/emergencies/disease-outbreak-news/](https://www.who.int/emergencies/disease-outbreak-news/item/2023-DON498)
1054 [item/2023-DON498](https://www.who.int/emergencies/disease-outbreak-news/item/2023-DON498)

1055 WHO. (2024). *Dengue and severe dengue*. Retrieved Use the date
1056 of access, from [https://www.who.int/news-room/fact-sheets/detail/](https://www.who.int/news-room/fact-sheets/detail/dengue-and-severe-dengue)
1057 [dengue-and-severe-dengue](https://www.who.int/news-room/fact-sheets/detail/dengue-and-severe-dengue)

1058 *Why Visual Studio Code?* (2021, 11). Retrieved from <https://code>

1059 `.visualstudio.com/docs/editor/whyvscode`
1060 World Health Organization (WHO). (2018). Dengue and severe dengue in the
1061 philippines. *WHO Dengue Factsheet*. (Available at: `https://www.who`
1062 `.int`)
1063 Zhou, S., & Malani, P. (2024). What is dengue? *Jama*, 332(10), 850–850.
1064 Zod. (n.d.). *TypeScript-first schema validation with static type inference*. Re-
1065 trieved from `https://zod.dev/?id=introduction`

1066 **Appendix A**

1067 **Appendix Title**

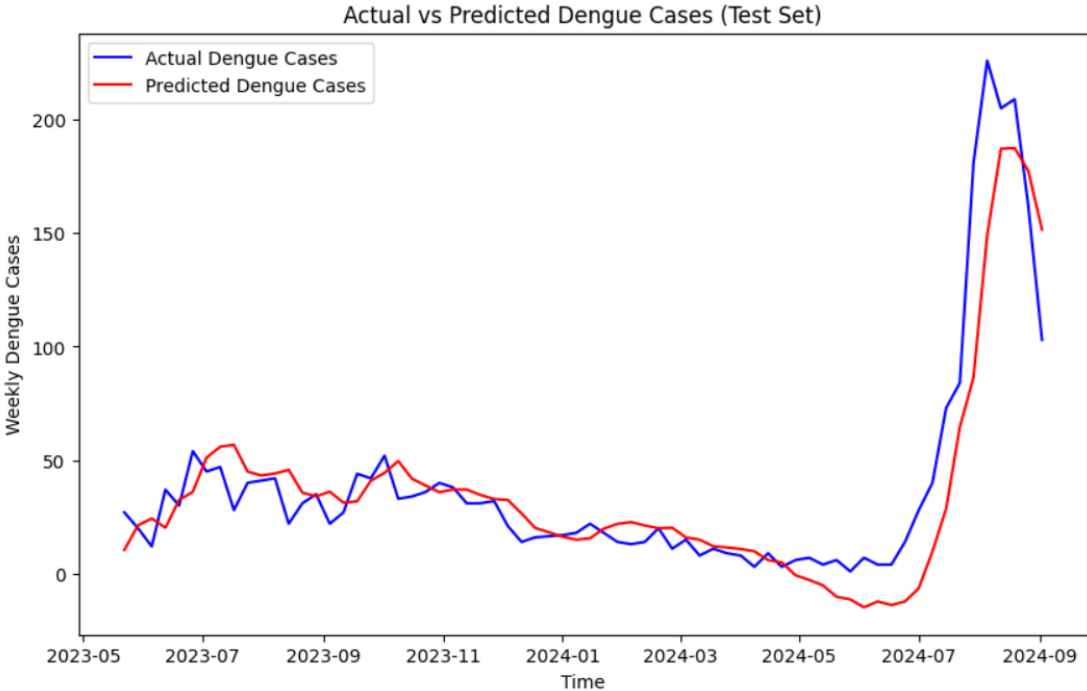


Figure A.1: LSTM Prediction Results for Test Set

1068 **Appendix B**

1069 **Resource Persons**

1070 **Mr. Firstname1 Lastname1**

1071 Role1

1072 Affiliation1

1073 emailaddr1@domain.com

1074 **Ms. Firstname2 Lastname2**

1075 Role2

1076 Affiliation2

1077 emailaddr2@domain.net

1078