carerDraft

Ben Alcock

2023-01-24

This R Markdown document is made interactive using Shiny. Unlike the more traditional workflow of creating static reports, you can now create documents that allow your readers to change the assumptions underlying your analysis and see the results immediately.

Inputs and Outputs

You can embed Shiny inputs and outputs in your document. Outputs are automatically updated whenever inputs change. This demonstrates how a standard R plot can be made interactive by wrapping it in the Shiny `renderPlot` function. The `selectInput` and `sliderInput` functions create the input widgets used to drive the plot.

```
## geom_path: Each group consists of only one observation. Do you need to adjust
## the group aesthetic?
## geom_path: Each group consists of only one observation. Do you need to adjust
## the group aesthetic?
```

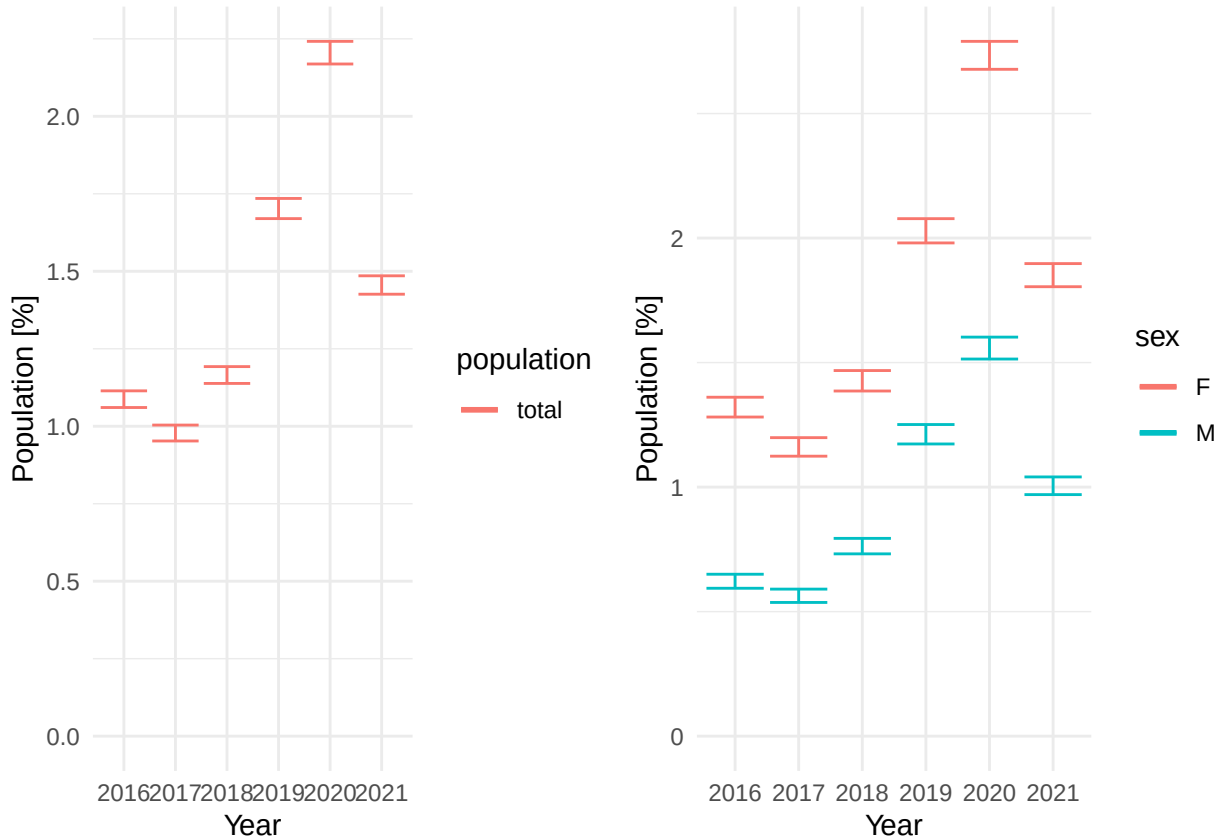


```
## geom_path: Each group consists of only one observation. Do you need to adjust
## the group aesthetic?
## geom_path: Each group consists of only one observation. Do you need to adjust
## the group aesthetic?
## geom_path: Each group consists of only one observation. Do you need to adjust
## the group aesthetic?
## geom_path: Each group consists of only one observation. Do you need to adjust
## the group aesthetic?
## geom_path: Each group consists of only one observation. Do you need to adjust
## the group aesthetic?
## geom_path: Each group consists of only one observation. Do you need to adjust
## the group aesthetic?
```

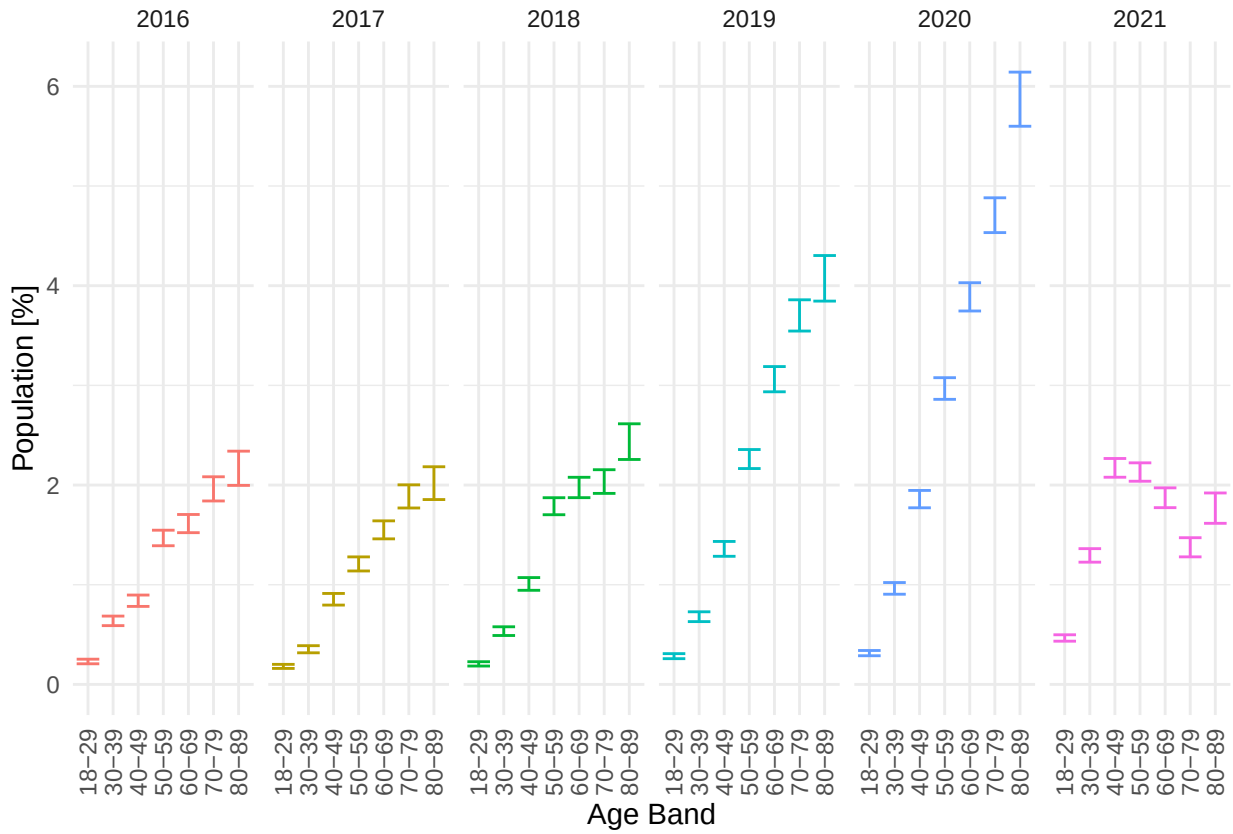


```
## geom_path: Each group consists of only one observation. Do you need to adjust
## the group aesthetic?
## geom_path: Each group consists of only one observation. Do you need to adjust
## the group aesthetic?
## geom_path: Each group consists of only one observation. Do you need to adjust
## the group aesthetic?
## geom_path: Each group consists of only one observation. Do you need to adjust
## the group aesthetic?
## geom_path: Each group consists of only one observation. Do you need to adjust
## the group aesthetic?
## geom_path: Each group consists of only one observation. Do you need to adjust
## the group aesthetic?
```

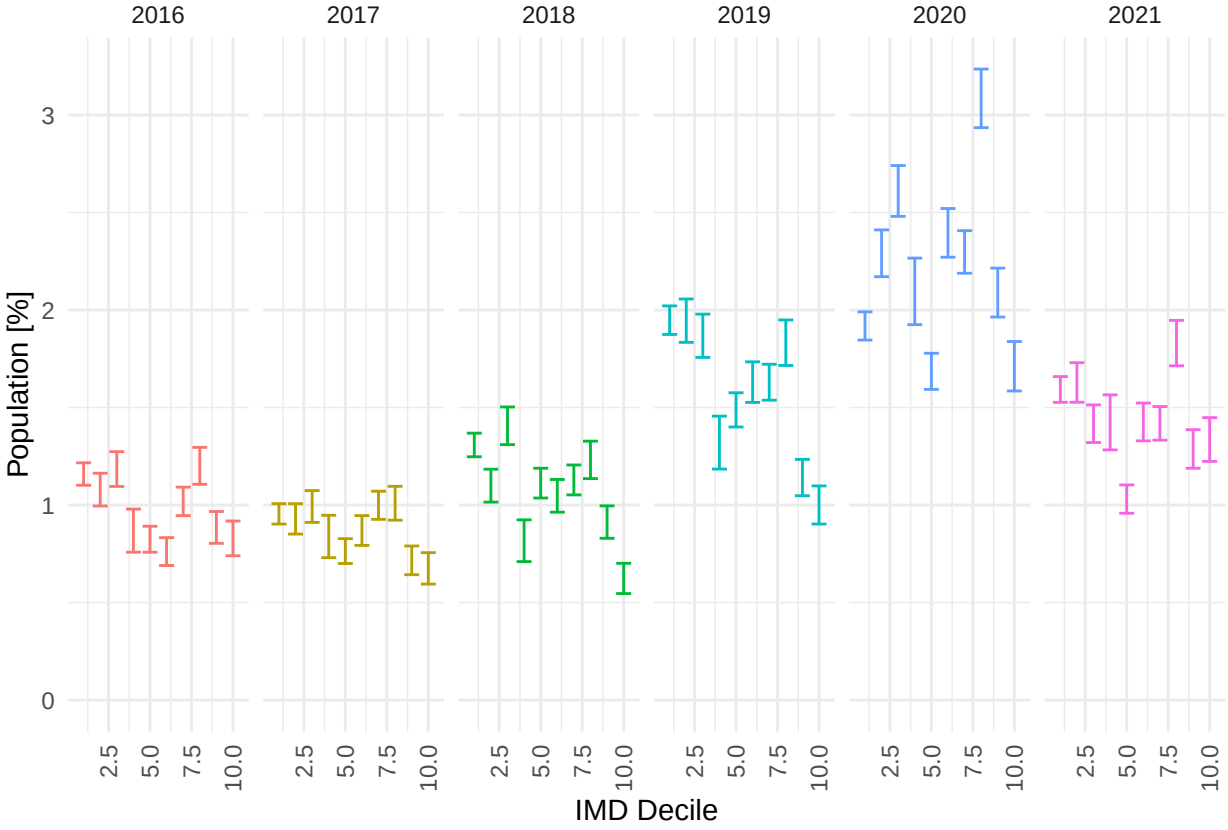
2016
2017
2018
2019
2020
2021
Population [%]
0
1
2
3
2.5
5.0
7.5
10.0
IMD Decile

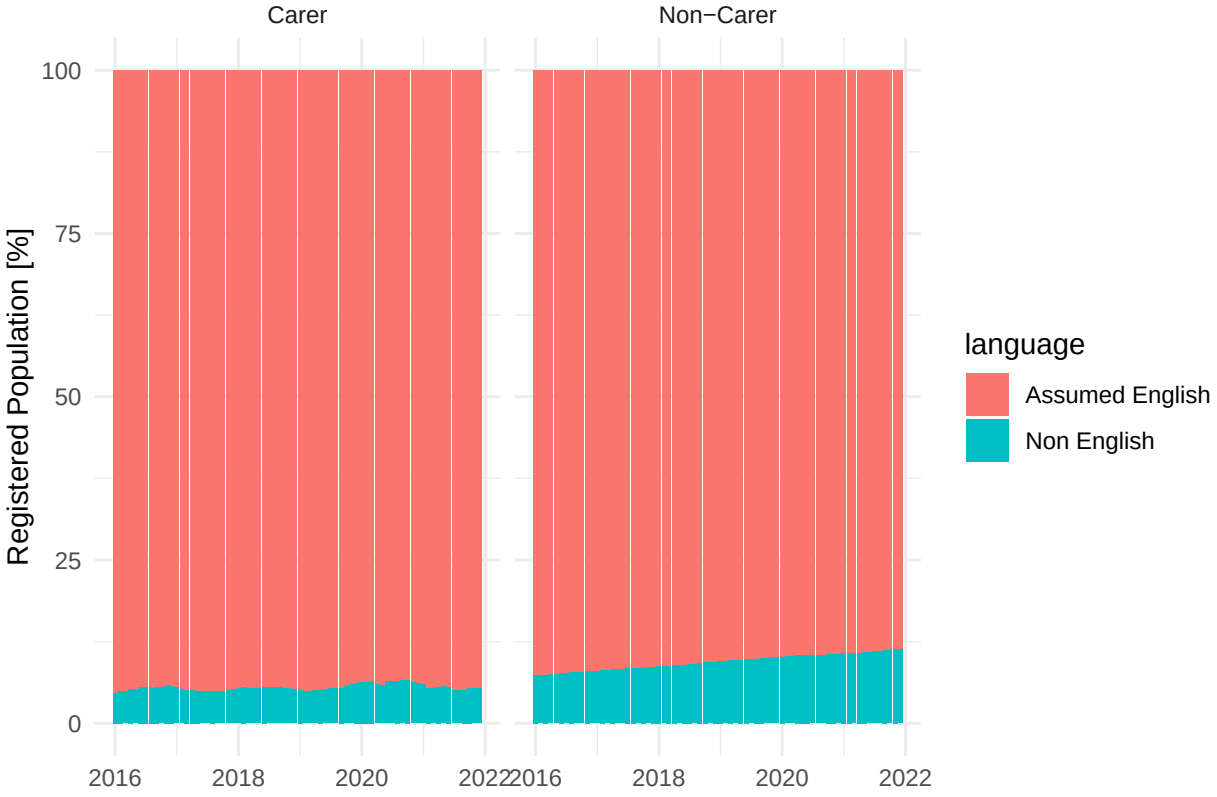
Carer
Non−Carer
Registered Population [%]
100
75
50
25
0
2016
2018
2020
2022
language
Assumed English
Non English

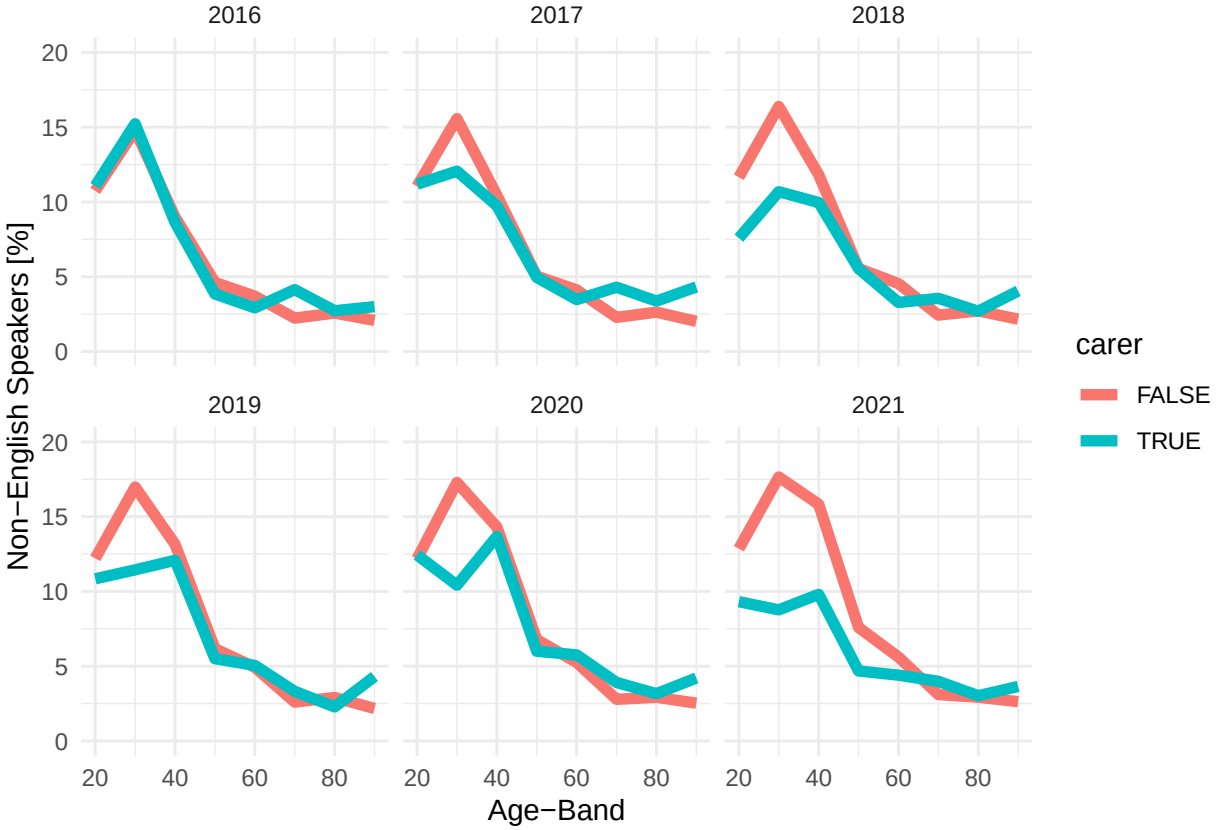


```
## `geom_smooth()` using formula 'y ~ x'
```

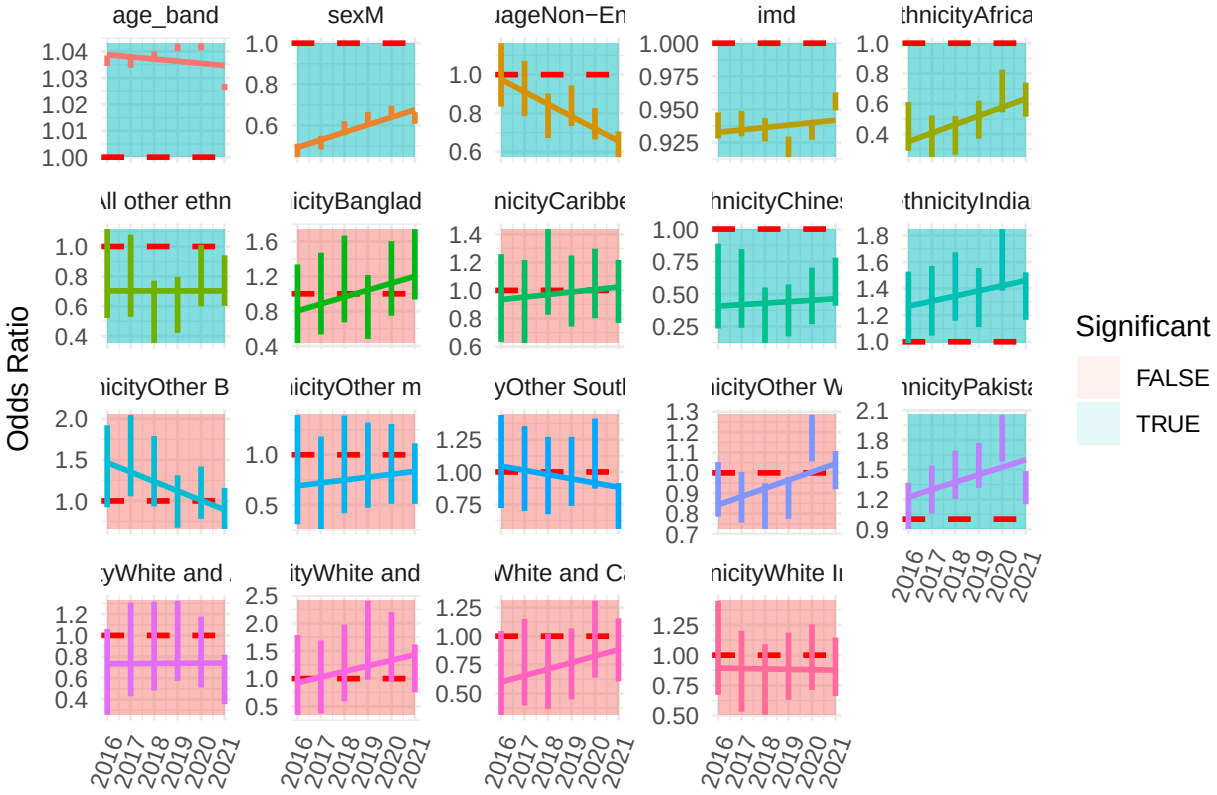
age_band
sexM
imd
Odds Ratio
Significant
FALSE
TRUE

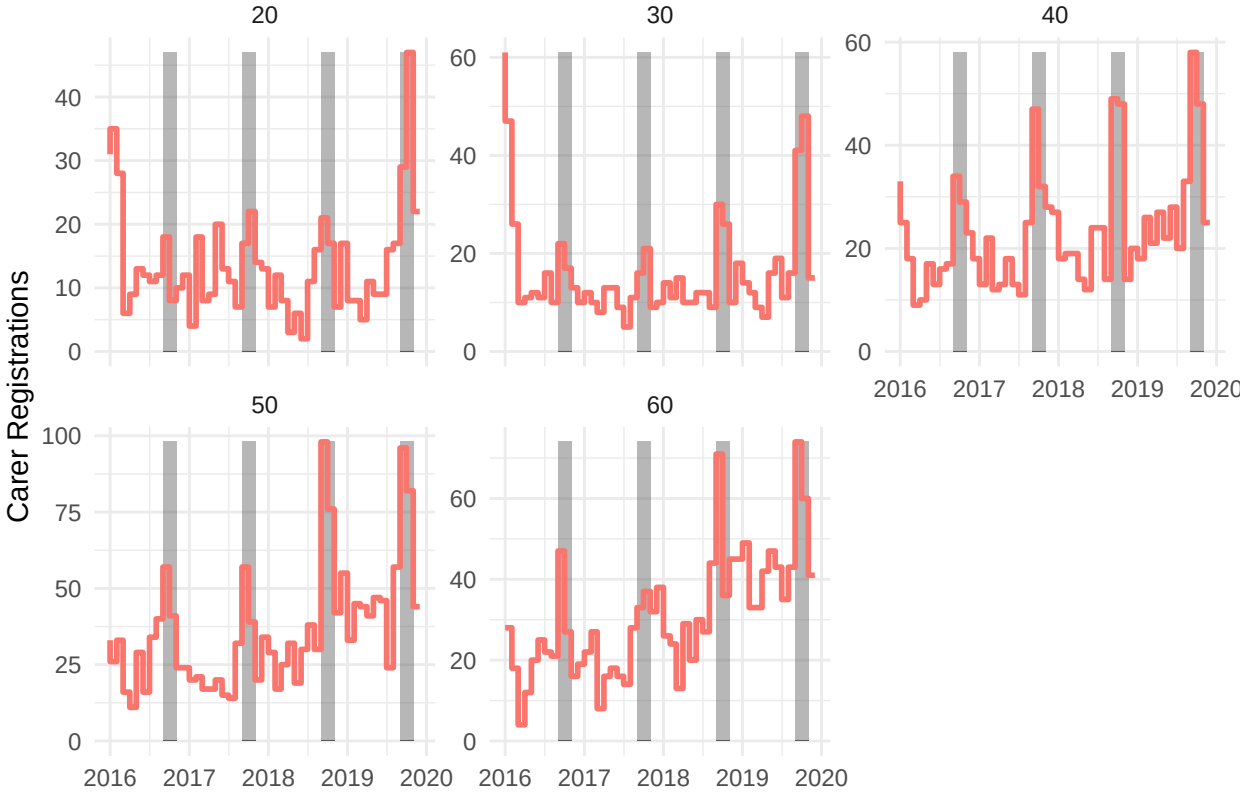
20
30
40
50
60
Carer Registrations
0
10
20
30
40
25
50
75
100
60
2016
2017
2018
2019
2020

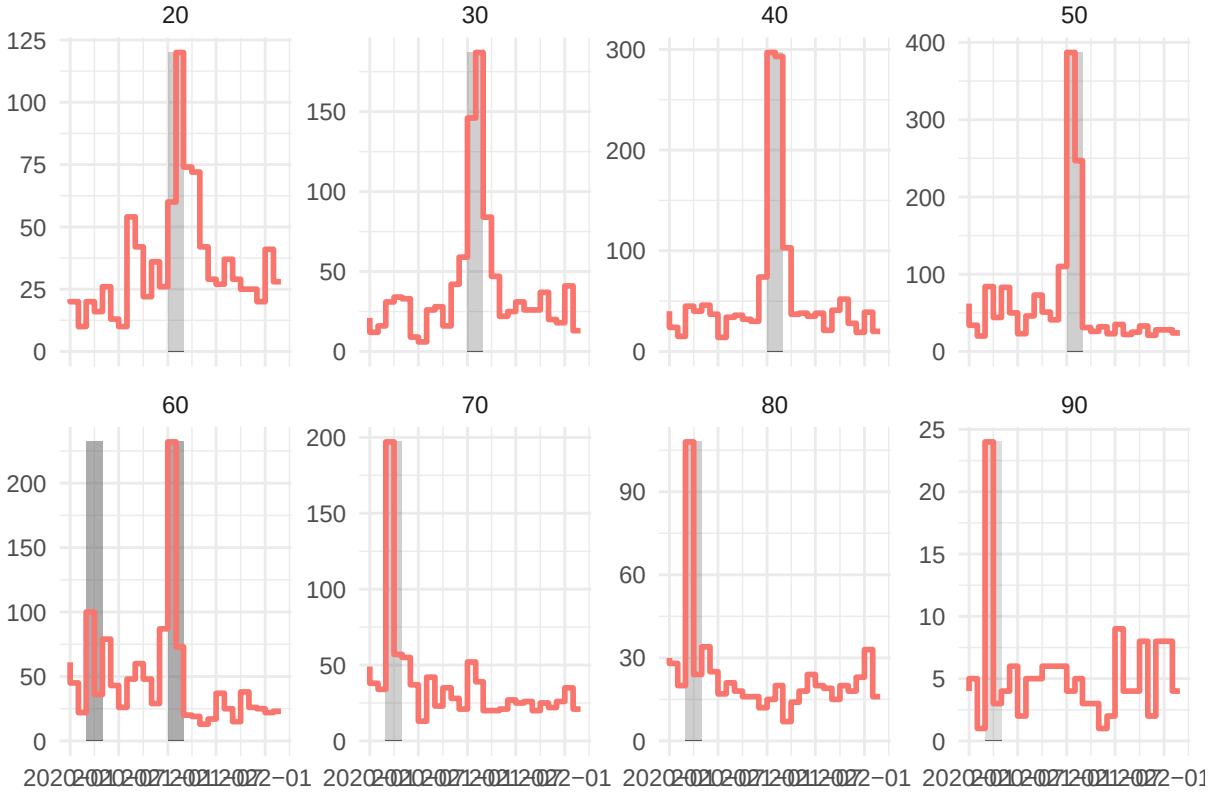
20
30
40
50
60
70
80
90

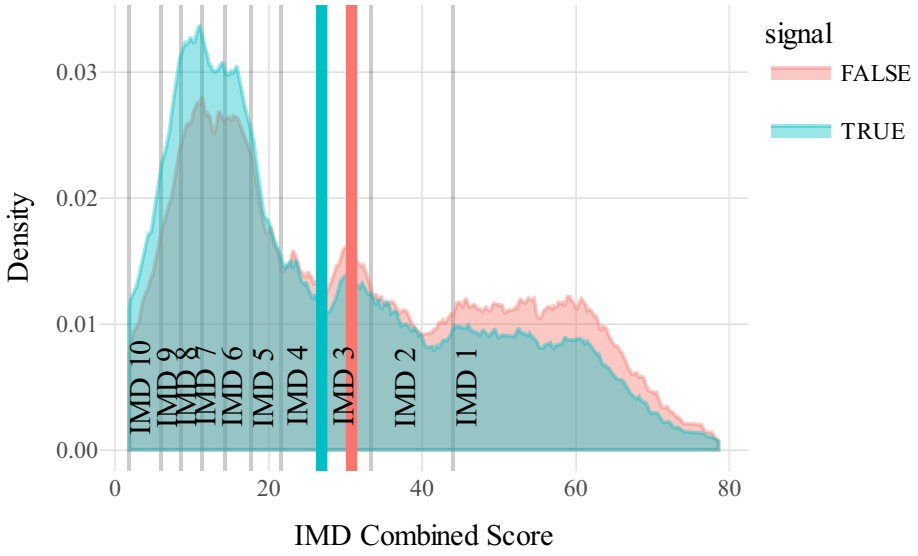
signal
FALSE
TRUE
Density
0.03
0.02
0.01
0.00
0
20
40
60
80
IMD Combined Score
IMD 10
IMD 9
IMD 8
IMD 7
IMD 6
IMD 5
IMD 4
IMD 3
IMD 2
IMD 1

Carer
FALSE
TRUE
0.006
0.004
0.002
0.000

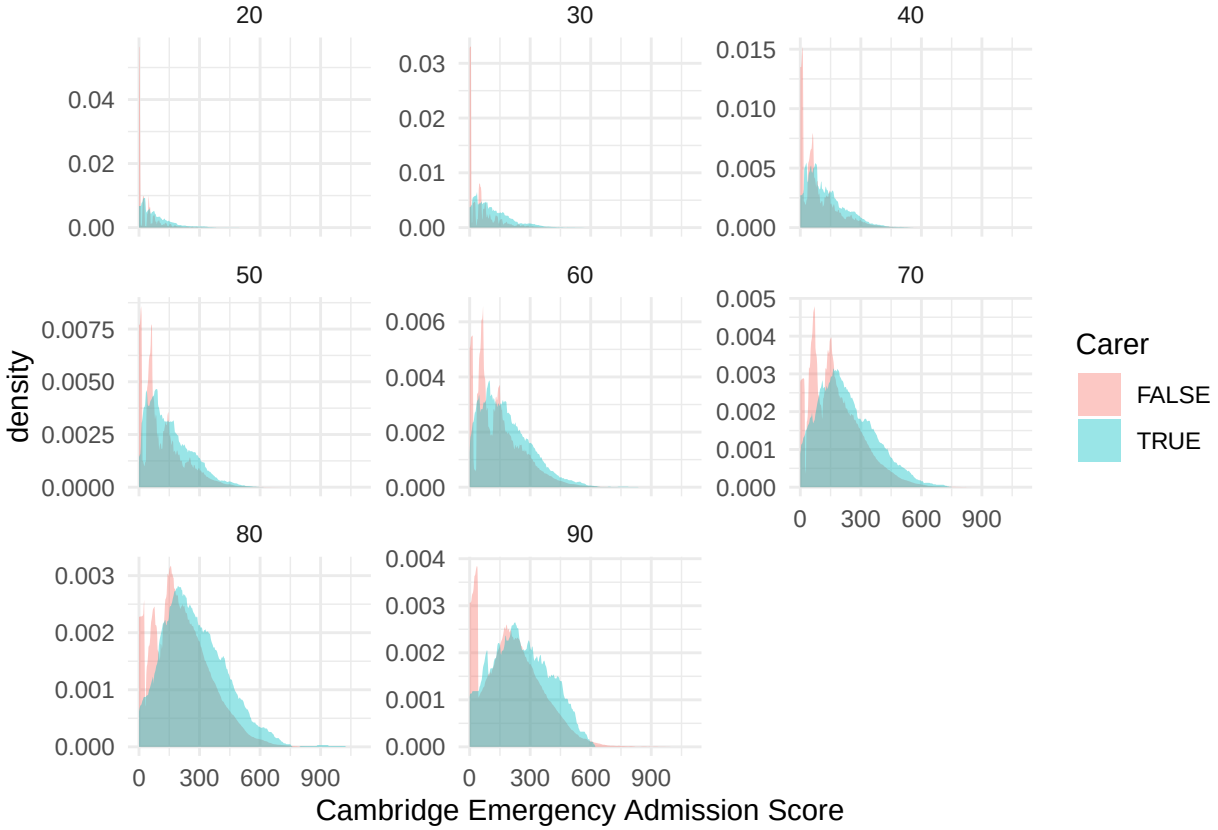
20
30
40
50
60
70
80
90
density
Cambridge Emergency Admission Score
Carer
FALSE
TRUE

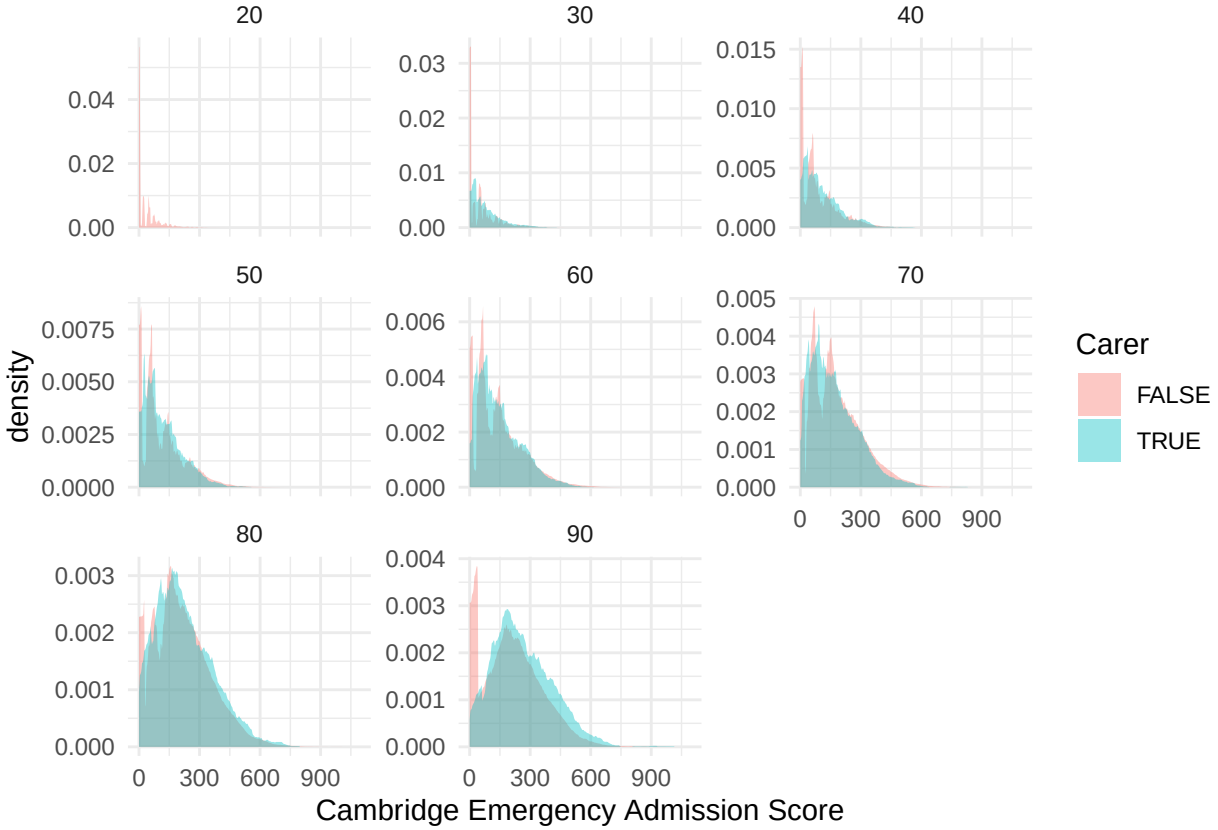
20
30
40
50
60
70
80
90
density
Cambridge Emergency Admission Score
Carer
FALSE
TRUE