
## **Apara**

Apara is an array with parameters, an example of all values in such array is printed in the console for a PHP example dugga shown in figure 1 below (red boxes). Below the red boxes the para is shown which changes after each value.

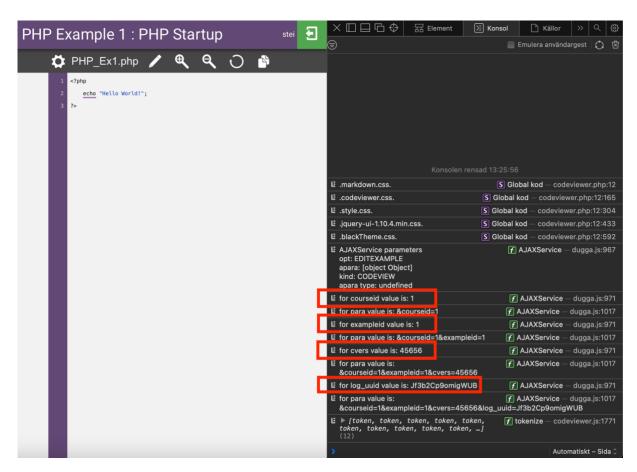

## log\_uuid

A random generated number from the possible array which seems to be used to identify a log.

```
var tex = "";
yar possible = "ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz0123456789";
for(var i=0; i<15; i++){
    tex += possible.charAt(Math.floor(Math.random() * possible.length));
}
apara.log_uuid = tex;</pre>
```