


Apara

Apara is an array with parameters, an example of all values in such array is printed in the console for a PHP example dugga shown in figure 1 below (red boxes). Below the red boxes the para is shown which changes after each value.

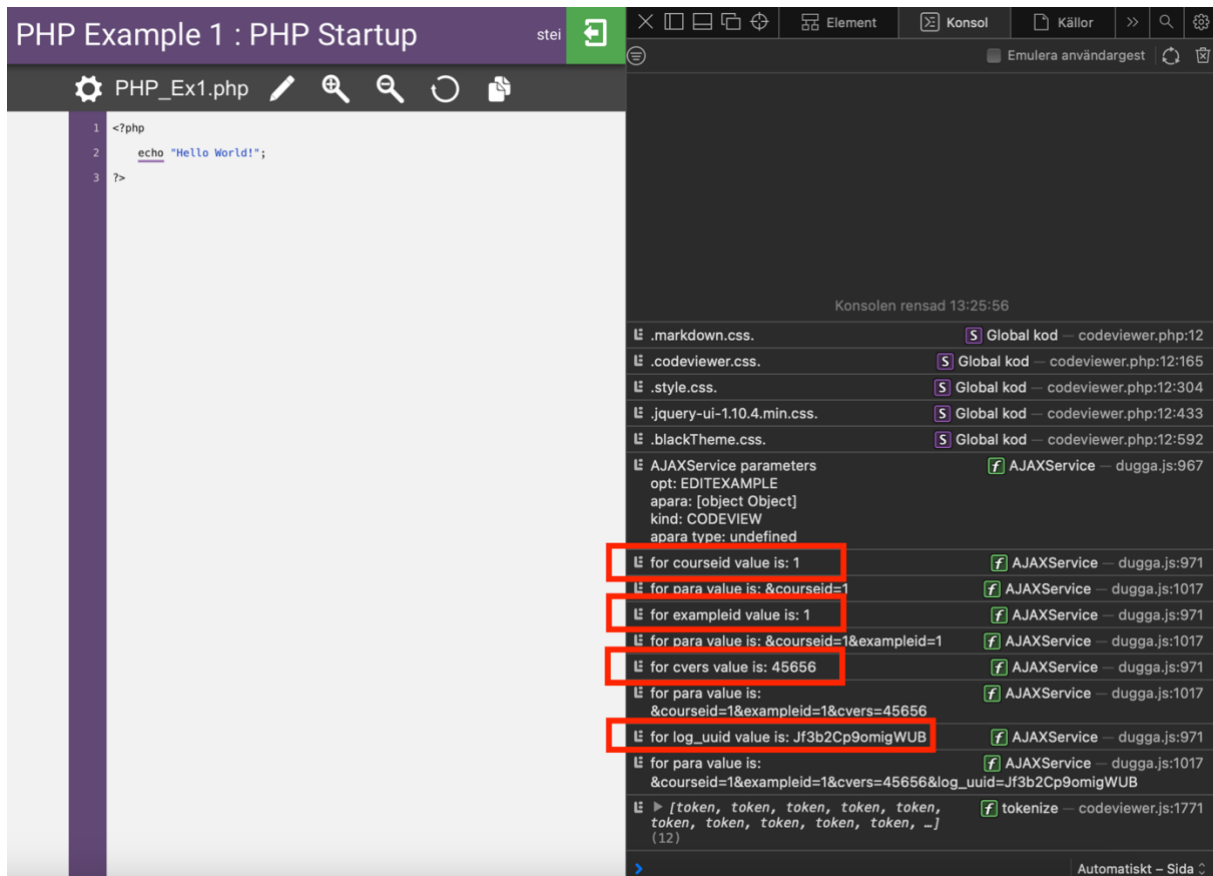

log_uuid

A random generated identification id from the possible string, which seems to be used to identify a log.

```
960     var tex = "";
961     var possible = "ABCDEFGHIJKLMNOPQRSTUVWXYZabcdefghijklmnopqrstuvwxyz0123456789";
962     for(var i=0; i<15; i++){
963         tex += possible.charAt(Math.floor(Math.random() * possible.length));
964     }
965     apara.log_uuid = tex;
```