Nama : Abdul Rozak A
NIM : 221344033
Kelas : 2B-TNK
Tugas Apl. Komputer dan Basis Data

▶ Cobalah contoh program JList, JTabbedPane dan JTable yang telah dijelaskan.

```
package GUI;
import java.awt.*;
import java.awt.event.*;
import javax.swing.*;

public class contohJList implements ActionListener {
	public JFrame frame;

	public JList list;
	public JButton btnTambah, btnHapus;
	public JTextField tfItem;
	public JScrollPane scroller;

	public contohJList() {
		tfItem = new JTextField(12);
		tfItem.setLocation(10,20);
		tfItem.setSize(tfItem.getPreferredSize());

		DefaultListModel lm;
		lm = new DefaultListModel();
		lm.addElement("Java");
		lm.addElement("C");
		lm.addElement("C++");

		list = new JList(lm);
		list.setSelectionMode(ListSelectionModel.SINGLE_SELECTION);

		scroller = new JScrollPane(list);
		scroller.setLocation(10,50);
		scroller.setSize(new Dimension(135,170));

		btnTambah = new JButton("Tambah");
		btnTambah.setLocation(150,17);
		btnTambah.setSize(btnTambah.getPreferredSize());
		btnTambah.addActionListener(this);
		btnTambah.setMnemonic('T');

		btnHapus = new JButton("Hapus");
		btnHapus.setLocation(150,50);
		btnHapus.setSize(btnHapus.getPreferredSize());
```

```
        btnHapus.addActionListener(this);
        btnHapus.setMnemonic('H');
}

public void createAndShowGUI() {
        JFrame.setDefaultLookAndFeelDecorated(true);
        frame = new JFrame("Demo JList");
        frame.setLayout(null);
        frame.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);

        frame.getContentPane().add(tfItem);
        frame.getContentPane().add(scroller);
        frame.getContentPane().add(btnTambah);
        frame.getContentPane().add(btnHapus);

        frame.setBounds(0, 0, 430, 350);
        frame.setLocationRelativeTo(null);
        frame.setVisible(true);
}

public void actionPerformed(ActionEvent event) {
        if (event.getSource()==btnTambah) {
                String s = tfItem.getText().trim();
                if (!s.equals("")) {
                        ((DefaultListModel) list.getModel()).addElement(s);
                        tfItem.setText("");
                }
                if(list.getModel().getSize()==1) {
                        btnHapus.setEnabled(true);
                }
        }
        else {
                int index = list.getSelectedIndex();
                if (index == -1) {
                        JOptionPane.showMessageDialog(frame,"Anda harus memilih"
                                        + "salah satu item terlebih dahulu");
                        return;
                }


                ((DefaultListModel)list.getModel()).remove(index);

                int size = list.getModel().getSize();

                if (size==0) {
                        btnHapus.setEnabled(false);
                }
```

```
                else {
                        if(index == list.getModel().getSize()) {
                                index--;
                        }
                        list.setSelectedIndex(index);
                        list.ensureIndexIsVisible(index);
                }
        }
    }

    public static void main(String[]args) {
        javax.swing.SwingUtilities.invokeLater(new Runnable() {
                public void run() {
                        contohJList app = new contohJList();
                        app.createAndShowGUI();
                }
        });
    }
}
```

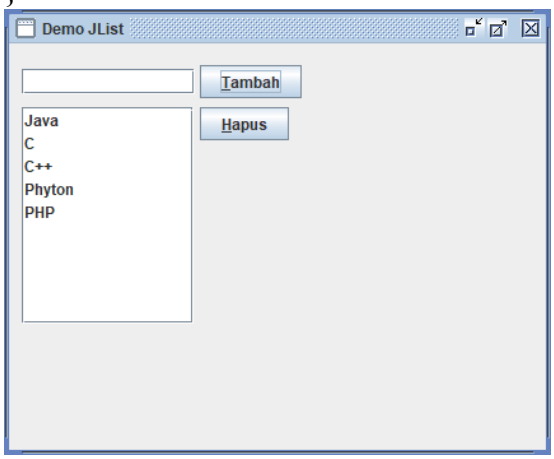


```
package GUI;
import java.awt.*;
import java.awt.event.*;
import javax.swing.*;

class Page1 extends JPanel implements ActionListener{
    private JButton btn;

    public Page1() {
        btn = new JButton("Info Page #1");
        btn.addActionListener(this);
        btn.setMnemonic('T');
        add(btn);
    }

    public void actionPerformed(ActionEvent event) {
```

```
            if(event.getSource()==btn) {
                JOptionPane.showMessageDialog(null,"INI ADALAH PAGE KE-1");
            }
        }
}

class Page2 extends JPanel{
        private JTextField tf;

        public Page2() {
            tf = new JTextField("Ini adalah contoh page kedua...",20);
            add(tf);
        }
}

public class DemoTabbedPane {
        public JTabbedPane tp;

        public DemoTabbedPane() {
            ImageIcon icon = new ImageIcon();

            tp = new JTabbedPane();


            tp.addTab("Page #1",icon,new Page1(),"Page pertama");
            tp.addTab("Page #2",icon,new Page2(),"Page kedua");

            tp.setLocation(0,0);
            tp.setSize(new Dimension(290,190));
        }

        public void createAndShowGUI() {
            JFrame.setDefaultLookAndFeelDecorated(true);
            JFrame frame = new JFrame("Demo JTabbedPane");
            frame.setLayout(null);
            frame.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
            frame.getContentPane().add(tp);
            frame.setBounds(0,0,300,200);
            frame.setLocationRelativeTo(null);
            frame.setVisible(true);
        }

        public static void main(String[]args) {
            javax.swing.SwingUtilities.invokeLater(new Runnable() {
                public void run() {
                    DemoTabbedPane app = new DemoTabbedPane();
                    app.createAndShowGUI();
```

```
                }
            });
        }
}
```

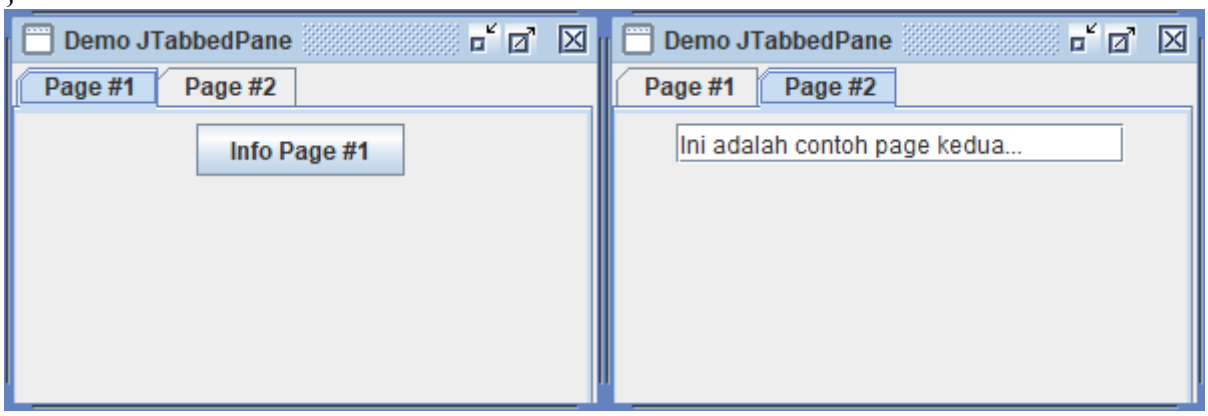


```
package GUI;
import java.awt.*;
import java.awt.event.*;
import javax.swing.*;

public class DemoTable {
        public JTable table;
        public JScrollPane scroller;

        public DemoTable() {
                final String[] judulKolom = {"No.","Nama","Alamat","Kota"};

                final Object[][] data = {
                                {"1","Totok Tribowo","Jl.Melati 12","Cimahi"},
                                {"2","Desi Mekarsari","Jl. Bunga 333","Bandung"},
                                {"3","Malik Hendrawan","Jl.Sukamiskin 444","Bandung"},
                                {"4","Wahyu Suhendi","Jl. Badak 1","Sumedang"},
                                {"5","Darmanto","Jl. Bawang 23","Brebes"},
                                {"6","Hendarto","Jl. Pemali 32","Brebes"},
                                {"7","Kiki Sumantro","Jl. Cipakoma 1","Tegal"},
                                {"8","Herman Wijanarko","Jl. Macanucul","Tegal"},
                                {"9","Slamet","Jl. Pakulaut 99","Tegal"},
                                {"10","Dewi Susanti","Jl. Tukul 99","Semarang"},
                                {"11","Noni Sumantri","Jl. A Yani 222","Solo"},
                                {"12","Tedjo Hermanto","Jl. Duren 6","Yogyakarta"},
                                {"13","Sri Sumarsih","Jl. Melati 5","Surabaya"},
                                {"14","Eko Waluyo","Jl. Batu 4","Malang"},
                                {"15","Doni Sandi","Jl. Jeruk 56","Malang"}
                };

                table = new JTable(data,judulKolom);
```

```
            scroller = new JScrollPane(table,

        ScrollPaneConstants.VERTICAL_SCROLLBAR_AS_NEEDED,

        ScrollPaneConstants.HORIZONTAL_SCROLLBAR_AS_NEEDED);
            scroller.setLocation(0,0);
            scroller.setSize(new Dimension(440,300));
        }

        public void createAndShowGUI() {
            JFrame.setDefaultLookAndFeelDecorated(true);
            JFrame frame = new JFrame("Demo JTable");
            frame.setLayout(null);
            frame.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);

            frame.getContentPane().add(scroller);

            frame.setBounds(0,0,450,350);
            frame.setLocationRelativeTo(null);
            frame.setVisible(true);
        }

        public static void main(String[]args) {
            javax.swing.SwingUtilities.invokeLater(new Runnable() {
                public void run() {
                    DemoTable app = new DemoTable();
                    app.createAndShowGUI();
                }
            });
        }
}
```



No.	Nama	Alamat	Kota
1	Totok Tribowo	Jl.Melati 12	Cimahi
2	Desi Mekarsari	Jl. Bunga 333	Bandung
3	Malik Hendrawan	Jl.Sukamiskin 444	Bandung
4	Wahyu Suhendi	Jl. Badak 1	Sumedang
5	Darmanto	Jl. Bawang 23	Brebes
6	Hendarto	Jl. Pemali 32	Brebes
7	Kiki Sumantro	Jl. Cipakoma 1	Tegal
8	Herman Wijanarko	Jl. Macanucul	Tegal
9	Slamet	Jl. Pakulaut 99	Tegal
10	Dewi Susanti	Jl. Tukul 99	Semarang
11	Noni Sumantri	Jl. A Yani 222	Solo
12	Tedjo Hermanto	Jl. Duren 6	Yogyakarta
13	Sri Sumarsih	Jl. Melati 5	Surabaya
14	Eko Waluyo	Jl. Batu 4	Malang
15	Doni Sandi	Jl. Jeruk 56	Malang

- Dari program JTabbedPane dapat dikembangkan, misal ; membuat program JTabbedPane yang terdiri dari 4 page, dimana page1 berisi form signup, page2 berisi form menu, page3 berisi form pemesanan, page4 berisi form data transaksi.

```
package GUI2;
import java.awt.*;
import java.awt.event.*;
import javax.swing.*;

class page1 extends JPanel implements ActionListener{
	private JLabel lUsername;
	private JLabel lPassword;
	private JTextField tfUsername;
	private JPasswordField pfPass;
	private JButton btn;

	public page1() {
		lUsername = new JLabel("username \t");
		add(lUsername);
		tfUsername = new JTextField(20);
		add(tfUsername);

		lPassword = new JLabel("password \t");
		add(lPassword);
		pfPass = new JPasswordField(20);
		pfPass.setEchoChar('*');
		add(pfPass);

		btn = new JButton("Log In");
		btn.addActionListener(this);
		add(btn);
	}

	public void actionPerformed(ActionEvent event) {
		if (event.getSource() == btn) {
			tabbedPane.tp.setSelectedIndex(1);
		}
	}
}

class page2 extends JPanel implements ActionListener{
	private JComboBox<String> cb;
	private JButton btn;

	public page2() {
		String[] menuItems = {"Nasi Goreng", "Nasi Bakar", "Nasi Lemak",
"Nasi Uduk"};
		cb = new JComboBox<>(menuItems);
		btn = new JButton ("pesan");
		btn.addActionListener(this);
		add(cb);
		add(btn);
	}

	@Override
	public void actionPerformed(ActionEvent e) {
		if (e.getSource() == btn) {
			tabbedPane.tp.setSelectedIndex(2);
```

```
            }

      }
}

class page3 extends JPanel implements ActionListener {
      private JLabel lbl;
      private JTextField tf;
      private JButton btn;

      public page3() {
            lbl = new JLabel("Jumlah pesanan");
            tf = new JTextField(3);
            btn = new JButton ("Pesan");
            btn.addActionListener(this);
            add(lbl);
            add(tf);
            add(btn);
      }

      public void actionPerformed(ActionEvent event) {
            if (event.getSource() == btn) {
                  tabbedPane.tp.setSelectedIndex(3);
            }
      }
}

class page4 extends JPanel {
      private JTextArea ta;

      public page4() {
            ta = new JTextArea("Terima kasih atas pesanan anda.\n Pesanan anda
sedang diproses", 2, 20);
            add(ta);
      }
}

public class tabbedPane {
      public static JTabbedPane tp;

      public tabbedPane() {
            ImageIcon icon = new ImageIcon();

            tp = new JTabbedPane();

            tp.addTab("Log In",icon,new page1(),"Sign In");
            tp.addTab("Menu",icon,new page2(),"menu");
            tp.addTab("Pemesanan",icon,new page3(),"pemesanan");
            tp.addTab("Transaksi",icon,new page4(),"transaksi");

            tp.setLocation(0,0);
            tp.setSize(new Dimension(320,140));
      }

      public void createAndShowGUI() {
            JFrame.setDefaultLookAndFeelDecorated(true);
            JFrame frame = new JFrame("Pemesanan Makanan");
            frame.setLayout(null);
            frame.setDefaultCloseOperation(JFrame.EXIT_ON_CLOSE);
```

```
            frame.getContentPane().add(tp);
            frame.setBounds(0,0,330,150);
            frame.setLocationRelativeTo(null);
            frame.setVisible(true);
      }

      public static void main(String[]args) {
            javax.swing.SwingUtilities.invokeLater(new Runnable() {
                  public void run() {
                        tabbedPane app = new tabbedPane();
                        app.createAndShowGUI();
                  }
            });
      }
}
```

