PR vs deterministic PF | $\varepsilon = 0.0005$

Linear H-chains, 1 Å · STO-3G · T = 0.8 · P = 0 · usual signed bias / factor 1

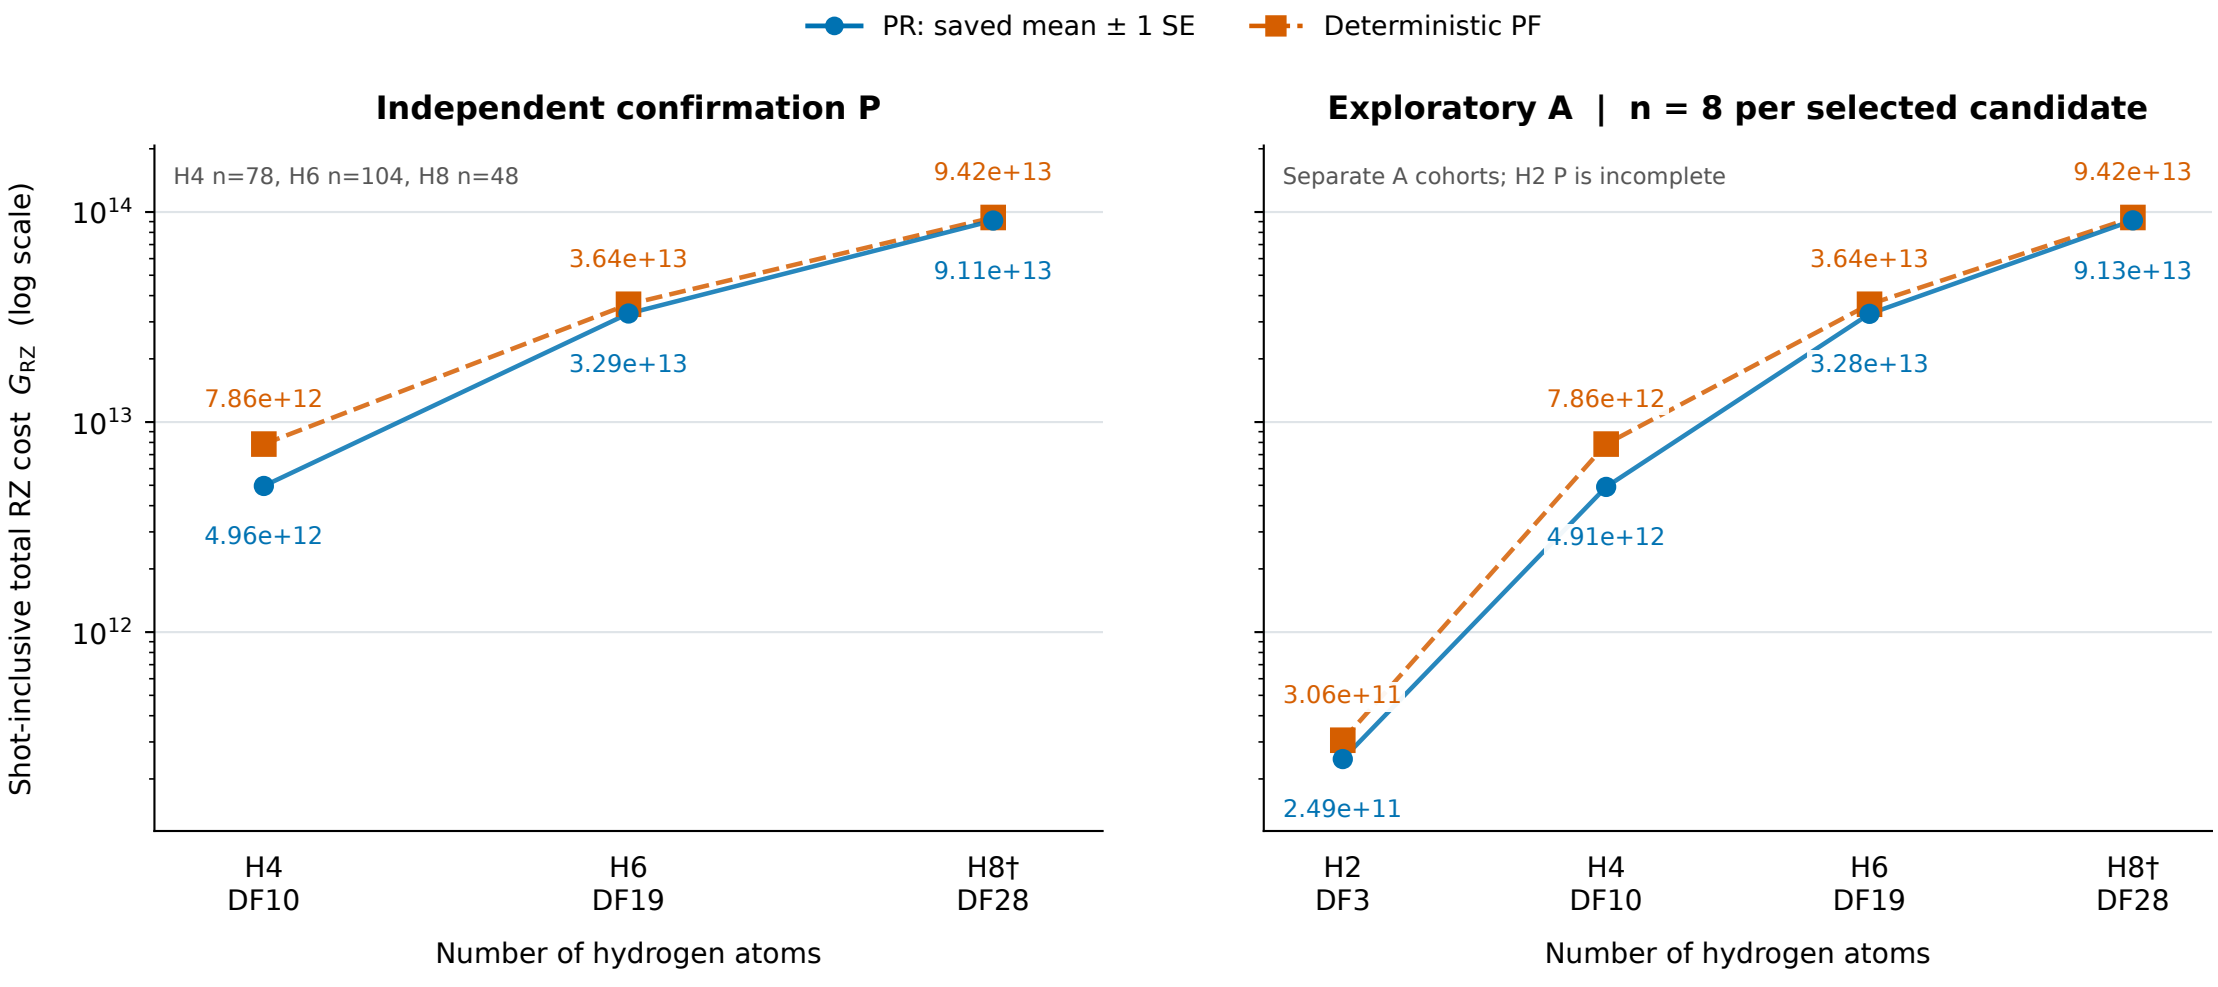

Stored analytic shots × compiled RZ; PR bars are saved paired ±1 SE, not confidence intervals.
† H8: full public PR execution receipts not reverified; original profile bytes remain unverified.
Input-generation procedures differ. Lines guide the eye across discrete chains; no scaling or population-mean claim.
Fixed P controls are directly measured; the exploratory H6/H8 registered PF domains retain model dependence.