PR standard error versus MC sample size n (log-log axes)

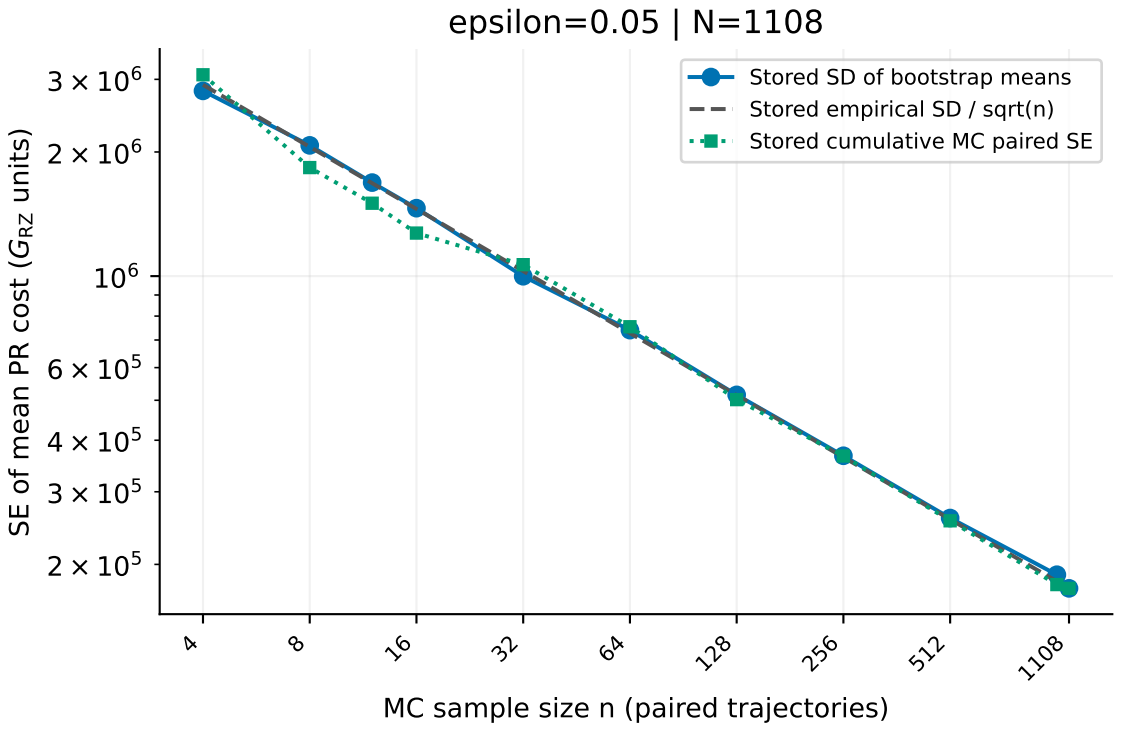

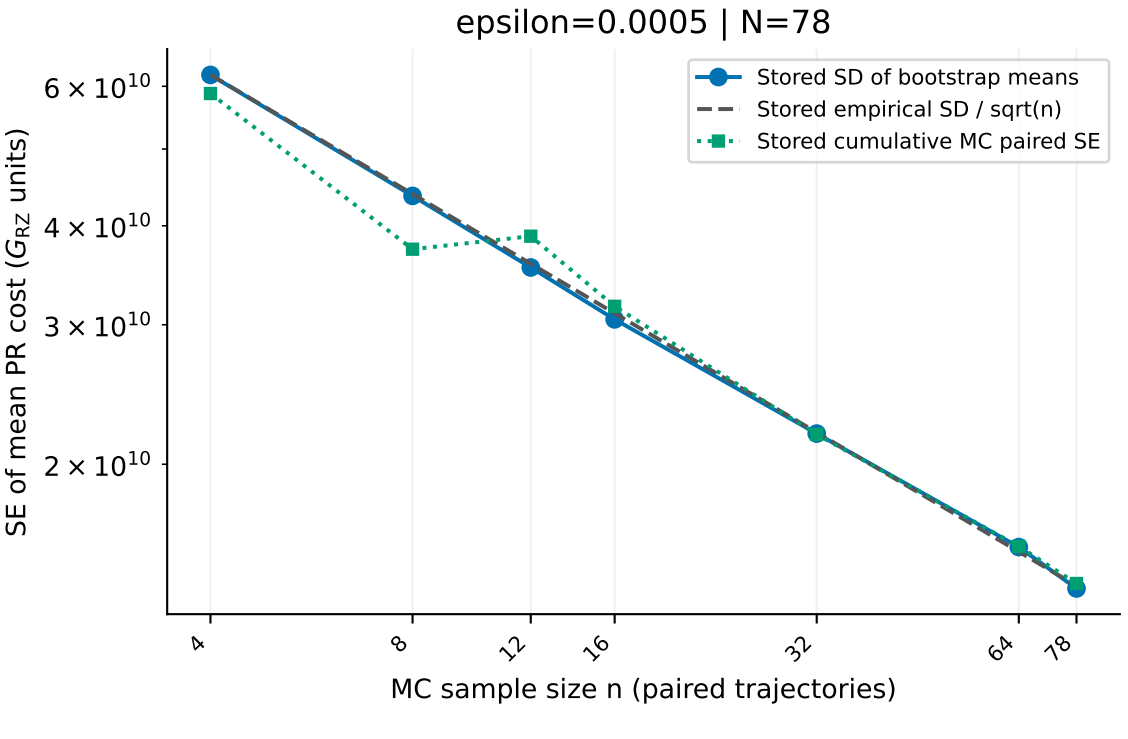

H4 1 A | STO-3G | tol-only DF10 | T=0.8 | P=0 | saved shots x full-wrapper compiled RZ
Deterministic prefix + stochastic RTE tail + full Hadamard wrapper. Stored values only; no new analysis.
The sqrt(n) reference is an existing saved column. No new fit or SE calculation; the cumulative MC curve uses one nested sequence.