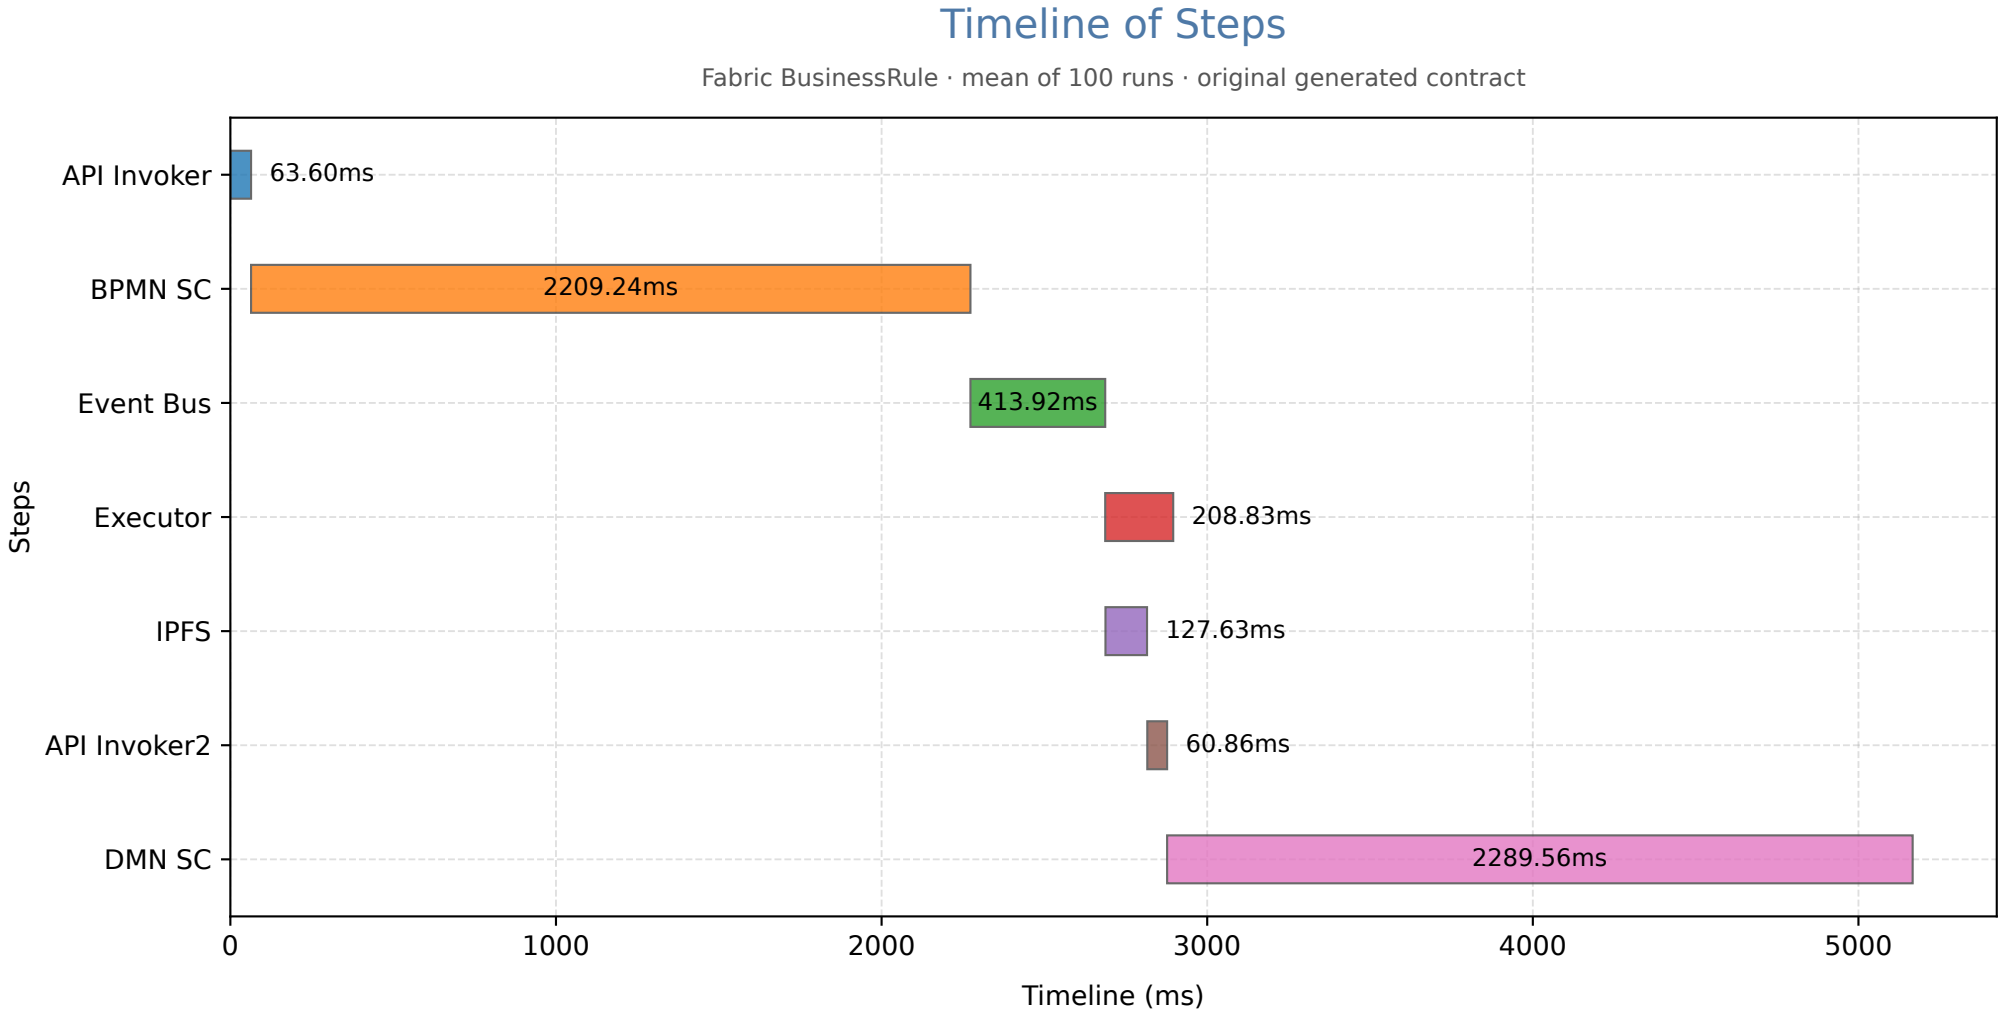

Each round uses a fresh instance; DMN publication and initialization are outside measurement.
Event Bus starts at BPMN SC completion. Executor includes IPFS and API2; overlapping intervals must not be summed.