


© Zahra Shakeri, Dalla Lana School of Public Health, University of Toronto



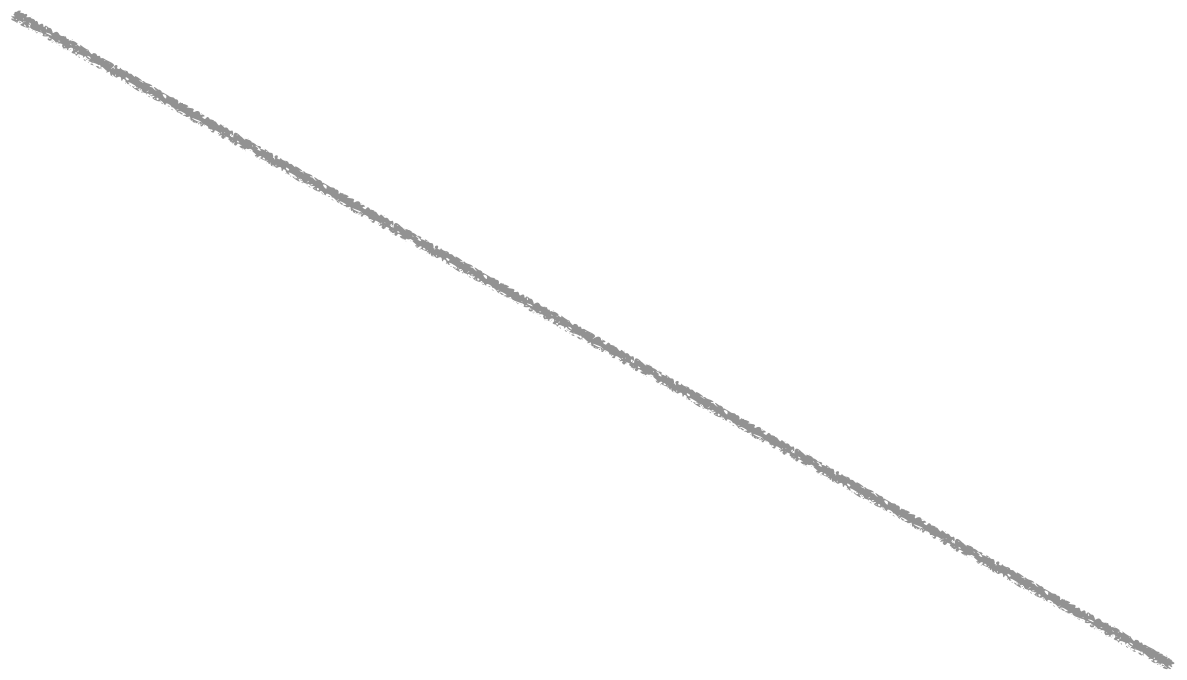

DOES MORE DATA (EXPERIENCE) LEAD TO BETTER PERFORMANCE?

Bias— Bias refers to the error from simplifying a real-world problem with an overly simple model. High bias can cause the model to overlook important relationships between input features and output predictions.

With high bias, adding more data might not help as the model is too basic to grasp data complexities.

Variance— Reflects the model's responsiveness to small fluctuations or noise in training data. A model with high variance excels on its training data by accounting for random noise, but falters on new, unseen data (overfitting).

With high variance, adding more data can often boost performance since it helps "average out" or reduce the noise captured by the model.





























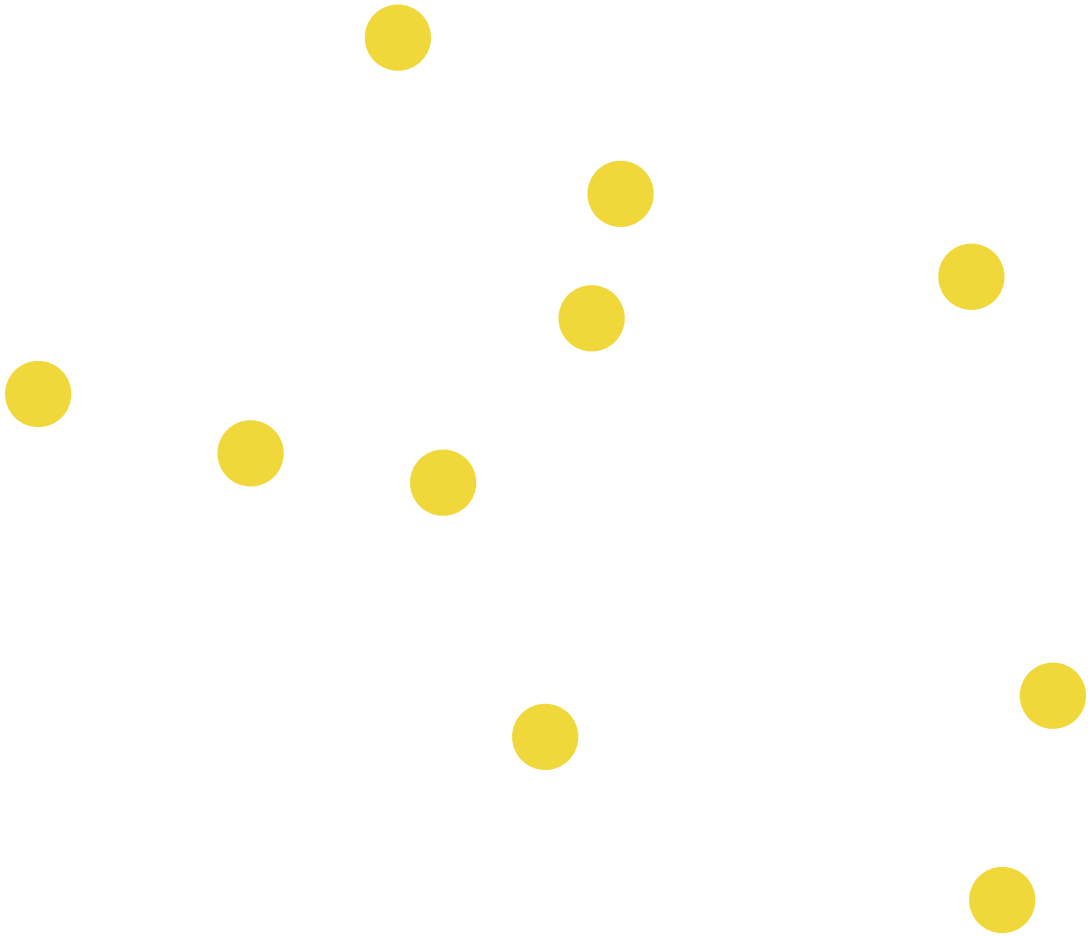

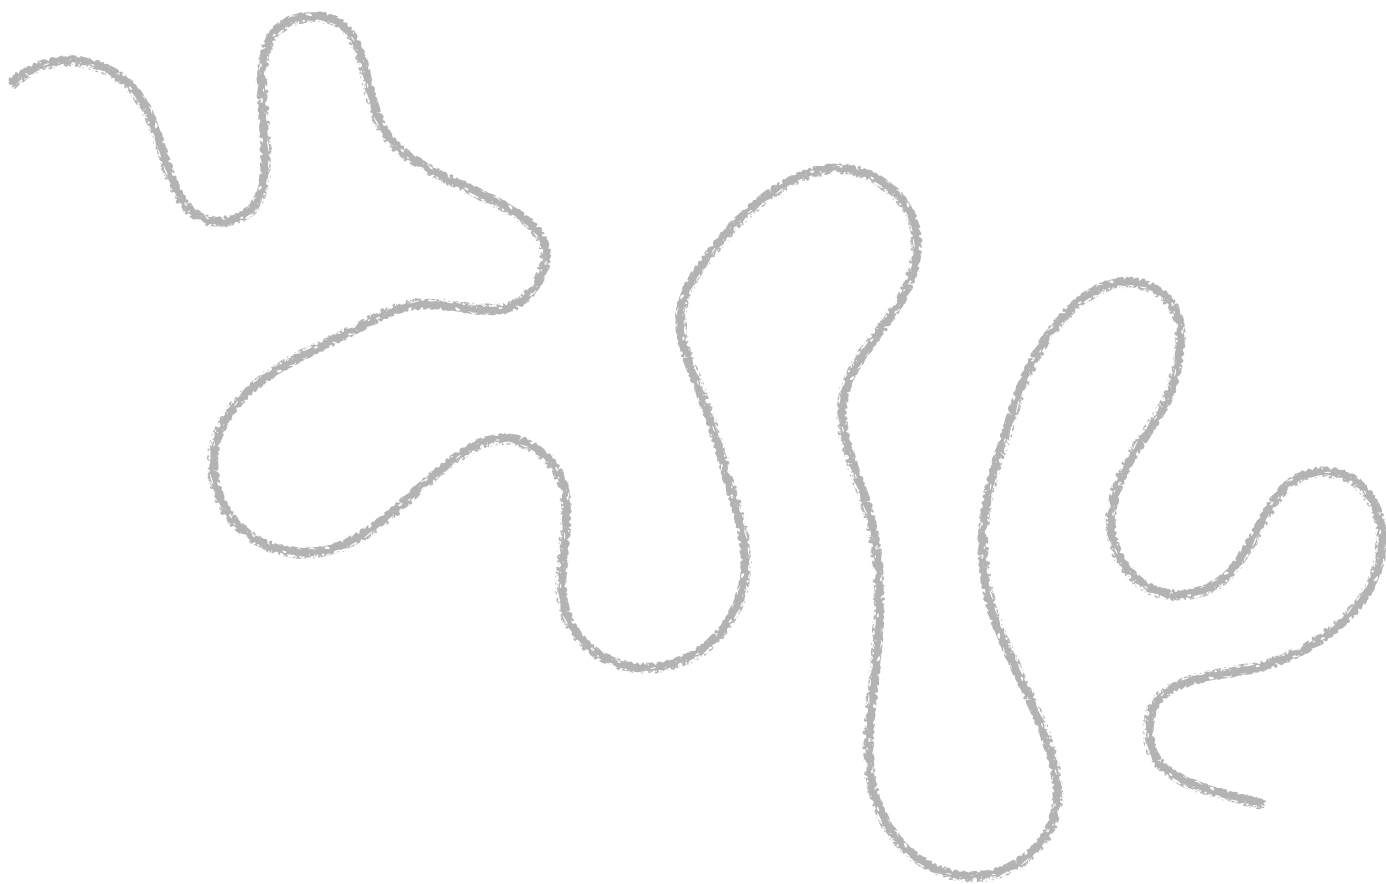























































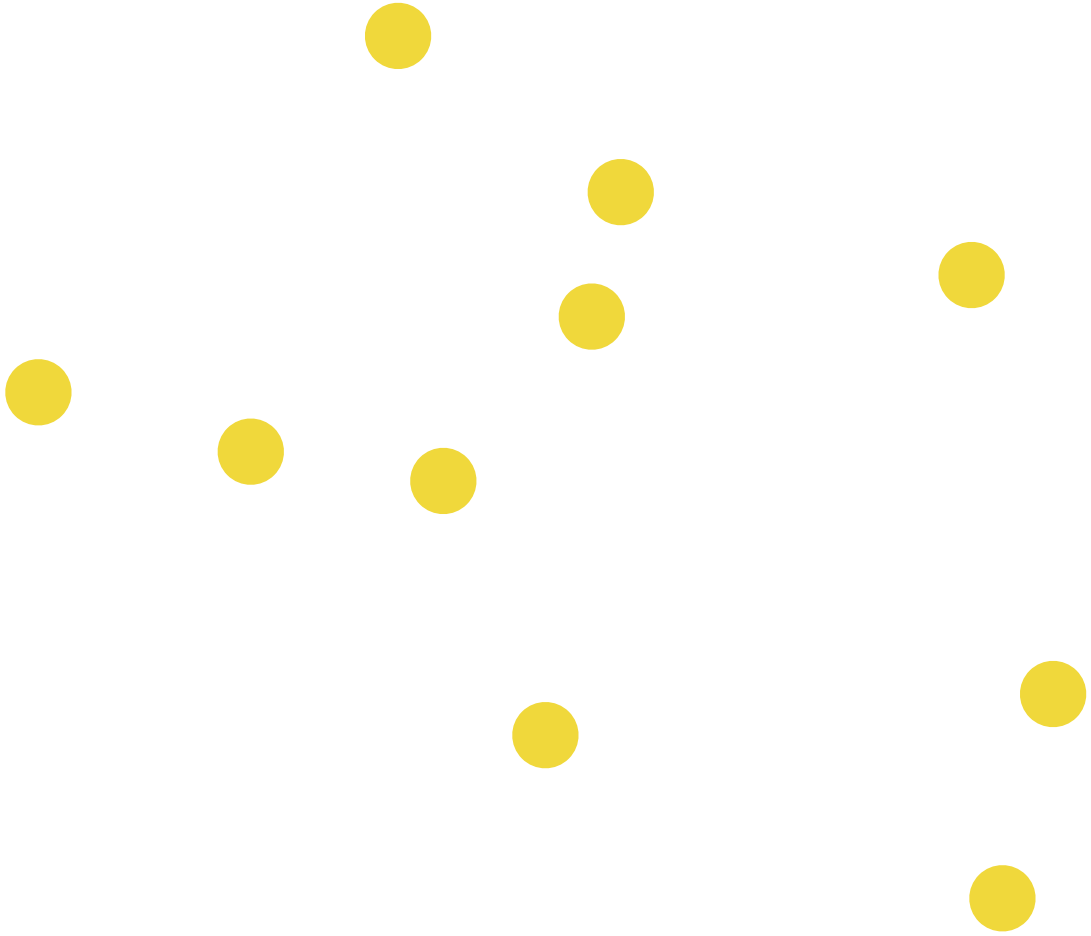

3

2



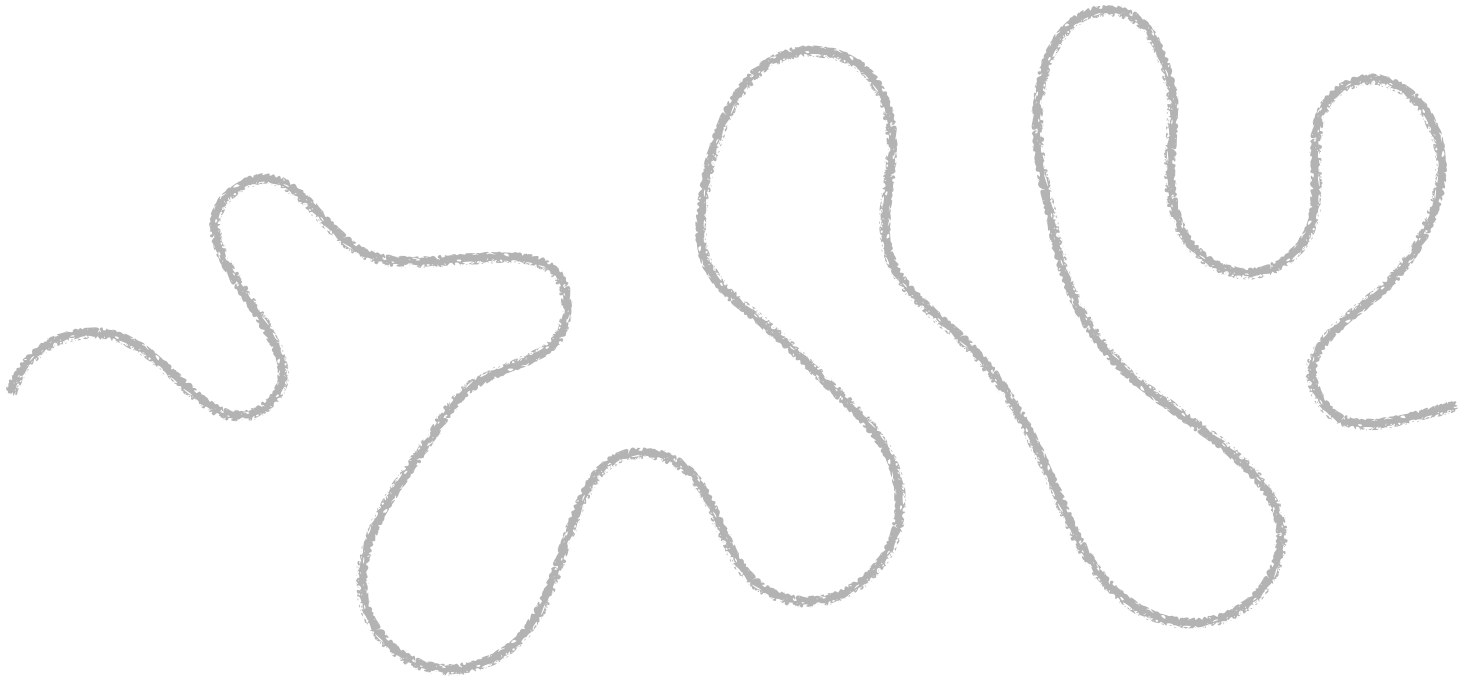

TAXONOMY OF FINANCIAL RISK TAKING



Unsupervised Learning



Supervised Learning



Reinforcement Learning

data, where the outcome is

already known.

Training a computer using labeled

Example-Utilizing historical patient

predict health outcomes.

records with known outcomes (labels) to

orking for patterns or structures.

Allowing a computer to analyze

data without explicit guidance,

data to find clusters of similar symptoms

without any prior labeling.

Letting a computer sift through patient

to optimize outcomes over time.

error, receiving feedback for its actions

Computer learns through trial and

strategies and adapting based on the success

of each strategy, like improving vaccination

campaigns based on feedback.

A computer testing different public health

