

© Zahra Shakeri, Dalla Lana School of Public Health, University of Toronto



Institute of Health Policy, Management and Evaluation
UNIVERSITY OF TORONTO

Dalla Lana
School of Public Health





K-NEAREST NEIGHBORS (K-NN) [REVISIT THE TITLE



ell



u



u



u



u















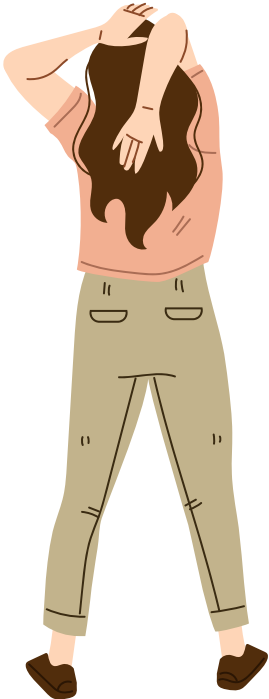





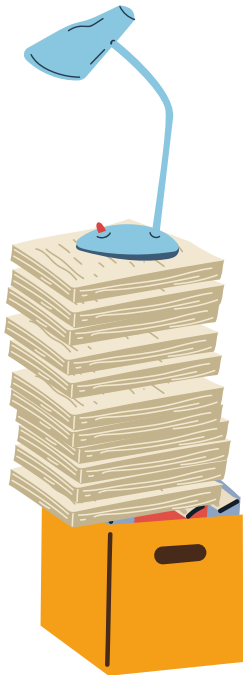



















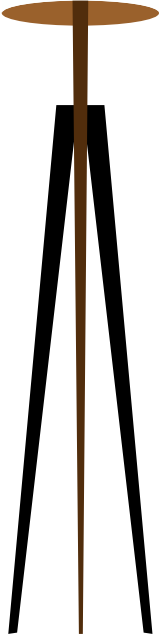







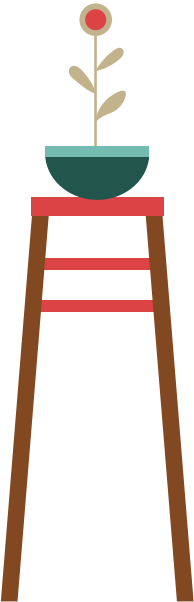







K-NEAREST NEIGHBORS (K-NN) [REVISE THE TITLE]



K-NEAREST NEIGHBOURS (K-NN) CLASSIFICATION

Given a dataset $\mathcal{D}$ consisting of n data points $\{(x_1, y_1), (x_2, y_2), \dots, (x_n, y_n)\}$, where x is the input vector and y is the corresponding output label, the K-NN algorithm assigns a label to a new data point x_{new} based on the majority label of its K nearest neighbours in the dataset.

1. For the new data point x_{new} , compute its distance to all points in $\mathcal{D}$. Common distance measures include Euclidean, Manhattan, or Hamming distance.
2. Identify the K data points in $\mathcal{D}$ that are closest to x_{new} .
3. Assign the label y_{new} to x_{new} based on the majority label among the K nearest neighbors.