

© Zahra Shakeri, Dalla Lana School of Public Health, University of Toronto



Institute of Health Policy, Management and Evaluation
UNIVERSITY OF TORONTO

Dalla Lana
School of Public Health






















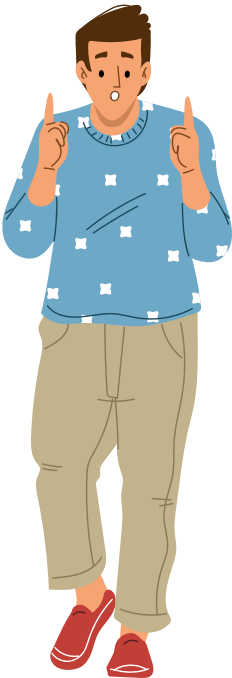



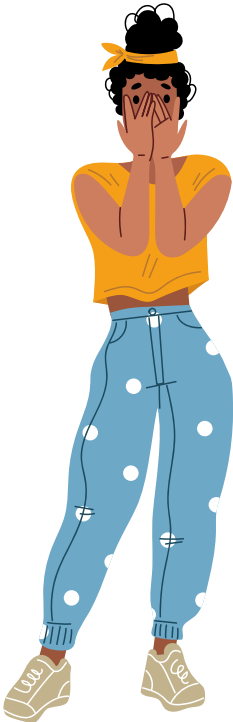



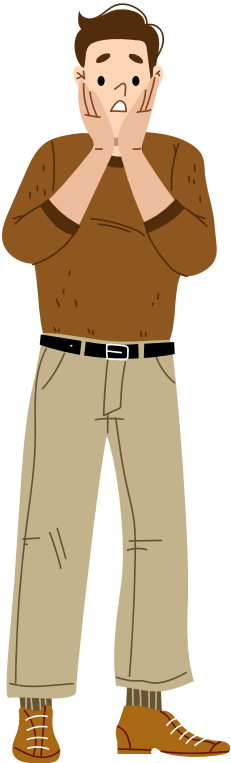







2

9



EXAMPLE-MODERN-TOD-BRING-ME-NOT-ALL-HAVE-BROTHERS

KMEANSCLUSTERING

distinct clusters where each data point

belongs to the cluster with the closest mean.

The main idea is to divide a set of data points into

K

Context: In a given city, officials are concerned about the mental well-being of residents due to

various stressors like unemployment, crime, housing issues, etc. They have survey data from

address(org|location).

residents across the city, where each individual has rated their street level and provided their





The city officials want to identify neighborhoods that are most stressed, so they

establish mental health support centers.


















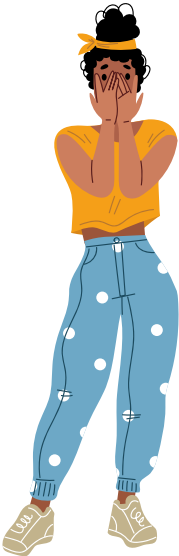











30

EXAMPLE-MODERN-TODAY-BRING-ME-NOT-ALL-HIGH-BODIES