

© Zahra Shakeri, Dalla Lana School of Public Health, University of Toronto



Institute of Health Policy, Management and Evaluation
UNIVERSITY OF TORONTO

Dalla Lana
School of Public Health

3

1

EXAMPLE-MODERN-TODAY-BRING-ME-NOT-ALL-HIGH-BODIES

K-MEANS CLUSTERING

The city officials want to identify neighborhoods or zones that are most stressed, so they can establish mental health support centers.






























































C1



c2

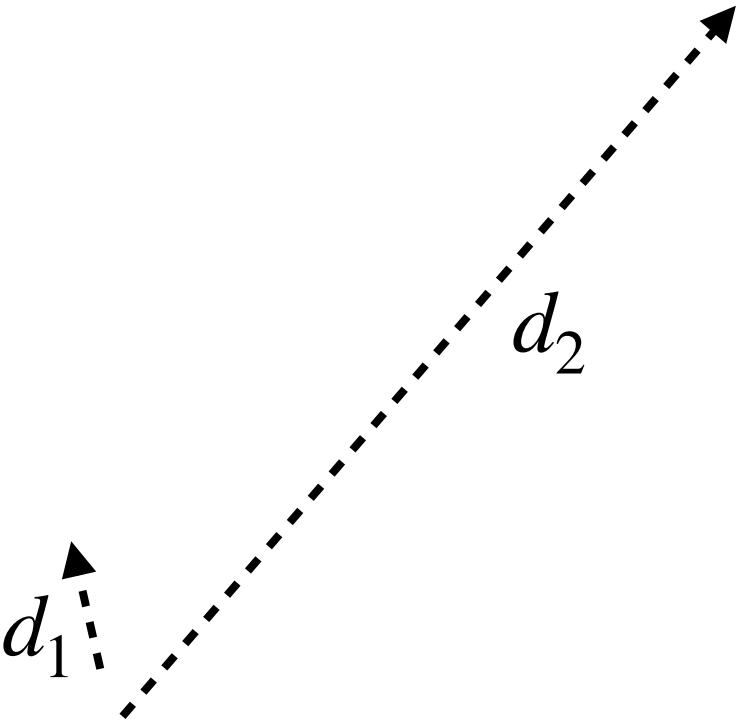





















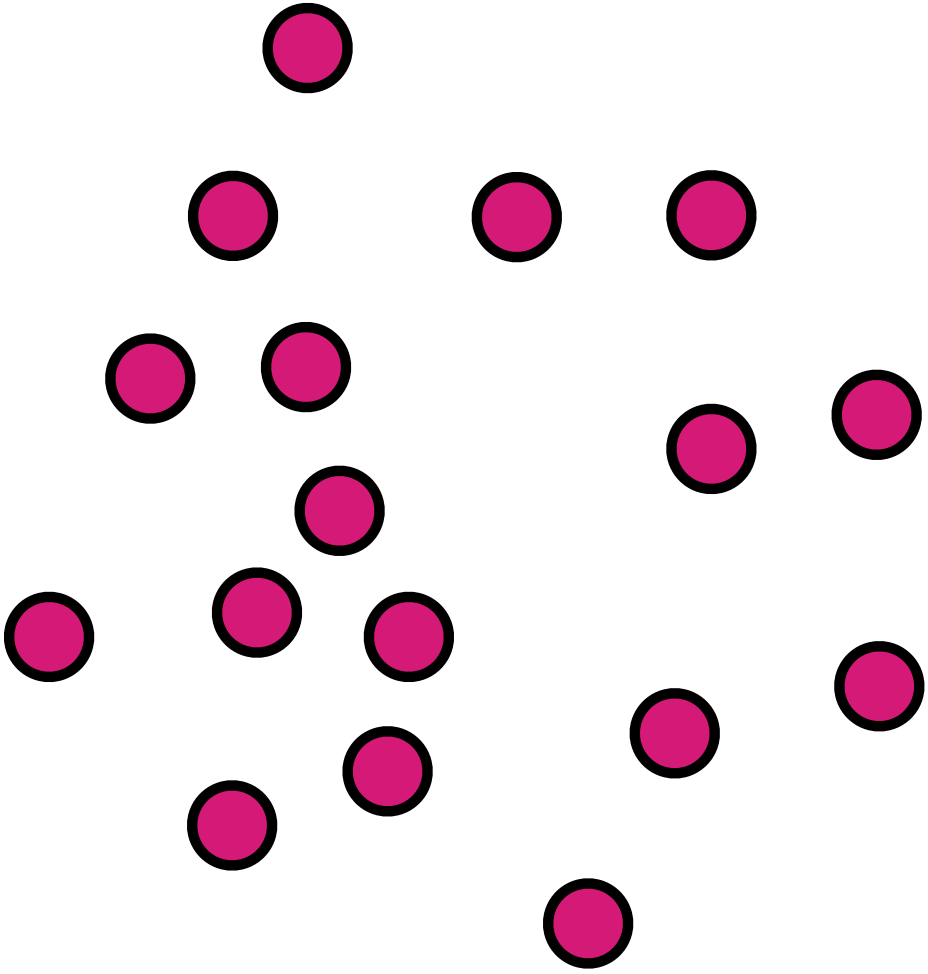

Algorithm

1. Initialize K centroids randomly.
2. Assign each data point to the nearest centroid.
3. Recompute the centroid of each cluster.
4. Repeat steps 2 and 3 until centroids no longer change significantly or a certain number of iterations are reached.

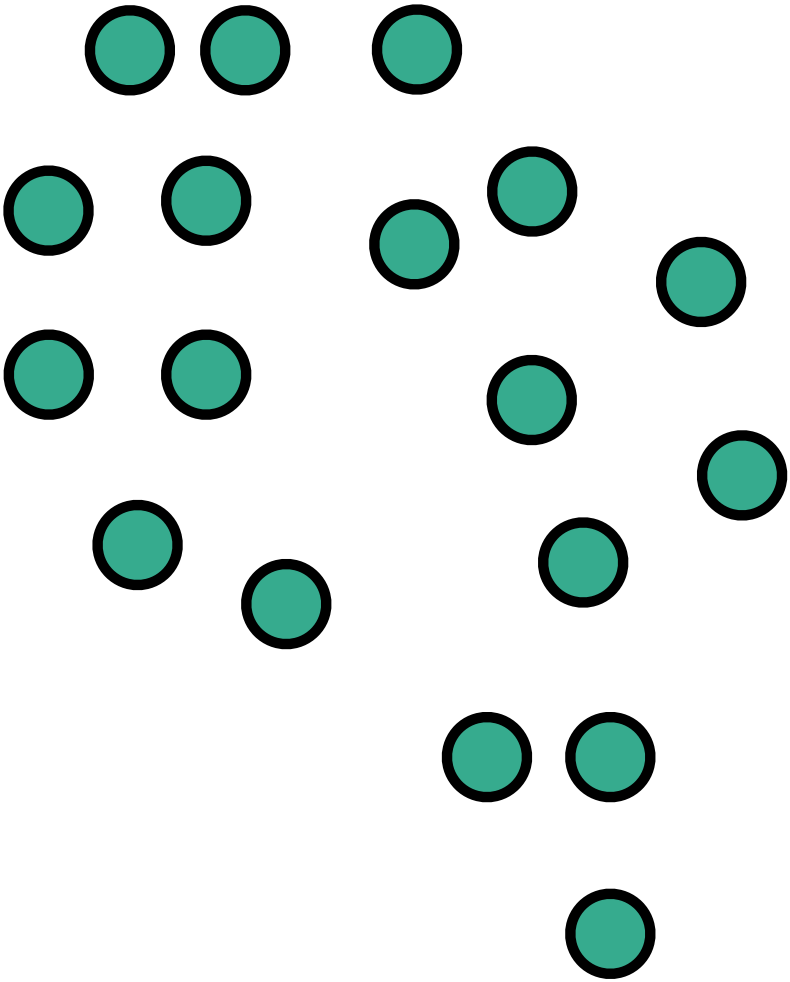


K-MEANS CLUSTERING

EXAMPLE-MONITORING MENTAL HEALTH IN DIFFERENT NEIGHBORHOODS

The city officials want to identify neighbourhoods or zones that are most stressed, so they can establish mental health support centers.

Algorithm

1. Initialize K centroids randomly.
2. Assign each data point to the nearest centroid.
3. Recompute the centroid of each cluster.
4. Repeat steps 2 and 3 until centroids no longer change significantly or a certain number of iterations are reached.

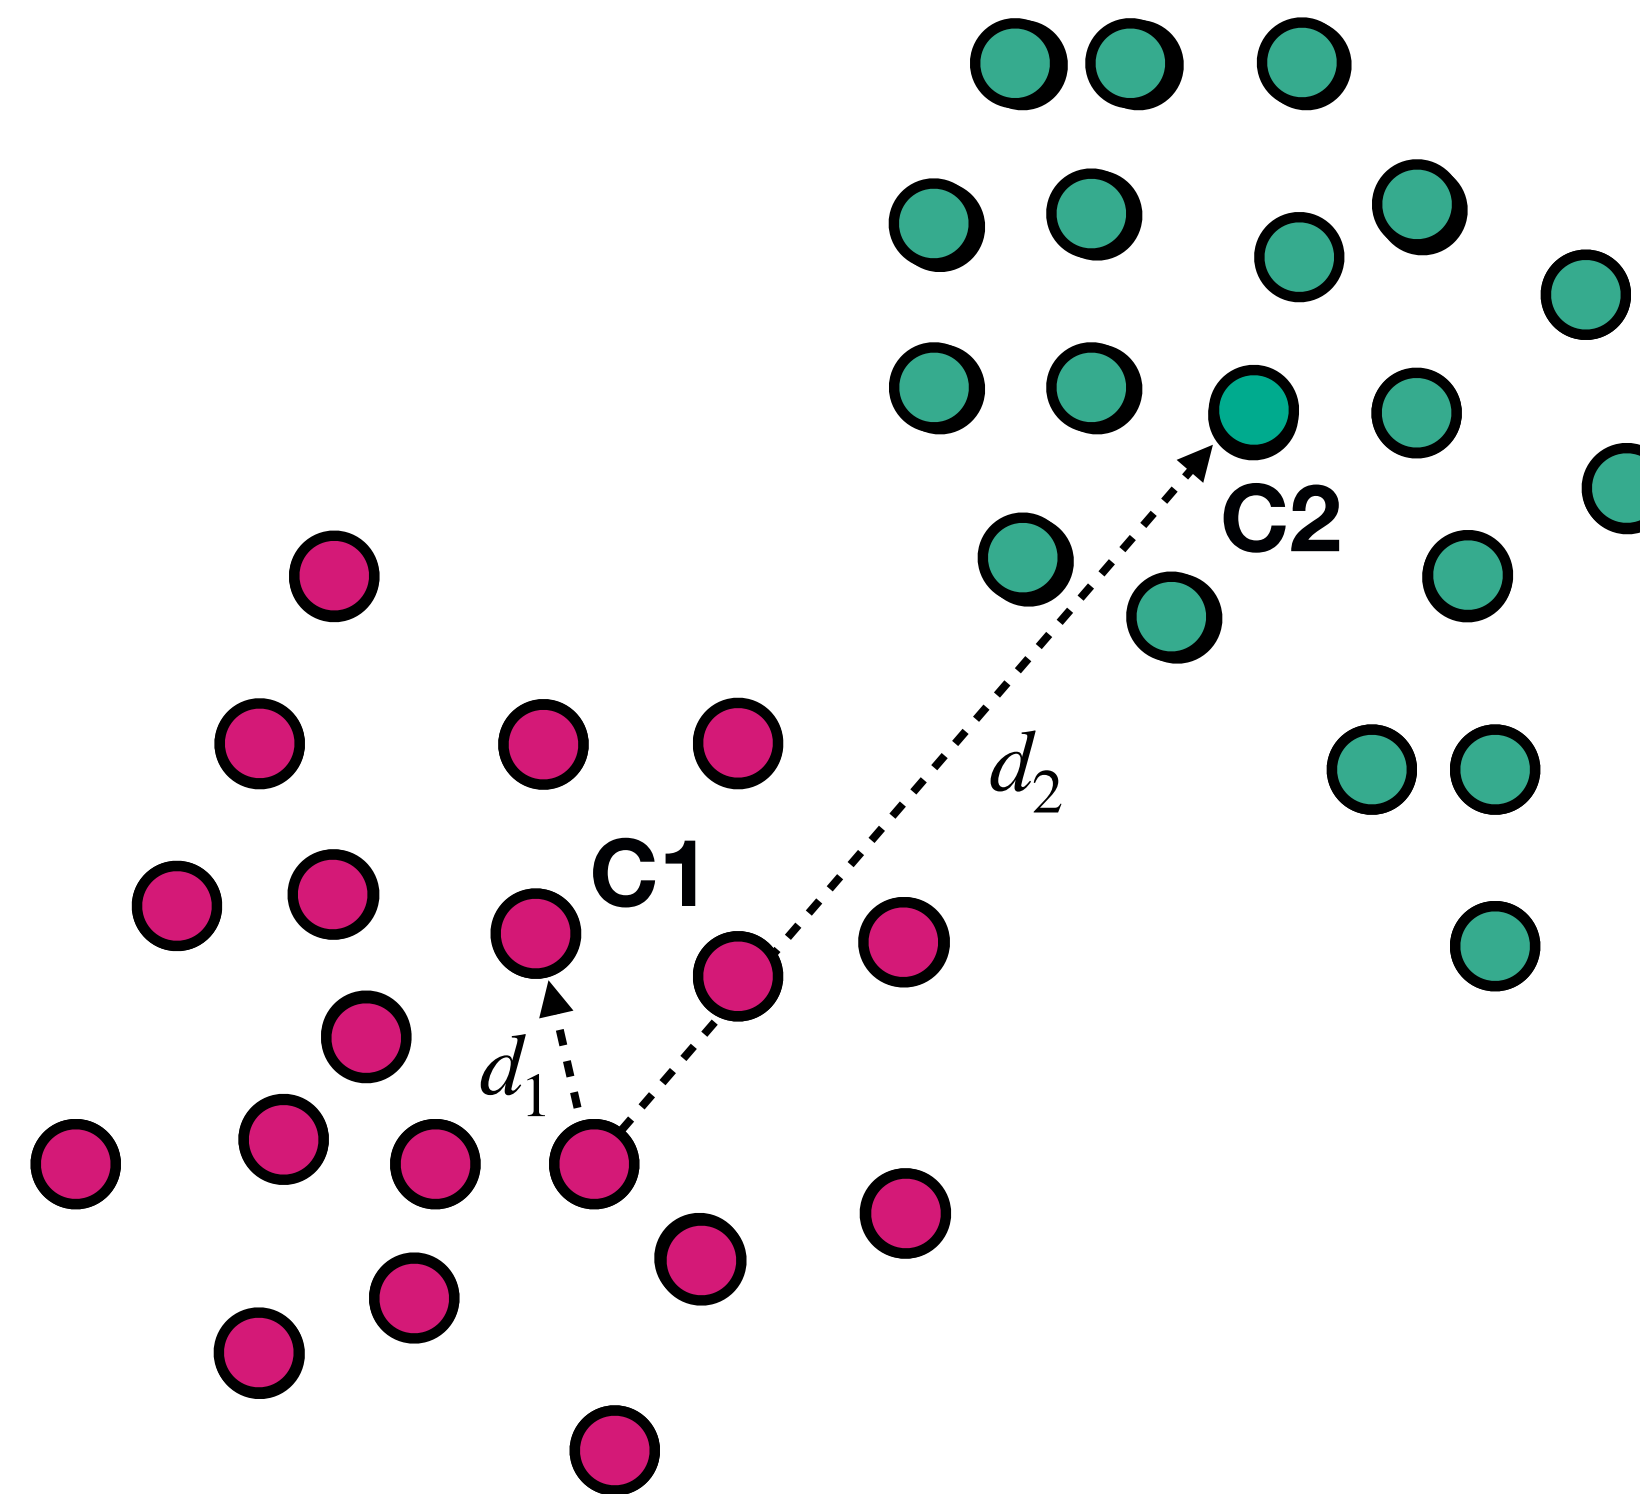

K-MEANS CLUSTERING

EXAMPLE-MONITORING MENTAL HEALTH IN DIFFERENT NEIGHBORHOODS

The city officials want to identify neighbourhoods or zones that are most stressed, so they can establish mental health support centers.

