In the Name of God

General Test Conditions:

No. of Channels:	1 to 5	No. of Subjects:	109
_	_	Baseline Channel:	T10 (In case of use)
Task:	REO	No. of Epochs:	25(Ch1), 30(Ch2)
Orthogonal:	Yes (In case of use)	Tries:	3(Ch1), 10(Ch2)
Inner Shift:	4	Outer Shift:	8
Train Data Percentage:	50(Ch1), 80(Ch2)	Test Data Percentage:	25(Ch1), 20(ch2)

Overall Test Results:

Channels No.	Number of Tries	Previously Selected	Baseline	Orthog.	Best Channel	7	Train Data	Test Data		
Cha No.	of fries	Channel(s)	Ba	Ö	Chamier	Loss	Acc.	Loss	Acc.	
1	3			×	Oz (2 out of 3) (+)	0.4655	0.8514	0.5059	0.8352	
1	3	-	-	^	Oz (2 out of 3) (+)	0.4724	0.8487	0.5079	0.8338	
	10	Oz		./	F4 (1 out of 10)(+)	0.0200	0.9944 ± 0.0034	0.0286	0.9911 ± 0.0041	
2	10	OZ		•	F4 (0 out of 10)(+)	0.0200	0.9944 ± 0.0034	0.0286	0.9911 ± 0.0041	
2	10	Oz		×	Fz (1 out of 10)(+)	0.0614	0.9829 ± 0.0048	0.0806	0.9755 ± 0.0063	
	10	OZ.			F8 (0 out of 10)(+)	0.0627	0.9810 ± 0.0081	0.0767	0.9751 ± 0.0086	
	_	Oz, –	_	./	- (+)					
3		<i>OZ</i> ,	Oz,		- (+)					
9	_	Oz, –	_	×	- (+)					
		<i>52</i> ,		^	- (+)					

${\bf Description:}$

Blue color: Best Channel according to the train accuracy.

Red color: Best Channel according to the test accuracy.

+: Link to the figures and tables in detail.

1

Test Conditions of Case 1: One Channel, Without Orthogonalization

No. of Channels:	1	No. of Subjects:	109
Previous Selected Channels:	_	Baseline Channel:	_
Task:	REO	No. of Epochs:	25
Orthogonal:	No.	Tries:	3
Inner Shift:	4	Outer Shift:	8
Train Data Percentage:	50%	Test Data Percentage:	25%

 $\begin{tabular}{ll} Table 1: Avg. Results for Searching first best channel with 109 subjects, no baseline is removed. Channels are sorted due to the test data accuracy. \\ \end{tabular}$

Channel	Train	Data	Validati	ion Data	Test Data		
	Loss	Acc.	Loss	Acc.	Loss	Acc.	
P4,52	1.0402	0.6749	1.0848	0.6619	1.0916	0.6598	
P3,48	0.9958	0.6864	1.0424	0.6734	1.0434	0.6708	
Pz,50	0.9156	0.7207	0.9726	0.7029	0.9715	0.7021	
F7,29	0.9033	0.7149	0.9488	0.7034	0.9472	0.7039	
P8,54	0.9010	0.7197	0.9443	0.7059	0.9484	0.7056	
Fp1,21	0.8695	0.7283	0.9234	0.7103	0.9251	0.7117	
Cz,10	0.8564	0.7309	0.9083	0.7171	0.9093	0.7150	
C3,8	0.8013	0.7504	0.8514	0.7357	0.8491	0.7352	
Fp2,23	0.7990	0.7551	0.8465	0.7393	0.8429	0.7402	
Fz,33	0.7587	0.7573	0.8083	0.7431	0.8037	0.7438	
T8,41	0.7296	0.7615	0.7619	0.7513	0.7653	0.7493	
P7,46	0.7243	0.7653	0.7658	0.7512	0.7685	0.7509	
F3,31	0.7160	0.7695	0.7643	0.7542	0.7626	0.7540	
F4,35	0.7146	0.7707	0.7539	0.7588	0.7578	0.7573	
C4,12	0.7111	0.7783	0.7627	0.7608	0.7712	0.7586	
T7,40	0.6517	0.7892	0.6894	0.7793	0.6893	0.7757	
F8,36	0.6471	0.7958	0.6889	0.7832	0.6925	0.7802	
$O2,\!62$	0.5575	0.8189	0.5895	0.8055	0.5958	0.8050	
O1,60	0.5302	0.8252	0.5660	0.8137	0.5692	0.8105	
Oz,61	0.4655	0.8514	0.5062	0.8362	0.5059	0.8352	

Table 2: Best channels, in order, in each try.

		Try 1	Try 2	Try 3
B.C.	Train	<i>Oz</i> >O2>O1	<i>Oz</i> >O2>T7	O1> <i>Oz</i> >O2
Б.С.	Test	<i>Oz</i> >O2>T7	<i>Oz</i> >O2>T7	O1> <i>Oz</i> >O2

Test Conditions of Case 1: (continued)

No. of Channels:	1	No. of Subjects:	109
Previous Selected Channels:	_	Baseline Channel:	_
Task:	REO	No. of Epochs:	25
Orthogonal:	No.	Tries:	3
Inner Shift:	4	Outer Shift:	8
Train Data Percentage:	50%	Test Data Percentage:	25%

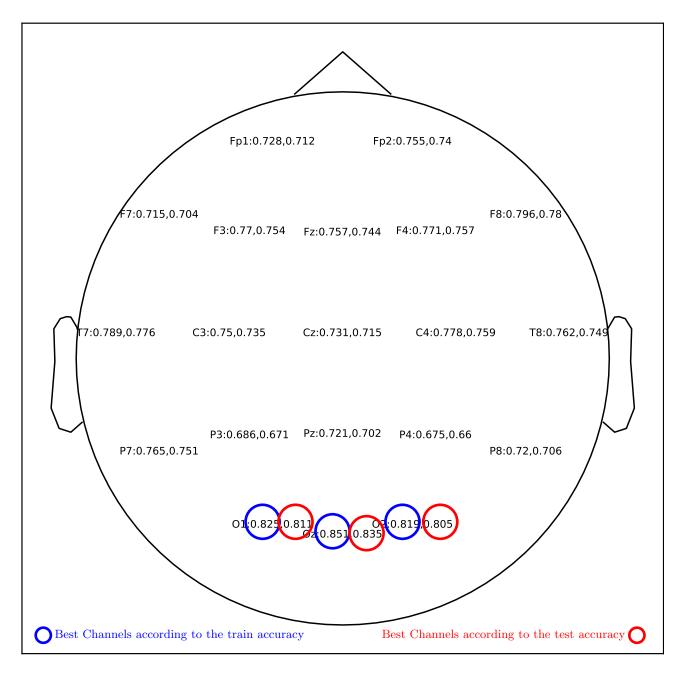


Figure 1: Avg. Results for Searching first best channel with 109 subjects, no baseline is removed.

0

Test Conditions of Case 2: Two Channels, With Orthogonalization

No. of Channels:	2	No. of Subjects:	109
Previous Selected Channels:	Oz	Baseline Channel:	_
Task:	REO	No. of Epochs:	30
Orthogonal:	Yes	Tries:	10
Inner Shift:	4	Outer Shift:	8
Train Data Percentage:	80%	Test Data Percentage:	20%

Table 3: Avg. Results for Searching the second best channel with 109 subjects with orthogonalization. No baseline is removed. Channels are sorted due to the test data accuracy.

Channel	, .	Train Data		Test Data
	Loss	Acc.	Loss	Acc.
Oz	0.1000	0.0000 ± 0.0000	0.0000	0.0000 ± 0.0000
C3	0.0434	0.9859 ± 0.0054	0.0566	0.9806 ± 0.0060
O1	0.0511	0.9845 ± 0.0239	0.0604	0.9813 ± 0.0248
Cz	0.0396	0.9872 ± 0.0083	0.0508	0.9828 ± 0.0089
Fp2	0.0350	0.9889 ± 0.0131	0.0475	0.9845 ± 0.0147
O2	0.0372	0.9881 ± 0.0103	0.0475	0.9845 ± 0.0115
Pz	0.0352	0.9889 ± 0.0111	0.0466	0.9847 ± 0.0119
F7	0.0342	0.9892 ± 0.0098	0.0442	0.9852 ± 0.0115
T7	0.0314	0.9902 ± 0.0056	0.0423	0.9862 ± 0.0060
F8	0.0309	0.9903 ± 0.0100	0.0411	0.9866 ± 0.0123
C4	0.0307	0.9906 ± 0.0073	0.0411	0.9867 ± 0.0085
Т8	0.0309	0.9904 ± 0.0047	0.0412	0.9869 ± 0.0053
P8	0.0293	0.9909 ± 0.0035	0.0393	0.9869 ± 0.0041
P3	0.0318	0.9903 ± 0.0090	0.0408	0.9871 ± 0.0107
Fp1	0.0287	0.9906 ± 0.0115	0.0371	0.9874 ± 0.0119
F3	0.0295	0.9912 ± 0.0077	0.0389	0.9874 ± 0.0083
Fz	0.0299	0.9907 ± 0.0070	0.0390	0.9874 ± 0.0081
P7	0.0270	0.9918 ± 0.0056	0.0377	0.9878 ± 0.0068
P4	0.0245	0.9926 ± 0.0038	0.0344	0.9888 ± 0.0042
F4	0.0200	0.9944 ± 0.0034	0.0286	0.9911 ± 0.0041

Table 4: Best channels, in order, in each try.

Tr	y 1	Tr	y 2	Tr	у 3	Tr	y 4	Tr	y 5	Tr	y 6	Tr	y 7	Tr	y 8	Tr	y 9	Try	10
Tr	Те	Tr	Те	Tr	Те	Tr	Те	Tr	Те	Tr	Те	Tr	Те	Tr	Те	Tr	Те	Tr	Те
P7	P7	Т8	O1	P7	Fp1	Fz	Fz	Fp1	Fp1	F 4	Р3	Fz	Fz	Fp1	F8	F8	F8	F3	F3
T7	T7	P4	P4	Fp1	P7	Fp1	Fp1	P7	P7	Р3	Fz	C4	P4	F8	Fp1	F3	РЗ	O1	O1
F7	F7	O1	Т8	F 4	F 4	Cz	Cz	F4	Fz	Fp2	Fp1	P4	C4	C4	C4	Р3	Fp2	F 4	F4
P4	Fp1	O2	O2	Cz	Cz	F7	F7	Fz	O2	Fz	F 4	O1	O1	F 4	F 4	Fp2	F 4	Cz	Pz
F 4	Fp1	Cz	Р3	F7	Pz	Fp2	Fp2	C4	F 4	Pz	F3	P8	P7	P8	P8	O1	F3	Pz	F7

Test Conditions of Case 2: (continued)

No. of Channels:	2	No. of Subjects:	109
Previous Selected Channels:	Oz	Baseline Channel:	_
Task:	REO	No. of Epochs:	30
Orthogonal:	Yes	Tries:	10
Inner Shift:	4	Outer Shift:	8
Train Data Percentage:	80%	Test Data Percentage:	20%

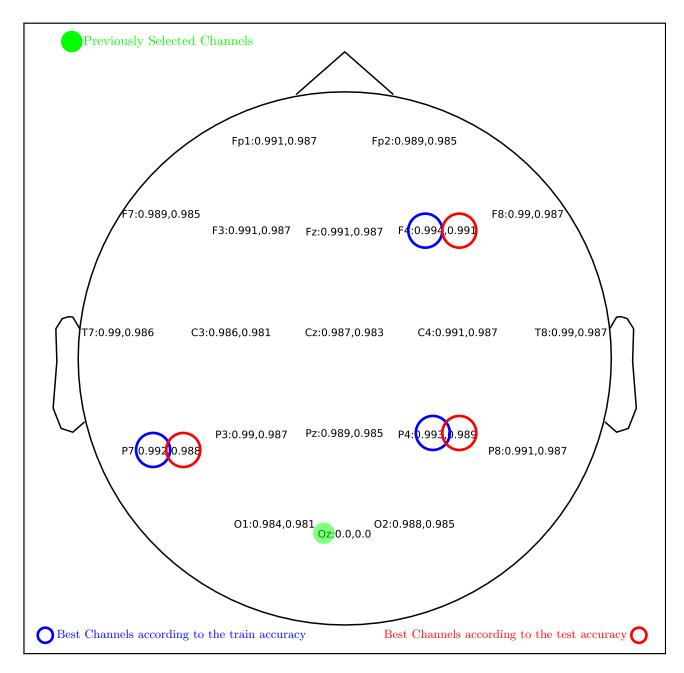


Figure 2: Avg. Results for Searching the second best channel with 109 subjects with orthogonalization. No baseline is removed.

_

Test Conditions of Case 3: Two Channels, Without Orthogonalization

No. of Channels:	2	No. of Subjects:	109
Previous Selected Channels:	Oz	Baseline Channel:	_
Task:	REO	No. of Epochs:	30
Orthogonal:	No	Tries:	10
Inner Shift:	4	Outer Shift:	8
Train Data Percentage:	80%	Test Data Percentage:	20%

Table 5: Avg. Results for Searching the second best channel with 109 subjects Without orthogonalization. No baseline is removed. Channels are sorted due to the test data accuracy.

Channel	-	Гrain Data	ı	Test Data
	Loss	Acc.	Loss	Acc.
Oz	0.1000	0.0000 ± 0.0000	0.0000	0.0000 ± 0.0000
P8	0.1373	0.9557 ± 0.0368	0.1613	0.9476 ± 0.0379
P4	0.1221	0.9618 ± 0.0374	0.1451	0.9536 ± 0.0389
P3	0.1003	0.9681 ± 0.0203	0.1235	0.9595 ± 0.0208
O1	0.0980	0.9672 ± 0.0159	0.1181	0.9598 ± 0.0164
Fp2	0.0963	0.9705 ± 0.0158	0.1227	0.9608 ± 0.0187
Cz	0.0982	0.9694 ± 0.0184	0.1184	0.9617 ± 0.0195
T7	0.0995	0.9681 ± 0.0303	0.1175	0.9618 ± 0.0298
C3	0.0936	0.9713 ± 0.0166	0.1151	0.9633 ± 0.0176
O2	0.0872	0.9713 ± 0.0136	0.1072	0.9640 ± 0.0148
Т8	0.0913	0.9715 ± 0.0192	0.1091	0.9649 ± 0.0211
F3	0.0844	0.9732 ± 0.0176	0.1025	0.9658 ± 0.0196
Fp1	0.0852	0.9744 ± 0.0189	0.1085	0.9659 ± 0.0199
P7	0.0810	0.9744 ± 0.0122	0.1030	0.9661 ± 0.0129
C4	0.0886	0.9728 ± 0.0194	0.1073	0.9664 ± 0.0206
Pz	0.0828	0.9748 ± 0.0104	0.1027	0.9667 ± 0.0118
F7	0.0753	0.9778 ± 0.0071	0.0960	0.9694 ± 0.0086
F4	0.0674	0.9784 ± 0.0172	0.0848	0.9717 ± 0.0194
Fz	0.0615	0.9814 ± 0.0078	0.0781	0.9751 ± 0.0086
F8	0.0627	0.9810 ± 0.0081	0.0767	0.9751 ± 0.0086

Table 6: Best channels, in order, in each try.

Tr	y 1	Tr	y 2	Tr	у 3	Tr	y 4	Tr	y 5	Tr	y 6	Tr	у 7	Tr	y 8	Tr	у 9	Try	10
Tr	Те	Tr	Те	Tr	Те	Tr	Те	Tr	Те	Tr	Те	Tr	Те	Tr	Те	Tr	Те	Tr	Te
O2	O2	Fz	F4	F4	F4	Т8	Т8	Fp1	Fp1	F4	F4	P4	P4	T7	T7	T7	T7	Т8	F3
Fp1	Fp1	F4	Fz	F 8	F 8	Cz	Cz	T7	Т8	C4	Р3	СЗ	Fp1	F4	P8	C4	C4	F3	Т8
F4	F4	F3	F3	СЗ	Fz	O2	O2	Т8	T7	F8	F4	Fz	F 8	Fz	F4	P7	P7	F7	F8
O1	O1	P4	P4	Fz	С3	O1	Fz	F 8	Fz	Fp2	Cz	Fp1	СЗ	P8	O2	СЗ	F 8	F8	F7
P4	C4	F8	F 8	Cz	F7	Fz	O1	C4	F 8	Pz	Fp1	F 8	Т8	Р3	Fz	F 8	C3	Pz	Cz

Test Conditions of Case 2: (continued)

No. of Channels:	2	No. of Subjects:	109
Previous Selected Channels:	Oz	Baseline Channel:	_
Task:	REO	No. of Epochs:	30
Orthogonal:	No	Tries:	10
Inner Shift:	4	Outer Shift:	8
Train Data Percentage:	80%	Test Data Percentage:	20%

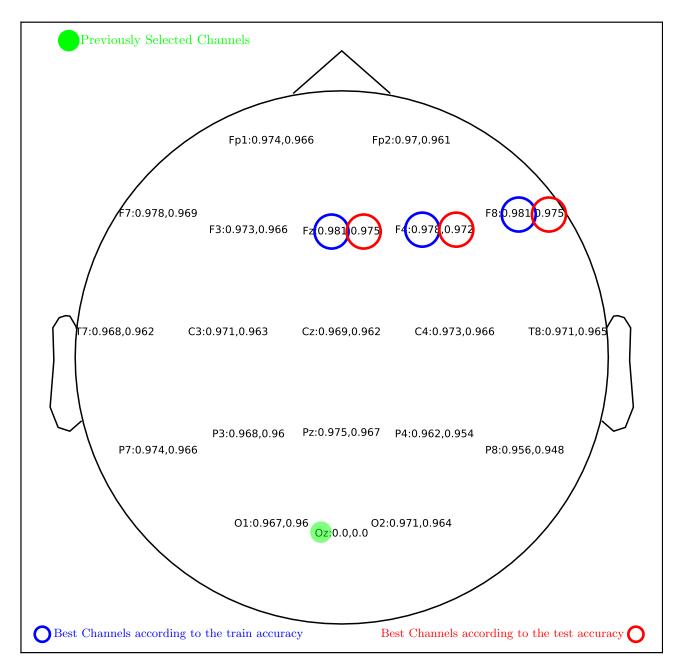


Figure 3: Avg. Results for Searching the second best channel with 109 subjects without orthogonalization. No baseline is removed.

_