


HLParty

"Danmarks hyggeligste lanparty"

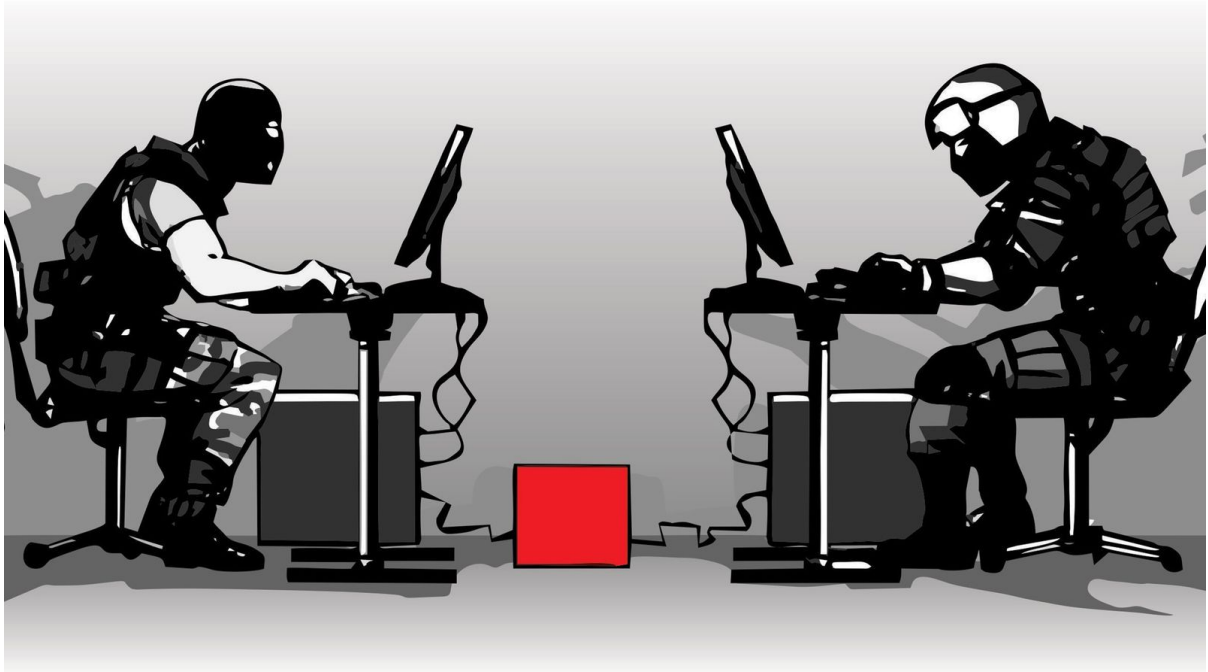

HLParty 2018 Hjemmeside - Bilag

Lavet af:

Mark Lenti

Patrick Rosenheim

Tor Soya

Afleveret d.11.Januar

Indholdsfortegnelse

1 Kode	3
1.1 TopHeader.php	3
1.2 UrlController.php	4
1.3 TilesAndTournament.php	5
1.4 Sponsors.php	7
1.5 PageCaller.php	8
1.6 Page.php	9
1.7 NavigationBar.php	10
1.8 Include/Home.php	12
1.9 DEBUGGIN.php	14
1.10 Footer.php	14
1.11 DBconn.php	15
1.12 Usermodule/EditOrRegister.php	16
1.13 Include/oneall_hlpf/oneall_callback_handler.php	24
1.14 Include/oneall_hlpf/oneall_calls.php	28
1.15 Include/Newsarchive/kgPager.php	29
1.16 Include/Newsarchive/News.php	32
1.17 Include/Event/Event.php	34
1.18 Include/Admin/Index.php	41
1.19 Include/Admin/Users.php	43
1.20 Include/Admin/Sponsors.php	45
1.21 Include/Admin/NewOrEditSponsor.php	49
1.22 Include/Admin/Pages.php	52
1.23 Include/Admin/NewOrEditPage.php	55
1.24 Include/Admin/NewsLetters.php	57
1.25 Include/Admin/NewOrEditNewsLetter.php	59
1.26 Include/Admin/News.php	61
1.27 Include/Admin/Events.php	62
1.28 Include/Admin/NewOrEditEvent.php	64
1.29 Style/hlpf_main.css	67

2 Usecase beskrivelser	70
2.1 Case - Opret Event	70
2.2 Opret nyhedsbrev	70
2.3 Opret sponsor	71
2.4 Rediger sponsor	71
2.5 Opret ny side	72
2.6 Rediger side	72
2.7 Se seneste nyhed	73
2.8 Se nyhedsarkiv	73
2.9 OneAll / Login	74
2.10 Log ud	74
2.11 Se event information	75
2.12 Se regler	75
2.13 Se kantinen tilbyder	76
1.14 Se yderligere information	76
1.15 Rediger profil	77

1 Kode

1.1 TopHeader.php

```
<div class="container">
  <div class="container">
    <div class="row">
      <div class="hidden-xs col-lg-4 col-md-4 col-sm-4 col-xs-12
        text-center" id="hlpf_Logo">
        
      </div>
      <div class="col-lg-4 col-md-4 col-sm-4 col-xs-12
        text-center" id="hlpf_countdown">
      </div>
      <div class="col-lg-4 col-md-4 col-sm-4 col-xs-12
        text-center hidden-xs" id="hlpf_Login">
        <?php if(!isset($_SESSION['UserID'])){ ?>
    <div id="oa_social_login_container"></div>
    <script type="text/javascript">
      /* Replace #your_callback_uri# with the url to your own callback
        script */
      var your_callback_script =
        'http://localhost/Website-2017/Include/' +
        'oneall_hlpf/oneall_callback_handler.php';
      /* Embeds the buttons into the container
        oa_social_login_container */
      var _oneall = _oneall || [];
      _oneall.push(['social_login', 'set_providers', ['facebook',
        'Google', 'Battlenet', 'Steam', 'Twitch']]);
      _oneall.push(['social_login', 'set_callback_uri',
        your_callback_script]);
      _oneall.push(['social_login', 'do_render_ui',
        'oa_social_login_container']);
    </script>
    <?php } ?>
  </div>
</div>
</div>
```

1.2 UrlController.php

```
<?php
#page // hvilken side er det man står på
if(isset($_GET['page']))
{
    $page = mysqli_real_escape_string($db_conn,
                                     strip_tags($_GET['page']))
    );
    $html_header_title = $page;
}
#subpage // hvilken subside er det man står på eller,
#om man ikke er på en
if(isset($_GET['subpage']))
{
    $subpage = mysqli_real_escape_string($db_conn,
                                         strip_tags($_GET['subpage']))
    );
    $html_header_title = $page.' -> '.$subpage;
}
else{ $subpage = ''; }
// action // hvad skal der ske
if(isset($_GET['action']))
{
    $action = mysqli_real_escape_string($db_conn,
                                        strip_tags($_GET['action']))
    );
}
else { $action = ''; }
?>
```

1.3 TilesAndTournament.php

```

<!-- Tournaments start -->
<hr>
<div class="container">
  <div class="row">
    <div class="col-lg-2 col-xs-4 col-md-2 col-sm-2
      hlpf_margin_botom ">
      <a href="#">
        
      </a>
    </div>
    <div class="col-lg-2 col-xs-4 col-md-2 col-sm-2
      hlpf_margin_botom ">
      <a href="#">
        </a>
    </div>
    <div class="col-lg-2 col-xs-4 col-md-2 col-sm-2
      hlpf_margin_botom ">
      <a href="#">
        
      </a>
    </div>
    <div class="col-lg-2 col-xs-4 col-md-2 col-sm-2
      hlpf_margin_botom ">
      <a href="#">
        
      </a>
    </div>
    <div class="col-lg-2 col-xs-4 col-md-2 col-sm-2
      hlpf_margin_botom ">
      <a href="#">
        
      </a>
    </div>
  </div>

```

```
<div class="col-lg-2 col-xs-4 col-md-2 col-sm-2
    hlpf_margin_botom">
    <a href="#">
        
        </a>
    </div>
</div>
</div>
<!-- Tournaments end -->
<br>
<!-- Menu tiles start -->
<div class="container">
    <div class="row">
        <div class="col-xs-6 col-md-3 col-sm-3 hlpf_margin_botom">
            <a href="#" class="">
                
            </a>
        </div>
        <div class="col-xs-6 col-md-3 col-sm-3 hlpf_margin_botom">
            <a href="#" class="">
                
            </a>
        </div>
        <div class="col-xs-6 col-md-3 col-sm-3 hlpf_margin_botom">
            <a href="#" class="">
                
            </a>
        </div>
        <div class="col-xs-6 col-md-3 col-sm-3 hlpf_margin_botom">
            <a href="#" class="">
                
            </a>
        </div>
    </div>
</div>
<!-- Menu tiles end -->
```

1.4 Sponsors.php

```

<div class="container">
  <div class="text-center">
    <h2>Sponsorer</h2>
  </div>
  <div class="text-center">
    <?php
      if( $result = $db_conn->query(
        "SELECT Sponsors.Url, Sponsors.Banner
        FROM Sponsors WHERE MainSponsor = 1" ) )
      {
        if( $result -> num_rows ) {
          $row = $result->fetch_assoc();
          echo "<a href='" . $row[ 'Url' ] .
            "' class='thumbnail hlpf_no_round_border'>
            <img src='Images/Sponsore/" . $row[ 'Banner' ] . "'>
            </a>";
        } else { return null; }
        $result -> close();
      }
    ?>
  </div>
</div>
<div class="container">
  <div class="row">
    <div class="col-lg-4 col-md-4 col-sm-4 col-xs-12">
      <a href="#" class="thumbnail">
        
      </a>
    </div>
    <div class="col-lg-4 col-md-4 col-sm-4 col-xs-12">
      <a href="#" class="thumbnail">
        
      </a>
    </div>
    <div class="col-lg-4 col-md-4 col-sm-4 col-xs-12">
      <a href="#" class="thumbnail">
        
      </a>
    </div>
  </div>
</div>

```


1.5 PageCaller.php

```
<?php
if(!empty($_SESSION['UserToken'])){
    include_once("Include/Usermodule/EditOrRegister.php");
}
elseif (! empty( $page ) ) {
    // Pages
    switch($page){
        case "EditMyProfile":
            include_once("Include/Usermodule/EditOrRegister.php");
            break;
        case "Forside":
            include_once("Include/Home.php");
            break;
        case "Admin":
            if($_SESSION['Admin'] == 1) {
                include_once("Include/Admin/index.php");
            } else {
                header("Location: index.php");
            }
            break;
        case "Newsarchive":
            include_once("Include/Newsarchive/News.php");
            break;
        case "Event":
            include_once("Include/Event/Event.php");
            break;
        case "Gallery":
            include_once("Include/FBAlbumAPI.php");
            break;
        default:
            include_once("Include/Page.php");
            break;
    }
    // Actions
    switch($action){
        case "LogOut":
            session_destroy();
            header("Location: index.php");
            break;
    }
}
?>
```

1.6 Page.php

```

<div class="row">
  <div class="col-lg-12 hlpf_newsborder">
    <?php
      if( ctype_digit( strval( $page ) ) ) {
        $result = $db_conn->query( "
          SELECT P.Content,P.PageTitle, U1.Username AS Creator,
            U2.Username AS Editor, P.CreatedDate,
            P.LastEditedDate FROM Pages P
            INNER JOIN Users U1 ON P.AuthorID = U1.UserID
            INNER JOIN Users U2 ON P.LastEditedID = U2.UserID
            WHERE P.PageID = $page AND P.Online = '1'
          " ); // End query.
      } elseif ( ! ctype_digit( strval( $page ) ) ) {
        $result = $db_conn->query( "
          SELECT P.Content, P.PageTitle, U1.Username AS Creator,
            U2.Username AS Editor, P.CreatedDate,
            P.LastEditedDate FROM Pages P
            INNER JOIN Users U1 ON P.AuthorID = U1.UserID
            INNER JOIN Users U2 ON P.LastEditedID = U2.UserID
            WHERE P.PageTitle = '$page' AND P.Online = '1'
          " ); // End query.
      }
      if( $result -> num_rows ){
        $row = $result->fetch_assoc();
      } else {
        // TO THE FRONT-PAGE!
        header("Location: /Website-2017/index.php");
      }
    ?>
    <div class="row">
      <div class="col-lg-12 hlpf_large_news_box">
        <h3>
          <?php
            echo str_replace('_', ' ', $row['PageTitle']);
          ?>
        </h3>
        <hr/>
        <div class="hlpf_flex">
          <!-- Content -->
          <?php echo "<p>" . $row[ 'Content' ] . "</p>"; ?>
        </div>
      </div>
    </div>
    <hr/>
    <?php $result -> close(); ?>
  </div></div>

```

1.7 NavBar.php

```
<nav class="navbar navbar-fixed" id="hlpf_menu" role="navigation">
  <div class="container">
    <div class="navbar-header">
      <a class="visible-xs navbar-brand" href="#">
        
      </a>
      <button type="button" class="navbar-toggle"
        data-toggle="collapse"
        data-target=".navbar-collapse">
        <span class="sr-only">Toggle navigation</span>
        <i class="fa fa-bars fa-2x" aria-hidden="true"
          style="color: white;">
        </i>
      </button>
    </div>
    <div class="collapse navbar-collapse hlpf_white_text">
      <ul class="nav navbar-nav ">
        <li class="active">
          <a href="index.php">Forside</a>
        </li>
        <li><a href="?page=Om_Os">Om os</a></li>
        <li class="dropdown" id="hlpf_menu">
          <a class="dropdown-toggle" data-toggle="dropdown"
            role="button" aria-haspopup="true"
            aria-expanded="false">
            HLParty <span class="caret"></span>
          </a>
          <ul class="dropdown-menu">
            <li>
              <a href="?page=Event">Information</a>
            </li>
            <li>
              <a href="?page=Regler">Regler</a>
            </li>
            <li>
              <a href="?page=Crew">Crew</a>
            </li>
            <li role="separator" class="divider"></li>
            <li>
              <a href="?page=Kiosk">Kantinen tilbyder</a>
            </li>
            <li role="separator" class="divider"></li>
            <li>
```

```

        <a href="?page=Yderligere_information">
            Yderliger information
        </a>
    </li>
    <li>
        <a href="?page=Find_Os">Find Os</a>
    </li>
    <li>
        <a href="?page=Huskeliste">Huskeliste</a>
    </li>
</ul>
</li>
<li>
    <a href="?page=Kontakt">Kontakt os</a>
</li>
<?php if(isset($_SESSION['UserID'])){ ?>
<li class="dropdown" id="hlpf_menu">
    <a class="dropdown-toggle" data-toggle="dropdown"
        role="button" aria-haspopup="true"
        aria-expanded="false">
        Min profil <span class="caret"></span>
    </a>
    <ul class="dropdown-menu">
        <li>
            <a href="?page=EditMyProfile">
                Ret min profil
            </a>
        </li>
        <?php if($_SESSION['Admin'] == 1){ ?>
        <li>
            <a href="?page=Admin">Administration</a>
        </li>
        <?php } ?>
        <li><a href="?action=LogOut">Logud</a></li>
    </ul>
</li>
<?php } ?>
</ul>
</div><!--.nav-collapse -->
</div>
</nav>

```

1.8 Include/Home.php

```

<!-- Headsponsor and Latest news start -->
<div class="row">
  <!-- Main sponsor post Start -->
  <div class="col-lg-5 hlpf_newsborder">
    <?php
      // Don't you just love SQL?
      if( $result = $db_conn->query("SELECT Description, Banner
        FROM Sponsors WHERE Sponsors.MainSponsor = 1" ) )
      {
        if( $result -> num_rows ){
          $row = $result->fetch_assoc();
        }
      }
    <?>
    <div class="row">
      <div class="col-lg-12 hlpf_large_news_box">
        

        <hr/>
        <div class="hlpf_flex">
          <div class="hlpf_news">
            <?php
              echo "<p>".$row['Description']. "</p>";
            <?>
          </div>
        </div>
      </div>
    </div>
    <hr/>
    <?php $result -> close(); ?>
  </div>
  <!-- Main sponsor post End -->
  <div class="col-lg-2">
    <!-- Facebook Like box comming -->
  </div>
  <!-- Lastest News start -->
  <div class="col-lg-5 hlpf_newsborder">
    <div class="row">
      <div class="col-lg-12 hlpf_large_news_box">
        <h1 class="text-center">Seneste nyhed</h1>
        <hr/>
        <div class="hlpf_flex">
          <div class="hlpf_news">

```

```
<?php
    // Get the Latest news that is online.
    if( $result = $db_conn->query("
    SELECT News.Content, News.Title
    From News Where News.Online = 1
    order by News.NewsID desc limit 1"))
    {
        if( $result -> num_rows ){
            $row = $result->fetch_assoc();
            echo "<h4>".$row['Title']. "</h4>";
            echo "<p>".$row['Content']. "</p>";
        }
        $result -> close();
    }
    ?>
</div>
</div>
</div>
</div>
<hr>
<!-- News archive button start -->
<div class="row">
    <div class="col-lg-12">
        <a href="?page=Newsarchive"
        class="btn btn-primary btn-xs btn-block">
            Nyhedsarkiv
        </a>
    </div>
</div>
<br>
<!-- News archive button end -->
</div>
<!-- Lastest News End -->
</div>
<!-- Headsponsor and Latest news end -->
```

1.9 DEBUGGIN.php

```
<?php
    // sessions
    if (true) {
        echo '<pre>';
        echo print_r($_SESSION);
        echo print_r($_POST);
        echo '</pre>';
    }
?>
```

1.10 Footer.php

```
<footer class="container-fluid" id="hlpf_footer">
    <div class="container">
        <div class="row">
            <!-- Google Maps -->
            <div class="hidden-xs col-sm-12 col-md-6">
                <iframe src="https://goo.gl/ODHZsh" width="100%"
                height="400" frameborder="0"
                style="border:0" allowfullscreen>
            </iframe>
        </div>
        <!-- Genel information, kontaktinformation og sociale medier-->
        <div class="col-sm-12 col-md-6">
            <!-- Adresse og kontakt -->
            <div class="col-lg-6 hidden-xs hidden-sm hidden-md"
            id="hlpf_footer_contact">
                <h2>Adresse</h2>
                <address>
                    Hillerødsholmskolen <br>
                    Hillerødsholmsallé 2 <br>
                    3400 Hillerød
                </address>
                <h2>Kontakt</h2>
                <p>
                    Bestyrelsen kan kontaktes på
                    <a href="mailto:best@hlpf.dk">best@hlpf.dk</a>.
                    <br> Ellers henviser vi til vores
                    <a href="?page=Kontakt">kontaktside</a>.
                </p>
            </div>
        </div>
    </div>
</footer>
```

1.11 DBconn.php

15/77

1.12 Include/Usermodule/EditOrRegister.php

```
<?php
if(!isset($_SESSION['UserToken']) && !isset($_SESSION['UserID'])){
    header("Location: /Website-2017/index.php");
}else{
    if(isset($_SESSION['UserToken'])){
        if(isset($_SESSION['FullName'])){
            $FullName = $_SESSION['FullName'];
        }
        if(isset($_SESSION['Email'])){
            $Email = $_SESSION['Email'];
        }
        if(isset($_SESSION['PreferredUsername'])){
            $PreferredUsername = $_SESSION['PreferredUsername'];
        }
    }
    if(isset($_SESSION['UserID'])){
        $UserID = $_SESSION['UserID'];
        if($result = $db_conn->query(
            "SELECT * FROM Users WHERE UserID = '$UserID'"))
        {
            if($result -> num_rows){
                $row = $result->fetch_assoc();
                $FullName          = $row['FullName'];
                $Email             = $row['Email'];
                $PreferredUsername = $row['Username'];
                $Birthday          = $row['Birthdate'];
                $Phone             = $row['Phone'];
                $Address           = $row['Address'];
                $Zipcode           = $row['ZipCode'];
                $Bio               = $row['Bio'];
                $Newsletter        = $row['Newsletter'];
            }
        }
    }
    if(isset($_POST['Send_form'])) // Submit form start
    {
        $RegErroMSG = array();
        $FormAOKAY = 0;
        if($_POST['FullName'] == ''){
            $RegErroMSG[] .= 'Fulde Navn'; $FormAOKAY = 1;
        }
        if($_POST['Email'] == ''){
            $RegErroMSG[] .= 'Email'; $FormAOKAY = 1;
        }
        if($_POST['Birthday'] == ''){
```

```

    $RegErroMSG[] .='Fødselsdag'; $FormAOKAY = 1;
}
if($_POST['Username'] == ''){
    $RegErroMSG[] .='Brugernavn'; $FormAOKAY = 1;
}

if($page != 'EditMyProfile'){
    if($_POST['Password'] == ''){
        $RegErroMSG[] .='Kodeord'; $FormAOKAY = 1;
    }
    if($_POST['CPassword'] == ''){
        $RegErroMSG[] .='Bekræft kodeord'; $FormAOKAY = 1;
    }
    if(!isset($_POST['ToS'])){
        $RegErroMSG[] .='Bekræfte betingelserne';
        $FormAOKAY = 1;
    }
}
if($_POST['Phone'] == ''){
    $RegErroMSG[] .='Telefonnummer'; $FormAOKAY = 1;
}
if($_POST['Address'] == ''){
    $RegErroMSG[] .='Adresse'; $FormAOKAY = 1;
}
if($_POST['Zipcode'] == ''){
    $RegErroMSG[] .='Postnummer'; $FormAOKAY = 1;
}
if($page != 'EditMyProfile')
{
    if($_POST['Password'] != $_POST['CPassword']){
        $FormAOKAY = 1;
        $RegErroMSG[] .='Kodeord & Bekræft Kodeord passed'.
            'ikke sammen';
    }
}
if($page != 'EditMyProfile'){
    $tempUsername = $_POST['Username'];
    if($result = $db_conn ->query("SELECT Username
FROM Users Where Username = '$tempUsername'"))
    {
        if($result -> num_rows){
            $RegErroMSG[] .='Brugernavnet findes, beklager';
            $FormAOKAY = 1;
        }
    }
}

$FullName          = $_POST['FullName'];
$email              = $_POST['Email'];
$PreferredUsername = $_POST['Username'];

```

```
        $Birthday          = $_POST['Birthday'];
        $Phone              = $_POST['Phone'];
        $Address             = $_POST['Address'];
        $Zipcode             = $_POST['Zipcode'];
        $Bio                 = $_POST['Bio'];

if($FormAOKAY == 0){
    // For sucessfull filled
    // injection prevention
    $FullName = $db_conn->real_escape_string(
        $_POST['FullName']);
    $Email     = $db_conn->real_escape_string(
        $_POST['Email']);
    $Birthday  = $db_conn->real_escape_string(
        $_POST['Birthday']);
    $Username  = $db_conn->real_escape_string(
        $_POST['Username']);
    if($page != 'EditMyProfile'){
        $Password = $db_conn->real_escape_string(
            $_POST['Password']);
        $CPassword = $db_conn->real_escape_string(
            $_POST['CPassword']);
        $ToS       = $db_conn->real_escape_string(
            $_POST['ToS']);
        $PW = hash('sha512', $Password);
    }
    $Phone = $db_conn->real_escape_string($_POST['Phone']);
    $Address = $db_conn->real_escape_string($_POST['Address']);
    $Zipcode = $db_conn->real_escape_string($_POST['Zipcode']);
    $Bio     = $db_conn->real_escape_string($_POST['Bio']);
    if(isset($_POST['Newsletter'])){
        $Newsletter = $_POST['Newsletter'];
    } else{$Newsletter = 0;}
    $Birthday = strtotime($Birthday);

    if(isset($_SESSION['SocialNetwork'])){
        switch($_SESSION['SocialNetwork']){
            case 'steam':
                $TokenRow = 'SteamToken';
                $profileURLCol = 'SteamURL';
                break;
            case 'facebook':
                $TokenRow = 'FacebookToken';
                $profileURLCol = 'FacebookURL';
                break;
            case 'twitch':
                $TokenRow = 'TwitchToken';
                $profileURLCol = 'TwitchURL';
                break;
            case 'google':
```

```

        $TokenRow      = 'GoogleToken';
        $profileURLCol = 'GoogleURL';
        break;
    case 'battlenet':
        $TokenRow      = 'BattlenetToken';
        $profileURLCol = 'BattlenetID';
        break;
    }
}
if($page == 'EditMyProfile')
{ // user edits own informations
    if($db_conn->query("UPDATE Users
    SET Username = '$Username', FullName = '$FullName',
    ZipCode = '$Zipcode', Birthdate = '$Birthday',
    Email = '$Email', Bio = '$Bio', Address = '$Address',
    Phone = '$Phone', Newsletter = '$NewsLetter'
    WHERE UserID = '$UserID'")){}
    header("Location: index.php?page=EditMyProfile");
}
else // user creation
{
    $CreateTime = time();
    $profileURL = $_SESSION['ProfileUrl'];
    $token = $_SESSION['UserToken'];
    if($db_conn->query("INSERT INTO
    `Users`(Username, FullName, ZipCode, Birthdate, Created,
    Email, Bio, Admin, Address, PW, Phone, $TokenRow,
    $profileURLCol, NewsLetter)
    VALUES
    ('$Username','$FullName','$Zipcode', '$Birthday',
    '$CreateTime','$Email', '$Bio','0',
    '$Address','$PW','$Phone','$token',
    '$profileURL', '$NewsLetter')"))
    {

        if($result = $db_conn ->query("
        Select Users.UserID, Users.Admin From Users
        Where Users.Username = '$Username'"))
        {
            $row = $result->fetch_assoc();
            $tempUserID = $row['UserID'];
            if(isset($_SESSION['SocialNetwork'])){}
            unset($_SESSION['SocialNetwork']);
        }
        if(isset($_SESSION['UserToken'])){}
        unset($_SESSION['UserToken']);
        }
        if(isset($_SESSION['ProfileUrl'])){}
        unset($_SESSION['ProfileUrl']);
    }
}

```

```

    }
    if(isset($_SESSION['FullName'])){
        unset($_SESSION['FullName']);
    }
    if(isset($_SESSION['Email'])){
        unset($_SESSION['Email']);
    }
    if(isset($_SESSION['PictureUrl'])){
        unset($_SESSION['PictureUrl']);
    }
    if(isset($_SESSION['BattleTag'])){
        unset($_SESSION['BattleTag']);
    }
    if(isset($_SESSION['PreffereredUsername'])){
        unset($_SESSION['PreffereredUsername']);
    }
    $_SESSION['UserID'] = $tempUserID;
    $_SESSION['Admin'] = $row['Admin'];
    $LastLogin = time();
    if($db_conn->query("UPDATE Users
SET LastLogin = '$LastLogin'
WHERE UserID = '$tempUserID'")){}
    header("Location: index.php?page=EditMyProfile");
} else {echo 'find ny bruger fejled';}
} else {echo 'opret fejled';}
}
} // if formOKAY end
} // Form submit end
?>
<!-- Form Start -->
<div class="row">
    <div class="col-lg-12 hlpf_newsborder">
        <div class="row">
            <div class="col-lg-12 hlpf_large_news_box">
                
                <hr/>
                <div class="hlpf_flex">
                    <div class="table-responsive">
                        <table class="table">
                            <form action="" method="post">
                                <tr>
                                    <td>
                                        <label for="FullName">Fulde Navn:*</label>
                                        <input type="text" class="form-control"
                                        placeholder="Santa Claus" id="FullName"
                                        value="<?php if(isset($FullName)){
                                        echo $FullName;} ?>" name="FullName">
                                    </td>
                                </tr>
                            </form>
                        </table>
                    </div>
                </div>
            </div>
        </div>
    </div>
</div>

```

```

<td>
    <label for="Email">Email:*/label>
    <input type="email" class="form-control"
        id="Email"
        placeholder="Workshop@santa.chrismas"
        value="<?php if(isset($Email)){
            echo $Email;} ?>" name="Email">
</td>
<td>
    <label for="Birthday">Fødselsdag:*/label>
    <input type="date" class="form-control"
        id="Birthday" value="<?php
        if(isset($Birthday)){
            echo date("d.m.Y", $Birthday);
        } ?>" name="Birthday" title="dd.mm.yyyy">
</td>
</tr>
<tr>
    <td>
        <label for="Username">Brugernavn:*/label>
        <input type="text" placeholder="ImNotSanta"
            class="form-control" id="FullName"
            value="<?php
            if(isset($PreferredUsername))
            {
                echo $PreferredUsername;
            } ?>" name="Username">
    </td>
    <?php
    if($page == 'EditMyProfile'){?>
    <td>&nbsp;</td><td>&nbsp;</td>
    <?php }else{ ?>
    <td>
        <label for="Password">Kodeord:*/label>
        <input type="password" class="form-control"
            pattern=".{4,18}"
            title="4 til 18 karaktere"
            id="Password" placeholder="Kodeord"
            name="Password">
    </td>
    <td>
        <label for="CPassword">
            Bekræft Kodeord:
        </label>
        <input type="password" class="form-control"
            pattern=".{4,18}"
            title="4 til 18 karaktere" id="CPassword"
            placeholder="Gentag Kodeord"
            name="CPassword">
    </td>

```

```

        </td>
        <?php
        }
        ?>
    </tr>
    <tr>
    <td>
    <label for="Phone">Telefon:*</label>
    <input type="text" class="form-control"
        id="Phone" value="<?php if(isset($Phone)){
            echo $Phone;} ?>"
        placeholder="feks: 11223344"
        name="Phone">
    </td>
    <td>
    <label for="Address">Adresse:*</label>
    <input type="text"
        placeholder="feks Norpolen 42, 6.sal tv"
        class="form-control" id="FullName"
        value="<?php if(isset($Address)){
            echo $Address;} ?>"
        name="Address">
    </td>
    <td>
    <label for="Zipcode">Postnumber:*</label>
    <input type="text" list="DBZipcodes"
        placeholder="1337 Awesome city"
        class="form-control" id="Zipcode"
        value="<?php if(isset($Zipcode)){
            echo $Zipcode;} ?>" name="Zipcode">
    <!-- List of Zipcodes in Denmark -->
    <datalist id="DBZipcodes">
    <?php
    if($result = $db_conn->query(
        "SELECT * FROM ZipCodes"))
    {
        while($row = $result->fetch_assoc()){
            echo '<option value=', $row["Zipcode"], '>',
                $row["Zipcode"], ' ', $row["City"], '</option>';
        }
    }
    ?>
    </datalist>
    <!-- List of Zipcodes in Denmark End -->
    </td>
    </tr>
    <tr>
    <td colspan="3">
    <label for="Bio">Profil tekst:</label>

```

```

<textarea id="PublicTinyMCE"
          class="form-control awesomecomplete"
          rows="5" name="Bio">
    <?php if(isset($Bio)){echo $Bio;} ?>
</textarea>
</td>
</tr>
<tr>
<td>
<div class="form-inline">
<?php if($page != 'EditMyProfile'){ ?>
<label for="ToS">*Brugerbetinjelser:</label>
<input type="checkbox" class="form-control"
        id="ToS" value="1" name="ToS">&nbsp; |&nbsp;
<?php } ?>
<label for="ToS">Nyhedsbrev:</label>
<input type="checkbox" <?php
    if(isset($NewsLetter) && $NewsLetter == 1){
        echo 'checked';
    } ?> class="form-control"
        id="NewsLetter" value="1" name="NewsLetter">
</div>
</td>
<td>&nbsp;</td>
<td class="text-center">
<input type="submit" value="Send"
        class="btn btn-default" name="Send_form">
</td>
</tr>
<?php
if(isset($RegErrorMsg)){
echo '<tr><td><ul class="alert
alert-danger" role="alert">
<b>Feltkravene er ikke opfyldt:</b>';

foreach($RegErrorMsg as $i){
echo '<li>'. $i. '</li>';
}
echo '</li></ul></td></tr>';
}
unset($RegErrorMsg);
?>
</form>
</table>
</div>
</div>
</div>
</div>
<hr/>

```



```
</div>
</div>
<!-- Form end -->
<?php
}
?>
```

1.13 Include/oneall_hlpf/oneall_callback_handler.php

```
<?php
session_start();
require_once("oneall_calls.php");
require_once("../DBconn.php");

// Check if we have received a connection_token
if ( ! empty ( $_POST['connection_token'] ) )
{
    // Get connection_token
    $token = $_POST['connection_token'];

    // Your Site Settings
    $site_subdomain = 'hlpartyjoomla';
    $site_public_key = '6058925d-18e5-4c0e-b1ad-39da9dfddbff';
    $site_private_key = 'ffb6dca2-c350-4489-a8b1-f183405c9589';

    // API Access domain
    $site_domain = $site_subdomain.'.api.oneall.com';

    // Connection Endpoint
    /*http://docs.oneall.com/api/resources/connections/
    read-connection-details/*/
    $resource_uri = 'https://' . $site_domain . '/connections/
    ' . $token . '.json';

    // Setup connection
    $curl = curl_init();
    curl_setopt($curl, CURLOPT_URL, $resource_uri);
    curl_setopt($curl, CURLOPT_HEADER, 0);
    curl_setopt($curl, CURLOPT_USERPWD, $site_public_key . ":"
    . $site_private_key);
    curl_setopt($curl, CURLOPT_TIMEOUT, 15);
    curl_setopt($curl, CURLOPT_VERBOSE, 0);
    curl_setopt($curl, CURLOPT_RETURNTRANSFER, 1);
    curl_setopt($curl, CURLOPT_SSL_VERIFYPEER, 0);
    curl_setopt($curl, CURLOPT_FAILONERROR, 0);
    // Send request
    $result_json = curl_exec($curl);
```

```
// Error
if ($result_json === false)
{
    //You may want to implement your custom error handling here
    echo 'Curl error: ' . curl_error($curl). '<br />';
    echo 'Curl info: ' . curl_getinfo($curl). '<br />';
    curl_close($curl);
}
// Success
else
{
    // Close connection
    curl_close($curl);
    // Decode
    $json = json_decode ($result_json);
    // Extract data
    $data = $json->response->result->data;
    // Check for service
    switch ($data->plugin->key)
    {
        // Social Login
        case 'social_login':

            // Single Sign On
            case 'single_sign_on':

                // Operation successful
                if ($data->plugin->data->status == 'success')
                {
                    // The user_token uniquely identifies the user
                    // that has connected with his social network account
                    $user_token = $data->user->user_token;
                    // The identity_token uniquely identifies the social
                    // network account
                    // that the user has used to connect with
                    $identity_token = $data->user->identity->source->key;
                    // has connected with a social network account on your
                    // website
                    switch($identity_token){
                        // Battle.net
                        case "battlenet":
                            $user_id = get_user_id_for_user_token(
                                $user_token, 'BattlenetToken', $db_conn);
                            break;
                        // Facebook
                        case "facebook":
                            $user_id = get_user_id_for_user_token(
                                $user_token, 'FacebookToken', $db_conn);
                            break;
```

```

        // Steam
        case "steam":
            $user_id = get_user_id_for_user_token(
                $user_token, 'SteamToken', $db_conn);
            break;
        //Google
        case "google":
            $user_id = get_user_id_for_user_token(
                $user_token, 'GoogleToken', $db_conn);
            break;
        // Twitch TV
        case "twitch":
            $user_id = get_user_id_for_user_token(
                $user_token, 'TwitchToken', $db_conn);
            break;
    }

    if ($user_id == null)
    {
        switch($identity_token){
            // Battle.net
            case "battlenet":
                $_SESSION['SocialNetwork'] = 'battlenet';
                $_SESSION['UserToken'] = $user_token;
                $_SESSION['PreffereredUsername'] = $data->user->identity->preferredUsername;
                $_SESSION['BattleTag'] = $data->user->identity->accounts[0]->username;
                break;
            // Facebook
            case "facebook":
                $_SESSION['SocialNetwork'] = 'facebook';
                $_SESSION['UserToken'] = $user_token;
                $_SESSION['ProfileUrl'] = $data->user->identity->profileUrl;
                $_SESSION['FullName'] = $data->user->identity->name->formatted;
                $_SESSION['PreffereredUsername'] = $data->user->identity->preferredUsername;
                $_SESSION['Email'] = $data->user->identity->emails[0]->value;
                $_SESSION['PictureUrl'] = $data->user->identity->pictureUrl;
                break;
            // Steam
            case "steam":
                $_SESSION['SocialNetwork'] = 'steam';
                $_SESSION['UserToken'] = $user_token;
                $_SESSION['ProfileUrl'] = $data->user->identity->profileUrl;
                $_SESSION['PreffereredUsername'] = $data->user->identity->preferredUsername;
                $_SESSION['PictureUrl'] = $data->user->identity->pictureUrl;
                break;
            //Google
            case "google":
                $_SESSION['SocialNetwork'] = 'google';
                $_SESSION['UserToken'] = $user_token;
                $_SESSION['ProfileUrl'] = $data->user->identity->profileUrl;

```

```

$_SESSION['FullName'] = $data->user->identity->name->formatted;
$_SESSION['Email'] = $data->user->identity->emails[0]->value;
$propicture = explode('50', $data->user->identity->pictureUrl);
// calling larger picture than what we get from 'pictureUrl'^
$_SESSION['PictureUrl'] = $propicture[0]. '250';
        break;
        // Twitch TV
        case "twitch":
$_SESSION['SocialNetwork'] = 'twitch';
$_SESSION['UserToken'] = $user_token;
$_SESSION['ProfileUrl'] = $data->user->identity->profileUrl;
$_SESSION['PreffereredUsername'] = $data->user->identity->preferredUsername;
$_SESSION['Email'] = $data->user->identity->emails[0]->value;
$_SESSION['PictureUrl'] = $data->user->identity->pictureUrl;
        break;
    }
    header("Location: /Website-2017/index.php");
    /*echo "<pre>";
    print_r($data->user);
    echo "</pre>";*/
    }
    else // if user exxist.
    {
        $_SESSION['UserID'] = $user_id;
        if($Result = $db_conn ->query("
        Select Admin From Users
        Where UserID = '$user_id'"))
        {
            $row = $Result->fetch_assoc();
            $_SESSION['Admin'] = $row['Admin'];
        }

        $LastLogin = time();
        if($db_conn->query("
        UPDATE Users
        SET LastLogin = '$LastLogin'
        WHERE UserID = '$user_id'")){}

        header("Location: /Website-2017/index.php");
    }
    }
    break;
}
}
}
}
?>

```

1.14 Include/oneall_hlpf/oneall_calls.php

```
<?php
function get_user_id_for_user_token ($user_token,$tokencoll, $db_conn){
    // Return the user_id or null if none found.
    if($result = $db_conn->query("
    SELECT UserID FROM Users WHERE $tokencoll = '$user_token'"))
    {
        if($result -> num_rows){
            $row = $result->fetch_assoc();
            return $row['UserID'];
        }else {return null;}
    }
}
//echo get_user_id_for_user_token('45', $db_conn), '<br>';
// =====
function get_user_token_for_user_id ($user_id, $db_conn){
    // Return the user_token or null if none found.
    if($result = $db_conn->query("
    SELECT OneallUserToken FROM Users WHERE UserID = '$user_id'"))
    {
        if($result -> num_rows){
            $row = $result->fetch_assoc();
            return $row['OneallUserToken'];
        }else {return null;}
    }
}
//echo get_user_token_for_user_id('1',$db_conn), '<br/>';
// =====
function link_user_token_to_user_id ($user_token, $user_id,$db_conn){
    if($result = $db_conn->query("
    UPDATE Users SET OneallUserToken= '$user_token' WHERE UserID = '$user_id'"))
    {
        if(mysqli_affected_rows($db_conn) == 1){
            return true;
        }else {return false;}
    }
}
//echo link_user_token_to_user_id('48', '2', $db_conn);
?>
```

1.15 Include/Newsarchive/kgPager.php

```
<?PHP
/*
#####
#
#   KG Pager v2.0.1
#   Class Name   : KG Pager Class
#   Version      : 2.0.1
#   Requirement  : PHP4 >
#   Build Date   : December 17, 2007 - Monday
#   Developer    : Muharrem ER&#304;N (T K&#304;YE) - info@muharremerin.com -
muharremerin.com - mhrrmrnr.com - kisiselgunce.com
#   Licence      : GNU General Public License (c) 2007
#
#####
*/
// pager class
class kgPager {
    var $total_records = NULL;
    var $start = NULL;
    var $scroll_page = NULL;
    var $per_page = NULL;
    var $total_pages = NULL;
    var $current_page = NULL;
    var $page_links = NULL;
    var $next_page = NULL;
    var $last_page = NULL;
    // total pages and essential variables
    function total_pages ($pager_url, $total_records,
        $scroll_page, $per_page, $current_page)
    {
        $this -> url = $pager_url;
        $this -> total_records = $total_records;
        $this -> scroll_page = $scroll_page;
        $this -> per_page = $per_page;
        if (!is_numeric($current_page)) {
            $this -> current_page = 1;
        }else{
            $this -> current_page = $current_page;
        }
        if ($this -> current_page == 1) $this -> start = 0;
        else $this -> start = ($this -> current_page - 1) * $this -> per_page;
        $this -> total_pages = ceil($this -> total_records / $this -> per_page);
    }
    // page links
    function page_links ($inactive_page_tag, $pager_url_last) {
```

```

if ($this -> total_pages <= $this -> scroll_page) {
    if ($this -> total_records <= $this -> per_page) {
        $loop_start = 1;
        $loop_finish = $this -> total_pages;
    }else{
        $loop_start = 1;
        $loop_finish = $this -> total_pages;
    }
}
}
else{
    if($this -> current_page < intval($this -> scroll_page / 2) + 1) {
        $loop_start = 1;
        $loop_finish = $this -> scroll_page;
    }else{
        $loop_start = $this -> current_page - intval(
            $this -> scroll_page / 2);
        $loop_finish = $this -> current_page + intval(
            $this -> scroll_page / 2);
    }
    if ($loop_finish > $this -> total_pages) $loop_finish = $this -> total_pages;
}
}
for ($i = $loop_start; $i <= $loop_finish; $i++) {
    if ($i == $this -> current_page) {
        $this -> page_links .= '<a><b style="color:Black">'. $i. '
        </b></a>';
    }else{
        $this -> page_links .= '<a href="
        '. $this -> url. $i. $pager_url_last. '">'. $i. '</a>';
    }
}
}
}
// previous page
function previous_page ($previous_page_text, $pager_url_last) {
    if ($this -> current_page > 1) {
        $this -> previous_page = '<a href="
        '. $this -> url. ($this -> current_page - 1). $pager_url_last. '">
        '. $previous_page_text. '</a>';
    }
}
// next page
function next_page ($next_page_text, $pager_url_last) {
    if ($this -> current_page < $this -> total_pages) {
        $this -> next_page = '<a href="
        '. $this -> url. ($this -> current_page + 1). $pager_url_last. '">
        '. $next_page_text. '</a>';
    }
}
// first page
function first_page ($first_page_text, $pager_url_last) {
    if ($this -> current_page > 1) {

```

```
        $this -> first_page = '<a href="
        '.$this -> url.'1'.$pager_url_last.'">
        '.$first_page_text.'</a>'; // :)
    }
}
// last page
function last_page ($last_page_text, $pager_url_last) {
    if ($this -> current_page < $this -> total_pages) {
        $this -> last_page = '<a href="
        '.$this -> url.$this -> total_pages.$pager_url_last.'">
        '.$last_page_text.'</a>';
    }
}
// pages functions set
function pager_set ($pager_url, $total_records, $scroll_page, $per_page,
                    $current_page, $inactive_page_tag, $previous_page_text,
                    $next_page_text, $first_page_text, $last_page_text,
                    $pager_url_last)
{
    $this -> total_pages($pager_url, $total_records, $scroll_page, $per_page,
    $current_page);
    $this -> page_links($inactive_page_tag, $pager_url_last);
    $this -> previous_page($previous_page_text, $pager_url_last);
    $this -> next_page($next_page_text, $pager_url_last);
    $this -> first_page($first_page_text, $pager_url_last);
    $this -> last_page($last_page_text, $pager_url_last);
}
}
?>
```


1.16 Include/Newsarchive/News.php

```

<?php
    $news_sql = "SELECT News.Title, News.Content FROM News";
    $news_result = mysqli_query($db_conn, $news_sql)
or die (mysqli_error($db_conn));
    $total_records = mysqli_num_rows($news_result); // Total number of data
    $scroll_page = 5; // Number of pages to be scrolled
    $per_page = 5; // Number of pages to display each page

    if(isset($_GET['npage']))
    {
        $current_page = strip_tags($_GET['npage']); // Found page
    }
    else
    {
        $current_page = 1;
    }
    $pager_url = "index.php?page=$page&npage=";
// The address where the paging is done
    $inactive_page_tag = 'id="current_page"'; // Format for inactive page link
    $previous_page_text = '&nbsp;<&nbsp;  ';
// Previous page text (such as <img src = "...")
    $next_page_text = '>&nbsp;  '; // Next page text (such as <img src = "...")
    $first_page_text = '<<'; // First page text (such as <img src = "...")
    $last_page_text = '>>'; // Last page text (such as <img src = "...")
    $pager_url_last = ' ';

    include("Include/Newsarchive/kgPager.php");
    $kgPagerOBJ = new kgPager();
    $kgPagerOBJ -> pager_set($pager_url , $total_records , $scroll_page ,
        $per_page , $current_page , $inactive_page_tag ,
        $previous_page_text , $next_page_text ,
        $first_page_text , $last_page_text ,
        $pager_url_last);

    $albums_result = mysqli_query($db_conn,$news_sql."
ORDER BY CreatedDate DESC LIMIT ".$kgPagerOBJ -> start.",
".$kgPagerOBJ -> per_page."");
?>

<div class="col-lg-12 hlpf_newsborder">
<?php
    while ($news_row = mysqli_fetch_assoc($albums_result))
    {
?>

        <div>

            <?php echo '<h2>'.$news_row['Title'].' </h2>'; ?>
            <?php echo '<p>'.$news_row['Content'].' </p>'; ?>

```

```
<hr style="clear:both;"/>
</div>
<?php } ?>
<div class="text-center">
<?php
    echo '<ul class="pagination pagination-lg">';

    if($current_page > 1) {
        echo '<li>'. $kgPagerOBJ -> first_page. '</li>' ;
        echo '<li>'. $kgPagerOBJ -> previous_page. '</li>' ;
    } else {
        echo '<li class="disabled"><a><<</a></li>';
        echo '<li class="disabled"><a><</a></li>';
    }
    echo '<li>'. $kgPagerOBJ -> page_links. '</li>' ;
    if($current_page >= $kgPagerOBJ -> total_pages) {
        echo '<li class="disabled"><a>>>/a></li>';
        echo '<li class="disabled"><a>>>/a></li>';
    } else {
        echo '<li>'. $kgPagerOBJ -> next_page. '</li>' ;
        echo '<li>'. $kgPagerOBJ -> last_page. '</li>' ;
    }
    ?>
</div>
</div>
```

1.17 Include/Event/Event.php

```
<?php
$result = $db_conn->query(
    /* This should be used when website is done. NOT UPDATED YET.
    "SELECT e.Title, e.Poster, e.StartDate, e.EndDate, e.Location, e.Network,
    e.SeatsOpen, e.Seatmap, e.Rules, tp.EndTime, tp.Price FROM Event as e
    INNER JOIN TicketPrices as tp ON e.EventID = tp.EventID
    ORDER BY StartDate DESC LIMIT 0, 1"*/

    "SELECT e.Title, e.Poster, e.StartDate,
        e.EndDate, e.Location, e.Network,
        e.SeatsOpen, e.Seatmap, e.Rules,
        tp.StartTime, tp.EndTime, tp.Price
    FROM Event as e
    INNER JOIN TicketPrices as tp
        ON e.EventID = tp.EventID
    WHERE e.EventID = 2 AND tp.Type = 'Member'
    ORDER BY
        tp.EndTime ASC LIMIT 0, 1" // Use this while project is being tested.
);
if( $result -> num_rows ) {
    $row = $result->fetch_assoc();
}
$result2 = $db_conn->query(
    /* This should be used when website is done. NOT UPDATED YET.
    "SELECT e.Title, e.Poster, e.StartDate, e.EndDate, e.Location, e.Network,
    e.SeatsOpen, e.Seatmap, e.Rules, tp.EndTime, tp.Price FROM Event as e
    INNER JOIN TicketPrices as tp ON e.EventID = tp.EventID
    ORDER BY StartDate DESC LIMIT 0, 1"*/

    "SELECT e.Title, e.Poster, e.StartDate,
        e.EndDate, e.Location, e.Network,
        e.SeatsOpen, e.Seatmap, e.Rules,
        tp.StartTime, tp.EndTime, tp.Price
    FROM Event as e
    INNER JOIN TicketPrices as tp
        ON e.EventID = tp.EventID
    WHERE e.EventID = 2 AND tp.Type = 'Nonmember'
    ORDER BY
        tp.StartTime ASC LIMIT 0, 1" // Use this while project is being tested.
);
if( $result2 -> num_rows ) {
    $row2 = $result2->fetch_assoc();
}
$result3 = $db_conn->query(
    /* This should be used when website is done. NOT UPDATED YET.
```

```

"SELECT e.Title, e.Poster, e.StartDate, e.EndDate, e.Location, e.Network,
e.SeatsOpen, e.Seatmap, e.Rules, tp.EndTime, tp.Price FROM Event as e
INNER JOIN TicketPrices as tp ON e.EventID = tp.EventID
ORDER BY StartDate DESC LIMIT 0, 1"*/

"SELECT e.Title, e.Poster, e.StartDate,
        e.EndDate, e.Location, e.Network,
        e.SeatsOpen, e.Seatmap, e.Rules,
        tp.StartTime, tp.EndTime, tp.Price
FROM Event as e
INNER JOIN TicketPrices as tp
    ON e.EventID = tp.EventID
WHERE e.EventID = 2 AND tp.Type = 'Member'
ORDER BY
    tp.EndTime DESC LIMIT 0, 1" // Use this while project is being tested.
);
if( $result3 -> num_rows ) {
    $row3 = $result3->fetch_assoc();
}
$result4 = $db_conn->query(
    /* This should be used when website is done. NOT UPDATED YET.
    "SELECT e.Title, e.Poster, e.StartDate, e.EndDate, e.Location, e.Network,
e.SeatsOpen, e.Seatmap, e.Rules, tp.EndTime, tp.Price FROM Event as e
INNER JOIN TicketPrices as tp ON e.EventID = tp.EventID
ORDER BY StartDate DESC LIMIT 0, 1"*/

"SELECT e.Title, e.Poster, e.StartDate,
        e.EndDate, e.Location, e.Network,
        e.SeatsOpen, e.Seatmap, e.Rules,
        tp.StartTime, tp.EndTime, tp.Price
FROM Event as e
INNER JOIN TicketPrices as tp
    ON e.EventID = tp.EventID
WHERE e.EventID = 2 AND tp.Type = 'Nonmember'
ORDER BY
    tp.EndTime DESC LIMIT 0, 1" // Use this while project is being tested.
);
if( $result4 -> num_rows ) {
    $row4 = $result4->fetch_assoc();
}
$result5 = $db_conn->query(
    /* This should be used when website is done. NOT UPDATED YET.
    "SELECT e.Title, e.Poster, e.StartDate, e.EndDate, e.Location, e.Network,
e.SeatsOpen, e.Seatmap, e.Rules, tp.EndTime, tp.PriceFROM Event as e
INNER JOIN TicketPrices as tp ON e.EventID = tp.EventID
ORDER BY StartDate DESC LIMIT 0, 1"*/

"SELECT tp.StartTime, tp.EndTime, tp.Price

```

```

        FROM Event as e
        INNER JOIN TicketPrices as tp
            ON e.EventID = tp.EventID
        WHERE e.EventID = 2 AND tp.Type = 'Supplement'
        ORDER BY
            tp.StartTime ASC LIMIT 0, 1" // Use this while project is being tested.
    );
    if( $result5 -> num_rows ) {
        $row5 = $result5->fetch_assoc();
    }
?>

<div class="col-lg-12 hlpf_newsborder"> <!-- Ret class til-->
    <div class="col-lg-6 row">
        <div class="row col-lg-12">
            <p><h2>Information</h2></p>
        </div>
        <!-- Tid og sted -->
        <div class="row col-lg-12">
            <p><h4>Tid og sted</h4></p>
        </div>
        <table class="table table-striped">
            <tr>
                <td width="40%">Navn</td>
                <td><?php echo $row['Title'] ?></td>
            </tr>
            <tr>
                <td width="40%">Dato</td>
                <td>
                    <?php echo date("d", $row['StartDate']) ?> -
                    <?php echo date("d M Y", $row['EndDate']) ?>
                </td>
            </tr>
            <tr>
                <td width="40%">Start</td>
                <td><?php echo date("d M Y - H:i:s", $row['StartDate']) ?></td>
            </tr>
            <tr>
                <td width="40%">Slut</td>
                <td><?php echo date("d M Y - H:i:s", $row['EndDate']) ?></td>
            </tr>
            <tr>
                <td width="10%">Adresse</td>
                <td><?php echo $row['Location'] ?></td>
            </tr>
        </table>
        <!-- Pladser-->
        <div class="row col-lg-12">
            <p><h4>Pladser</h4></p>

```

```

        </div>
<table class="table table-striped">
<tr>
    <td width="40%">Pladser</td>
    <td>
        <?php if ($row['Seatmap'] == null || $row['Seatmap'] == "") { ?>
            Ingen information tilgængelig.
        <?php }else{
            echo $row['Seatmap'];
        } ?>
    </td>
</tr>
</table>

<!-- Tilmelding og priser -->
<div class="row col-lg-12">
    <p><h4>Tilmelding og priser</h4></p>
</div>
<table class="table table-striped">
<tr>
    <td width="70%">Tilmelding for medlemmer før prisstigning:</td>
    <td></td>
</tr>
<tr>
    <td width="40%">
        <?php echo date("d M Y - H:i:s", $row['StartTime']) ?>
    </td>
    <td>Pris: <?php echo $row['Price'] ?></td>
</tr>
<tr>
    <td width="70%">Tilmelding for alle før prisstigning:</td>
    <td></td>
</tr>
<tr>
    <td width="40%">
        <?php echo date("d M Y - H:i:s", $row2['StartTime']) ?>
    </td>
    <td>Pris: <?php echo $row2['Price'] ?></td>
</tr>
<tr>
    <td width="70%">Tilmelding for medlemmer efter prisstigning:</td>
    <td></td>
</tr>
<tr>
    <td width="40%">
        <?php echo date("d M Y - H:i:s", $row3['StartTime']) ?>
    </td>
    <td>Pris: <?php echo $row3['Price'] ?></td>
</tr>
</table>

```

```

        <td width="70%">Tilmelding for alle efter prisstigning:</td>
    </td></td>
</tr>
<tr>
    <td width="40%">
        <?php echo date("d M Y - H:i:s", $row4['StartTime']) ?>
    </td>
    <td>Pris: <?php echo $row4['Price'] ?></td>
</tr>
<tr>
    <td width="70%">Senest tilmelding for medlemmer:</td>
    <td></td>
</tr>
<tr>
    <td width="70%">
        <?php echo date("d M Y - H:i:s", $row3['EndTime']) ?></td>
    <td></td>
</tr>
<tr>
    <td width="70%">Senest tilmelding for alle:</td>
    <td></td>
</tr>
<tr>
    <td width="70%">
        <?php echo date("d M Y - H:i:s", $row4['EndTime']) ?></td>
    <td></td>
</tr>
</table>
<!-- Netværk -->
<div class="row col-lg-12">
    <p><h4>Netværk:</h4></p>
</div>
<table class="table table-striped">
<tr>
    <td width="40%">Lokalt netværk:</td>
    <td><?php echo $row['Network'] ?></td>
</tr>
<tr>
    <td width="40%">Internet:</td>
    <td>100 Mbit / 100 Mbit</td>
</tr>
</table>
<!-- Faciliteter -->
<!--
<div class="row col-lg-12">
    <p><h4>Faciliteter:</h4></p>
</div>
<div class="row col-lg-4">
    <p>Soverum:</p>

```

```

    </div>
    <div class="row col-lg-8">
        <p>On the way ...<?php //echo $row['Location'] ?></p>
    </div>
    <div class="row col-lg-4">
        <p>Bad:</p>
    </div>
    <div class="row col-lg-8">
        <p>On the way ...<?php //echo $row['Location'] ?></p>
    </div>
    <div class="row col-lg-4">
        <p>Kiosk:</p>
    </div>
    <div class="row col-lg-8">
        <p>On the way ...<?php //echo $row['Location'] ?></p>
    </div>
    -->
    <!-- Regler -->
    <div class="row col-lg-12">
        <p><h4>Regler:</h4></p>
    </div>
    <!--
    <div class="row col-lg-4">
        <p>Rygning tilladt:</p>
    </div>
    <div class="row col-lg-8">
        <p>On the way ...<?php //echo $row['Location'] ?></p>
    </div>
    <div class="row col-lg-4">
        <p>Alkohol tilladt:</p>
    </div>
    <div class="row col-lg-8">
        <p>On the way ...<?php //echo $row['Location'] ?></p>
    </div>
    -->
    <table class="table table-striped">
        <tr>
            <td width="40%">Se regelset:</td>
            <td><?php echo $row['Rules'] ?></td>
        </tr>
    </table>

    <!-- Arrangør -->
    <div class="row col-lg-12">
        <p><h4>Arrangør:</h4></p>
    </div>
    <div class="row col-lg-12">
        <p>

```

HLParty arrangeres af foreningen Hovedstadens LanParty Forening.

Foreningen er en folkeoplysende forening, godkendt i Hillerød kommune. Foreningens formål er (uddrag af vedtægter):

"Foreningens formål er at samle unge mennesker, primært i hovedstadsområdet, med interesse for computere og IT, for derved at medvirke til at styrke medlemmernes sociale kompetencer, skabe kontakt på tværs af kommunegrænser, etnicitet, køn og alder og styrke medlemmernes almennyttige IT kundskaber til glæde for den enkelte, såvel som for samfundet."

Overskud fra et arrangement går til drift af foreningen (f.eks. webhotel, vedligeholdelse og nyinkøb af servere, switche, netværkskabler mv.), samt til at sikre fremtidige arrangementer.

</p>

</div>

<div class="row col-lg-12">

<p>Læs mere om foreningen bag HLPparty på adressen

https://hlpf.dk.

</p>

</div>

</div>

<div class="col-lg-6 row">

<div class="row col-lg-12">

<?php if (\$row['Poster'] == null || \$row['Poster'] == "") {

echo '';

}else{

echo '
<div class="row">
 <div id="admin_menu" class="col-lg-12 col-sm-12 hlpf_newsborder
 hlpf_adminmenu">

 <ul class="list-group">
 <?php
 $result = $db_conn->query("SELECT
 (SELECT COUNT(*) FROM Users) as Users,
 (SELECT COUNT(*) FROM News) as News,
 (SELECT COUNT(*) FROM Pages) as Pages,
 (SELECT COUNT(*) FROM NewsLetter) as NewsLetter,
 (SELECT COUNT(*) FROM Event) as Event,
 (SELECT COUNT(*) FROM Sponsors) as Sponsors,
 (SELECT COUNT(*) FROM Competitions) as Competitions
 ");
 if($result -> num_rows) {
 $row = $result->fetch_assoc();
 }
 ?>

 <li class="<?php if($subpage == "Users") echo "active "; ?>
 list-group-item col-lg-2 col-xs-6 col-md col-xl-2 col-sm-4">
 <?php echo $row['Users']?>
 Brugere

 <li class="<?php if($subpage == "News") echo "active "; ?>
 list-group-item col-lg-2 col-xs-6 col-md col-xl-2 col-sm-4">
 <?php echo $row['News']?>
 Nyheder

 <li class="<?php if($subpage == "Pages") echo "active "; ?>
 list-group-item col-lg-2 col-xs-6 col-md col-xl-2 col-sm-4">
 <?php echo $row['Pages']?>
 Side Redigering

 <li class="<?php if($subpage == "NewsLetters") echo "active ";
 ?>list-group-item col-lg-2 col-xs-6 col-md col-xl-2 col-sm-4">
 <?php echo $row['NewsLetter']?>
 Nyheds Breve

```

```


 <li class="<?php if($subpage == "Events") echo "active "; ?>
 list-group-item col-lg-2 col-xs-6 col-md col-xl-2 col-sm-4">
 <?php echo $row['Event']?>
 Arrangementer

 <li class="<?php if($subpage == "Sponsors") echo "active "; ?>
 list-group-item col-lg-2 col-xs-6 col-md col-xl-2 col-sm-4">
 <?php echo $row['Sponsors']?>
 Sponsore

 <li class="<?php if($subpage == "Competitions") echo "active ";
 ?>list-group-item col-lg-2 col-xs-6 col-md col-xl-2 col-sm-4">
 <?php echo $row['Competitions']?>
 Konkurrencer

</div>
<div class="col-lg-12 col-sm-12 hlpf_newsborder">
<div id="admin_panel" class="table-responsive">
 <!-- Load pages here... -->
 <?php
 if($subpage != ''){
 include("Include/Admin/" . $subpage . ".php");
 }else{
 echo "<h3 class='text-center'>Velkommen til administrationen, Sir.
 Admin</h3>";
 }
 ?>
</div>
</div>
</div>
<?php $result -> close(); ?>

```

## 1.19 Include/Admin/Users.php

```

<?php
if($action != ''){
 if(isset($_GET['id']) && $_GET['id'] != ''){
 $URLPageID = $db_conn->real_escape_string($_GET['id']);
 } // get id end
 switch($action){
 case 'NonAdmin':
 $db_conn->query("Update Users SET Admin = '0'
 Where UserID = '$URLPageID' ");
 header("Location: index.php?page=Admin&subpage=Users");
 break;
 case 'SetAdmin':
 $db_conn->query("Update Users SET Admin = '1'
 Where UserID = '$URLPageID' ");
 header("Location: index.php?page=Admin&subpage=Users");
 break;
 } // switch end
} // Action end

// create the List over pages
$result = $db_conn->query(" SELECT Users.UserID, Users.Username,
Users.FullName, Users.Created, Users.LastLogin, Users.Email,
Users.Admin, Users.Phone FROM Users");
?>
<table class="table table-striped table-condensed
 table-hover hlpf_adminmenu">
 <thead>
 <tr>
 <th class="text-center">ID</th>
 <th class="text-center">Username</th>
 <th class="text-center">Fulde navn</th>
 <th class="text-center">Opretted</th>
 <th class="text-center">Seneste Login</th>
 <th class="text-center">E-mail</th>
 <th class="text-center">Telefon</th>
 <th class="text-center">Admin</th>
 </tr>
 </thead>
 <tbody>
 <?php while ($row = $result->fetch_assoc()) { ?>
 <tr>
 <td class="text-center"><?php echo $row['UserID'] ?></td>
 <td class="text-center"><?php echo $row['Username'] ?></td>
 <td class="text-center"><?php echo $row['FullName']; ?></td>
 <td class="text-center">

```

```
<?php echo date("d M Y", $row['Created']); ?>
</td>
<td class="text-center">
 <?php echo date("d M Y", $row['LastLogin']); ?>
</td>
<td class="text-center"><?php echo $row['Email']; ?></td>
<td class="text-center"><?php echo $row['Phone']; ?></td>
<td class="text-center"><?php
 if($row['Admin'] == '1') {
 echo '<a href="?page=Admin&subpage=Users&action=NonAdmin&id=
 '.$row['UserID'].'" alt="Fjern admin" type="button"
 class="btn btn-success">Admin';
 } else {
 echo '<a href="?page=Admin&subpage=Users&action=SetAdmin&id=
 '.$row['UserID'].'" alt="Set som admin" type="button"
 class="btn btn-danger">Bruger';
 } ?>
</td>
</tr>
<?php } ?>
</tbody>
</table>
```

## 1.20 Include/Admin/Sponsors.php

```

<?php
if($action != ''){
 if(isset($_GET['id']) && $_GET['id'] != ''){
 $URLID = $db_conn->real_escape_string($_GET['id']);
 }// get id end

 function Sorter($Opreator,$DBCON,$ID){
 // Find Curren Sort int
 $CurrentResult = $DBCON->query("SELECT SponsorID, Sort FROM Sponsors
 WHERE SponsorID = '$ID'");
 if($CurrentRow = $CurrentResult->fetch_assoc()){
 $CurrentSposID = $CurrentRow['SponsorID']; // current Sort ID
 $CurrentSort = $CurrentRow['Sort'];
 }
 // Find Swap Sort
 if($Opreator == '+'){
 $FindNext = $CurrentSort +1;
 }else{
 $FindNext = $CurrentSort -1;
 }

 $SwapResult = $DBCON->query("SELECT SponsorID, Sort FROM Sponsors
 WHERE Sort = '$FindNext'");
 if($SwapRow = $SwapResult->fetch_assoc()){
 $SwapSposID = $SwapRow['SponsorID']; // current Sort ID
 $SwapSort = $SwapRow['Sort'];
 }
 // Update the sort ints
 $DBCON->query("Update Sponsors SET Sort = '$SwapSort' Where SponsorID
 = '$CurrentSposID' ");
 $DBCON->query("Update Sponsors SET Sort = '$CurrentSort'
 Where SponsorID = '$SwapSposID' ");
 return true;
 }// sponsor sort function end

 switch($action){
 case 'Offline': // set sponsor to be offline
 $db_conn->query("Update Sponsors SET Online = '0'
 Where SponsorID = '$URLID' ");
 header("Location: index.php?page=Admin&subpage=Sponsors");
 break;
 case 'Online': // set sponsor to be online
 $db_conn->query("Update Sponsors SET Online = '1'
 Where SponsorID = '$URLID' ");
 header("Location: index.php?page=Admin&subpage=Sponsors");
 }
}

```

```

 break;
 case 'NotMainSponsor': // Sponsor is not mainsponsor
 $db_conn->query("Update Sponsors SET MainSponsor = '0'
 Where SponsorID = '$URLID' ");
 header("Location: index.php?page=Admin&subpage=Sponsors");
 break;
 case 'MainSponsor': // Sponsor is mainsponsor
 $db_conn->query("Update Sponsors SET MainSponsor = '1'
 Where SponsorID = '$URLID' ");
 header("Location: index.php?page=Admin&subpage=Sponsors");
 break;

 case 'Up': // Give sponsor Higher Listing
 Sorter('-', $db_conn, $URLID);
 header("Location: index.php?page=Admin&subpage=Sponsors");
 break;

 case 'Down': // Give sponsor Lower Listing
 Sorter('+', $db_conn, $URLID);
 header("Location: index.php?page=Admin&subpage=Sponsors");
 break;
 case 'Edit':
 $NewOrEditSponsor = true;
 break;
 case 'New':
 $NewOrEditSponsor = true;
 break;
} // switch end
} // Action end
if(isset($NewOrEditSponsor) && $NewOrEditSponsor != false){
 include_once("Include/Admin/NewOrEditSponsor.php");
}else{
 $result = $db_conn->query("Select * from Sponsors ORDER BY Sort ASC");
 $NumRows = $result->num_rows;
 ?>
 <a href="?page=Admin&subpage=Sponsors&action=New"
 alt="Ny Side" type="button" class="text-center btn btn-info">
 Opret Ny Sponsor

 <hr>
 <table class="table table-striped
 table-condensed table-hover hlpf_adminmenu">

 <thead>
 <tr>
 <th width="15%" class="text-center">Image</th>
 <th class="text-center">ID</th>
 <th class="text-center">Navn</th>
 <th class="text-center">Link</th>
 <th class="text-center">Hoved Sponsor</th>

```

```

<th class="text-center">Online</th>
<th class="text-center">Sort</th>
<th class="text-center">Rediger</th>
</tr>
</thead>
<tbody>
<?php
$Counter = 0;
while ($row = $result->fetch_assoc()) { /* Create List of Sponsors */
$Counter++;
?>
<tr>
<td class="text-center">
<?php
echo '';
?>
</td>
<td class="text-center"><?php echo $row['SponsorID']; ?></td>
<td class="text-center"><?php echo $row['Name']; ?></td>
<td class="text-center">
<?php echo '' . $row['Url'] . ''; ?>
</td>
<td class="text-center">
<?php
if($row['MainSponsor'] == '1'){ // Is Sponsor Main sponsor or not
echo '<a href="?page=Admin&subpage=Sponsors&
action=NotMainSponsor&id=
' . $row['SponsorID'] . '" alt="Set Normal Sponsor"
type="button" class="btn btn-success">Ja';
}else{
echo '<a href="?page=Admin&subpage=Sponsors
&action=MainSponsor&id=' . $row['SponsorID'] . '"
alt="Set Main Sponsor" type="button"
class="btn btn-danger">Nej';
}
?>
</td>
<td class="text-center">
<?php // IS the Sponsor onlinen? Button
if($row['Online'] == '1'){
echo '<a href="?page=Admin&subpage=Sponsors&action=Offline&id=
' . $row['SponsorID'] . '" alt="Set Offline" type="button"
class="btn btn-success">Online';
}else{
echo '<a href="?page=Admin&subpage=Sponsors&action=Online&id=
' . $row['SponsorID'] . '" alt="Set Online" type="button"
class="btn btn-danger">Offline';
}
}

```



```
?>
</td>
<td class="text-center">
 <?php // Sort Up/Down buttons
 if($Counter != 1){
 echo '<a href="?page=Admin&subpage=Sponsors&action=Up&id=
 '.$row['SponsorID'].'"' class="btn btn-success">⇑ ';
 }
 if($Counter != $NumRows){
 echo '<a href="?page=Admin&subpage=Sponsors&action=Down&id=
 '.$row['SponsorID'].'"' class="btn btn-danger">⇓';
 }

 ?>
</td>
<td class="text-center">
 <?php // Edit Button
 echo '<a href="?page=Admin&subpage=Sponsors&action=Edit&id=
 '.$row['SponsorID'].'"' alt="Rediger Sponsor" type="button"
 class="btn btn-warning">Rediger';
 ?>
</td>
</tr>
<?php } ?>
</tbody>
</table>
<?php
}
?>
```

## 1.21 Include/Admin/NewOrEditSponsor.php

```

<?php
if(isset($_GET['id'])){
 $tempID = $db_conn->real_escape_string($_GET['id']);
 if($result = $db_conn->query("Select * From Sponsors
 Where SponsorID = '$tempID'")){
 $row = $result->fetch_assoc();
 if($row['MainSponsor'] == '1'){ $MainSponsor = true;}
 if($row['Online'] == '1'){ $Online = true;}
 $SponsorExist = true;
 }
}

if(isset($_POST['Save'])){
 $Title = $db_conn->real_escape_string($_POST['Title']);
 $Context = $db_conn->real_escape_string($_POST['AdminTinyMCE']);
 if(isset($_POST['MainSponsor'])) {
 $MainSponsor = $db_conn->real_escape_string($_POST['MainSponsor']);
 }else{ $MainSponsor = 0;}

 if(isset($_POST['Online'])){
 $Online = $db_conn->real_escape_string($_POST['Online']);
 }else{ $Online = 0;}
 $URL = $db_conn->real_escape_string($_POST['URL']);
 $Page = $db_conn->real_escape_string($_POST['Page']);

 if($action == 'Edit'){
 if(isset($_POST['Banner'])){
 $Banner = $db_conn->real_escape_string($_POST['Banner']);
 }else{
 $Banner = $row['Banner'];
 }
 }else{
 if(isset($_POST['Banner'])){
 $Banner = $db_conn->real_escape_string($_POST['Banner']);
 }else{
 $Banner = 'NoBanner.png';
 }
 }
}

if($action == 'Edit'){
 // edit Query
 /* Do stuff with upload banner */
 if($db_conn->query("UPDATE Sponsors
SET Name = '$Title', Description = '$Context', Url = '$URL',
Online = '$Online', MainSponsor = '$MainSponsor', Banner = '$Banner'

```

```
WHERE SponsorID = '$tempID'))){
 header("Location: index.php?page=Admin&subpage=Sponsors");
}
}else{
 // Create Query
 /* Do stuff with upload banner */
 $LastSortresult = $db_conn->query("SELECT Sort FROM Sponsors
 ORDER BY Sort DESC LIMIT 1");
 $LastSortRow = $LastSortresult->fetch_assoc();
 $LastSortID = $LastSortRow['Sort'];
 $LastSortID ++;
 if($db_conn->query("INSERT INTO Sponsors
 (Name, Description, Url, Online, MainSponsor, Banner, Sort)
 VALUES
 ('$Title', '$Context', '$URL', '$Online', '$MainSponsor', '$Banner',
 '$LastSortID')")){
 header("Location: index.php?page=Admin&subpage=Sponsors");
 }
}
}
?>

<table class="table hlpf_adminmenu">
 <form method="post" action="" enctype="multipart/form-data">
 <tr>
 <td>
 <label for="Title">Title:</label>
 <input required type="text" name="Title" id="Title"
 value="<?php if(isset($SponsorExist)){echo $row['Name'];} ?>"
 maxLength="50"/>
 </td>
 <td>
 <label for="Admin">Hovedsponsor Side:</label>
 <input <?php if(isset($MainSponsor)){echo 'checked';} ?>
 type="checkbox" name="MainSponsor" id="MainSponsor"
 value="1"/> &~
 <label for="Online">Online:</label>
 <input <?php if(isset($Online)){echo 'checked';} ?> type="checkbox"
 name="Online" id="Online" value="1"/>
 </td>
 <td>
 <label for="URL">Link: </label>
 <input type="text" required name="URL" size="40" id="URL"
 value="<?php if(isset($SponsorExist)){echo $row['Ur1'];} ?>"
 </td>
 </tr>
 <tr>
 <td>
 <label for="Banner">Banner: </label>
 <input type="file" name="Banner" id="Banner" value="">
 </td>
 </tr>
 </form>
</table>
```

```
</td>
<td colspan="2">
 <?php if($action == 'Edit'){
 ?>

 <?php
 }
 ?>
</td>
</tr>
<tr>
 <td colspan="3">
 <textarea rows="25" id="AdminTinyMCE" name="AdminTinyMCE">
 <?php if(isset($SponsorExist)){echo $row['Description'];} ?>
 </textarea>
 </td>
</tr>
<tr>
 <td colspan="3" class="text-center">
 <input class="btn btn-default" type="submit"
 value="Gem" name="Save" />
 </td>
</tr>
</form>
</table>
```

## 1.22 Include/Admin/Pages.php

```

<?php
// get the username by ID
function TorGetUserName($TempUserID, $DBCONN){
 $Func_result = $DBCONN->query("Select Username from Users
 Where UserID = '$TempUserID'");
 $Func_row = $Func_result->fetch_assoc();
 return $Func_row['Username'];
}
if($action != ''){
 if(isset($_GET['id']) && $_GET['id'] != ''){
 $URLPageID = $db_conn->real_escape_string($_GET['id']);
 }// get id end
 switch($action){
 case 'Offline':
 $db_conn->query("Update Pages SET Online = '0'
 Where PageID = '$URLPageID' ");
 header("Location: index.php?page=Admin&subpage=Pages");
 break;
 case 'Online':
 $db_conn->query("Update Pages SET Online = '1'
 Where PageID = '$URLPageID' ");
 header("Location: index.php?page=Admin&subpage=Pages");
 break;
 case 'Forall':
 $db_conn->query("Update Pages SET AdminOnly = '0'
 Where PageID = '$URLPageID' ");
 header("Location: index.php?page=Admin&subpage=Pages");
 break;
 case 'Foradmin':
 $db_conn->query("Update Pages SET AdminOnly = '1'
 Where PageID = '$URLPageID' ");
 header("Location: index.php?page=Admin&subpage=Pages");
 break;
 case 'New':
 $NewOrEditPage = true;
 break;
 case 'Edit':
 $NewOrEditPage = true;
 break;
 }// switch end
} // Action end

if(isset($NewOrEditPage) && $NewOrEditPage != false){
 include_once("Include/Admin/NewOrEditPage.php");
}else{

```

```
// create the Lsit over pages
$result = $db_conn->query("Select * from Pages ORDER BY AdminOnly ASC,
 Online DESC, PageTitle ASC");

?>
<a href="?page=Admin&subpage=Pages&action=New" alt="Ny Side"
 type="button" class="text-center btn btn-info">Opret Ny Side
<hr>
<table class="table table-striped table-condensed table-hover hlpf_adminmenu">
 <thead>
 <tr>
 <th class="text-center">ID</th>
 <th class="text-center">Title</th>
 <th class="text-center">Forfatter</th>
 <th class="text-center">Opretted</th>
 <th class="text-center">Seneste Editor</th>
 <th class="text-center">Seneste ændring</th>
 <th class="text-center">Online</th>
 <th class="text-center">Aministration</th>
 <th class="text-center">Rediger</th>
 </tr>
 </thead>
 <tbody>
 <?php while ($row = $result->fetch_assoc()) { ?>
 <tr>
 <td class="text-center"><?php echo $row['PageID'] ?></td>
 <td class="text-center"><?php echo $row['PageTitle'] ?></td>
 <td class="text-center">
 <?php echo TorGetUserName($row['AuthorID'], $db_conn); ?>
 </td>
 <td class="text-center">
 <?php echo date('d.m.Y',$row['CreatedDate']); ?>
 </td>
 <td class="text-center">
 <?php echo TorGetUserName($row['LastEditedID'], $db_conn); ?>
 </td>
 <td class="text-center">
 <?php echo date('d.m.Y',$row['LastEditedDate']); ?>
 </td>
 <td class="text-center"><?php
 if($row['Online'] == '1'){
 echo '<a href="?page=Admin&subpage=Pages&action=Offline&id=
 '.$row['PageID'].' " alt="Set Offline" type="button"
 class="btn btn-success">Online';
 }else{
 echo '<a href="?page=Admin&subpage=Pages&action=Online&id=
 '.$row['PageID'].' " alt="Set Online" type="button"
 class="btn btn-danger">Offline';
 }
 <?php
 </td>
 </tr>
 <?php
 </tbody>
</table>
```

```
<td class="text-center"><?php if($row['AdminOnly'] == '1'){
 echo '<a href="?page=Admin&subpage=Pages&action=Forall&id=
 '.$row['PageID'].'"' alt="For Alle" type="button"
 class="btn btn-success">Ja';
} else{
 echo '<a href="?page=Admin&subpage=Pages&action=Foradmin&id=
 '.$row['PageID'].'"' alt="For Admin" type="button"
 class="btn btn-danger">Nej';
} ?>
</td>
<td class="text-center">
 <?php
 echo '<a href="?page=Admin&subpage=Pages&action=Edit&id=
 '.$row['PageID'].'"' alt="Rediger Side" type="button"
 class="btn btn-warning">Rediger';
 ?>
</td>
</tr>
<?php } ?>
</tbody>
</table>
<?php
}
?>
```

## 1.23 Include/Admin/NewOrEditPage.php

```

<?php
if(isset($_GET['id'])){
 $tempID = $db_conn->real_escape_string($_GET['id']);

 if($result = $db_conn->query("Select * From Pages
 Where PageID = '$tempID'"))
 {
 $row = $result->fetch_assoc();
 if($row['AdminOnly'] == '1'){ $adminOnly = true;}
 if($row['Online'] == '1'){ $Online = true;}
 $pageExist = true;
 }
}

if(isset($_POST['Save'])){
 $Title = $db_conn->real_escape_string($_POST['Title']);
 if(isset($_POST['Admin'])){
 $Admin = $db_conn->real_escape_string($_POST['Admin']);
 }else{ $Admin = 0;}
 if(isset($_POST['Online'])){
 $Online = $db_conn->real_escape_string($_POST['Online']);
 }else{ $Online = 0;}
 $Context = $db_conn->real_escape_string($_POST['AdminTinyMCE']);
 $Time = time();
 $user = $_SESSION['UserID'];
 if($action == 'Edit'){
 // edit Query
 if($db_conn->query("UPDATE Pages SET LastEditedID = '$user',
 LastEditedDate = '$Time', Content = '$Context', PageTitle = '$Title',
 Online = '$Online', AdminOnly = '$Admin' WHERE PageID = '$tempID'"))
 {
 header("Location: index.php?page=Admin&subpage=Pages");
 }
 }else{
 // Create Query
 if($db_conn->query("INSERT INTO Pages (AuthorID,
 LastEditedID, CreatedDate, LastEditedDate,
 Content, PageTitle, Online, AdminOnly)
 VALUES ('$user', '$user', '$Time', '$Time', '$Context', '$Title',
 '$Online', '$Admin')"))
 {
 header("Location: index.php?page=Admin&subpage=Pages");
 }
 }
}
}

```



56/77

## 1.24 Include/Admin/NewsLetters.php

```

<?php
// get the username by ID
function TorGetUserName($TempUserID, $DBCONN){
 $Func_result = $DBCONN->query("SELECT Username from Users
 Where UserID = '$TempUserID'");
 $Func_row = $Func_result->fetch_assoc();
 return $Func_row['Username'];
}
if($action != '') {
 if(isset($_GET['id']) && $_GET['id'] != ''){
 $URLPageID = $db_conn->real_escape_string($_GET['id']);
 }// get id end
 switch($action){
 case 'Edit':
 $NewOrEditNewsLetter = true;
 break;
 case 'New':
 $NewOrEditNewsLetter = true;
 break;
 }// switch end
} // Action end

if(isset($NewOrEditNewsLetter) && $NewOrEditNewsLetter != false){
 include_once("Include/Admin/NewOrEditNewsLetter.php");
}else{
 // create the List over pages
 $result = $db_conn->query("Select * from NewsLetter ORDER BY LetterID DESC");
 ?>
 <a href="?page=Admin&subpage=NewsLetters&action=New"
 alt="Nyt Nyhedsbrev" type="button" class="text-center btn btn-info">
 Nyt Nyhedsbrev

 <hr>
 <table class="table table-striped table-condensed
 table-hover hlpf_adminmenu">
 <thead>
 <tr>
 <th class="text-center">ID</th>
 <th class="text-center">Title</th>
 <th class="text-center">Forfatter</th>
 <th class="text-center">Udsent Dato</th>
 <th class="text-center">Brug Som skabelon</th>
 <th class="text-center">Rediger</th>
 </tr>
 </thead>

```

```
<tbody>
<?php while ($row = $result->fetch_assoc()) { ?>
 <tr>
 <td class="text-center"><?php echo $row['LetterID'] ?></td>
 <td class="text-center"><?php echo $row['Subject'] ?></td>
 <td class="text-center">
 <?php echo TorGetUserName($row['Author'], $db_conn); ?>
 </td>
 <?php
 if($row['SentDate'] == '0'){
 echo '<td class="textcenter">Udsend</td>';
 }else{
 ?>
 <td class="text-center">
 <?php echo date('d.m.Y', $row['SentDate']); ?>
 </td>
 <?php
 } ?>
 <td class="text-center">Brug Som skabelon</td>
 <td class="text-center">Rediger</td>
 </tr>
 <?php } ?>
 </tbody>
</table>
<?php
}
?>
```

## 1.25 Include/Admin/NewOrEditNewsLetter.php

```

<?php
if(isset($_POST['Save'])){
 $Title = $db_conn->real_escape_string($_POST['Title']);
 if(isset($_POST['Send'])){
 $Send = $db_conn->real_escape_string($_POST['Send']);
 }else { $Send = '0'; }
 $Body = $db_conn->real_escape_string($_POST['AdminTinyMCE']);
 $Aurthor = $_SESSION['UserID'];
 if($action == 'Edit'){
 // update query
 /*$db_conn->query("UPDATE NewsLetter SET Subject = '$Title',
 Body = '$Body', SentDate = '$Send', Author = '$Aurthor'");
 header("Location: index.php?page=Admin&subpage=NewsLetters");*/
 }else{
 if($Send == 1){

 // call all users signed for news Letters
 $NewsResult = $db_conn->query("Select Users.FullName, Users.Email,
 Users.NewsLetter From Users Where Users.NewsLetter = 1");
 while($NewsRow = $NewsResult->fetch_assoc()){

 // To send HTML mail, the Content-type header must be set
 $headers[] = 'MIME-Version: 1.0';
 $headers[] = 'Content-type: text/html; charset=UTF-8';

 // Additional headers
 $headers[] = 'To: '.$NewsRow['FullName'].' <'.$NewsRow['FullName'].'>';
 $headers[] = 'From: HLPparty Testin <noreply@hlpf.dk>';

 // Mail it
 mail($NewsRow['Email'], $Title, $Body, implode("\r\n", $headers));
 } // End of Users tehre want news
 // Insert query
 if($Send != '0'){ $Send = time($Send); }
 $db_conn->query("INSERT INTO NewsLetter
 (Subject, Body, SentDate, Author)
 VALUES ('$Title', '$Body', '$Send', '$Aurthor')");
 } // if $Send = 1
 header("Location: index.php?page=Admin&subpage=NewsLetters");
 } // if action is not Edit
 } // if submit send
?>

<form method="post" action="">
 <table class="table hlpf_adminmenu">

```

```
<tr>
 <td>
 <label for="Title">Emne: </label>
 <input type="text" maxLength="50" name="Title"
 id="Title" required size="50">
 </td>
 <td>
 <label>Udsend:</label> <input type="checkbox" value="1" name="Send">
 </td>
</tr>
<tr>
 <td colspan="2">
 <textarea rows="25" id="AdminTinyMCE" name="AdminTinyMCE">
 <?php if(isset($pageExist)){echo $row['Content'];} ?>
 </textarea>
 </td>
</tr>
<tr>
 <td colspan="3" class="text-center">
 <input class="btn btn-default" type="submit"
 value="Gem" name="Save" />
 </td>
</tr>
</table>
</form>
```

## 1.26 Include/Admin/News.php

```

Opret nyhed
<?php
$result = $db_conn->query("
 SELECT
 (SELECT COUNT(*) FROM NEWS) AS News,
 N.NewsID AS ID,
 N.Title AS Title,
 U1.Username AS Creator,
 U2.Username AS Editor,
 N.CreatedDate AS CreatedDate,
 N.LastEditedDate AS LastEditDate,
 N.Online AS Online
 FROM News N
 INNER JOIN Users U1
 ON N.AuthorID = U1.UserID
 INNER JOIN Users U2
 ON N.LastEditedID = U2.UserID
 LIMIT 20
");
?>
<table class="table table-striped table-hover hlpf_adminmenu">
 <thead>
 <tr>
 <th>ID</th>
 <th>Title</th>
 <th>Lavet af</th>
 <th>Sidst ændret af</th>
 <th>Lavet den</th>
 <th>Sidst ændret den</th>
 <th>Online</th>
 </tr>
 </thead>
 <tbody>
 <?php while ($row = $result->fetch_assoc()) { ?>
 <tr>
 <td><?php echo $row['ID'] ?></td>
 <td><?php echo $row['Title'] ?></td>
 <td><?php echo $row['Creator'] ?></td>
 <td><?php echo $row['Editor'] ?></td>
 <td><?php echo date("d M Y", $row['CreatedDate']); ?></td>
 <td><?php echo date("d M Y", $row['LastEditDate']); ?></td>
 <td><?php echo $row['Online'] ?></td>
 </tr>
 <?php } ?>
 </tbody>

```

```

</table>
<?php
 if ($row['News'] > 20) { ?>
 <ul class="pagination">
 <li <?php if ($p = 1) { echo "class='disable'" } ?>>
 «

 <li <?php if ($p = 1) { echo "class='active'" } ?>>1
 2
 »

 <?php } ?>

```

## 1.27 Include/Admin/Events.php

```

<?php
if($action != ''){
 if(isset($_GET['id']) && $_GET['id'] != ''){
 $URLPageID = $db_conn->real_escape_string($_GET['id']);
 }
 switch($action){
 case 'New':
 $newOrEdit = true;
 break;
 }
}
if (isset($newOrEdit) && $newOrEdit != '') {
 include_once("Include/Admin/NewOrEditEvent.php");
} else {
 $result = $db_conn->query("
 SELECT
 Event.EventID AS ID,
 Event.Title AS Title,
 Event.Poster AS Poster,
 Event.StartDate AS StartDate,
 Event.EndDate AS EndDate,
 Event.Location AS Location,
 Event.SeatsOpen AS SeatsOpenDate
 FROM
 Event
 ORDER BY
 Event.StartDate DESC
 ");
 ?>
 <a href="?page=Admin&subpage=Events&action=New" alt="Ny Side"
 type="button" class="text-center btn btn-info">Opret ny event

```

```

<hr>
<table class="table table-striped table-condensed
 table-hover hlpf_adminmenu">
 <thead>
 <tr>
 <th class="text-center">ID</th>
 <th class="text-center">Event navn</th>
 <th class="text-center" style="width: 10%">Plakat</th>
 <th class="text-center">Åbnings dato</th>
 <th class="text-center">Slut dato</th>
 <th class="text-center">Lokation</th>
 <th class="text-center">SeatsOpen</th>
 </tr>
 </thead>
 <tbody>
 <?php while ($row = $result->fetch_assoc()) { ?>
 <tr>
 <td class="text-center"><?php echo $row['ID'] ?></td>
 <td class="text-center"><?php echo $row['Title'] ?></td>
 <td class="text-center">

 </td>
 <td class="text-center">
 <?php echo date("d M Y - H:i:s", $row['StartDate']); ?>
 </td>
 <td class="text-center">
 <?php echo date("d M Y - H:i:s", $row['EndDate']); ?>
 </td>
 <td class="text-center">
 <?php echo $row['Location'] ?>
 </td>
 <td class="text-center">
 <?php echo date("d M Y - H:i:s", $row['SeatsOpenDate']); ?>
 </td>
 </tr>
 <?php } ?>
 </tbody>
</table>
<?php } ?>

```



## 1.28 Include/Admin/NewOrEditEvent.php

```

<?php
if(isset($_GET['id'])){
 $tempID = $db_conn->real_escape_string($_GET['id']);

 if($result = $db_conn->query("Select * From Event
 Where EventID = '$tempID'")){
 $row = $result->fetch_assoc();
 $EventExist = true;
 }
}

if(isset($_POST['Save'])) {
 # PREF_SPLIT 0:YEAR, 1:MONTH, 2:DAY, 3:HOURL, 4:MINUTE.
 $StartDate = preg_split("/([-:]+)/",
 $db_conn->real_escape_string($_POST['StartDate']));
 $EndDate = preg_split("/([-:]+)/",
 $db_conn->real_escape_string($_POST['EndDate']));
 $SeatsOpen = preg_split("/([-:]+)/",
 $db_conn->real_escape_string($_POST['SeatsOpen']));
 $Title = $db_conn->real_escape_string($_POST['Title']);
 # Uncomment for poster
 #$Poster = $db_conn->real_escape_string($_POST['Poster']);
 # MKTIME(HOUR, MINUTE, SECOND, MONTH, DAY, YEAR)
 $Unix_StartDate = mktime($StartDate[3], $StartDate[4], 0,
 $StartDate[1], $StartDate[2], $StartDate[0]);
 $Unix_EndDate = mktime($EndDate[3], $EndDate[4],
 0, $EndDate[1], $EndDate[2], $EndDate[0]);
 $Location = $db_conn->real_escape_string($_POST['Location']);
 $Unix_SeatsOpen = mktime($SeatsOpen[3], $SeatsOpen[4],
 0, $SeatsOpen[1], $SeatsOpen[2], $SeatsOpen[0]);
 $Rules_ID = $db_conn->real_escape_string($_POST['Rules']);
 if($action == 'Edit') {
 // edit Query
 if($db_conn->query("
 UPDATE Event
 SET Title = '$Title',
 StartDate = '$Unix_StartDate',
 EndDate = '$Unix_EndDate',
 Location = '$Location',
 Network = '$Network',
 SeatsOpen = '$Unix_SeatsOpen',
 Rules = '$Rules_ID'
 WHERE PageID = '$tempID' ")) {
 header("Location: index.php?page=Admin&subpage=Events");
 }
 }
}

```

```

 }

else {
 // Create Query
 if($db_conn->query("INSERT INTO Event
 (Title,StartDate,EndDate,Location,SeatsOpen,Rules)
 VALUES ('$Title', '$Unix_StartDate', '$Unix_EndDate', '$Location',
 '$Unix_SeatsOpen', '$Rules_ID')")){
 header("Location: index.php?page=Admin&subpage=Events");
 }
}
}
?>

<form method="post" action="">
 <div class="form-group col-lg-3">
 <label class="control-label" for="Title">Title</label>
 <input required class="form-control" type="text" name="Title" id="Title"
 value="<?php if(isset($EventExist)){echo $row['Title'];} ?>"
 maxlength="50"/>
 </div>
 <div class="form-group col-lg-3">
 <label class="control-label" for="Poster">Poster</label>
 <input class="form-control" type="file" id="Poster">
 </div>
 <div class="form-group col-lg-3">
 <label class="control-label" for="StartDate">Start Dato</label>
 <input class="form-control" required type="datetime-local"
 name="StartDate" id="StartDate"
 value="<?php if(isset($EventExist)){echo $row['StartDate'];} ?>"
 />
 </div>
 <div class="form-group col-lg-3">
 <label class="control-label" for="EndDate">Slut Dato</label>
 <input class="form-control" required type="datetime-local" name="EndDate"
 id="EndDate" value="<?php if(isset($EventExist)){
 echo $row['EndDate'];
 } ?>" />
 </div>
 <div class="form-group col-lg-6">
 <label class="control-label" for="Location">Lokation</label>
 <input class="form-control" required type="text" name="Location"
 id="Location" value="<?php if(isset($EventExist)){
 echo $row['Location'];} ?>" />
 </div>
 <div class="form-group col-lg-6">
 <label class="control-label" for="SeatsOpen">SeatsOpen</label>
 <input class="form-control" required type="datetime-local"
 name="SeatsOpen" id="SeatsOpen"
 value="<?php if(isset($EventExist)){echo $row['SeatsOpen'];} ?>" />
 </div>

```

```
</div>
<div class="form-group col-lg-6">
 <label for="RuleSetSelect">Regelsæt (Vælg en)</label>
 <?php $GetRuleSets = $db_conn->query("
 SELECT
 Pages.PageID,
 Pages.PageTitle,
 Pages.LastEditedDate
 FROM
 Pages
 WHERE
 Pages.PageTitle like '%Regler%'
 ORDER BY
 Pages.LastEditedDate DESC
 "); ?>
 <select name="Rules" class="form-control" id="RuleSetSelect">
 <?php while($RuleSets = $GetRuleSets->fetch_assoc()) { ?>
 <option value="<?php echo $RuleSets['PageID'] ?>">
 <?php
 echo $RuleSets['PageTitle'] . " --- Sidst ændret den
 " . date("d M Y", $RuleSets['LastEditedDate']); ?>
 </option>
 <?php } ?>
 </select>
 </div>
 <div class="form-group col-lg-12">
 <input class="btn btn-primary" type="submit" value="Gem" name="Save" />
 </div>
</form>
```

## 1.29 Style/hlpf\_main.css

```
body {
 background-image: url(../Images/background.png);
 background-color: #e8e8e8;
 background-repeat: repeat;
 overflow-y: scroll;
 overflow-x: none;
}

p {
 word-wrap: break-word;
}

#hlpf_menu, #hlpf_menu ul li ul {
 background-color: #2060c0;
 border-radius: 0px;
 margin-bottom: 0px;
}

#hlpf_menu ul li ul {
 background-color: #236ad5;
}

.hlpf_white_text, .hlpf_white_text ul li a {
 color: white;
}

.hlpf_white_text ul li a:hover {
 background-color: #2a78ea;
}

.hlpf_news {
 overflow-y: auto;
 overflow-x: none;
 max-height: 222px;
 word-wrap: break-word;
}

.hlpf_newsborder {
 background-color: white;
 border: 1px solid rgba(0,0,0,0.2);
 color: black;
 padding-top: 10px;
 padding-bottom: 10px;
}
```

```
.hlpf_adminmenu {
 overflow-y: auto;
}

.hlpf_adminmenu ul {
 list-style: none;
}
.hlpf_adminmenu ul li {
 float: left;
}

hr {
 border: 1px solid #2060c0;
}

.hlpf_large_news_box {
 min-height: 200px;
 max-height: auto;
}

.hlpf_no_round_border a{
 border-radius: 0px;
}

#hlpf_footer {
 background-color: #2060c0;
 color: white;
}

#hlpf_footer div div {
 padding: 30px;
}

#hlpf_footer h2 {
 margin-bottom: 15px;
}

#hlpf_bottom_margin {
 margin-bottom: 15px;
}
#hlpf_footer_contact a{
 color: lightblue;
}
#hlpf_footer_links{
 list-style-type: none;
 padding: 0;
}
#hlpf_footer_links li a{
 color: white
```

```
}
#social_media a{
 color: white;
 margin-right: 50px;
}
.hlpf_margin_botom img {
 margin-bottom: 5px;
}
.hlpf_margin_botom img:hover {
 border: 1px solid #337ab7;
}
.hlpf_no_margin_padding {
 margin: 0px;
 padding: 0px;
}
.hlpf_facebok_like {
 min-height: 22px;
}
/* Nav drop down mouse over when on desktop */
@media (min-width:767px) {
 .dropdown:hover .dropdown-menu {
 display: block;
 }
}
/* Bootstrap Override */
.nav .open > a, .nav .open > a:hover, .nav .open > a:focus {
 background-color: #337ab7;
}
/* Til admin side. Se menuen.*/
.list-group .list-group-item {
 margin-bottom: 4px;
}
.list-group a:hover {
 text-decoration: none;
}
/* ===== Temp styles ===== */
@-moz-document url-prefix() {
 fieldset { display: table-cell; }
}
```

## 2 Usecase beskrivelser

### 2.1 Case - Opret Event

ID	1
Navn	Opret event
Beskrivelse	Her bliver et event oprettet.
Aktør	Administrator.
Hvad kræves	Bruger skal være logget ind som administrator. (Se use case 9)
Hvad udløser	At administratoren trykker på 'Opret ny event' knappen i 'Administration' under 'Min profil' menupunktet.
Hvad bør der ske	Administratoren vælger at oprette en event, heri vælger han dato, skriver informationer om eventet, og lægger det ud offentligt, for normal brugere at tilmelde sig til.
Hvad kan der ske	Man kan komme til at skrive tekst i en boks hvor der kun skal være tal, hvilket vil give en fejl fra databasen.

### 2.2 Opret nyhedsbrev

ID	2
Navn	Opret nyhedsbrev
Beskrivelse	Her bliver et nyhedsbrev oprettet.
Aktør	Administrator.
Hvad kræves	Bruger skal være logget ind som administrator. (Se use case 9)
Hvad udløser	At administratoren trykker på 'Nyt nyhedsbrev' knappen i 'Administration' under 'Min profil' menupunktet.
Hvad bør der ske	Administratoren vælger at oprette et nyhedsbrev, og får mulighed for at udfylde formularen, vælge om den skal udsendes og derefter gemme det.
Hvad kan der ske	N/A

## 2.3 Opret sponsor

ID	3
Navn	Opret sponsor
Beskrivelse	Her bliver en sponsor oprettet i systemet.
Aktør	Administrator.
Hvad kræves	Bruger skal være logget ind som administrator. (Se use case 9)
Hvad udløser	At administratoren trykker på 'Opret ny sponsor' knappen i 'Administration' under 'Min profil' menupunktet.
Hvad bør der ske	Administratoren vælger at oprette en sponsor, og udfylder de relevante informationer. Administratoren angiver sponsorens prioritet, og om det er en hovedsponsor, og gemmer det.
Hvad kan der ske	De angivne informationer for sponsoren var forkerte. Administratoren kan rette det ved brug af use case 4, 'Rediger sponsor'.

## 2.4 Rediger sponsor

ID	4
Navn	Rediger sponsor
Beskrivelse	Her kan man redigere en sponsor.
Aktør	Administrator.
Hvad kræves	Bruger skal være logget ind som administrator. (Se use case 9) Der skal som minimum findes én sponsor i systemet.
Hvad udløser	At administratoren trykker på 'Rediger' knappen i 'Administration' under 'Min profil' menupunktet.
Hvad bør der ske	En form med data for sponsoren bør blive vist på skærmen, og være redigérbar for administratoren, hvorefter administratoren kan gemme disse ændringer.
Hvad kan der ske	N/A



## 2.5 Opret ny side

ID	5
Navn	Opret ny side (dynamisk)
Beskrivelse	Her bliver en dynamisk side oprettet i systemet.
Aktør	Administrator.
Hvad kræves	Bruger skal være logget ind som administrator. (Se use case 9)
Hvad udløser	At administratoren trykker på 'Opret ny side' knappen i 'Administration' under 'Min profil' menupunktet.
Hvad bør der ske	Administratoren får muligheden for at udfylde en "tinyMCE" form, som bliver til en ny dynamisk side, når der gemmes.
Hvad kan der ske	N/A

## 2.6 Rediger side

ID	6
Navn	Rediger side (dynamisk)
Beskrivelse	Her kan en dynamisk side redigeres.
Aktør	Administrator.
Hvad kræves	Bruger skal være logget ind som administrator. (Se use case 9) Der skal som minimum findes én dynamisk side i systemet.
Hvad udløser	At administratoren trykker på 'Rediger' knappen i 'Administration' under 'Min profil' menupunktet.
Hvad bør der ske	Her kan administratoren rette på diverse fejl, tilføje mangler, eller opdatere gammel information på siden, og derefter gemme den.
Hvad kan der ske	N/A

## 2.7 Se seneste nyhed

ID	7
Navn	Se seneste nyhed
Beskrivelse	Her kan den nyeste nyhed læses.
Aktør	Alle.
Hvad kræves	Intet.
Hvad udløser	At brugeren står på forsiden.
Hvad bør der ske	Forsiden bør vises, med en sponsor oversigt, og seneste nyhed.
Hvad kan der ske	N/A

## 2.8 Se nyhedsarkiv

ID	8
Navn	Se nyhedsarkiv
Beskrivelse	Her kan alle nyheder ses.
Aktør	Alle.
Hvad kræves	Intet.
Hvad udløser	At der bliver trykket på 'Nyhedsarkiv' knappen, der ligger i 'Seneste nyhed' på forsiden.
Hvad bør der ske	Man bliver sendt til nyhedsarkivet.
Hvad kan der ske	Siden findes ikke hvorefter man bliver sendt til forsiden.

## 2.9 OneAll / Login

ID	9
Navn	OneAll
Beskrivelse	Login eller registrering med OneAll API.
Aktør	Bruger.
Hvad kræves	At brugeren har en af følgende konti: Google, Steam, Battle.net, Twitch.tv, Facebook.
Hvad udløser	Ved tryk på en af OneAll's ikoner på siden.
Hvad bør der ske	Brugeren bliver bedt om at logge ind på den valgte konto, og bliver derefter sendt videre til enten registrering hvis vi ikke kender brugeren, eller tilbage til forsiden hvis brugeren er kendt af systemet.
Hvad kan der ske	Brugeren lukker siden som kommer op med login for den givende konto. Brugeren bliver derefter sendt til forsiden uden at være logget ind, og kan derefter prøve igen.

## 2.10 Log ud

ID	10
Navn	Log ud
Beskrivelse	Brugeren kan logge ud.
Aktør	Brugere eller Administrator som er logget ind.
Hvad kræves	At man er logget ind. (Se use case 9)
Hvad udløser	At der bliver trykket på 'Logud' knappen under 'Min profil'
Hvad bør der ske	Man bliver logget ud.
Hvad kan der ske	Apache2 stopper med at fungere... Hvilket resultere i at du stadig bliver logget ud.

## 2.11 Se event information

ID	11
Navn	Se event information
Beskrivelse	Her kan næste begivenheds information ses.
Aktør	Alle.
Hvad kræves	Intet.
Hvad udløser	At der bliver trykket på 'Information' under 'HLPparty' menupunktet.
Hvad bør der ske	Information om næste begivenhed bør vises på siden.
Hvad kan der ske	N/A

## 2.12 Se regler

ID	12
Navn	Se regler
Beskrivelse	Her kan reglerne for begivenhederne ses.
Aktør	Alle.
Hvad kræves	Intet.
Hvad udløser	At der bliver trykket på 'Regler' under 'HLPparty' menupunktet.
Hvad bør der ske	Regler siden bør vises på siden.
Hvad kan der ske	N/A

## 2.13 Se kantinen tilbyder

ID	13
Navn	Se kantinen tilbyder
Beskrivelse	Her kan kantinens udvalg ses.
Aktør	Alle.
Hvad kræves	Intet.
Hvad udløser	At der bliver trykket på 'Kantinen tilbyder' under 'HLParty' menupunktet.
Hvad bør der ske	Udvalget fra kantinen bør vises på skærmen, samt betalings muligheder.
Hvad kan der ske	N/A

## 2.14 Se yderligere information

ID	14
Navn	Se yderligere information
Beskrivelse	Her kan yderligere information ses.
Aktør	Alle.
Hvad kræves	Intet.
Hvad udløser	At der bliver trykket på 'Yderligere information' under 'HLParty' menupunktet.
Hvad bør der ske	Yderligere informations siden bør vises på skærmen.
Hvad kan der ske	N/A

## 2.15 Rediger profil

ID	15
Navn	Rediger profil
Beskrivelse	Her kan en bruger redigere deres egen profil.
Aktør	Alle med en profil.
Hvad kræves	Det kræves at man har en profil. (Se use case 9)
Hvad udløser	At der bliver trykket på 'Ret min profil' knappen under 'Min profil' menupunktet.
Hvad bør der ske	Formen med detaljerne om brugerens profil bør blive hentet, og være åben for redigering.
Hvad kan der ske	N/A