
INSTALLATION GUIDE FOR LEGALEASE PROJECT Online Legal Services Platform

Supervior.	Lê Thanh Nhân	
Batch.	T3.2511.M0	
Group.	2	
Serial No.	Student Name	
1	Nguyễn Lê Nhật Hòa	Student1704189
2	Huỳnh Toàn Thắng	Student1707377
3	Dương Quốc Phú	Student1690422
4	Trần Quốc Anh	Student1704190

(*) - Installation documentation is included with the installation disc, should follow the proper format which have clear and complete content for anyone to perform.
- The Center performs the installation and give a notification of the protection list for successfully. Project not successfully installed is Fail.

A. SYSTEM REQUIREMENTS:

Sr.	Item	Description
1.	Operating system	Windows 7, 8, or higher
2.	Hardware	CPU Cores or better with 2 Gigabytes of RAM or better
3.	Fonts	Standard font Unicode: Arial, Tahoma, etc...
4.	Other requirement	A working internet connection, etc...

Notes: Do not install IDEs (Integrated Development Environment) on the system such as **MS Visual Code, Dreamweaver, Netbeans, etc.**


B. Program Installation

Step 1.


Access the GitHub link:

<https://github.com/HOANGUYENLE/eProjectSem1>

2. Download the .zip file as shown in the image then unzip it:

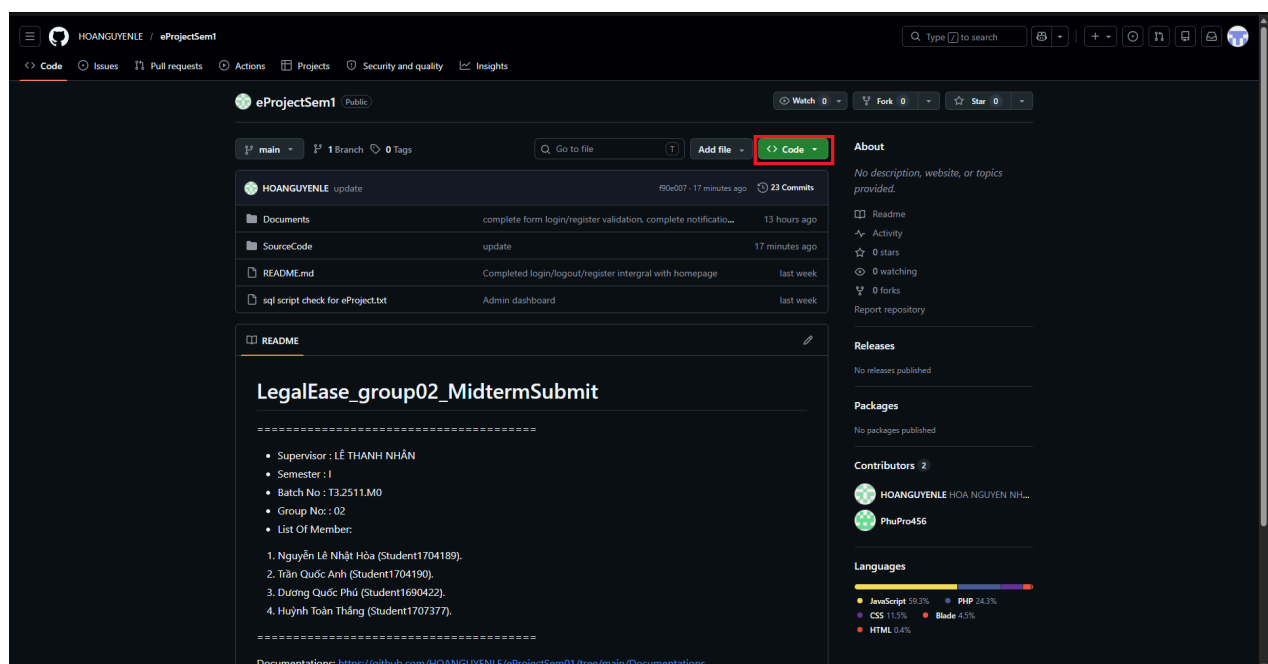


- (*)
- Installation documentation is included with the installation disc, should follow the proper format which have clear and complete content for anyone to perform.
 - The Center performs the installation and give a notification of the protection list for successfully. Project not successfully installed is Fail.

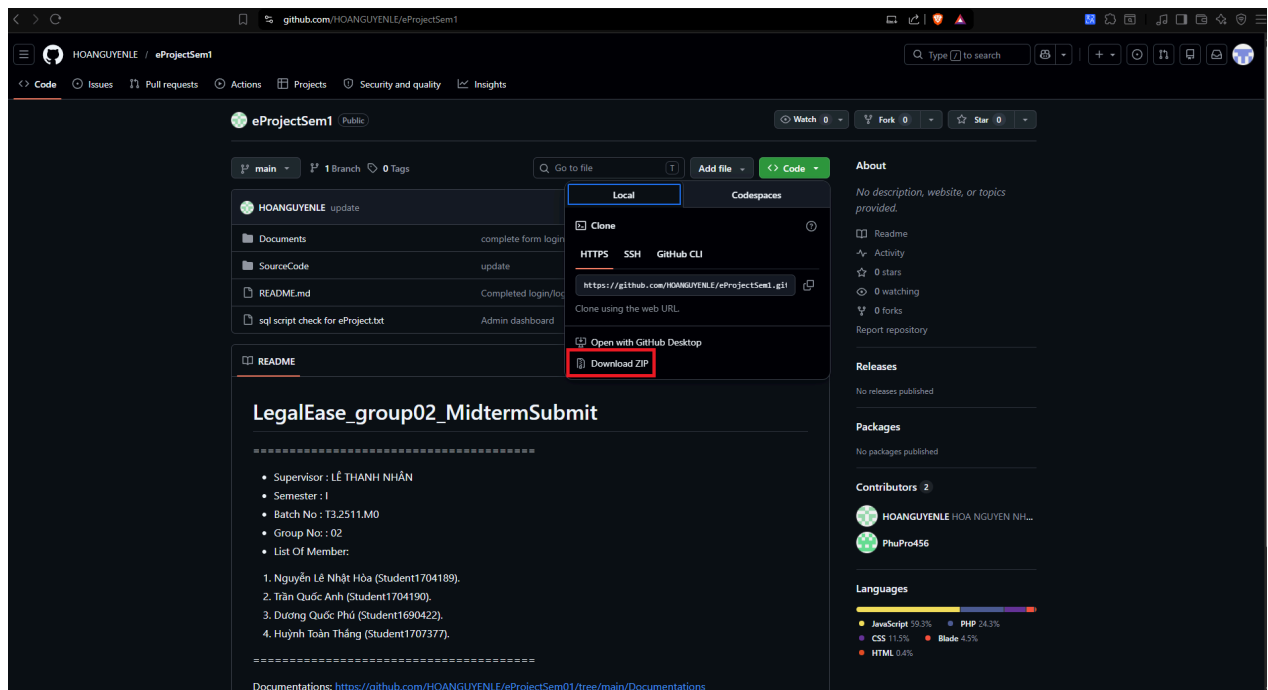



Step 2. Database Setup

Open the XAMPP Control Panel. Start Apache (for phpMyAdmin) and MySQL (the database server). In the XAMPP Control Panel, click Admin next to MySQL. This opens phpMyAdmin in browser (<http://localhost/phpmyadmin>).

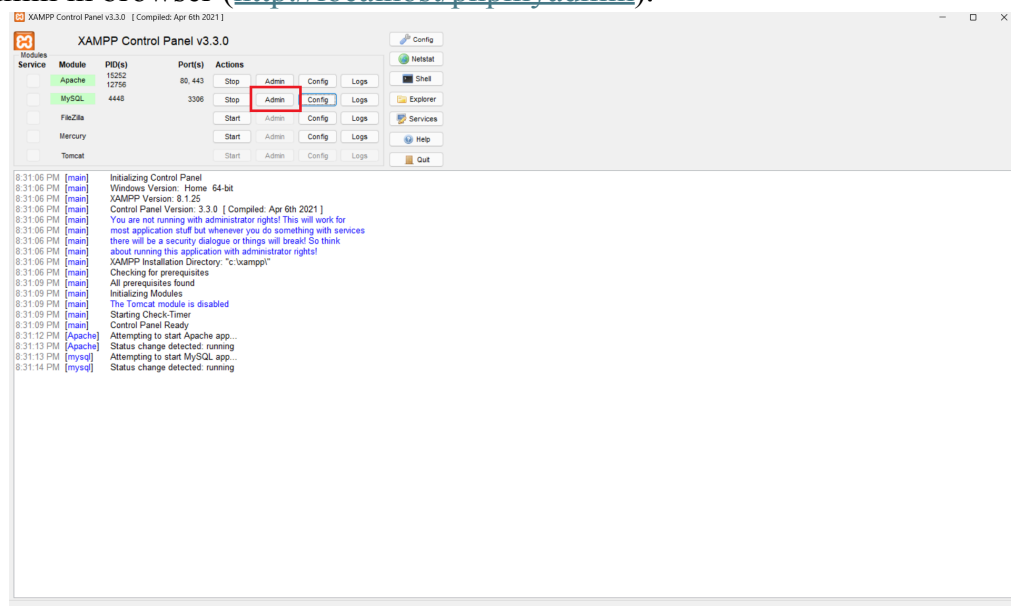


- (*)
- Installation documentation is included with the installation disc, should follow the proper format which have clear and complete content for anyone to perform.
 - The Center performs the installation and give a notification of the protection list for successfully. Project not successfully installed is Fail.

In phpMyAdmin, click import. Click Choose File and select LegalEase_Group02_ScripTable.sql file inside SourceCode\1.TableScript.

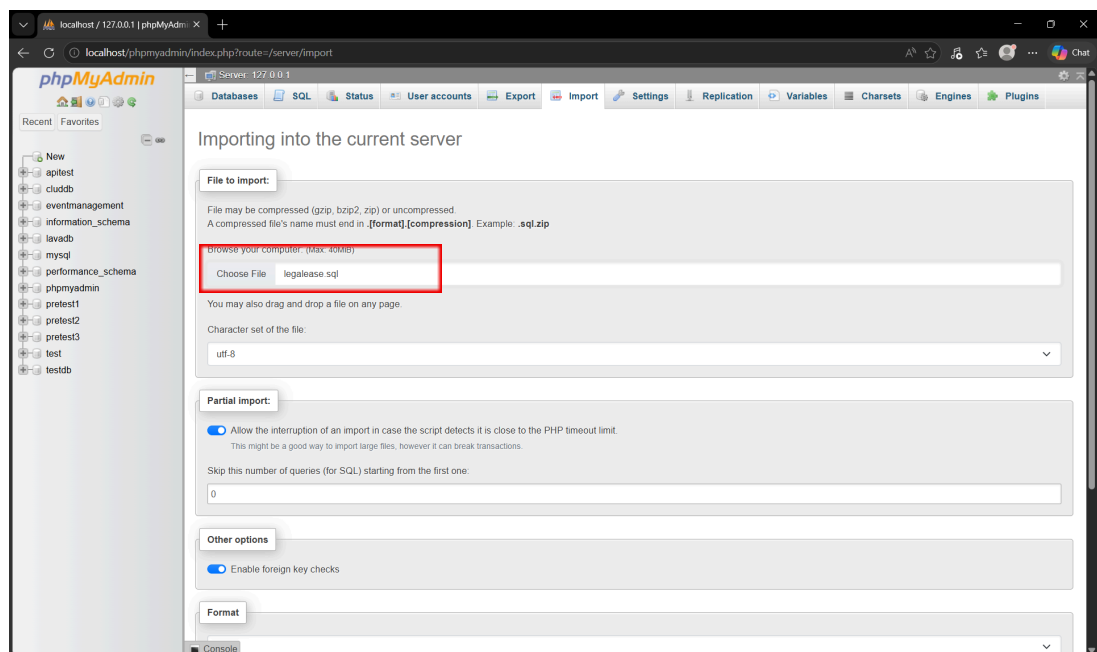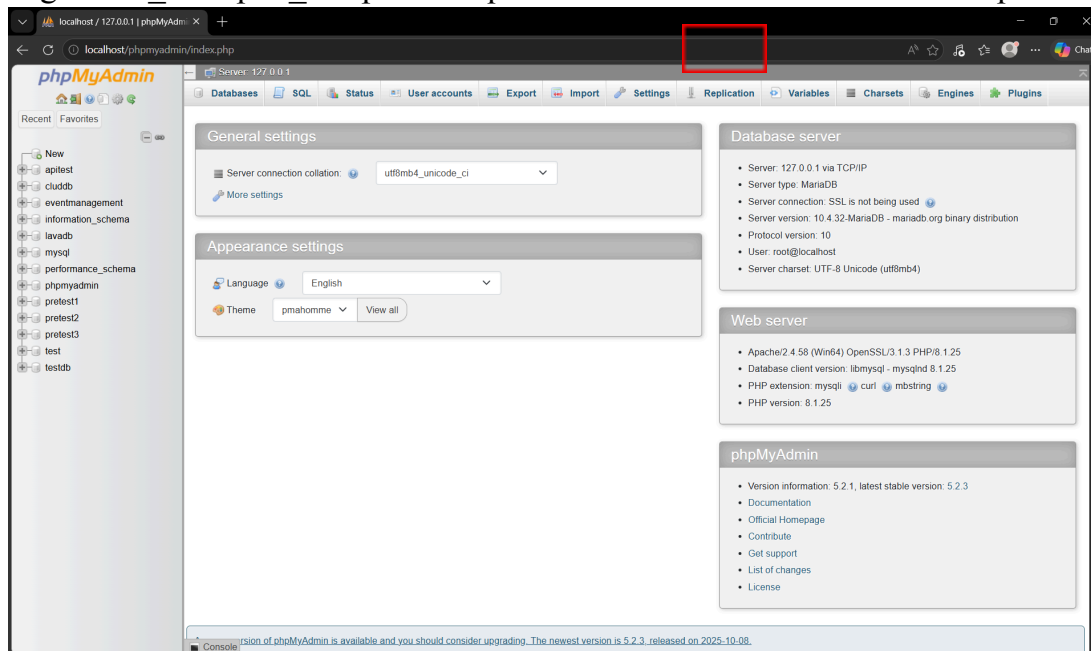


Click import to start the import.

-
- (*)
- Installation documentation is included with the installation disc, should follow the proper format which have clear and complete content for anyone to perform.
 - The Center performs the installation and give a notification of the protection list for successfully. Project not successfully installed is Fail.

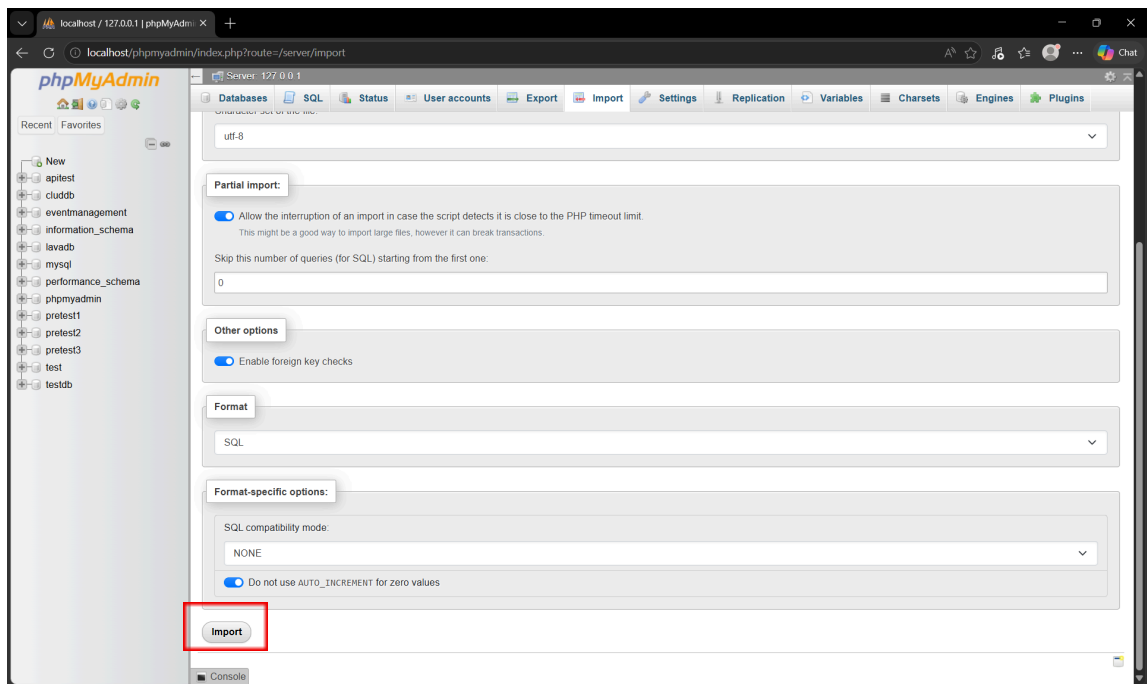

Click on a table to confirm structure and data.

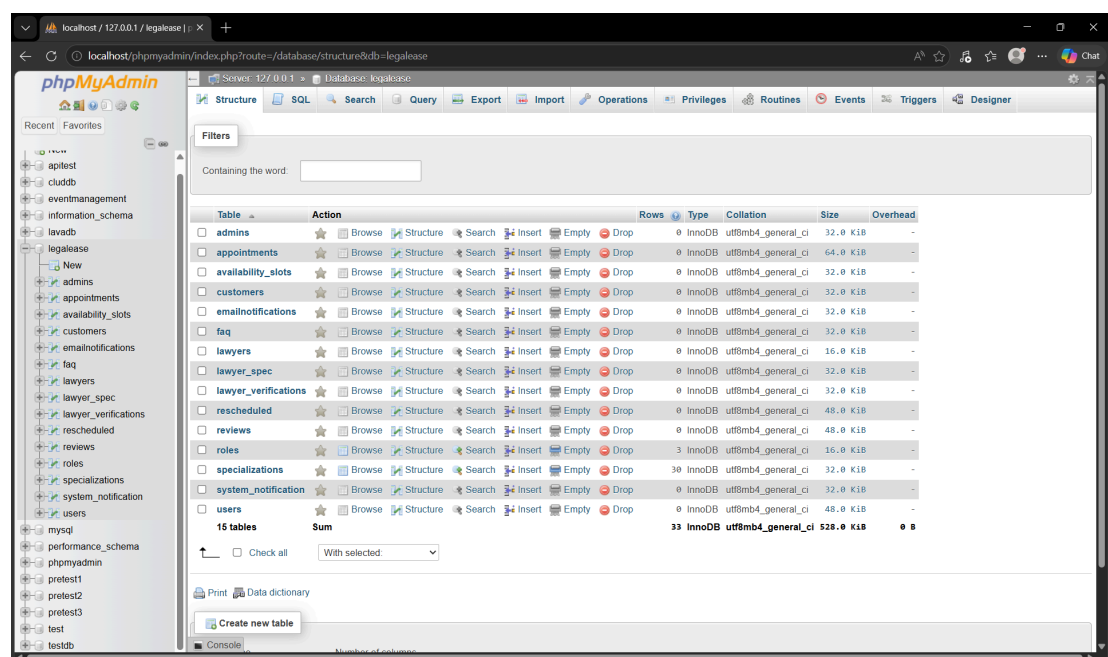


C.Instructions for creating and adding models


Step 1. Setup backend laravel

1. Open Visual Studio code
2. After opening the interface, click on Open folder...


-
- (*) - Installation documentation is included with the installation disc, should follow the proper format which have clear and complete content for anyone to perform.
 - The Center performs the installation and give a notification of the protection list for successfully. Project not successfully installed is Fail.

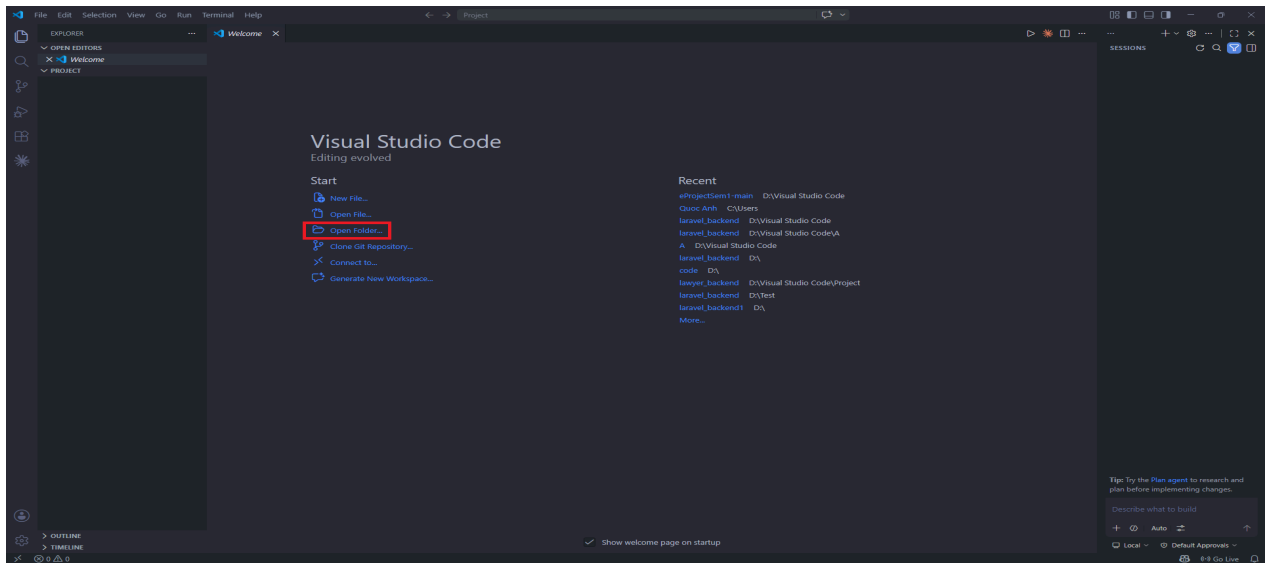


Locate the downloaded project backend file name in Source/laravel_backend and select:

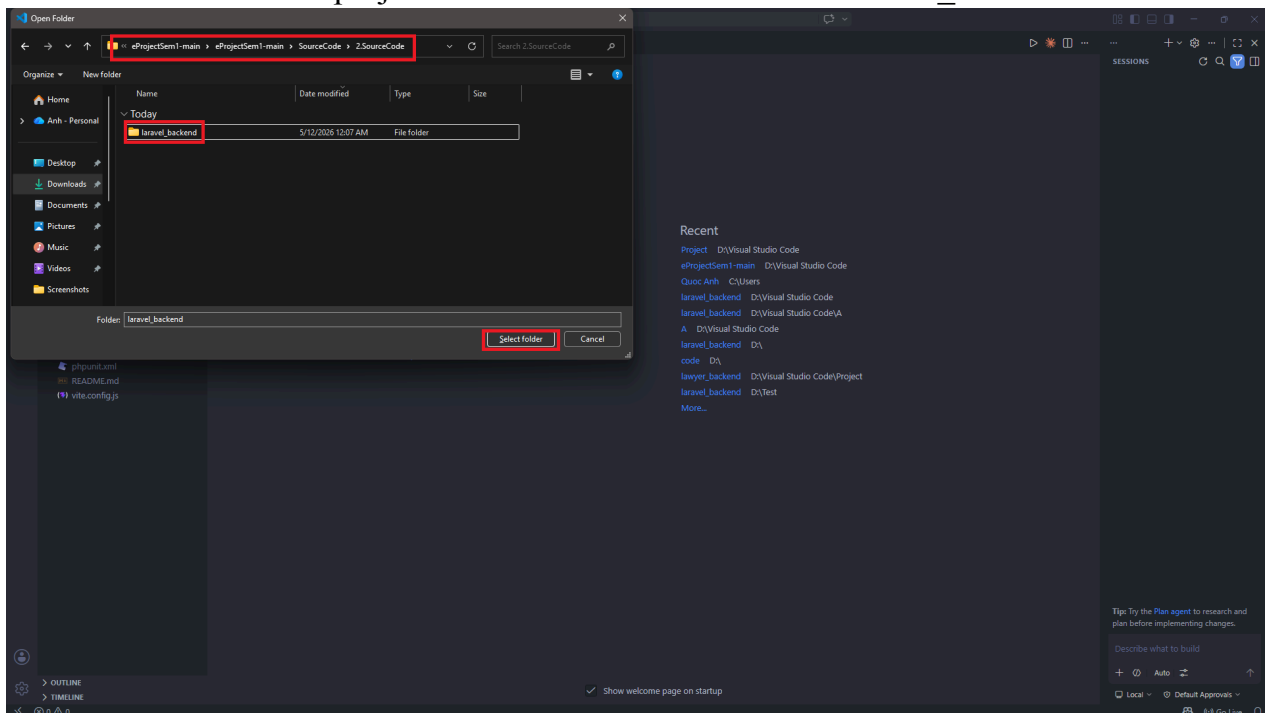

-
- (*)
- Installation documentation is included with the installation disc, should follow the proper format which have clear and complete content for anyone to perform.
 - The Center performs the installation and give a notification of the protection list for successfully. Project not successfully installed is Fail.

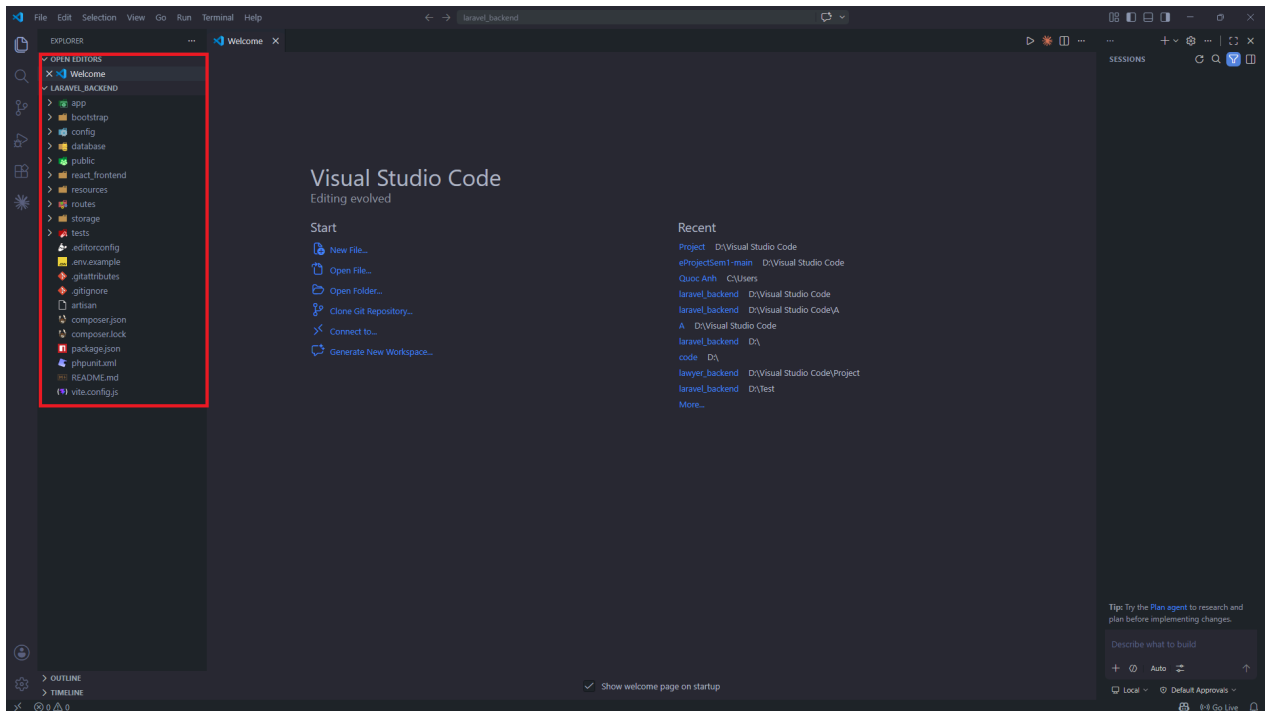


3. Set up environment variables for the project to run
4. Click on Terminal, select New Terminal. Once selected, a command prompt window will appear:

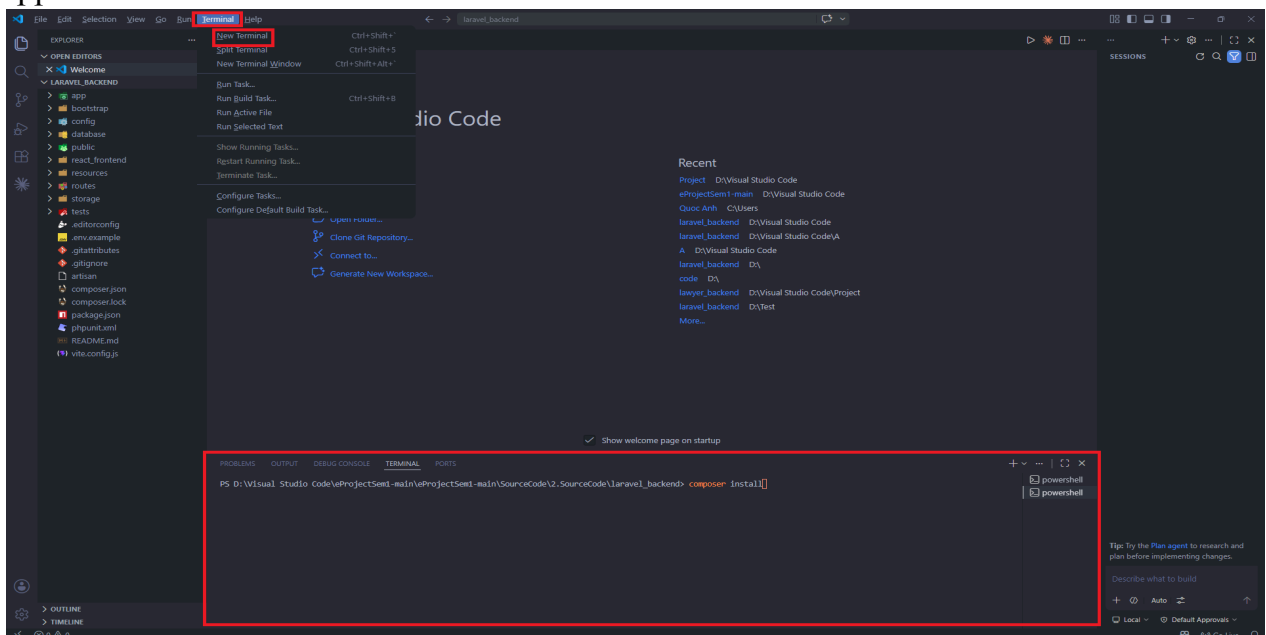

- After the window appears, type the command (composer install) to install the Laravel package.
- After running the command, open the Terminal and type the command (copy .env.example .env) to create the .env file.

-
- (*)
- Installation documentation is included with the installation disc, should follow the proper format which have clear and complete content for anyone to perform.
 - The Center performs the installation and give a notification of the protection list for successfully. Project not successfully installed is Fail.

After running the command (copy .env.xample .env), we will have the file (.env):

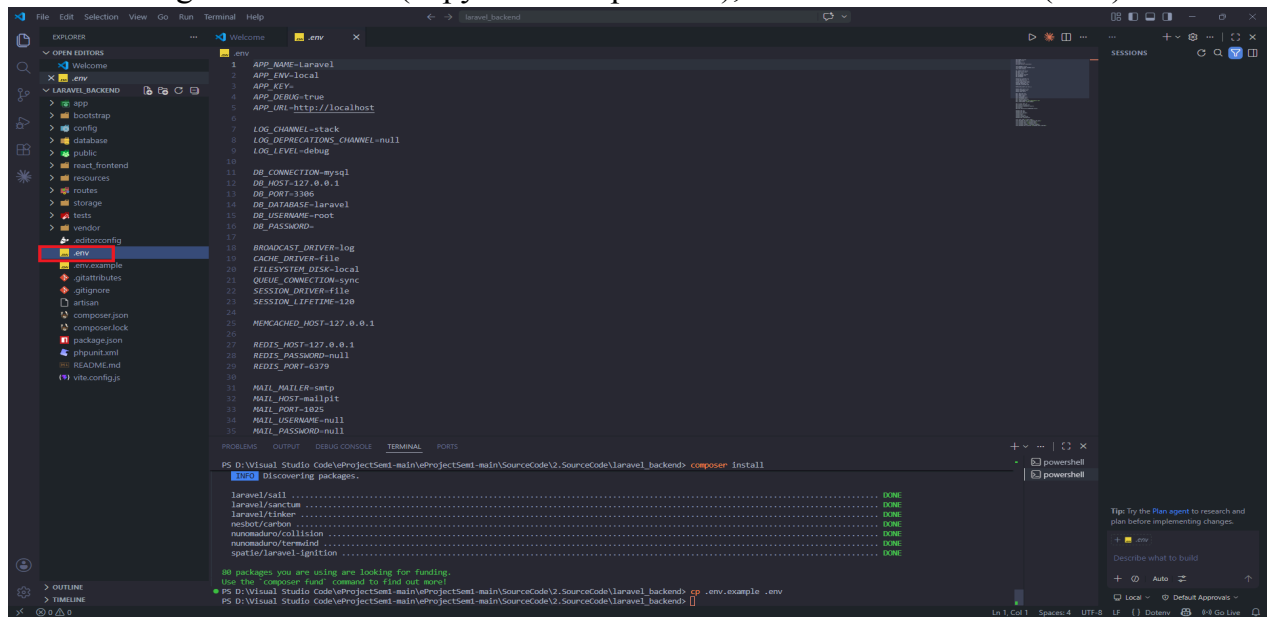

Click on the (.env) file and we will set it up as follows:

MySQL database:

Before configuration:

```
DB_CONNECTION=mysql
DB_HOST=127.0.0.1
DB_PORT=3306
DB_DATABASE=laravel
DB_USERNAME=root
DB_PASSWORD=
```

After configuration:


```
DB_CONNECTION=mysql
DB_HOST=127.0.0.1
DB_PORT=3306
DB_DATABASE=legal
DB_USERNAME=root
DB_PASSWORD=
```

- DB_DATABASE: Enter the name of the database you created which name is legal.

Open the Terminal and type the command (php artisan key:generate) to generate the APP_KEY.

-
- (*)
- Installation documentation is included with the installation disc, should follow the proper format which have clear and complete content for anyone to perform.
 - The Center performs the installation and give a notification of the protection list for successfully. Project not successfully installed is Fail.

5. Continue typing the command (php artisan migrate) to run the migration.

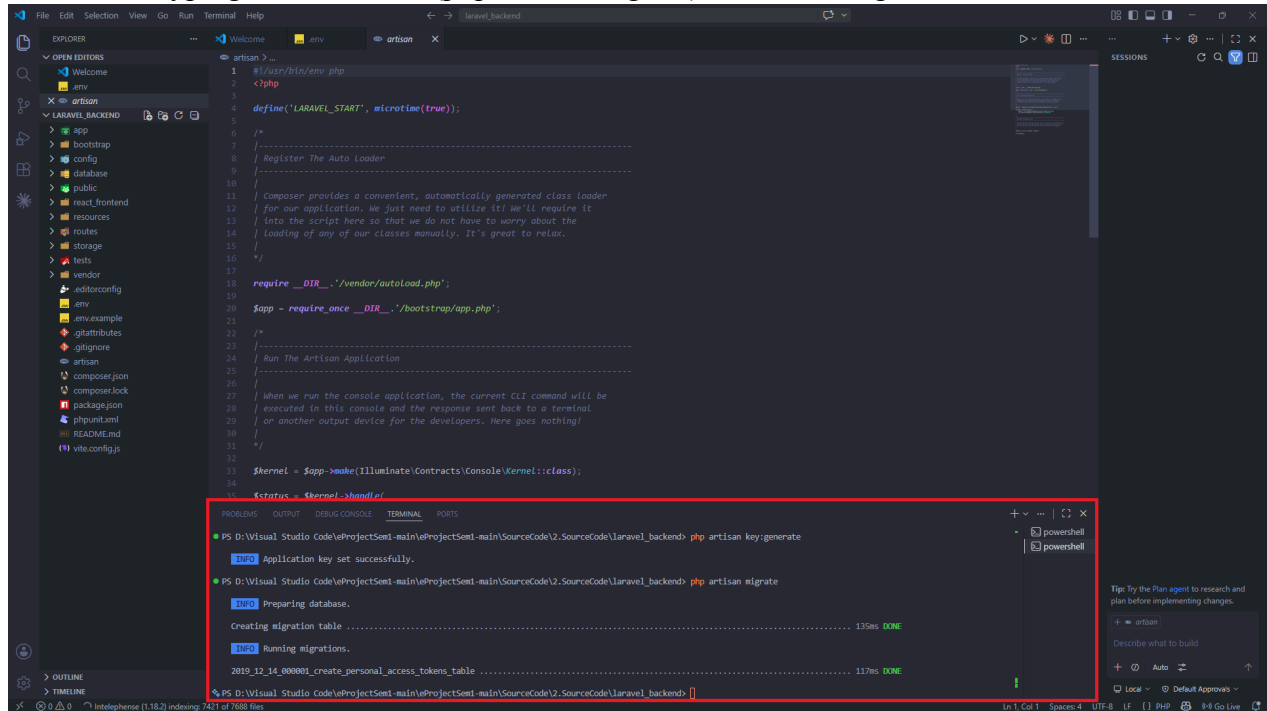

The screenshot shows the Visual Studio Code interface with the 'artisan' file open in the editor. The file contains the following code:


```
1 #!/usr/bin/env php
2 <?php
3
4 define('LARAVEL_START', microtime(true));
5
6 /*
7  * Register The Auto Loader
8  */
9
10
11 // Composer provides a convenient, automatically generated class loader
12 // for our application. We just need to utilize it! We'll require it
13 // into the script here so that we do not have to worry about the
14 // loading of any of our classes manually. It's great to relax.
15 */
16
17 require __DIR__.'/vendor/autoload.php';
18
19 $app = require_once __DIR__.'/bootstrap/app.php';
20
21 /*
22  * Run The Artisan Application
23  */
24
25
26 // When we run the console application, the current CLI command will be
27 // executed in this console and the response sent back to a terminal
28 // or another output device for the developers. Here goes nothing!
29
30
31
32 $kernel = $app->make(Illuminate\Contracts\Console\Kernel::class);
33
34 $status = $kernel->handle();
```

The terminal output shows the following commands and their results:

```
PS D:\Visual Studio Code\ProjectSemi-main\ProjectSemi-main\SourceCode\laravel_backend> php artisan key:generate
INFO Application key set successfully.
PS D:\Visual Studio Code\ProjectSemi-main\ProjectSemi-main\SourceCode\laravel_backend> php artisan migrate
INFO Preparing database.
Creating migration table ..... 135ms DONE
INFO Running migrations.
2019_12_14_080001_create_personal_access_tokens_table ..... 117ms DONE
PS D:\Visual Studio Code\ProjectSemi-main\ProjectSemi-main\SourceCode\laravel_backend>
```

6. After run migration, typing command line php artisan storage:link

7. Open the Terminal and type the command (php artisan serve) to run the Laravel server.

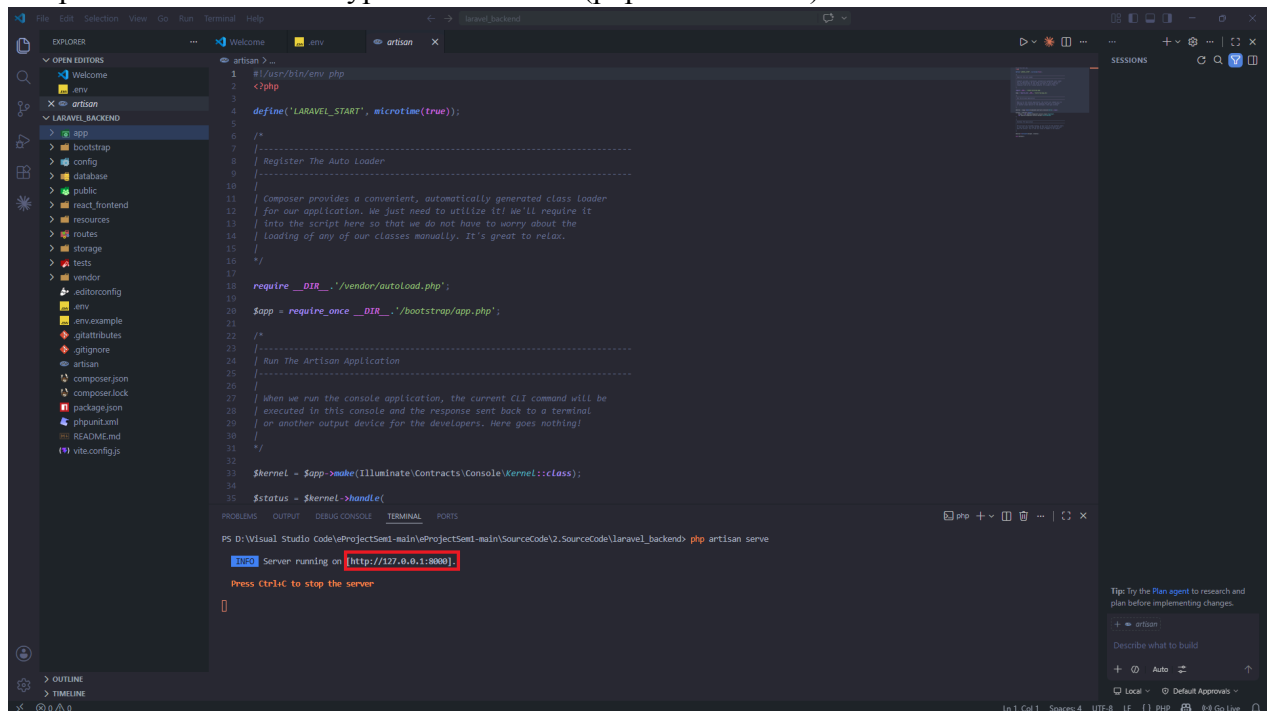

The screenshot shows the Visual Studio Code interface with the 'artisan' file open in the editor. The file contains the following code:


```
1 #!/usr/bin/env php
2 <?php
3
4 define('LARAVEL_START', microtime(true));
5
6 /*
7  * Register The Auto Loader
8  */
9
10
11 // Composer provides a convenient, automatically generated class loader
12 // for our application. We just need to utilize it! We'll require it
13 // into the script here so that we do not have to worry about the
14 // loading of any of our classes manually. It's great to relax.
15 */
16
17 require __DIR__.'/vendor/autoload.php';
18
19 $app = require_once __DIR__.'/bootstrap/app.php';
20
21 /*
22  * Run The Artisan Application
23  */
24
25
26 // When we run the console application, the current CLI command will be
27 // executed in this console and the response sent back to a terminal
28 // or another output device for the developers. Here goes nothing!
29
30
31
32 $kernel = $app->make(Illuminate\Contracts\Console\Kernel::class);
33
34 $status = $kernel->handle();
```

The terminal output shows the following commands and their results:


```
PS D:\Visual Studio Code\ProjectSemi-main\ProjectSemi-main\SourceCode\laravel_backend> php artisan serve
INFO Server running on http://127.0.0.1:8000.
Press Ctrl+C to stop the server
```

- (*)
- Installation documentation is included with the installation disc, should follow the proper format which have clear and complete content for anyone to perform.
 - The Center performs the installation and give a notification of the protection list for successfully. Project not successfully installed is Fail.

8. After confirm it running, make new command line terminal

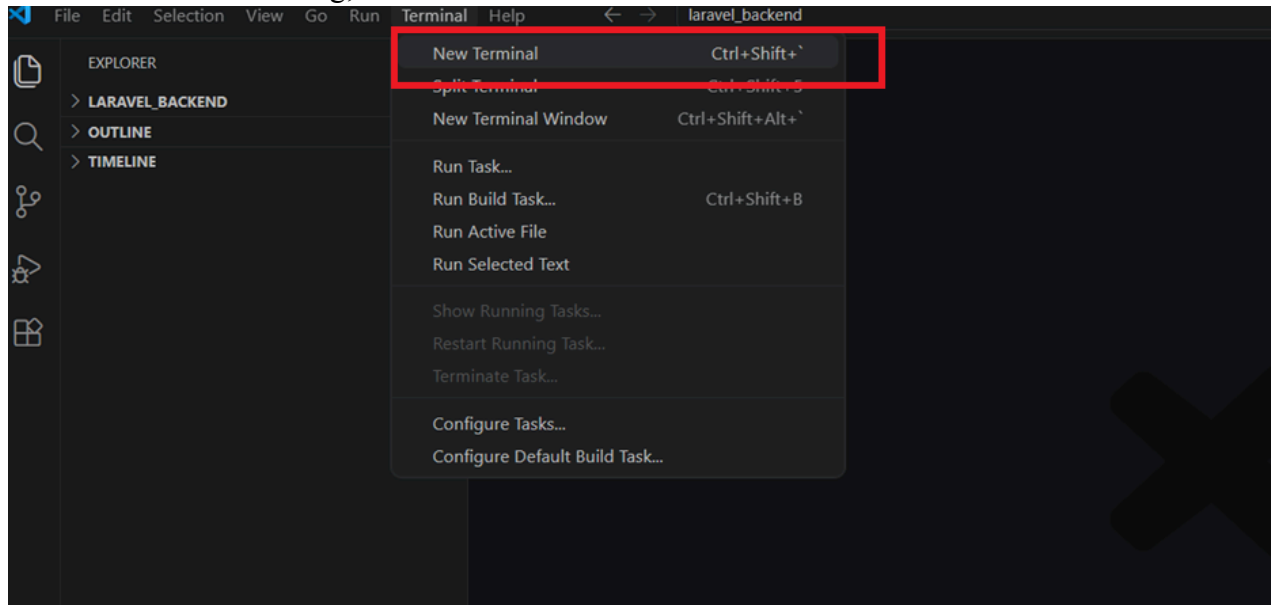


9. Run command line php artisan schedule:work and confirm it running

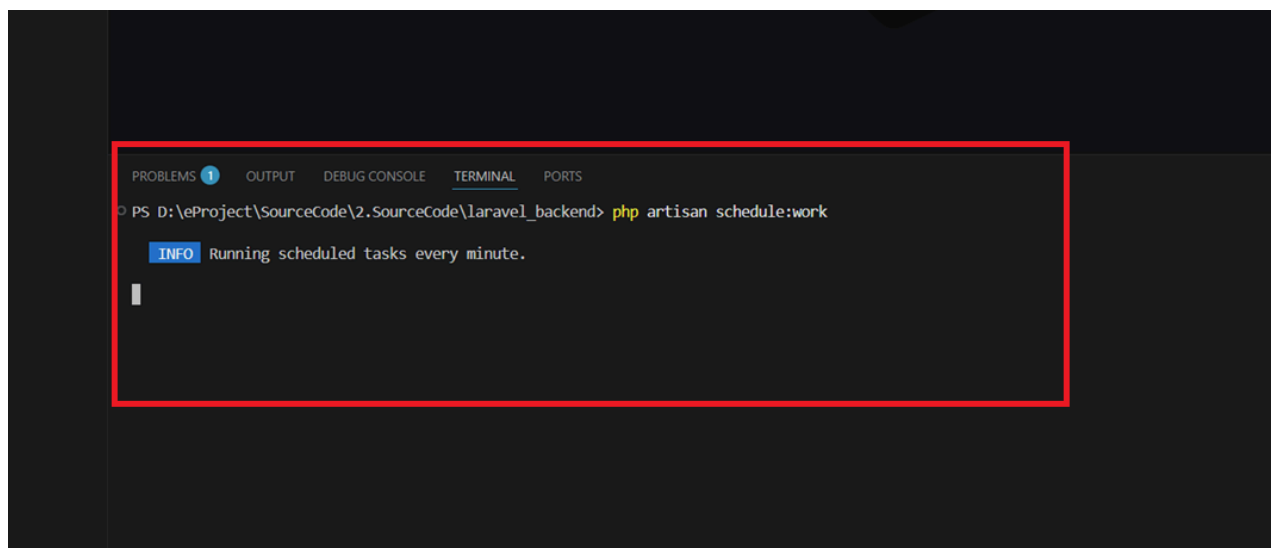


-
- (*)
- Installation documentation is included with the installation disc, should follow the proper format which have clear and complete content for anyone to perform.
 - The Center performs the installation and give a notification of the protection list for successfully. Project not successfully installed is Fail.

Step 2. Setup Frontend React

1. After the Backend setup is complete, we will set up the Frontend.
2. Locate front end folder in /2.SourceCode\react_frontend open it inside Visual studio code

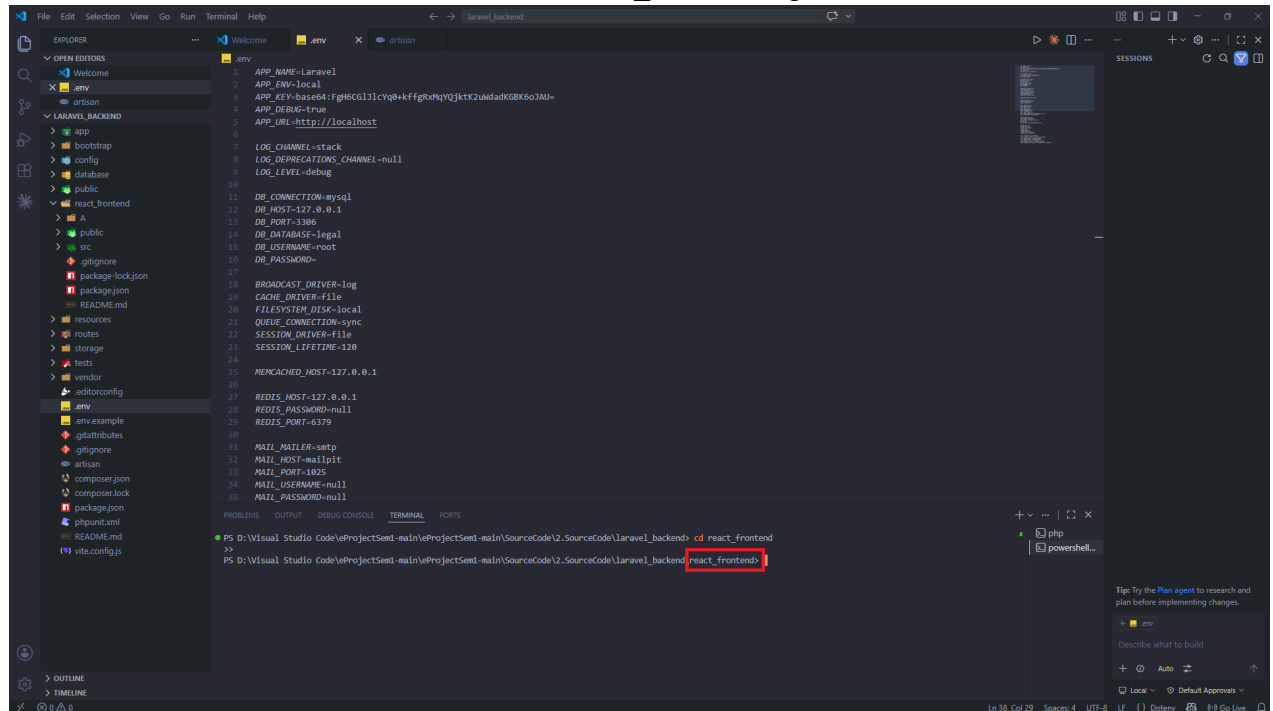

3. After it finishes running, continue by typing the command (npm install). Once it's finished, type in command npm start and it will take you directly to the homepage.

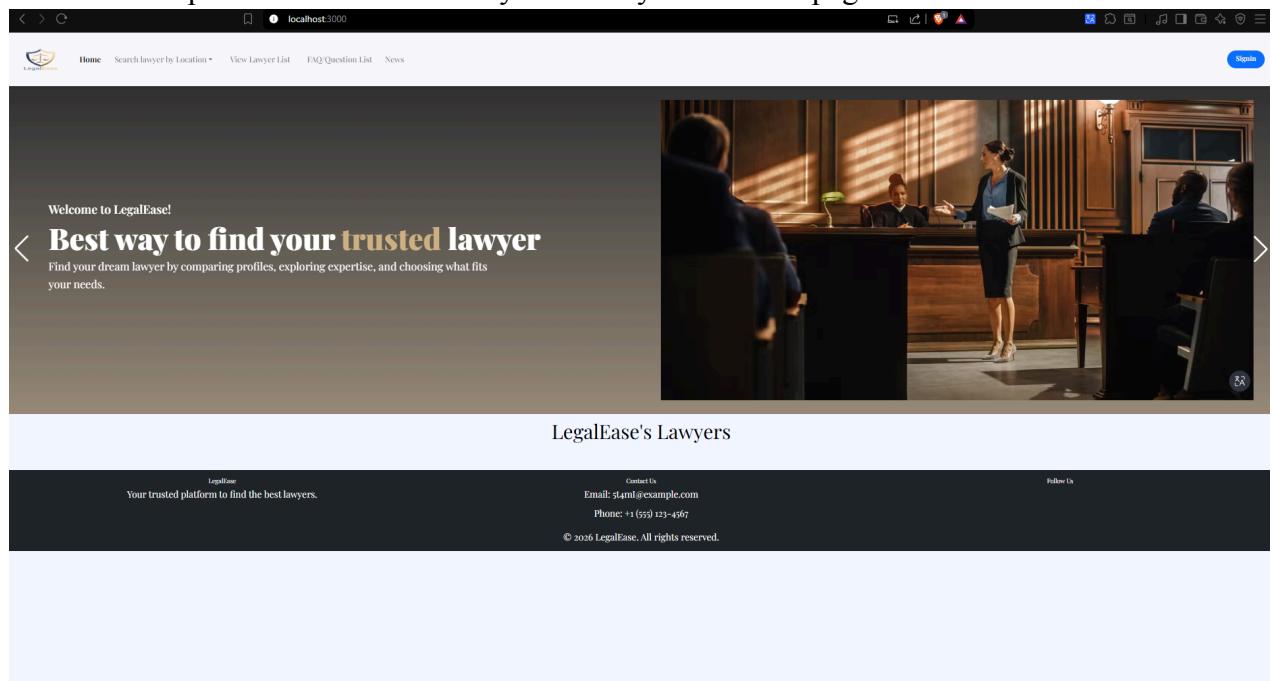

- (*)
- Installation documentation is included with the installation disc, should follow the proper format which have clear and complete content for anyone to perform.
 - The Center performs the installation and give a notification of the protection list for successfully. Project not successfully installed is Fail.