







Diagram illustrating the components of the `DOTween.To` method call:

```
DOTween.To(() => myValue, x => myValue = x, 100, 1);
```

The components are labeled as follows:

- Name of the variable to tween:** `myValue` (in the first lambda).
- end value:** `100`.
- duration:** `1`.
- This is a lambda that gets a value:** `() => myValue`.
- This is a lambda that sets a value:** `x => myValue = x`.

DoScale

DoPunchScale



DoScale

DoPunchScale



DoScale

DoPunchScale




Tweening

Code-based animation

Devs: Be careful, this means less control for artists

Good for UI animations

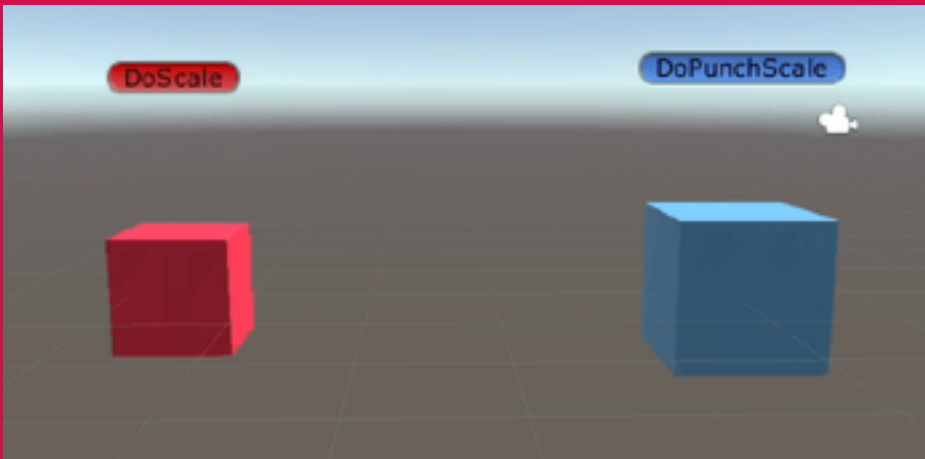

```
DOTween.To(() => myValue, x => myValue = x, 100, 1);
```

Diagram illustrating the DOTween.To method signature with annotations:

- `() => myValue`: This is a lambda that gets a value (Name of the variable to tween)
- `x => myValue = x`: This is a lambda that sets a value (end value)
- `100`: end value
- `1`: duration



Tweneing (UI & Values)

Example: Tweening the values of a health bar.

The **UI** itself can be tweened (gradual shrinking of the bars, shaking, glow etc),

but the actual health **float variable** can be tweened as well (tip, use a separate variable like `_displayHealth` that reads from the actual `_health` variable)

