







Diagram illustrating the parameters of the `DDTween.To` method:

```
DDTween.To( ()=> myValue, x=> myValue = x, 100, 1 );
```

Annotations:

- `myValue`: Name of the variable to tween
- `x=> myValue = x`: This is a lambda that sets a value
- `100`: end value
- `1`: duration
- `()=> myValue`: This is a lambda that gets a value

DoScale

DoPunchScale



DoScale

DoPunchScale



DoScale

DoPunchScale




Tweening

Code-based animation

Devs: Be careful, this means less control for artists

Good for UI animations

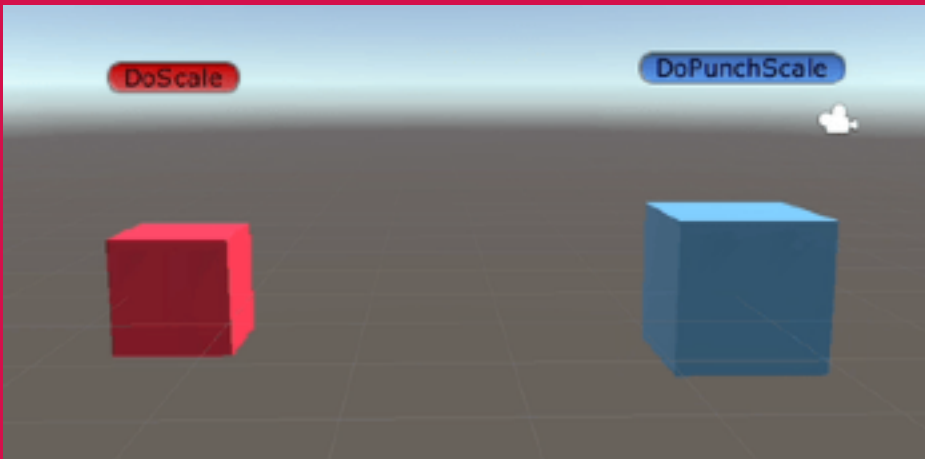

```
DOTween.To(() => myValue, x => myValue = x, 100, 1);
```

Diagram illustrating the DOTween.To method signature with annotations:

- `() => myValue`: This is a lambda that gets a value (Name of the variable to tween)
- `x => myValue = x`: This is a lambda that sets a value (end value)
- `100`: end value
- `1`: duration



Tweneing (UI & Values)

Example: Tweening the values of a health bar.

The **UI** itself can be tweened (gradual shrinking of the bars, shaking, glow etc),

but the actual health **float variable** can be tweened as well (tip, use a separate variable like `_displayHealth` that reads from the actual `_health` variable)

