DATABASE MANAGEMENT SYSTEMS PROJECT REVIEW-1

PROJECT BY:

HRITISHA-18BIT0226

SHREYA CHATTERJEE- 18BIT0251

EMMADI DIVYA SRUJANA-18BIT0257

Slot: F2+TF2

L35+L36

TOPIC:

CRICKET WORLD CUP

REVIEW: 1

Project Name : Cricket World Cup

Introduction:

Our DBMS project is based on Cricket World Cup management. It provides various information about the various teams participating in the World Cup, in which all the major countries participate. It also provides us with information about the various players participating in the tournament. The database contains details of players, coaches and umpires among others. All the useful information about the entire World Cup can be found here.

Data Requirements:

Entities:

- 1) **Team** is an entity type which has many attributes like Team Name which uses the data type varchar. Every team has been given a *Team ID which is the primary key* which is of data type varchar. Team Ranking, Number of Batsmen and Number of Bowlers are of the data type number. There is another attribute Wicketkeeper which is of multivalued type and accepts varchar data type. Primary key cannot have null value.
- 2) Players is an entity type which has an attribute Player Name which is of the data type varchar. <u>It has a primary key, Player ID, which cannot have null value</u>. It has a foreign key, Team ID which is the primary key of the entity, Team. There is a complex attribute, Number of matches played, which comprises of Number of Test Matches, Number of T20 Matches, Number of World Cup Matches and Number of ODIs.

- 3) **Batsman** is an entity type which has the attributes Number of sixes hit, Number of Fours hit, the batting average, and the total runs scored. All of these attributes are of the data type number.
- 4) **Bowler** is an entity type which has the attribute type of batsman with varchar data type. It also includes number of wickets and economy which are of the data type number.
- 5) **Umpire** is an entity type which has the attributes name and country of origin of data type varchar. *The primary key of this is Umpire Id which is of varchar data type*. It also has an attribute Number of matches of data type number.
- 6) **Coach** is an entity type with a foreign key, Team ID, which is a primary key of entity type, Team. <u>It has a primary key, Coach ID, of data type varchar</u>. It also has another attribute of data type varchar, Name.
- 7) **Captain** is an entity type with a <u>primary key, Captain ID of data type</u> <u>varchar</u>. It has two foreign keys, i) Player id from table Players and ii) Team ID from table Team. Number of years of captaincy and Number of wins are also attributes of this table of data type number.
- 8) Matches is an entity type with a <u>primary key, match ID</u>, <u>of varchar</u> <u>data type</u>. It has attributes like Team1 Name, Team2 Name, Stadium, Winner Team and Loser Team of data type varchar. Match date is an attribute which uses the datatype date. Match time is an attribute which is of the data type time.

Relationships:

Cricket player plays in team (N-1)

A cricket player can play in only one team but a team can have many players in it but a team must have players in it. So, the relationship becomes (N-1).

Coach manages team(1-N)

Coach can manage a single team, but each team can have many coaches (like batting coach, fielding coach, bowling coach). But it is compulsory for a team to have a coach. So, the relationship is 1-N

Team plays match(M-N)

Team can play many matches and a match can be played by two teams. So, the relationship is M-N.

Matches are umpired by Umpire(M-N)

An umpire can umpire in many matches and a match can have two umpires. So, the relationship is M-N.

Team headed by a Captain (1-1)

A team has 1 captain and a captain is from single team only. So the relationship is 1-1.

Functional Requirements:

1) VIEWER

System must allow users to login if they enter the correct login id and password. The users must be able to see the player details of each player in the database. Scores of each match must be visible. Match date and venue should be displayed on the login if the users seek for it.

System should display the complete roster of a team including the captain and the players playing in the top 11 and the current rank of the team. The details of the coach must also be available to the users. Referees and their details are also important as the players and the viewers want to see the best referees managing their team's match. Each player's statistics should also be available like total runs, number of matches played etc.

System should display data on each match which has been scored in the duration of the entire tournament. System should allow fixtures to be searched and the date should also be available.

BASIC ANALOGY:

- View the website with a browser.
- Login to the website.
- View all teams.
- View all players of a team.
- View all batsmen in the tournament.
- View all bowlers in the tournament.
- View all match reports in a season.
- View statistics of a player (all time).
- View coach details.
- View umpire details.
- View Match details.
- View ranking of each team

View Player information per match:

- a) Number of matches
- b) Total runs
- c) Total wickets

View all match details:

- i. Team 1
- ii. Team 2
- iii. Umpire
- iv. Winner
- v. Date
- vi. Time
- vii. Stadium
- viii. Rank of teams after match

2) ADMINISTRATOR

Administrator is in charge of creating the website which is used to access the database. Administrator has all the privileges of the user but has the authority to add and remove data from the database which the user cannot do.

Administrator is responsible for creating different user accounts and assigning the id and password. Administrators are the one who generate the fixtures and update them in the database. They should be allowed to enter the team name of home and away teams. He should have the authority to enter and modify the match details like time and venue in case the need to be changed.

If any player has been punished for bad behaviour or other reasons and cannot play in the World Cup anymore the administrator should be able to delete the data from the database. The rank of every team must keep being modified after each match. After a team is eliminated or disqualified the administrator should be able to delete the entire team's record.

BASIC ANALOGY:

- Create website.
- Generate login ID for viewer.
- Design website.
- Display different menus.
- Create World Cup.
- Display Team Name.
- Display Team Captain.
- Display Team Squad.

View Player information per match:

- a) Number of matches
- b) Total runs
- c) Total wickets

REMOVAL OF OLD DATA:

- i. If any team gets disqualified, then their data needs to be removed from the database.
- ii. If a player gets injured during the World Cup and is unable to play further, then their data needs to be removed from the database.
- iii. If any match gets cancelled due to unforeseen circumstances, then the particular match details should be removed.

MODIFICATION OF DATA:

- i. After every match the existing ranks of every team should be modified.
- ii. After every match, the statistics of every player should be updated.
- iii. Due to unfavourable weather conditions, a match might get delayed. Hence, the match timings need to be changed.

RETRIEVAL OF DATA:

i) <u>View information of every Team:</u>

Before the start of a new match, we have to retrieve the Team record like:

- a) Team Name
- b) Number of Batsman
- c) Number of Bowlers
- d) Wicketkeeper
- e) Number of Wins
- f) Number of Losses
- g) Names of Players

ii) View information of every Match:

After every match, we have to retrieve the Match details like:

- a) First Team Name
- b) Second Team Name
- c) Umpire
- d) Winner
- e) Loser

iii) View Score Board:

After every match, we have to retrieve the ranking order of teams :


- a) Rank of each team
- b) Team name

iv) View the captain of each team:

During the toss, we need to retrieve the data of the captain

- a) Name of captain
- b) Number of wins under his captaincy
- c) Years of captaincy

ER MODEL along with key constraints, participation constraints and cardinality constraints:

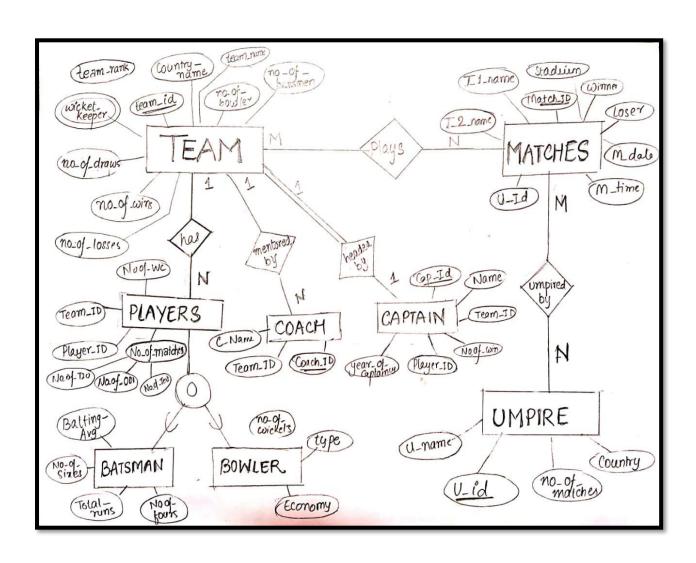


DATABASE MANAGEMENT SYSTEMS (ITE1003) REVIEW 2

BY:

HRITISHA 18BIT0226 SHREYA CHATTERJEE 18BIT0251 EMMADI DIVYA SRUJANA 18BIT0257

QUESTION 4:

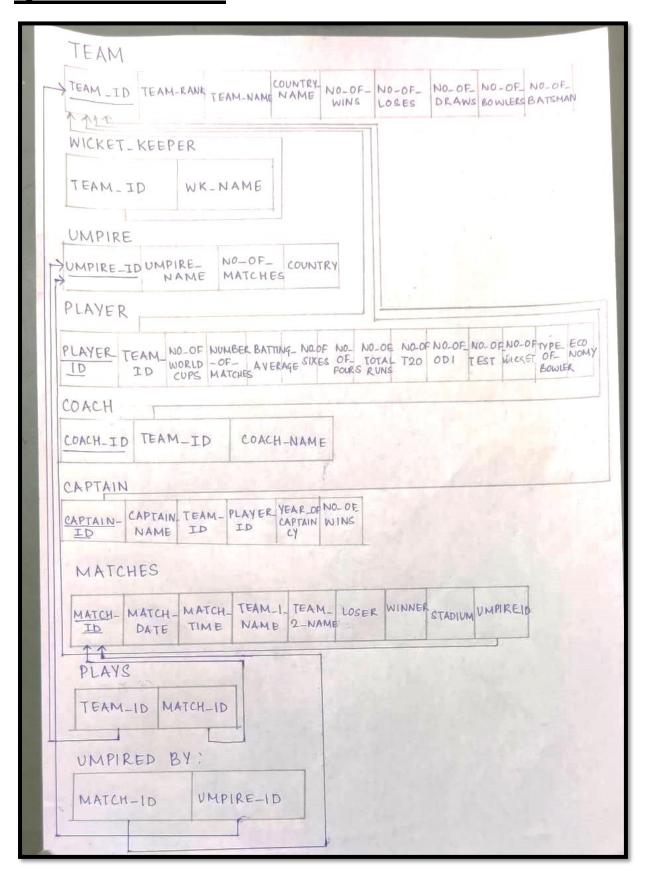

QUESTION 5:

TABLES

- Team
- Wicket_Keeper
- Umpire
- Player
- Coach
- Captain
- Matches
- Plays
- Umpired_By

CODE TO CREATE TABLES:

```
create table TEAM(
    team_id varchar(30) primary key,
    team_rank number(3),
    team_name varchar(20) not null,
    country_name varchar(20),
    no_of_wins number(3),
    no_of_loses number(3),
    no_of_draws number(3),
    no_of_bowlers number(2),
    no of batsmans number(2)
);
create table WICKET_KEEPER(
    team id references TEAM,
    wk_name varchar(30)
);
create table UMPIRE(
    umpire id varchar(30) primary key,
    umpire_name varchar(30),
    no_of_matches number(4),
    country varchar(20)
create table PLAYER(
    player id varchar(30) primary key,
    team id references TEAM,
    no_of_worldcups number(2),
    number_of_matches number(3),
    batting_average number(3),
    no of sixes number(3),
```

```
no_of_fours number(3),
    no of totalruns number(4),
    no of t20 number(3),
    no of odi number(3),
    no of test number(3),
    no of wickets number(2),
    type_of_bowler varchar(30),
    economy number(3)
);
create table COACH(
    coach_id varchar(30) primary key,
    team id references TEAM,
    coach_name varchar(30)
);
create table CAPTAIN(
    captain id varchar(30) primary key,
    captain_name varchar(30),
    team_id references TEAM,
    player_id varchar(30),
   year_of_captaincy number(2),
   no_of_wins number(4)
);
create table MATCHES(
   match_id varchar(20) primary key,
   match date date,
   match_time timestamp(0),
    team_1_name varchar(30),
    team_2_name varchar(30),
    loser varchar(30),
   winner varchar(30),
    stadium varchar(30),
    umpire_id references umpire
);
create table PLAYS(
    team_id references TEAM,
   match_id references MATCHES
);
create table UMPIRED BY(
   match_id references MATCHES,
    umpire_id references UMPIRE
```

TABLE TEAM:

```
SQL> create table TEAM(
         team_id varchar(30) primary key,
  2
         team_rank number(3),
  3
         team_name varchar(20) not null,
  4
         country_name varchar(20),
  5
  6
         no of wins number(3),
         no of loses number(3),
  7
         no of draws number(3),
  8
         no_of_bowlers number(2),
  9
 10
         no of batsmans number(2)
 11
     );
Table created.
```

```
SQL> desc TEAM;
Name
                                            Null?
                                                     Type
TEAM ID
                                            NOT NULL VARCHAR2(30)
TEAM RANK
                                                     NUMBER(3)
TEAM NAME
                                            NOT NULL VARCHAR2(20)
COUNTRY NAME
                                                     VARCHAR2(20)
NO OF WINS
                                                     NUMBER(3)
NO_OF_LOSES
                                                     NUMBER(3)
                                                     NUMBER(3)
NO OF DRAWS
NO OF BOWLERS
                                                     NUMBER(2)
NO OF BATSMANS
                                                     NUMBER(2)
```

TABLE WICKET_KEEPER:

```
SQL> create table WICKET_KEEPER(
2 team_id references TEAM,
3 wk_name varchar(30)
4 );
Table created.
```

TABLE UMPIRE:

```
SQL> create table UMPIRE(

2 umpire_id varchar(30) primary key,

3 umpire_name varchar(30),

4 no_of_matches number(4),

5 country varchar(20)

6 );

Table created.
```

```
SQL> desc UMPIRE;
Name Null? Type
------
UMPIRE_ID NOT NULL VARCHAR2(30)
UMPIRE_NAME VARCHAR2(30)
NO_OF_MATCHES NUMBER(4)
COUNTRY VARCHAR2(20)
```

TABLE PLAYER:

```
SQL> create table PLAYER(
         player_id varchar(30) primary key,
  2
         team_id references TEAM,
  3
         no of worldcups number(2),
  4
         number of matches number(3),
  5
         batting average number(3),
  6
  7
         no of sixes number(3),
  8
         no of fours number(3),
         no of totalruns number(4),
  9
 10
         no of t20 number(3),
         no of odi number(3),
 11
 12
         no_of_test number(3),
         no of wickets number(2),
 13
 14
         type of bowler varchar(30),
 15
         economy number(3)
 16
     );
Table created.
```

```
SQL> desc PLAYER;
                                                                                                   Null?
Name
 PLAYER_ID
                                                                                                   NOT NULL VARCHAR2(30)
                                                                                                              VARCHAR2(30)
 NO_OF_WORLDCUPS
                                                                                                              NUMBER(2)
 NUMBER_OF_MATCHES
                                                                                                              NUMBER(3)
BATTING_AVERAGE
                                                                                                              NUMBER(3)
NO_OF_SIXES
                                                                                                              NUMBER(3)
NUMBER(3)
 NO OF FOURS
NO_OF_TOTALRUNS
NO_OF_T20
NO_OF_ODI
                                                                                                              NUMBER(4)
                                                                                                              NUMBER(3)
                                                                                                              NUMBER(3)
 NO_OF_TEST
                                                                                                              NUMBER(3)
NO_OF_WICKETS
TYPE_OF_BOWLER
                                                                                                              NUMBER(2)
                                                                                                              VARCHAR2(30)
                                                                                                              NUMBER(3)
 ECONOMY
```

TABLE COACH:

```
SQL> create table COACH(

2 coach_id varchar(30) primary key,

3 team_id references TEAM,

4 coach_name varchar(30)

5 );

Table created.
```

```
      SQL> desc COACH;

      Name
      Null? Type

      COACH_ID
      NOT NULL VARCHAR2(30)

      TEAM_ID
      VARCHAR2(30)

      COACH_NAME
      VARCHAR2(30)
```

TABLE CAPTAIN:

```
SQL> create table CAPTAIN(
         captain id varchar(30) primary key,
  2
  3
         captain_name varchar(30),
  4
         team_id references TEAM,
         player_id varchar(30),
  5
  6
         year_of_captaincy number(2),
  7
         no of wins number(4)
  8
     );
Table created.
```

```
      SQL> desc CAPTAIN;

      Name
      Null?
      Type

      CAPTAIN_ID
      NOT NULL VARCHAR2(30)

      CAPTAIN_NAME
      VARCHAR2(30)

      TEAM_ID
      VARCHAR2(30)

      PLAYER_ID
      VARCHAR2(30)

      YEAR_OF_CAPTAINCY
      NUMBER(2)

      NO_OF_WINS
      NUMBER(4)
```

TABLE MATCHES:

```
SQL> create table MATCHES(
        match_id varchar(20) primary key,
 2
        match_date date,
        match_time timestamp(0),
        team_1_name varchar(30),
 6
        team 2 name varchar(30),
        loser varchar(30),
        winner varchar(30),
 8
 9
         stadium varchar(30),
10
        umpire_id references umpire
11 );
Table created.
```

```
SQL> desc MATCHES;
                                            Null?
Name
                                                      Type
MATCH ID
                                            NOT NULL VARCHAR2(20)
MATCH_DATE
                                                      DATE
MATCH_TIME
                                                      TIMESTAMP(0)
TEAM_1_NAME
                                                      VARCHAR2(30)
                                                      VARCHAR2(30)
 TEAM_2_NAME
LOSER
                                                      VARCHAR2(30)
WINNER
                                                      VARCHAR2(30)
STADIUM
                                                      VARCHAR2(30)
UMPIRE_ID
                                                      VARCHAR2(30)
```

TABLE PLAYS:

```
SQL> create table PLAYS(
2 team_id references TEAM,
3 match_id references MATCHES
4 );
Table created.
```

TABLE UMPIRED BY:

```
SQL> create table UMPIRED_BY(
2 match_id references MATCHES,
3 umpire_id references UMPIRE
4 );
Table created.
```

CODE TO INSERT VALUES TO TABLE:

TEAM VALUES

```
insert into team values(
  'IND1221', 1, 'MEN IN BLUE', 'INDIA', 5, 1, 0, 6, 7
);
Insert into team values(
  'AUS2174', 4, 'KANGAROO', 'AUSTRAILA', 3, 3, 0, 5, 6
);
Insert into team values(
  'SA5412', 3, 'PROTEA', 'SOUTH AFRICA', 3, 2, 1, 8, 5
);
Insert into team values(
  'NZ5687', 2, 'BLACK CAPS', 'NEW ZEALAND', 4, 2, 0, 6, 7
);
Insert into team values(
  'BAN9852', 5, 'TIGERS', 'BANGLADESH', 2, 4, 0, 7, 7
);
SQL> select * from team;
                    TEAM_RANK TEAM_NAME
TEAM_ID
                                        COUNTRY_NAME
                                                     NO_OF_WINS NO_OF_LOSES NO_OF_DRAWS NO_OF_BOWLERS NO_OF_BATSMANS
                         1 MEN IN BLUE
                         4 KANGAROO
                                        AUSTRAILA
                                        SOUTH AFRICA
                         3 PROTEA
IZ5687
                         2 BLACK CAPS
                                        NEW ZEALAND
```

BANGLADESH

UMPIRE VALUES

UMP41002

UMP74101

Jmp52410

JMP85201

JMP55200

```
insert into UMPIRE values (
  'UMP41002', 'Kumar Dharmasena', 103, 'Sri Lanka'
);
insert into UMPIRE values (
  'UMP74101', 'Aleem Dar', 207, 'Pakistan'
);
insert into UMPIRE values (
  'Ump52410', 'Anil Chaudhary', 19, 'India'
);
insert into UMPIRE values (
  'UMP85201', 'lan Gould', 140, 'England'
);
insert into UMPIRE values (
  'UMP55200', 'Tony Hill', 96, 'New Zealand'
);
SQL> select * from UMPIRE;
UMPIRE_ID
                         UMPIRE_NAME
                                                  NO_OF_MATCHES COUNTRY
```

Kumar Dharmasena

Aleem Dar Anil Chaudhary

Ian Gould

Tony Hill

103 Sri Lanka

207 Pakistan

96 New Zealand

19 India 140 England

COACH VALUES

```
insert into COACH values(
    'CH417', 'IND1221', 'RAVI SHASTRI'
);
insert into COACH values(
    'CH140', 'AUS2174', 'JUSTIN LANGER'
);
insert into COACH values(
    'CH223', 'SA5412', 'OTTIS GIBSON'
);
insert into COACH values(
    'CH398', 'NZ5687', 'GARY STEAD'
);
insert into COACH values(
    'CH748', 'BAN9852', 'RUSSEL DOMINGO'
);
```

SQL> select * from	COACH;	
COACH_ID	TEAM_ID	COACH_NAME
CH417	IND1221	RAVI SHASTRI
CH140	AUS2174	JUSTIN LANGER
CH223	SA5412	OTTIS GIBSON
CH398	NZ5687	GARY STEAD
CH748	BAN9852	RUSSEL DOMINGO

CAPTAIN VALUES

CAPTAIN_ID	CAPTAIN_NAME	TEAM_ID	PLAYER_ID	YEAR_OF_CAPTAINCY
NO_OF_WINS				
======= CAP11452 56	MS DHONI	IND1221	PLR44567	
CAP21478 74	DALE STEYN	SA5412	PLR10235	
CAP30214 100	MICHAEL CLARKE	AUS2174	PLR74138	
CAP14789 20	TAMIM IQBAL	BAN9852	PLR89562	
CAP36957 85	ROSS TAYLOR	NZ5687	PLR957417	

MATCHES VALUES

);

```
insert into MATCHES values(
  'MAT101',to date('12-03-2011','dd-mm-
yyyy'),to timestamp('15:30','hh24:mi'),'India','Bangladesh','Bangladesh','India','Feroz Shah
Kotla','UMP55200'
);
insert into MATCHES values(
  'MAT201',to date('15-03-2011','dd-mm-
yyyy'),to_timestamp('9:30','hh24:mi'),'England','Australia','England','Australia','Eden
Gardens','UMP41002'
);
insert into MATCHES values(
  'MAT301',to date('21-03-2011','dd-mm-yyyy'),to timestamp('11:30','hh24:mi'),'Sri
Lanka', 'Bangladesh', 'Bangladesh', 'Sri Lanka', 'M.A. Chidambaram', 'UMP74101'
);
insert into MATCHES values(
  'MAT401',to_date('23-03-2011','dd-mm-yyyy'),to_timestamp('15:30','hh24:mi'),'New
Zealand', 'South Africa', 'South Africa', 'New Zealand', 'Sardar Patel', 'UMP85201'
);
insert into MATCHES values(
  'MAT501',to_date('26-03-2011','dd-mm-
yyyy'),to_timestamp('8:30','hh24:mi'),'England','India','England','India','Wankhede','Ump524
10'
```

ATCH_ID	MATCH_DAT	MATCH_TIME		TEAM_1_NAM	E
EAM_2_NAME		LOSER	WINNER	STADIUM	UMPIRE_ID
======== AT101 angladesh	======================================	01-OCT-19 03.30.00 PM Bangladesh	India	India Feroz Shah Kotla	UMP55200
AT301 angladesh	21-MAR-11	01-0CT-19 11.30.00 AM Bangladesh	Sri Lanka	Sri Lanka M.A. Chidambaram	UMP74101
AT401 outh Africa	23-MAR-11	01-0CT-19 03.30.00 PM South Africa	New Zealand	New Zealan Sardar Patel	d UMP85201
AT501 ndia	26-MAR-11	01-OCT-19 08.30.00 AM England	India	England Wankhede	Ump52410
AT201 ustralia	15-MAR-11	01-0CT-19 09.30.00 AM England	Australia	England Eden Gardens	UMP41002

PLAYER VALUES

LAYER_ID			TEAM_IC			NO_	OF_WORLDCUF	S NUMBER_OF	_MATCHES	BATTI	VG_AVE	RAGE N	O_OF_SIXES	NO_OF_FOURS
IO_OF_TOT <i>E</i>	ALRUNS	NO_OF_T20	NO_OF_ODI	NO_OF_TEST	NO_OF_WICKETS	TY	PE_OF_BOWLE	R		ECON	OMY			=======
PLR17410	800	74	IND1221 120	20	1	. me	edium	2	13		3	58		24
PLR74203	463	41	AUS2174 210	140	1	. sl	low					67	10	39
PLR45987	985	24	SA5412 63		1	. me	edium-slow				11	99		47
PLR20147	85	52	NZ5687 10	74	1	. le	egspin		12		18	12		3
PLR65200	21	77	BAN9852 30		1	. fa	ist				17			1

UMPIRED_BY VALUES

```
insert into Umpired_by values(
   'MAT501','UMP55200'
);
insert into Umpired_by values(
   'MAT301','Ump52410'
);
insert into Umpired_by values(
   'MAT101','UMP41002'
);
insert into Umpired_by values(
   'MAT401','UMP74101'
);
insert into Umpired_by values(
   'MAT201','Ump52410'
);
```

PLAYS VALUES

```
insert into Plays values(
   'IND1221','MAT101'
);
insert into Plays values(
   'AUS2174','MAT201'
);
insert into Plays values(
   'BAN9852','MAT301'
);
insert into Plays values(
   'NZ5687','MAT401'
);
insert into Plays values(
   'IND1221','MAT501'
);
```

WICKET_KEEPER VALUES

```
insert into WICKET_KEEPER values(
   'IND1221','MS Dhoni'
);
insert into WICKET_KEEPER values(
   'IND1221','Dinesh Kartik'
);
insert into WICKET_KEEPER values(
   'AUS2174','Tim Lee'
);
insert into WICKET_KEEPER values(
   'AUS2174','Peter Hegward'
);
insert into WICKET_KEEPER values(
   'AUS2174','Hefer Kingsly'
);
```

DATABASE MANAGEMENT SYSTEMS (ITE1003) REVIEW 3

BY:

HRITISHA 18BIT0226 SHREYA CHATTERJEE 18BIT0251 EMMADI DIVYA SRUJANA 18BIT0257

QUESTION 6

Write down the necessary SQL statements for implementation of functional requirements through SQL query, delete and update statement.

UPDATE

1. Add column of total matches in the table TEAM. Update the rows using total matches= number of WNS+ number of LOSES + number of DRAWS.

CODE:

```
alter table team add total_matches number(5);
update team set total_matches=no_of_draws + no_of_wins + no_of_loses;
```

```
SQL> alter table team add total_matches number(S);

Table altered.

SQL update team set total_matches=no_of_draws + no_of_wins + no_of_loses;

SQL set pagesize 500
SQL set pages
```

2. Add column named 'PLAYER_NAME' in table PLAYER. Using interactive updation.

CODE:

```
3. alter table player add player_name varchar(20);4. update player set player_name = '&player_name' where player_id = '&player_id';
```

OUTPUT:

```
0 0 11
```

```
SQL> alter table player add player_name varchar(20);

Table altered.

SQL> update player set player_name = '&player_name' where player_id = '&player_id';

Enter value for player_name: MS Dhoni

Enter value for player_id: PLR17410

old 1: update player set player_name = '&player_name' where player_id = '&player_id'

new 1: update player set player_name = 'MS Dhoni' where player_id = 'PLR17410'

1 row updated.
```

	2	1 fa	st			17 Shak	kib Al F	Hassan				
QL> QL> set QL> sel 2 ;	: lines 1 ect * fr	50 om player										
LAYER_I	:D		TEAM_ID			NO_OF_WOF	RLDCUPS	NUMBER_OF_MATCHES	BATTING_	AVERAGE	NO_OF_SIXES	NO_OF_FOURS
0_0F_T0	TALRUNS	NO_OF_T20	NO_OF_ODI	NO_OF_TEST	NO_OF_WICKETS	TYPE_OF_	_BOWLER		ECONOMY	PLAYER_	NAME	
LR17410	800	74	IND1221 120	20	1	medium	2	13	3	58 MS Dhon	7 i	24
LR74203	463	41	AUS2174 210	140	1	slow	1	6	9	67 BRETT L	EE 10	39
LR45987	985	24	SA5412 63	65	1	medium-s	3 slow	4	11	99 DAVID M	4 IILLER	47
LR20147	85	52	NZ5687 10	74	1	legspin	1	12	18	12 Kane Wi	1 lliamson	3
LR65200	21	77	BAN9852 30	2	1	fast	2	9	17	4 Shakib	0 Al Hassan	1

SQL QUERIES USING JOIN/NESTING/SET OPERATIONS

1. Display the name of the umpires who have not umpired matches in eden gardens.

CODE:

```
select umpire_name from umpire minus select umpire_name from umpire
where umpire_id in(select umpire_id from matches where stadium='Eden Gardens');
select umpire_name from umpire minus select umpire_name from umpire natural join mat
ches where stadium='Wankhede';
```

OUTPUT:

- 2. (a)Display the country whose players have batting average greater than 60.
 - (b) Display the country whose players do not have batting average greater than 60.

CODE:

```
select country_name from team where team_id in(select team_id from player
  where batting_average >60);

select country_name from team natural join player where batting_average>60;

select country_name from team minus select country_name from team where team_id in(s
  elect team_id from player
  where batting_average >60);
```

OUTPUT:

3. Display name of coach who has coached a player with total_runs greater than 500;

CODE:

```
select distinct coach_name from coach where team_id in(select team_id
from player where no_of_totalruns>500 );
```

```
select distinct coach_name from coach inner join player on coach.team_id
= player.team_id where(player.no_of_totalruns>500);
select distinct coach_name from coach minus select distinct coach_name from coach where team_id in(select team_id from player where no_of_totalruns>500 );
OUTPUT:
```

4. Display name of wicket keeper who is also the captain of his team.

CODE:

```
select wk_name from WICKET_KEEPER where team_id in(select team_id from
  captain where captain_name=wk_name);

select wk_name from WICKET_KEEPER natural join captain where captain_name =wk_name;

select wk_name from WICKET_KEEPER minus select wk_name from WICKET_KEEPER where tea
  m_id in(select team_id from
  captain where captain_name=wk_name);
```

OUTPUT:

```
QL> update captain set captain_name ='MS Dhoni'where Captain_id='CAP11452';
SQL> select * from captain;
                   CAPTAIN_NAME
CAPTAIN_ID
AP11452
56
                                                                IND1221
                                                                                                  PLR44567
                               MS Dhoni
CAP21478
74
                                                                                                  PLR10235
                               DALE STEYN
                               MICHAEL CLARKE
                                                                                                  PLR74138
AP14789
20
                                                                BAN9852
                               TAMIM IQBAL
                                                                                                  PLR89562
                               ROSS TAYLOR
                                                                NZ5687
QL> select wk_name from WICKET_KEEPER where team_id in(select team_id from 2 captain where captain_name=wk_name);
```

```
SQL> select wk_name from WICKET_KEEPER natural join captain where captain_name =wk_name;

WK_NAME

MS Dhoni

SQL>
SQL> select wk_name from WICKET_KEEPER minus select wk_name from WICKET_KEEPER where team_id in(select team_id from 2 captain where captain_name=wk_name);

WK_NAME

Dinesh Kartik
Hefer Kingsly
Peter Hegward
Tim Lee

SQL>
```

GROUP BY HAVING CLAUSE QUERY

Display the name of players who have same bowling action CODE:

select player_id, upper(player_name) from player where type_of_bowler in(select type
_of_bowler from player group by type_of_bowler having count(*)>1);

OUTPUT:


DELETE:

1. Deleting the column number_of_matches.

CODE:

```
alter table player drop column no_of_matches;
delete from coach where coach_id='CH596';
```


OUTPUT:

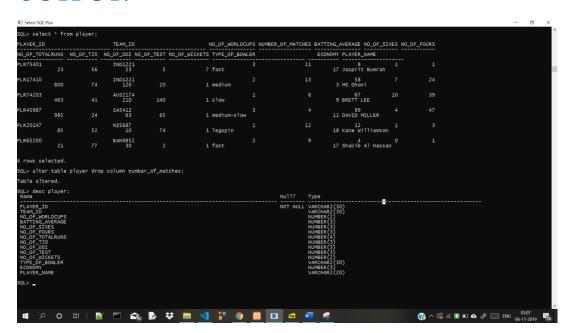

```
SQL>
SQL> insert into COACH values(
2 'CH596', 'IND1221', 'GARY KISTERN'
3 );
1 row created.
SQL> select * from coach;
COACH_ID
                                                          TEAM_ID
                                                                                                                    COACH_NAME
                                                         IND1221
IND1221
AUS2174
SA5412
NZ5687
BAN9852
----
СН596
СН417
СН140
                                                                                                                    GARY KISTERN
RAVI SHASTRI
JUSTIN LANGER
OTTIS GIBSON
GARY STEAD
RUSSEL DOMINGO
CH223
CH398
CH748
6 rows selected.
SQL>
SQL> delete from coach where coach_id='CH596';
1 row deleted.
SQL> select * from coach;
COACH_ID
                                                          TEAM_ID
                                                                                                                    COACH_NAME
CH417
CH140
CH223
CH398
CH748
                                                         IND1221
AUS2174
SA5412
NZ5687
                                                                                                                    RAVI SHASTRI
JUSTIN LANGER
OTTIS GIBSON
GARY STEAD
RUSSEL DOMINGO
SOL>
```

DELETION WITH EMBEDDED SELECT

delete from player where team_id in(select team_id from team where countr
y name='Australia');

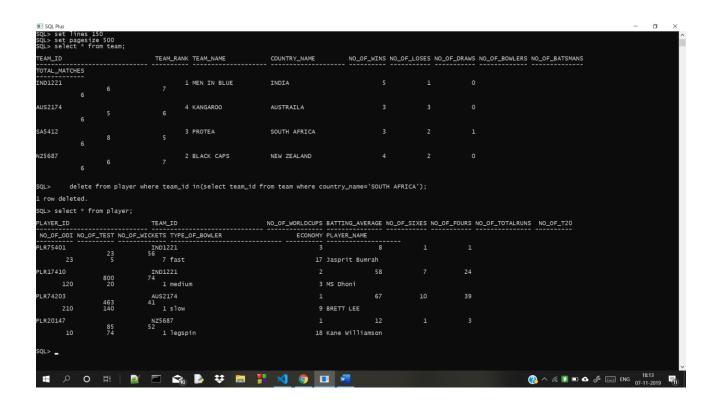


QUESTION 7

Define and implement one PL/SQL function and one PL/SQL procedure appropriate for the database under consideration.

PROCEDURE:

User wants to predict the competition level of the next match by fetching the player details of a particular team.

Use PL/SQL procedure to execute the same.

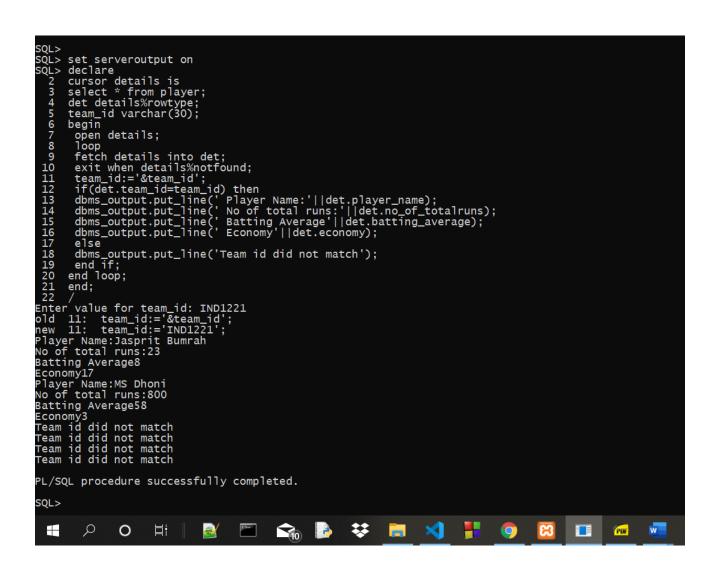

FUNCTION:

User wants to book the tickets of an upcoming match Create a PL/SQL function to display the stadium name on entering the desired Match.

```
SQL Plus
SQL> set serveroutput on;
SQL> declare
2 p match
3 tf match
       p matches.match_id%type;
tf matches.stadium%type;
function get_stdname(matchid out matches.match_id%type, std out
matches.stadium%type) return varchar is
       begin
select stadium into std from matches where match_id='&matchid';
return std;
       end;
begin
 11
       dbms_output.put_line('Stadium:'||get_stdname(p,tf));
 12
13
Enter value for matchid: MAT401
old 7: select stadium into std from matches where match_id='&matchid';
new 7: select stadium into std from matches where match_id='MAT401';
Stadium:Sardar Patel
PL/SQL procedure successfully completed.
SQL>
SQL>
SQL> set serveroutput on;
SQL> declare
       p matches.match_id%type;
tf matches.stadium%type;
function get_stdname(matchid out matches.match_id%type, std out
matches.stadium%type) return varchar is
       begin
select stadium into std from matches where match_id='&matchid';
       return std;
 9
10
       end;
begin
 11
12
13
       dbms_output.put_line('Stadium: '||get_stdname(p,tf));
         value for matchid: MAT501
7: select stadium into std from matches where match_id='&matchid';
7: select stadium into std from matches where match_id='MAT501';
old
PL/SQL procedure successfully completed.
SQL>
```

QUESTION 8

Define two business rules appropriate for the database under consideration and implement the rules using trigger.

TRIGGER 1

When a team is eliminated do the necessary process and update the elimination table.

CODE:

```
create table elimination
teamid varchar(10) primary key,
cntry_name varchar(15),
rankk number(2),
teamName varchar(15),
noLoses number(2)
);
set serveroutput on
create or replace trigger trig2
after delete on team
referencing new as new old as old
for each row
insert into elimination values (:OLD.team id ,:OLD.country name
,:OLD.team_rank ,:OLD.team_name,:OLD.no_of_loses);
delete from team where team_id='BAN9852';
select *from elimination ;
```

OUTPUT

(NEXT PAGE)

```
SQL>
SQL>
SQL> create table elimination
     teamid varchar(10) primary key, cntry_name varchar(15), rankk number(2), teamName varchar(15),
  7
8
     noLoses number(2)
     );
Table created.
SQL> set serveroutput on
SQL> create or replace trigger trig2
     after delete on team
     referencing new as new old as old
     for each row
     insert into elimination values (:OLD.team_id ,:OLD.country_name
      ,:OLD.team_rank ,:OLD.team_name,:OLD.no_of_loses);
  8
     END;
Trigger created.
```

```
SQL> delete from team where team_id='BAN9852';

1 row deleted.

SQL> select * from elimination;

TEAMID CNTRY_NAME RANKK TEAMNAME NOLOSES

BAN9852 BANGLADESH 5 TIGERS 4

SQL>
```

TRIGGER 2

Due to some malpractices a team was banned for 2 years. After 2 years when it came back the board of cricket council order to change the team_ID because of some reasons

CODE:

```
Create or replace trigger reference1
after update on team
for each row
begin
update player set team_id=:new.team_id where
team_id=:old.team_id;
update coach set team_id=:new.team_id
where team_id=:old.team_id;
update captain set team_id=:new.team_id where
team_id=:old.team_id;
update plays set team_id=:new.team_id where
team_id=:old.team_id;
update wicket_keeper set team_id=:new.team_id where
team id=:old.team id;
end;
update team set team_id= 'AUS7895' where team_id='AUS2174';
select * from player;
```

OUTPUT

```
QL> select * from player:
LAYER ID
                               TEAM_ID
                                                                NO_OF_WORLDCUPS NUMBER_OF_MATCHES BATTING_AVERAGE NO_OF_SIXES NO_OF_FOURS
O_OF_TOTALRUNS NO_OF_T20 NO_OF_ODI NO_OF_TEST NO_OF_WICKETS TYPE_OF_BOWLER
                                                                                                     ECONOMY PLAYER_NAME
LR75401
                                                                                                          8
17 Jasprit Bu<u>mra</u>h
                                                               7 fast
PLR17410
                                                                                                           58
3 MS Dhoni
           800
                                               20
                                                               1 medium
LR74203
                                                                                                          67
9 BRETT LEE
                               AUS2174
210
                                              140
                                                               1 slow
LR45987
                                                                                                          99
11 DAVID MILLER
                               SA5412
                                                               1 medium-slow
                               NZ5687
                                                                                                          12
18 Kane Williamson
                                                               1 legspin
LR65200
                               BAN9852
                                                                                                          4
17 Shakib Al Hassan
                                                               1 fast
 rows selected.
```

```
SQL>
           Create or replace trigger reference1
SQL>
  2
           after update on team
          for each row
begin
  45
          update player set team_id=:new.team_id where
  6
          team_id=:old.team_id;
  78
          update coach set team_id=:new.team_id
          where team_id=:old.team_id;
update captain set team_id=:new.team_id where
team_id=:old.team_id;
  9
 10
          update plays set team_id=:new.team_id where
team_id=:old.team_id;
 11
 12
 13
          update wicket_keeper set team_id=:new.team_id where
 14
           team_id=:old.team_id;
 15
           end:
 16
Trigger created.
SQL>
SQL>
                                            2
                     ≓ŧ
  \blacksquare
               0
```

	* from team;							
AM_ID		TEAM_RANK TEAM_NAME	COUNTRY_NAME	NO_OF_WINS NO_O	F_LOSES NO_	DF_DRAWS NO_OF	_BOWLERS NO_OF	_BATSMANS
TAL_MATCHES								
ID1221 6	5	1 MEN IN BLUE	INDIA		1		6	
IS7895 6	5	4 KANGAROO	AUSTRAILA	3	3			6
.5412 6	5	3 PROTEA	SOUTH AFRICA	3	2	1	8	5
:5687	5	2 BLACK CAPS	NEW ZEALAND	4	2		6	
	* from player;	TEAM_ID	NO_OF_WORLDCUPS BATT	ING_AVERAGE NO_OF	_SIXES NO_O	F_FOURS NO_OF_	TOTALRUNS NO_	OF_T20
AYER_ID		TEAM_ID 			_SIXES NO_O	F_FOURS NO_OF_	TOTALRUNS NO_	0F_T20
AYER_ID			ECONOMY PLAY		_SIXES NO_O 	F_FOURS NO_OF_ 	TOTALRUNS NO_	OF_T20 56
AYER_ID O_OF_ODI NO R75401	D_OF_TEST_NO_OF_	WICKETS TYPE_OF_BOWLER IND1221	ECONOMY PLAY	ER_NAME 				
AYER_ID 	D_OF_TEST_NO_OF_	WICKETS TYPE_OF_BOWLER IND1221 7 fast IND1221	ECONOMY PLAY 3 17 Jass	ER_NAME 	1	1	23	56
AYER_ID D_OF_ODI NO 23 R17410 120 R74203	5 20	WICKETS TYPE_OF_BOWLER IND1221 7 fast IND1221 1 medium AUS7895	ECONOMY PLAY 3 17 Jass 2 3 MS [9 BRE1	ER_NAME 	1 7	1 24	23 800	56 74