

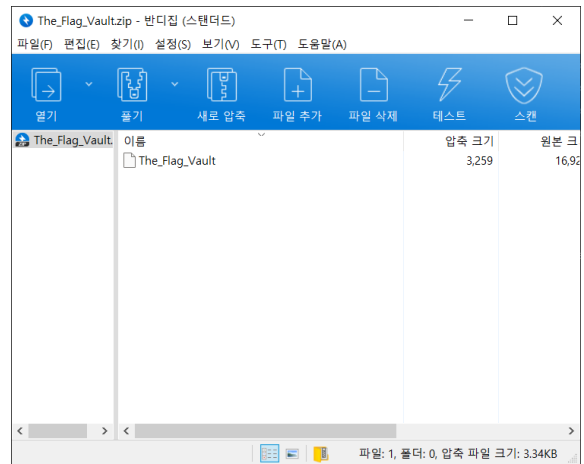


# The Flag Vault

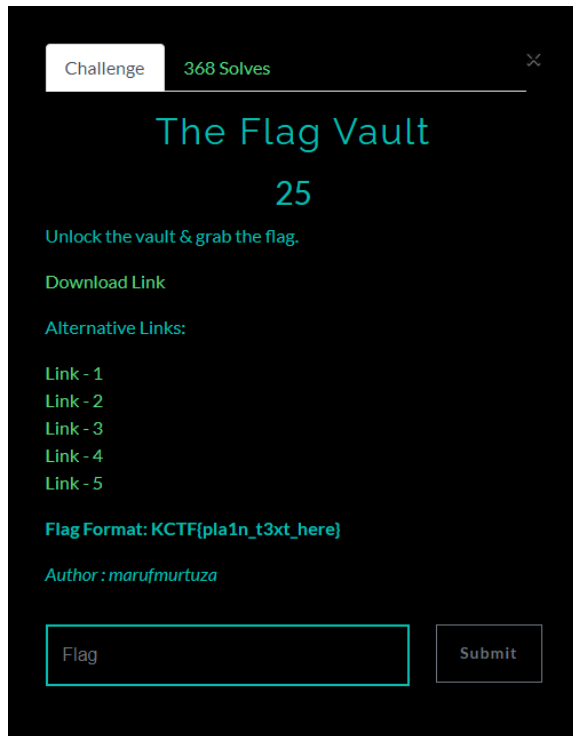

제공된 파일을 IDA로 열어보면

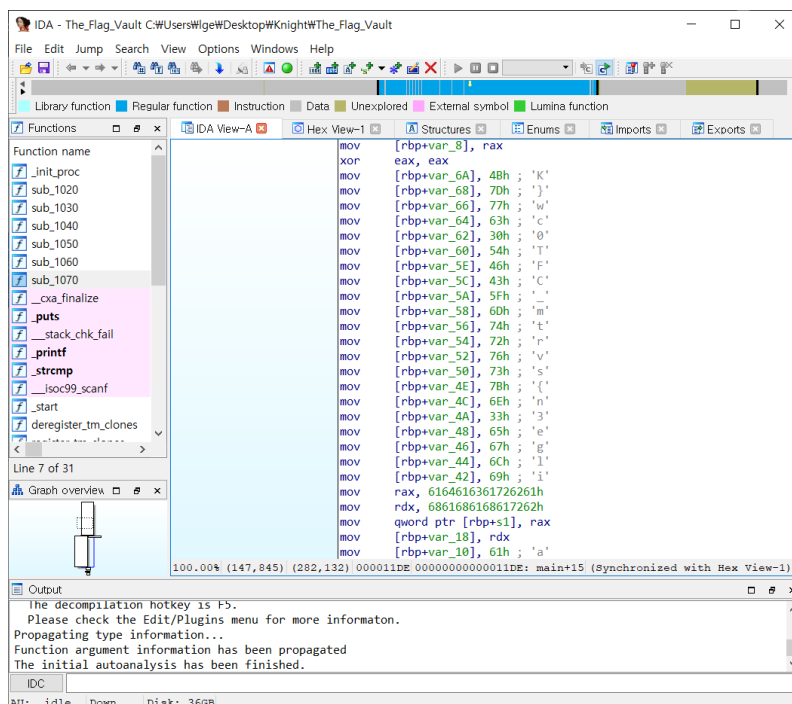

누가봐도 플래그에 쓰일 법  
한 문자열들이 나온다

```

lea     rdi, 5          ; "\nCongratulations! Here is your flag:"
call    _puts
lea     r8, [rbp+var_4E]
lea     rdi, [rbp+var_5E]
lea     rcx, [rbp+var_60]
lea     rdx, [rbp+var_5C]
lea     rax, [rbp+var_6A]
sub     rsp, 8
lea     rsi, [rbp+var_68]
push    rsi
lea     rsi, [rbp+var_46]
push    rsi
lea     rsi, [rbp+var_4C]

```

{FTCK  
}gn

```

lea     rsi, [rbp+var_42]
push    rsi
lea     rsi, [rbp+var_54]
push    rsi
lea     rsi, [rbp+var_48]
push    rsi
lea     rsi, [rbp+var_48]
push    rsi
lea     rsi, [rbp+var_4C]
push    rsi
lea     rsi, [rbp+var_42]
push    rsi
lea     rsi, [rbp+var_46]
push    rsi
lea     rsi, [rbp+var_4C]
push    rsi

```

ireenign

```

lea     rsi, [rbp+var_4A]
push    rsi
lea     rsi, [rbp+var_5A]
push    rsi
lea     rsi, [rbp+var_48]
push    rsi
lea     rsi, [rbp+var_50]
push    rsi
lea     rsi, [rbp+var_54]
push    rsi
lea     rsi, [rbp+var_48]
push    rsi
lea     rsi, [rbp+var_52]
push    rsi
lea     rsi, [rbp+var_48]
push    rsi
lea     rsi, [rbp+var_54]

```

3\_esrever

```

lea     rsi, [rbp+var_5A]
push    rsi
lea     rsi, [rbp+var_62]
push    rsi
lea     rsi, [rbp+var_56]
push    rsi
lea     rsi, [rbp+var_5A]
push    rsi
lea     rsi, [rbp+var_48]
push    rsi
lea     rsi, [rbp+var_58]
push    rsi
lea     rsi, [rbp+var_62]
push    rsi
lea     rsi, [rbp+var_64]
push    rsi

```

\_0t\_em0c

```

push    rsi
lea     rsi, [rbp+var_44]
push    rsi
lea     rsi, [rbp+var_48]
push    rsi
lea     rsi, [rbp+var_66]
push    rsi

```

lew

FLAG : KCTF{welc0me\_t0\_reverse\_3ngineering}