

Class 13 Mini Project

AUTHOR

Charlie Rezanka (A15837296)

Reading in Data

```
#l message = false  
library(DESeq2)
```

Loading required package: S4Vectors

Loading required package: stats4

Loading required package: BiocGenerics

Attaching package: 'BiocGenerics'

The following objects are masked from 'package:stats':

IQR, mad, sd, var, xtabs

The following objects are masked from 'package:base':

anyDuplicated, aperm, append, as.data.frame, basename, cbind,
colnames, dirname, do.call, duplicated, eval, evalq, Filter, Find,
get, grep, grepl, intersect, is.unsorted, lapply, Map, mapply,
match, mget, order, paste, pmax, pmax.int, pmin, pmin.int,
Position, rank, rbind, Reduce, rownames, sapply, setdiff, sort,
table, tapply, union, unique, unsplit, which.max, which.min

Attaching package: 'S4Vectors'

The following objects are masked from 'package:base':

expand.grid, I, unname

Loading required package: IRanges

Attaching package: 'IRanges'

The following object is masked from 'package:grDevices':

windows

Loading required package: GenomicRanges

Loading required package: GenomeInfoDb

Loading required package: SummarizedExperiment

Loading required package: MatrixGenerics

Loading required package: matrixStats

Attaching package: 'MatrixGenerics'

The following objects are masked from 'package:matrixStats':

colAlls, colAnyNAs, colAnys, colAvgPerRowSet, colCollapse,
colCounts, colCummaxs, colCummins, colCumprods, colCumsums,
colDiffs, colIQRDiffs, colIQRs, colLogSumExps, colMadDiffs,
colMads, colMaxs, colMeans2, colMedians, colMins, colOrderStats,
colProds, colQuantiles, colRanges, colRanks, colSdDiffs, colSds,
colSums2, colTabulates, colVarDiffs, colVars, colWeightedMads,
colWeightedMeans, colWeightedMedians, colWeightedSds,
colWeightedVars, rowAlls, rowAnyNAs, rowAnys, rowAvgPerColSet,
rowCollapse, rowCounts, rowCummaxs, rowCummins, rowCumprods,
rowCumsums, rowDiffs, rowIQRDiffs, rowIQRs, rowLogSumExps,
rowMadDiffs, rowMads, rowMaxs, rowMeans2, rowMedians, rowMins,
rowOrderStats, rowProds, rowQuantiles, rowRanges, rowRanks,
rowSdDiffs, rowSds, rowSums2, rowTabulates, rowVarDiffs, rowVars,
rowWeightedMads, rowWeightedMeans, rowWeightedMedians,
rowWeightedSds, rowWeightedVars

Loading required package: Biobase

Welcome to Bioconductor

Vignettes contain introductory material; view with
'browseVignettes()'. To cite Bioconductor, see
'citation("Biobase")', and for packages 'citation("pkgname")'.

Attaching package: 'Biobase'

The following object is masked from 'package:MatrixGenerics':

rowMedians

The following objects are masked from 'package:matrixStats':

anyMissing, rowMedians

```
metaFile <- "GSE37704_metadata.csv"
countFile <- "GSE37704_featurecounts.csv"

#metadata
colData = read.csv(metaFile, row.names=1)
head(colData)
```

```
          condition
SRR493366 control_sirna
SRR493367 control_sirna
SRR493368 control_sirna
SRR493369      hoxa1_kd
SRR493370      hoxa1_kd
SRR493371      hoxa1_kd
```

```
#count data
countData = read.csv(countFile, row.names=1)
head(countData)
```

```
          length SRR493366 SRR493367 SRR493368 SRR493369 SRR493370
ENSG00000186092    918         0         0         0         0         0
ENSG00000279928    718         0         0         0         0         0
ENSG00000279457   1982        23        28        29        29        28
ENSG00000278566    939         0         0         0         0         0
ENSG00000273547    939         0         0         0         0         0
ENSG00000187634   3214       124       123       205       207       212
          SRR493371
ENSG00000186092         0
ENSG00000279928         0
ENSG00000279457        46
ENSG00000278566         0
ENSG00000273547         0
ENSG00000187634       258
```

Checking Formats

Q. Complete the code below to remove the troublesome first column from countData

```
countData <- as.matrix(countData[,-1]) #use the -1 trick
head(countData)
```

```
          SRR493366 SRR493367 SRR493368 SRR493369 SRR493370 SRR493371
ENSG00000186092         0         0         0         0         0         0
ENSG00000279928         0         0         0         0         0         0
ENSG00000279457        23        28        29        29        28        46
ENSG00000278566         0         0         0         0         0         0
```

ENSG00000273547	0	0	0	0	0	0
ENSG00000187634	124	123	205	207	212	258

Q. Complete the code below to filter countData to exclude genes (i.e. rows) where we have 0 read count across all samples (i.e. columns).

```
zerocounts <- rowSums(countData) == 0
head(zerocounts)
```

ENSG00000186092	ENSG00000279928	ENSG00000279457	ENSG00000278566	ENSG00000273547
TRUE	TRUE	FALSE	TRUE	TRUE
ENSG00000187634				
FALSE				

```
newcounts <- countData[!zerocounts, ]
head(newcounts)
```

	SRR493366	SRR493367	SRR493368	SRR493369	SRR493370	SRR493371
ENSG00000279457	23	28	29	29	28	46
ENSG00000187634	124	123	205	207	212	258
ENSG00000188976	1637	1831	2383	1226	1326	1504
ENSG00000187961	120	153	180	236	255	357
ENSG00000187583	24	48	65	44	48	64
ENSG00000187642	4	9	16	14	16	16

```
nrow(newcounts)
```

```
[1] 15975
```

Running RNAseq

Running DESeq

```
#l message = false
library(DESeq2)
```

```
dds = DESeqDataSetFromMatrix(countData=newcounts,
                              colData=colData,
                              design=~condition)
```

Warning in DESeqDataSet(se, design = design, ignoreRank): some variables in design formula are characters, converting to factors

```
dds = DESeq(dds)
```

estimating size factors

estimating dispersions

gene-wise dispersion estimates

mean-dispersion relationship

final dispersion estimates

fitting model and testing

```
res <- results(dds, contrast=c("condition", "hoxa1_kd", "control_sirna"))
res
```

log2 fold change (MLE): condition hoxa1_kd vs control_sirna

Wald test p-value: condition hoxa1 kd vs control sirna

DataFrame with 15975 rows and 6 columns

	baseMean	log2FoldChange	lfcSE	stat	pvalue
	<numeric>	<numeric>	<numeric>	<numeric>	<numeric>
ENSG00000279457	29.9136	0.1792571	0.3248216	0.551863	5.81042e-01
ENSG00000187634	183.2296	0.4264571	0.1402658	3.040350	2.36304e-03
ENSG00000188976	1651.1881	-0.6927205	0.0548465	-12.630158	1.43990e-36
ENSG00000187961	209.6379	0.7297556	0.1318599	5.534326	3.12428e-08
ENSG00000187583	47.2551	0.0405765	0.2718928	0.149237	8.81366e-01
...
ENSG00000273748	35.30265	0.674387	0.303666	2.220817	2.63633e-02
ENSG00000278817	2.42302	-0.388988	1.130394	-0.344117	7.30758e-01
ENSG00000278384	1.10180	0.332991	1.660261	0.200565	8.41039e-01
ENSG00000276345	73.64496	-0.356181	0.207716	-1.714752	8.63908e-02
ENSG00000271254	181.59590	-0.609667	0.141320	-4.314071	1.60276e-05
	padj				
	<numeric>				
ENSG00000279457	6.86555e-01				
ENSG00000187634	5.15718e-03				
ENSG00000188976	1.76549e-35				
ENSG00000187961	1.13413e-07				
ENSG00000187583	9.19031e-01				
...	...				
ENSG00000273748	4.79091e-02				
ENSG00000278817	8.09772e-01				
ENSG00000278384	8.92654e-01				
ENSG00000276345	1.39762e-01				
ENSG00000271254	4.53648e-05				

Q. Call the `summary()` function on your results to get a sense of how many genes are up or down-regulated at the default 0.1 p-value cutoff.

```
summary(res)
```

```
out of 15975 with nonzero total read count
adjusted p-value < 0.1
LFC > 0 (up)      : 4349, 27%
LFC < 0 (down)    : 4396, 28%
outliers [1]      : 0, 0%
low counts [2]    : 1237, 7.7%
(mean count < 0)
[1] see 'cooksCutoff' argument of ?results
[2] see 'independentFiltering' argument of ?results
```

4349 are upregulated, 4396 are down-regulated

Annotate Results

```
library(AnnotationDbi)
library("org.Hs.eg.db")
```

```
columns(org.Hs.eg.db)
```

```
[1] "ACCNUM"      "ALIAS"      "ENSEMBL"    "ENSEMBLPROT" "ENSEMBLTRANS"
[6] "ENTREZID"    "ENZYME"     "EVIDENCE"   "EVIDENCEALL"  "GENENAME"
[11] "GENETYPE"    "GO"         "GOALL"      "IPI"          "MAP"
[16] "OMIM"        "ONTOLOGY"   "ONTOLOGYALL" "PATH"         "PFAM"
[21] "PMID"        "PROSITE"    "REFSEQ"     "SYMBOL"       "UCSCKG"
[26] "UNIPROT"
```

```
res$symbol = mapIds(org.Hs.eg.db,
                     keys=row.names(res),
                     keytype="ENSEMBL",
                     column="SYMBOL",
                     multiVals="first")
```

'select()' returned 1:many mapping between keys and columns

```
res$entrez = mapIds(org.Hs.eg.db,
                    keys=row.names(res),
                    keytype="ENSEMBL",
                    column="ENTREZID",
                    multiVals="first")
```

'select()' returned 1:many mapping between keys and columns

```
res$name = mapIds(org.Hs.eg.db,
                  keys=row.names(res),
                  keytype="ENSEMBL",
                  column="MAP",
                  multiVals="first")
```

'select()' returned 1:many mapping between keys and columns

```
head(res, 10)
```

log2 fold change (MLE): condition hoxa1_kd vs control_sirna

Wald test p-value: condition hoxa1 kd vs control sirna

DataFrame with 10 rows and 9 columns


	baseMean	log2FoldChange	lfcSE	stat	pvalue
	<numeric>	<numeric>	<numeric>	<numeric>	<numeric>
ENSG00000279457	29.913579	0.1792571	0.3248216	0.551863	5.81042e-01
ENSG00000187634	183.229650	0.4264571	0.1402658	3.040350	2.36304e-03
ENSG00000188976	1651.188076	-0.6927205	0.0548465	-12.630158	1.43990e-36
ENSG00000187961	209.637938	0.7297556	0.1318599	5.534326	3.12428e-08
ENSG00000187583	47.255123	0.0405765	0.2718928	0.149237	8.81366e-01
ENSG00000187642	11.979750	0.5428105	0.5215598	1.040744	2.97994e-01
ENSG00000188290	108.922128	2.0570638	0.1969053	10.446970	1.51282e-25
ENSG00000187608	350.716868	0.2573837	0.1027266	2.505522	1.22271e-02
ENSG00000188157	9128.439422	0.3899088	0.0467163	8.346304	7.04321e-17
ENSG00000237330	0.158192	0.7859552	4.0804729	0.192614	8.47261e-01
	padj	symbol	entrez	name	
	<numeric>	<character>	<character>	<character>	
ENSG00000279457	6.86555e-01	NA	NA	NA	
ENSG00000187634	5.15718e-03	SAMD11	148398	1p36.33	
ENSG00000188976	1.76549e-35	NOC2L	26155	1p36.33	
ENSG00000187961	1.13413e-07	KLHL17	339451	1p36.33	
ENSG00000187583	9.19031e-01	PLEKHN1	84069	1p36.33	
ENSG00000187642	4.03379e-01	PERM1	84808	1p36.33	
ENSG00000188290	1.30538e-24	HES4	57801	1p36.33	
ENSG00000187608	2.37452e-02	ISG15	9636	1p36.33	
ENSG00000188157	4.21963e-16	AGRN	375790	1p36.33	
ENSG00000237330	NA	RNF223	401934	1p36.33	

I will now produce a CSV file for later reference

```
res = res[order(res$pvalue),]
write.csv(res, file="myresultsc13proj.csv")
```

Visualize Results

```
plot( res$log2FoldChange, -log(res$padj) )
```

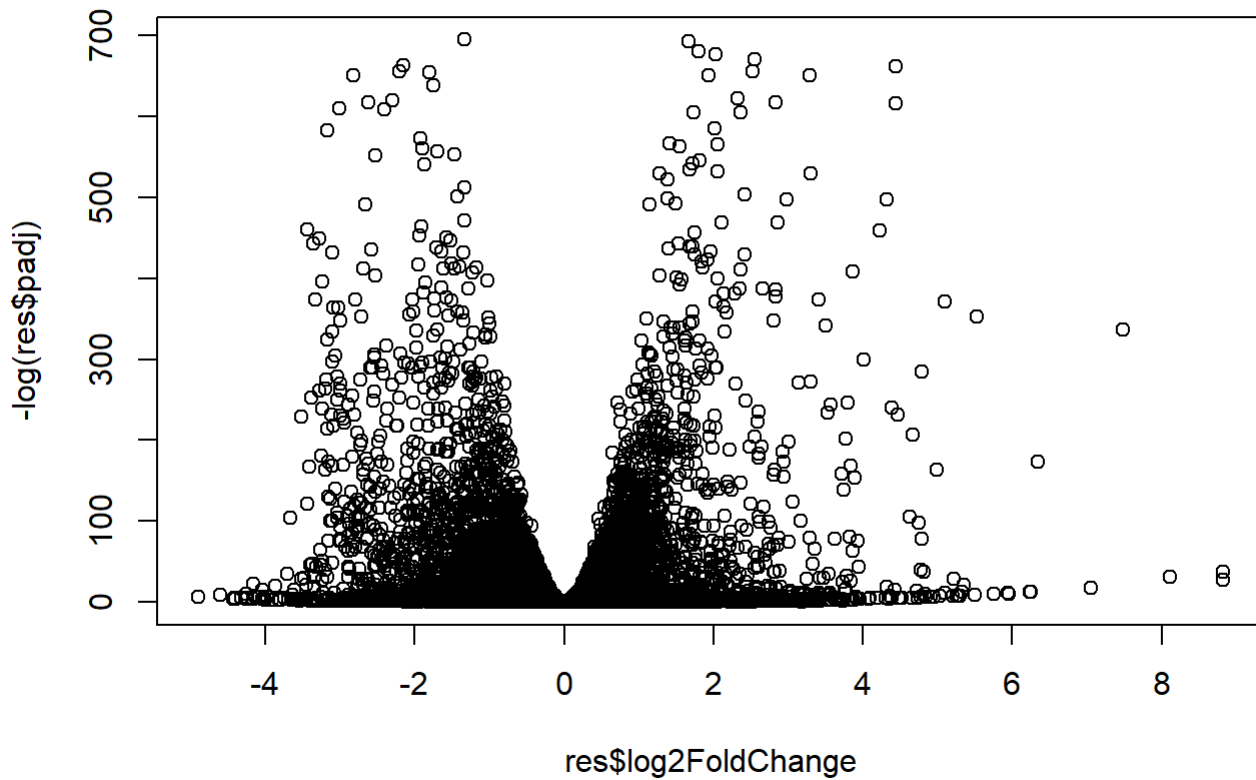


```
# Make a color vector for all genes
mycols <- rep("gray", nrow(res) )

# Color red the genes with absolute fold change above 2
mycols[ abs(res$log2FoldChange) > 2 ] <- "red"

# Color blue those with adjusted p-value less than 0.01
# and absolute fold change more than 2
inds <- (res$padj<0.01) & (abs(res$log2FoldChange) > 2 )
mycols[ inds ] <- "blue"

plot( res$log2FoldChange, -log(res$padj), col=mycols, xlab="Log2(FoldChange)", ylab="-Log(P-value"
```

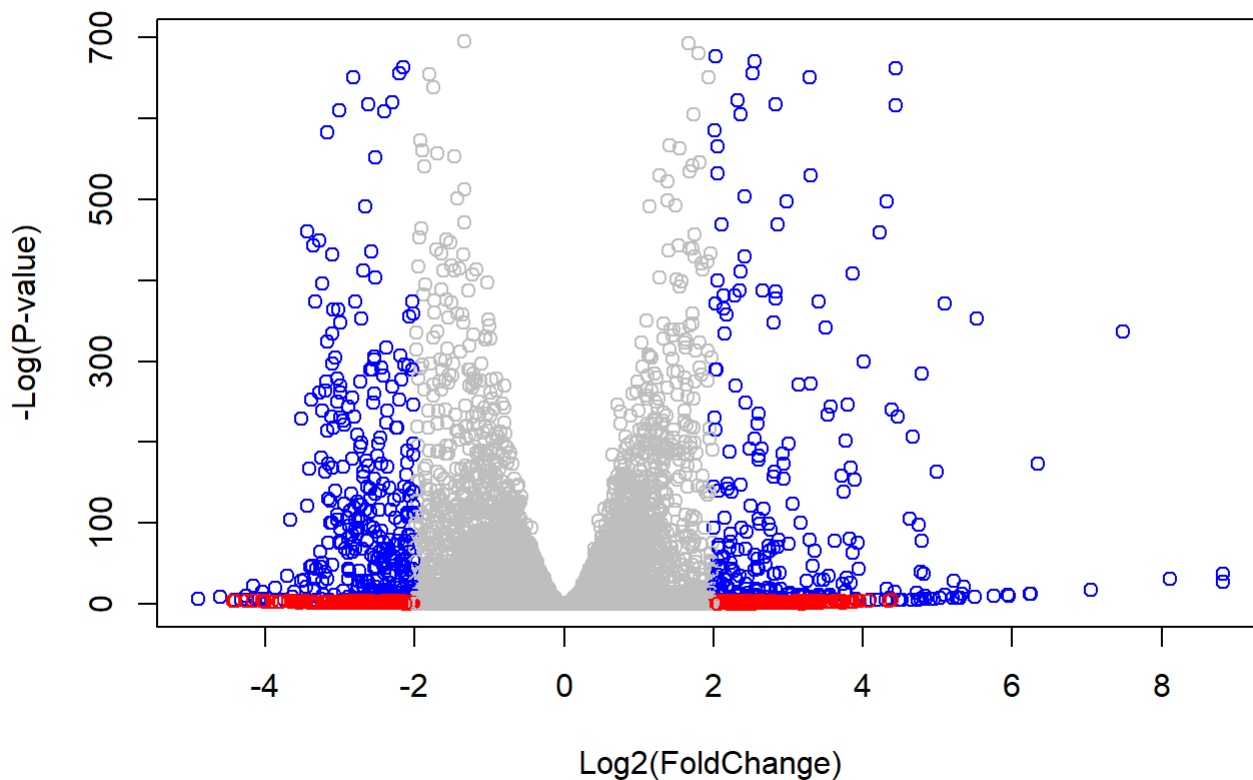Pathway Analysis

```
#l message: false
library(pathview)
```

```
#####
Pathview is an open source software package distributed under GNU General
Public License version 3 (GPLv3). Details of GPLv3 is available at
http://www.gnu.org/licenses/gpl-3.0.html. Particullary, users are required to
formally cite the original Pathview paper (not just mention it) in publications
or products. For details, do citation("pathview") within R.
```

The pathview downloads and uses KEGG data. Non-academic uses may require a KEGG license agreement (details at <http://www.kegg.jp/kegg/legal.html>).

```
#####
```

```
library(gage)
```

```
library(gageData)
```

```
data(kegg.sets.hs)
data(sigmet.idx.hs)

# Focus on signaling and metabolic pathways only
kegg.sets.hs = kegg.sets.hs[sigmet.idx.hs]

# Examine the first 3 pathways
head(kegg.sets.hs, 3)
```

```
$`hsa00232 Caffeine metabolism`
```

```
[1] "10" "1544" "1548" "1549" "1553" "7498" "9"
```

```
$`hsa00983 Drug metabolism - other enzymes`
```

```
[1] "10" "1066" "10720" "10941" "151531" "1548" "1549" "1551"
[9] "1553" "1576" "1577" "1806" "1807" "1890" "221223" "2990"
[17] "3251" "3614" "3615" "3704" "51733" "54490" "54575" "54576"
[25] "54577" "54578" "54579" "54600" "54657" "54658" "54659" "54963"
[33] "574537" "64816" "7083" "7084" "7172" "7363" "7364" "7365"
[41] "7366" "7367" "7371" "7372" "7378" "7498" "79799" "83549"
[49] "8824" "8833" "9" "978"
```

```
$`hsa00230 Purine metabolism`
```

```
[1] "100" "10201" "10606" "10621" "10622" "10623" "107" "10714"
[9] "108" "10846" "109" "111" "11128" "11164" "112" "113"
[17] "114" "115" "122481" "122622" "124583" "132" "158" "159"
[25] "1633" "171568" "1716" "196883" "203" "204" "205" "221823"
[33] "2272" "22978" "23649" "246721" "25885" "2618" "26289" "270"
[41] "271" "27115" "272" "2766" "2977" "2982" "2983" "2984"
[49] "2986" "2987" "29922" "3000" "30833" "30834" "318" "3251"
[57] "353" "3614" "3615" "3704" "377841" "471" "4830" "4831"
[65] "4832" "4833" "4860" "4881" "4882" "4907" "50484" "50940"
[73] "51082" "51251" "51292" "5136" "5137" "5138" "5139" "5140"
[81] "5141" "5142" "5143" "5144" "5145" "5146" "5147" "5148"
[89] "5149" "5150" "5151" "5152" "5153" "5158" "5167" "5169"
[97] "51728" "5198" "5236" "5313" "5315" "53343" "54107" "5422"
[105] "5424" "5425" "5426" "5427" "5430" "5431" "5432" "5433"
[113] "5434" "5435" "5436" "5437" "5438" "5439" "5440" "5441"
[121] "5471" "548644" "55276" "5557" "5558" "55703" "55811" "55821"
[129] "5631" "5634" "56655" "56953" "56985" "57804" "58497" "6240"
[137] "6241" "64425" "646625" "654364" "661" "7498" "8382" "84172"
[145] "84265" "84284" "84618" "8622" "8654" "87178" "8833" "9060"
[153] "9061" "93034" "953" "9533" "954" "955" "956" "957"
[161] "9583" "9615"
```

Obtaining entrez gene IDs

```
foldchanges = res$log2FoldChange
names(foldchanges) = res$entrez
```

```
head(foldchanges)
```

```
      1266      54855      1465      51232      2034      2317
-2.422719  3.201955 -2.313738 -2.059631 -1.888019 -1.649792
```

gage pathway analysis

```
keggres = gage(foldchanges, gsets=kegg.sets.hs)
attributes(keggres)
```

```
$names
```

```
[1] "greater" "less"    "stats"
```

Some of the downregulated pathways

```
head(keggres$less)
```

	p.geomean	stat.mean	p.val
hsa04110 Cell cycle	8.995727e-06	-4.378644	8.995727e-06
hsa03030 DNA replication	9.424076e-05	-3.951803	9.424076e-05
hsa03013 RNA transport	1.375901e-03	-3.028500	1.375901e-03
hsa03440 Homologous recombination	3.066756e-03	-2.852899	3.066756e-03
hsa04114 Oocyte meiosis	3.784520e-03	-2.698128	3.784520e-03
hsa00010 Glycolysis / Gluconeogenesis	8.961413e-03	-2.405398	8.961413e-03

	q.val	set.size	exp1
hsa04110 Cell cycle	0.001448312	121	8.995727e-06
hsa03030 DNA replication	0.007586381	36	9.424076e-05
hsa03013 RNA transport	0.073840037	144	1.375901e-03
hsa03440 Homologous recombination	0.121861535	28	3.066756e-03
hsa04114 Oocyte meiosis	0.121861535	102	3.784520e-03
hsa00010 Glycolysis / Gluconeogenesis	0.212222694	53	8.961413e-03

A simple visualization of our pathway

```
pathview(gene.data=foldchanges, pathway.id="hsa04110")
```

'select()' returned 1:1 mapping between keys and columns

Info: Working in directory C:/Users/charl/OneDrive/Desktop/BIMM 143/Class 13

Info: Writing image file hsa04110.pathview.png

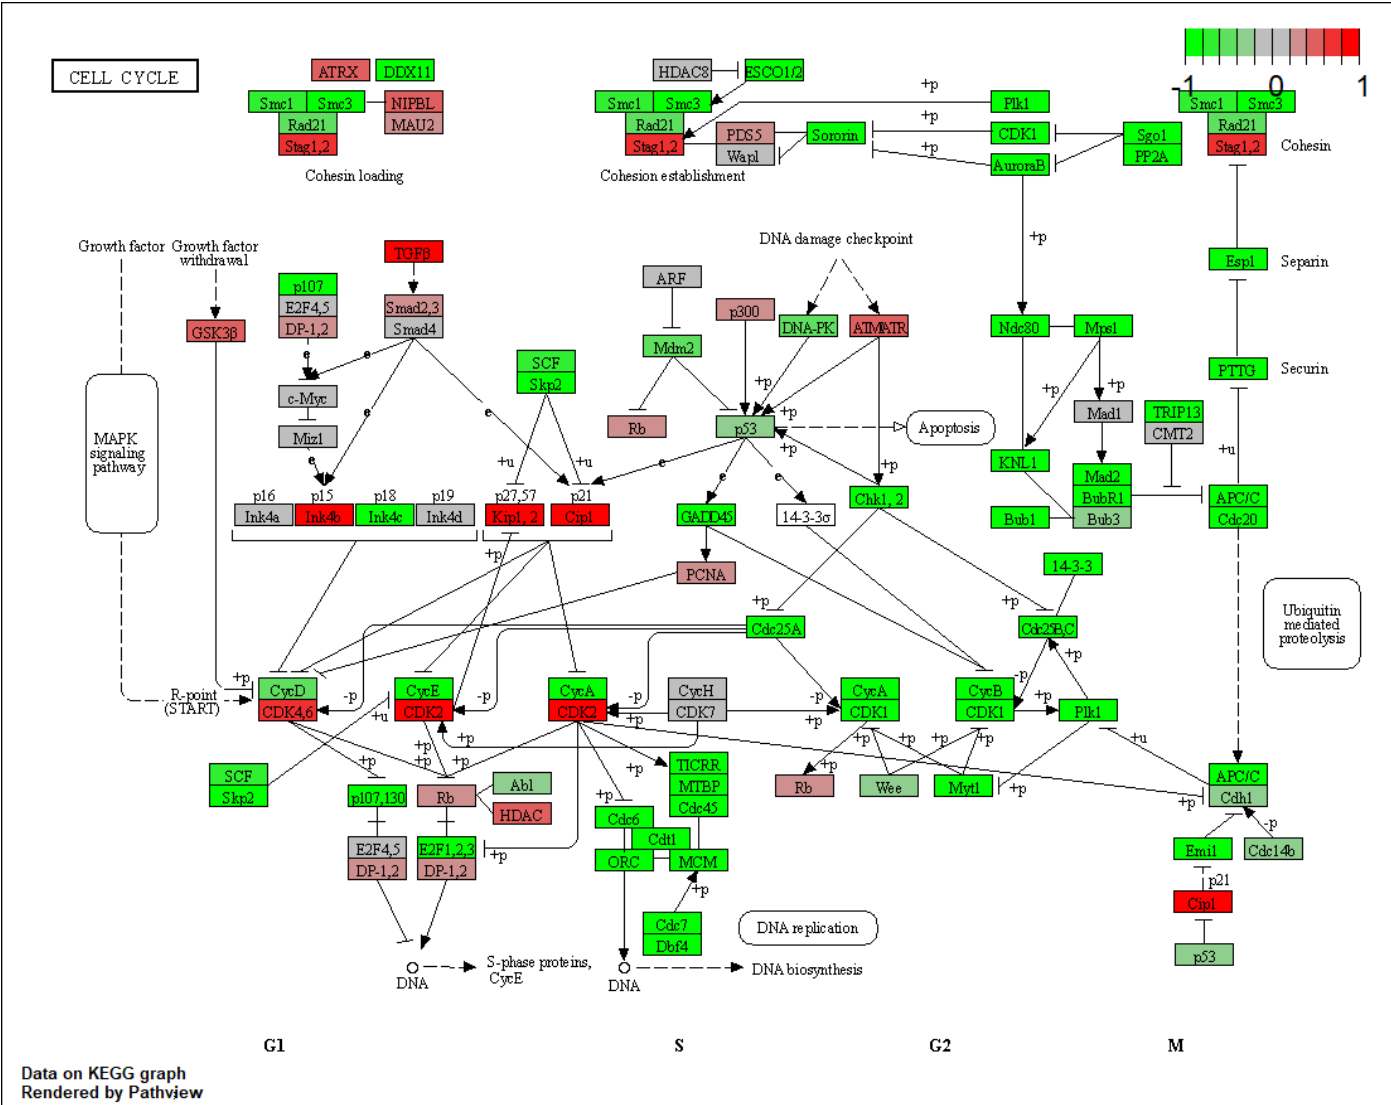


Fig. 1. A schematic overview of the cell cycle pathway and associated genes. Green coloration denotes upregulation, red coloration denotes down-regulation