Which LLM for Which Agent? Topology-Aware Bandit-based Model Selection for Multi-Agent Systems

Zhi Hong[1], Jie Mao[1], Qianlong Wang[2], Daohong Ying[3], Shuang Qiu[4], Bei Liu[5], Zhongxiang Dai[1]

[1]The Chinese University of Hong Kong, Shenzhen [2]Fudan University
[3]University of California San Diego [4]City University of Hong Kong
[5]Microsoft Research Asia

Abstract

Large Language Models (LLMs) have demonstrated strong capabilities in real-world applications, notably as the cognitive backbone of Multi-Agent Systems (MAS) for orchestrating complex workflows. Since many deployments preclude workflow modifications while the performance–cost trade-off of an MAS is highly sensitive to model choices, selecting an appropriate LLM for each agent becomes a critical strategy for improvement. However, real-world model selection for MAS requires sample-efficient identification of the optimal assignment: evaluating a candidate model configuration entails end-to-end MAS execution, often involving multiple LLM calls, which severely constrains the evaluation budget. To address this problem, we introduce **MASTAB** (**M**ulti-**A**gent **S**ystems Model Selection via **T**opology-**A**ware **B**andits), a novel sample-efficient framework based on bandits for optimizing the performance–cost trade-off in MAS workflows. By leveraging Upper Confidence Bound (UCB), MASTAB balances exploration and exploitation under a limited evaluation budget. To model topology-induced dependencies, MASTAB employs a Graph Neural Network (GNN) surrogate that captures workflow structure and model-choice interactions, thereby improving cost-aware score estimation and guiding the search toward promising configurations. In addition, MASTAB uses coordinate ascent to decompose the joint optimization into univariate subproblems, reducing per-sweep search complexity and computational overhead. Extensive experiments across diverse benchmarks demonstrate that MASTAB efficiently identifies high-scoring model configurations while achieving favorable performance–cost trade-offs.


1. Introduction

Large Language Models (LLMs) have demonstrated remarkable capabilities across a wide range of complex tasks (Brown et al. 2020; Chowdhery et al. 2022; Touvron et al. 2023; Chung et al. 2024). Building on these capabilities, LLM-based Multi-Agent Systems (MAS) orchestrate multiple role-specialized agents within structured workflows to achieve shared objectives (Hong et al. 2024; Li et al. 2023; Wu et al. 2024). By decomposing complex problems, such as code generation and mathematical reasoning, into coordinated subtasks, MAS can leverage complementary expertise and effective collaboration, thereby improving upon single-agent approaches (Qian et al. 2024; Du et al. 2024; Chen, Saha, and Bansal 2024; Islam, Ali, and Parvez 2024; Chen, Zhang, and Han 2024).

Recent studies have further explored the systematic refinement of MAS, spanning agent-role assignment, workflow-topology and communication-protocol design, and the automated construction of task-specific multi-agent systems (Zhuge et al. 2024; Li, Hasson, and Ghosh 2026; Hu, Lu, and Clune 2025; Zhang et al. 2025b). Although these approaches have achieved substantial progress, they fundamentally assume that the MAS workflow can be modified. However, many real-world MAS are often deployed with fixed workflows, particularly in high-stakes domains such as healthcare and finance. These workflows often encode domain expertise and have undergone expert vetting, safety validation, and compliance review (Bodnari and Travis 2025; Wells et al. 2025; Berger et al. 2025). Consequently, even minor structural modifications may trigger costly re-validation or be prohibited altogether. This practical constraint motivates a fundamental question: how can we improve the overall utility of an MAS without modifying its established workflow?

A natural and practical strategy is *agent-level model selection*: assigning an LLM backbone to each agent while leaving all other workflow components unchanged. Candidate LLMs exhibit heterogeneous capability–cost profiles (Ong et al. 2025; Chen, Zaharia, and Zou 2024), while agent roles impose distinct capability requirements (Cai, Ning, and Liu 2025; Chen et al. 2025). A uniform model assignment may therefore under-provision demanding agents or incur unnecessary inference costs on simpler ones. By matching model capacity to role-specific demands, agent-level model selection provides a principled means of improving the system-level performance–cost trade-off.

However, model selection for MAS presents a challenging combinatorial black-box optimization problem. Evaluating a candidate model configuration requires executing the entire MAS end to end, often requiring multiple LLM calls per task instance, thereby severely constraining the evaluation budget. Moreover, model choices are coupled through the workflow topology: changing the LLM assigned to an upstream agent alters the content and quality of the information received by downstream agents, making the effectiveness of any individual model assignment contingent on the models selected for other agents in the workflow. This topology-induced dependence makes the objective non-separable and further complicates the search under limited feedback. These challenges

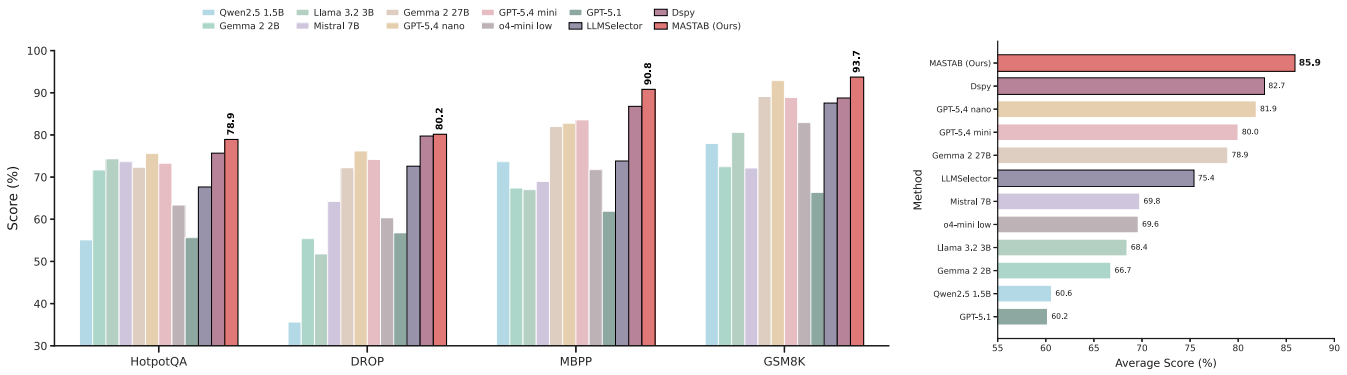

(a) Cost-aware score across benchmarks.

(b) Average score across benchmarks.

Figure 1: Cost-aware scores under a matched budget of 50 configuration evaluations: (a) results on HotpotQA, DROP, MBPP, and GSM8K; and (b) the four-benchmark average. Higher scores indicate better performance–cost trade-offs across methods.

raise a central question: *How can we perform sample-efficient and topology-aware model selection for MAS under a limited evaluation budget?*

Existing approaches involving model selection, however, do not fully address this problem setting. Recent approaches (Cai, Ning, and Liu 2025; Su et al. 2026; Zhao et al. 2026), including MasRouter (Yue et al. 2025) and OI-MAS (Wang et al. 2026), formulate LLM selection as one component of a broader joint orchestration problem that also optimizes role assignment, workflow structure, or communication patterns. In their formulations, model selection is tightly coupled with the optimization of these other workflow components; consequently, the model-selection component cannot be readily isolated and applied to a fixed workflow. LLMSelector (Chen et al. 2025) efficiently searches model assignments through LLM-based module diagnosis and iterative module-wise updates, but its objective focuses on task performance without explicitly incorporating model-dependent deployment-time inference costs. The MIPRO optimizer (Opsahl-Ong et al. 2024), which can be naturally adapted to this problem setting, optimizes chained programs but does not explicitly model dependencies induced by the workflow topology. Consequently, none of these methods simultaneously supports fixed-workflow model selection, topology-aware dependency modeling, sample-efficient search, and explicit performance–cost optimization.

To address this gap, we propose **MASTAB** (**M**ulti-**A**gent **S**ystems Model Selection via **T**opology-**A**ware **B**andits), a sample-efficient framework for jointly assigning LLMs to agents in a fixed MAS workflow. MASTAB optimizes a cost-aware objective that balances task performance and normalized cost efficiency. To identify high-utility configurations from limited evaluations, it combines uncertainty-guided exploration with topology-aware score prediction.

Uncertainty-guided exploration. To maximize sample efficiency under a limited evaluation budget, MASTAB formulates agent-level model selection as a bandit problem (Wang et al. 2025; Panda et al. 2025; Poon et al. 2026) and employs an Upper Confidence Bound (UCB) acquisition criterion. For each configuration, the criterion augments its predicted cost-aware score with an uncertainty bonus computed from a closed-form information matrix over frozen semantic model features. This design prioritizes configurations that are either promising or insufficiently explored, thereby increasing the informativeness of each evaluation.

Topology-aware score prediction. MASTAB employs a Graph Neural Network (GNN) surrogate that represents agents as nodes, workflow dependencies as edges, and assigned LLMs as node features (Zhuge et al. 2024; Zhang et al. 2025a; Hong et al. 2026). Agent-specific, semantically initialized model embeddings allow the same LLM to acquire different representations across agent roles. Through topology-constrained message passing, the surrogate captures how the suitability of a model assignment depends on the assignments of connected agents and predicts the cost-aware score of the complete configuration. In addition, MASTAB employs coordinate ascent to navigate efficiently the configuration space by sequentially updating the model assigned to each agent according to the topology-aware UCB objective.

In summary, our contributions are threefold:

- We formulate agent-level model selection in fixed-workflow MAS as a budgeted black-box optimization problem characterized by costly end-to-end evaluations, topology-induced dependencies, and joint performance–cost optimization.
- We develop MASTAB, a sample-efficient framework that combines a topology-aware GNN surrogate with uncertainty-guided exploration to identify coordinated model assignments from limited evaluation feedback.
- We evaluate MASTAB on four benchmarks spanning question answering, code generation, and mathematical reasoning, demonstrating consistent improvements in cost-aware performance over strong baselines under matched evaluation budgets.

2. Problem Setting

We study model selection for Large Language Model (LLM)-based Multi-Agent Systems (MAS). A workflow contains

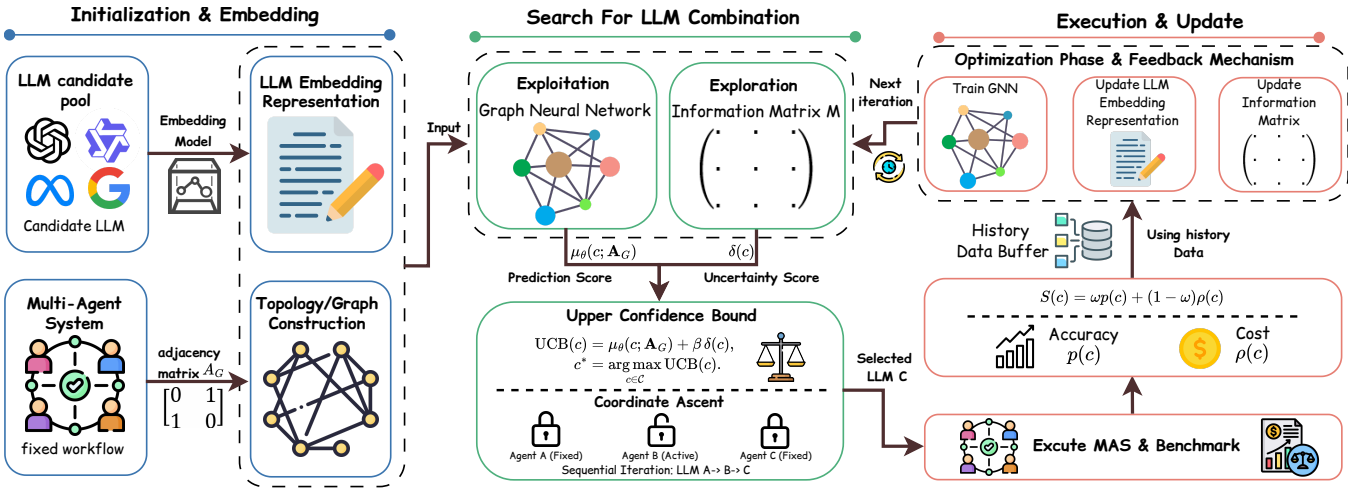


Figure 2: Overview of MASTAB. A topology-aware GNN predicts cost-aware scores from LLM representations and the fixed MAS topology, while LinUCB quantifies configuration uncertainty. Coordinate ascent maximizes the resulting UCB acquisition function, and end-to-end evaluations update the score predictor and uncertainty estimator.

multiple specialized agents that collaborate to solve instances from a target task. We assume that the workflow topology, agent roles, prompts, communication protocols, and other workflow components have already been designed and remain fixed. Our goal is therefore to jointly select a suitable LLM for each agent, seeking a configuration that achieves strong task performance while keeping inference cost low.

MAS Workflow as a Directed Acyclic Graph. We model an MAS workflow as a directed acyclic graph (DAG) $G = (\mathcal{V}, \mathcal{E})$, where $\mathcal{V} = \{v_1, v_2, \ldots, v_N\}$ denotes the set of N agent nodes and $\mathcal{E} \subseteq \mathcal{V} \times \mathcal{V}$ represents inter-agent information flow. An edge $(v_i, v_j) \in \mathcal{E}$ indicates that the output of agent v_i is included in the input context of agent v_j. Given an input query x, agents execute in a topological order: each agent v_i aggregates the messages produced by its predecessors $\{v_j : (v_j, v_i) \in \mathcal{E}\}$, invokes its assigned LLM according to its fixed role and prompt, and passes its output to downstream agents. This DAG captures inter-agent information flow, while reflection or retries remain internal to individual agent invocations.

Model Configurations. Let $\mathcal{P} = \{\ell_1, \ell_2, \ldots, \ell_P\}$ be a shared pool of candidate LLMs with different capabilities and inference costs. A model configuration is a tuple

$$c = (c_1, c_2, \ldots, c_N), \qquad c_i \in \mathcal{P}, \tag{1}$$

where c_i is the LLM assigned to agent v_i. The configuration space is the Cartesian product $\mathcal{C} = \mathcal{P}^N$, with $|\mathcal{C}| = P^N$. Agent-level model selections are coupled through the workflow topology. For an edge $(v_i, v_j) \in \mathcal{E}$, replacing the LLM assigned to the upstream agent v_i can alter the quality of the intermediate output passed to the downstream agent v_j (e.g., its accuracy, completeness, and reasoning structure), potentially changing the behavior of v_j even when its own LLM and prompt remain fixed. Such effects may propagate through the workflow, motivating a topology-aware surrogate that captures inter-agent dependencies when estimating the cost-aware score of a configuration.

Configuration Evaluation. Given a dataset $\mathcal{D} = \{(x_n, y_n)\}_{n=1}^{|\mathcal{D}|}$ and a task-specific evaluation metric $m(\cdot, \cdot)$, we define the empirical task performance of configuration c as

$$p(c \mid \mathcal{D}) = \frac{1}{|\mathcal{D}|} \sum_{n=1}^{|\mathcal{D}|} m\big(\mathrm{MAS}(c, x_n), y_n\big), \tag{2}$$

where $\mathrm{MAS}(c, x)$ is the output obtained by executing the entire workflow with configuration c on input x. Let $\kappa(c, x)$ denote the monetary inference cost of that execution, including all LLM calls made by the agents. Its empirical average is

$$u(c \mid \mathcal{D}) = \frac{1}{|\mathcal{D}|} \sum_{n=1}^{|\mathcal{D}|} \kappa(c, x_n). \tag{3}$$

Cost-Aware Score. Task performance and monetary inference cost differ in both scale and optimization direction. To combine them within a unified objective, we transform the average inference cost into a normalized, higher-is-better cost-efficiency score using fixed lower and upper reference costs $u_{\min}$ and $u_{\max}$:

$$\rho(c \mid \mathcal{D}) = 1 - \frac{u(c \mid \mathcal{D}) - u_{\min}}{u_{\max} - u_{\min}}. \tag{4}$$

Under this transformation, $u_{\min}$ and $u_{\max}$ correspond to $\rho = 1$ and $\rho = 0$, respectively; hence, larger values of ρ indicate lower inference cost. With performance and cost expressed on comparable $[0, 1]$ scales, we define the cost-aware score as their convex combination:

$$S(c \mid \mathcal{D}) = \omega p(c \mid \mathcal{D}) + (1 - \omega)\rho(c \mid \mathcal{D}). \tag{5}$$

Here, $\omega \in [0, 1]$ governs the performance–cost trade-off. Increasing ω places greater emphasis on task performance, whereas decreasing it favors cost efficiency.

Budgeted Black-Box Optimization. Given a validation set $\mathcal{D}_{\text{val}}$, our objective is to identify the model configuration that maximizes the cost-aware score:

$$c^\star = \arg\max_{c \in \mathcal{C}} \; S(c \mid \mathcal{D}_{\text{val}}). \tag{6}$$

Evaluating $S(c \mid \mathcal{D}_{\text{val}})$ entails executing the complete MAS workflow over the validation set, making each score evaluation expensive. Together with the exponential search space $|\mathcal{C}| = P^N$, this precludes exhaustive evaluation. We therefore cast model selection as a budgeted black-box optimization problem with at most T end-to-end evaluations.

3. Methodology

We present MASTAB, a sample-efficient framework for agent-level LLM selection in a fixed MAS workflow. Candidate LLM descriptions initialize agent-specific node embeddings, while the workflow topology is encoded by the adjacency matrix $\mathbf{A}_G$. MASTAB centers on two components: (i) a topology-aware GATv2 surrogate (Brody, Alon, and Yahav 2021) that captures interactions among agent-level model choices and predicts their cost-aware score, and (ii) a LinUCB estimator (Abbasi-Yadkori, Pál, and Szepesvári 2011) that uses frozen semantic features to provide stable, observation-driven uncertainty under an evaluation budget. Together, they form a UCB objective that balances exploitation and exploration. To optimize this objective efficiently, MASTAB applies coordinate ascent, reducing the number of acquisition evaluations per round from P^N to NP.

3.1 Topology-Aware Score Prediction

Graph Construction. We represent the MAS workflow as a directed graph in which each node corresponds to an agent and each edge encodes the flow of intermediate outputs between agents. We define $(\mathbf{A}_G)_{ij} = 1$ if $(v_j, v_i) \in \mathcal{E}$ and $(\mathbf{A}_G)_{ij} = 0$ otherwise. GATv2 adds self-loops internally during message passing. We therefore use $\mathcal{N}(i) = \{j : (v_j, v_i) \in \mathcal{E}\} \cup \{i\}$ to denote the effective incoming neighborhood aggregated by agent v_i. Together with multi-layer message passing, this graph construction propagates information across multi-hop dependencies and exposes topology-coupled model choices to the surrogate.

Model Representations. For each agent v_i, MASTAB maintains a separate learnable embedding table $\mathbf{B}_i \in \mathbb{R}^{P \times d}$. Given a configuration c, the initial representation of node v_i is

$$\mathbf{h}_i^{(0)} = \mathbf{B}_i[c_i] \in \mathbb{R}^d. \tag{7}$$

All agent-specific tables are initialized from the same set of description embeddings $\{\bar{\mathbf{b}}(\ell) : \ell \in \mathcal{P}\}$, derived from the candidate LLM descriptions provided in Appendix B.2. These tables are subsequently *optimized jointly with the GNN*. Separate tables allow the same LLM to acquire different representations at agents with different roles, while semantic initialization equips the surrogate with an informative representation of capability similarities among candidate LLMs.

Attention-Based Message Passing. We apply L GATv2 layers with K attention heads. For head $k \in \{1, \dots, K\}$ at an intermediate layer $l \in \{0, \dots, L-2\}$, the head-specific representation of agent v_i is

$$\mathbf{h}_i^{(l+1,k)} = \sigma\left(\sum_{j \in \mathcal{N}(i)} \alpha_{ij}^{(l,k)} \mathbf{W}^{(l,k)} \mathbf{h}_j^{(l)}\right), \tag{8}$$

where σ is a nonlinear activation and $\mathbf{W}^{(l,k)}$ is the learnable projection of the corresponding GATv2 head. Following the standard GATv2 notation, the unnormalized attention score is

$$e_{ij}^{(l,k)} = \mathbf{a}^{(l,k)\top} \text{LeakyReLU}\left(\mathbf{W}^{(l,k)} \left[\mathbf{h}_i^{(l)} \parallel \mathbf{h}_j^{(l)}\right]\right), \tag{9}$$

where $\mathbf{a}^{(l,k)}$ is the learnable attention vector. The score is normalized over the incoming neighborhood:

$$\alpha_{ij}^{(l,k)} = \frac{\exp(e_{ij}^{(l,k)})}{\sum_{r \in \mathcal{N}(i)} \exp(e_{ir}^{(l,k)})}. \tag{10}$$

GATv2 applies the LeakyReLU nonlinearity before the final projection by the attention vector, allowing the relative ranking of incoming neighbors to vary with the representation of the receiving node. At intermediate layers, the K head outputs are concatenated:

$$\mathbf{h}_i^{(l+1)} = \Big\Vert_{k=1}^{K} \mathbf{h}_i^{(l+1,k)}, \qquad l = 0, \dots, L-2. \tag{11}$$

At the final layer, the head-specific neighborhood aggregations are averaged to obtain a fixed-dimensional node representation:

$$\mathbf{h}_i^{(L)} = \sigma\left(\frac{1}{K} \sum_{k=1}^{K} \sum_{j \in \mathcal{N}(i)} \alpha_{ij}^{(L-1,k)} \mathbf{W}^{(L-1,k)} \mathbf{h}_j^{(L-1)}\right). \tag{12}$$

This topology-constrained message passing contextualizes each node representation with model assignments in its multi-hop incoming neighborhood, enabling the surrogate to capture interactions along workflow dependencies.

Score Prediction. After L layers, we obtain a graph-level representation by mean pooling and predict its cost-aware score with a multilayer perceptron:

$$\begin{aligned} \mathbf{z}_\theta(c; \mathbf{A}_G) &= \frac{1}{N} \sum_{i=1}^{N} \mathbf{h}_i^{(L)}, \\ \mu_\theta(c; \mathbf{A}_G) &= \text{MLP}(\mathbf{z}_\theta(c; \mathbf{A}_G)). \end{aligned} \tag{13}$$

Unlike a performance-only surrogate, $\mu_\theta(c; \mathbf{A}_G)$ approximates the complete cost-aware score $S(c \mid \mathcal{D}_{\text{val}})$ from Eq. 5, jointly accounting for task performance and inference cost. The prediction serves as the exploitation signal in the subsequent acquisition function, guiding the search toward promising regions of the model-configuration space.

3.2 Bandit-Based Exploration

Under a limited evaluation budget, we use LinUCB to balance exploitation of high-scoring configurations with exploration of uncertain ones.

Uncertainty Estimation. For a configuration c, we construct its feature vector by concatenating the frozen description embeddings of the assigned LLMs:

$$\boldsymbol{\phi}(c) = [\bar{\mathbf{b}}(c_1); \bar{\mathbf{b}}(c_2); \ldots; \bar{\mathbf{b}}(c_N)] \in \mathbb{R}^{Nd}. \quad (14)$$

We maintain an information matrix $\mathbf{M} \in \mathbb{R}^{Nd \times Nd}$, initialized as $\mathbf{M}_0 = \lambda \mathbf{I}_{Nd}$ with $\lambda > 0$. After each configuration evaluation, we update it as

$$\mathbf{M} \leftarrow \mathbf{M} + \eta\, \boldsymbol{\phi}(c)\boldsymbol{\phi}(c)^\top, \quad (15)$$

where $\eta > 0$ scales the contribution of each observation. We quantify the confidence width associated with c as

$$\delta(c) = \sqrt{\boldsymbol{\phi}(c)^\top \mathbf{M}^{-1} \boldsymbol{\phi}(c)}. \quad (16)$$

This confidence width is large for feature directions that are weakly covered by previous evaluations and contracts as evidence accumulates in related directions.

We decouple score prediction from uncertainty estimation: the GATv2 surrogate uses learnable, role-specific representations in Eq. 7 for exploitation, whereas LinUCB estimates uncertainty from the frozen semantic features in Eq. 14 through $\mathbf{M}$. This stationary feature space makes confidence updates observation-driven and independent of surrogate retraining. This design contrasts with NeuralUCB methods, which derive confidence bonuses from evolving representations or gradients (Zhou, Li, and Gu 2020; Lin et al. 2023). By retaining a fixed feature space, LinUCB provides reliable, stable and computationally efficient uncertainty estimates under scarce observations and repeated coordinate-wise scoring, as supported by Table 2.

Upper Confidence Bound. We score each candidate configuration using

$$\mathrm{UCB}(c) = \mu_\theta(c; \mathbf{A}_G) + \beta\, \delta(c), \quad (17)$$

where $\beta \geq 0$ is the exploration coefficient. The first term favors configurations with high predicted cost-aware scores, whereas the second assigns larger exploration bonuses to configurations whose feature directions are less well covered by the accumulated observations.

3.3 Coordinate Ascent Search

MASTAB maximizes the UCB acquisition function via coordinate ascent. At round t, the search begins from $c^{(t-1)}$, and agent assignments are updated sequentially. When optimizing v_i, preceding agents use their current-round assignments, whereas subsequent agents retain their previous-round assignments:

$$c_i^{(t)} \leftarrow \arg\max_{\ell \in \mathcal{P}} \mathrm{UCB}\big(c_1^{(t)}, \ldots, c_{i-1}^{(t)}, \ell, c_{i+1}^{(t-1)}, \ldots, c_N^{(t-1)}\big). \quad (18)$$

After a complete sweep, the resulting configuration $c^{(t)}$ undergoes end-to-end evaluation. Each sweep requires $\mathcal{O}(NP)$ acquisition evaluations rather than the $\mathcal{O}(P^N)$ evaluations required by exhaustive search. These acquisition evaluations involve only surrogate inference and uncertainty estimation, not end-to-end MAS execution.

The complete procedure, including random warm-up, UCB-guided coordinate updates, end-to-end evaluation, and surrogate retraining, is summarized in Algorithm 1 in Appendix B.6.

4. Experiments

4.1 Experimental Setup

Datasets. We evaluate on HotpotQA (Yang et al. 2018), DROP (Dua et al. 2019), MBPP (Austin et al. 2021), and GSM8K (Cobbe et al. 2021), covering question answering, code generation, and mathematical reasoning. Validation subsets are used for configuration search and held-out test subsets for final evaluation; dataset and split details are provided in Appendix C.1.

Baselines. We compare against three baseline groups: (i) 9 uniform configurations that assign the same LLM to all agents; (ii) LLMSelector (Chen et al. 2025), which performs coordinate-wise model selection using diagnostic feedback but optimizes task performance only; and (iii) MIPRO (Opsahl-Ong et al. 2024), which we adapt as a Bayesian optimizer over agent-level model configurations under the cost-aware objective. Adaptation details are provided in Appendix C.2.

Metrics. Following established evaluation practices for agentic workflows (Zhang et al. 2025b), we measure task performance $p(c \mid \mathcal{D})$ using F1 for HotpotQA and DROP, Pass@1 for MBPP (Chen et al. 2021), and exact-match accuracy for GSM8K. We derive the cost-efficiency score $\rho(c \mid \mathcal{D})$ and the cost-aware score $S(c \mid \mathcal{D})$ from the average inference cost using Eqs. 4 and 5. Cost accounting, normalization, and test reporting details are provided in Appendix C.

Implementation Details. We use the nine candidate LLMs in Table 1. Each optimization method receives $T = 50$ validation evaluations per benchmark, including $T_0 = 5$ random warm-up evaluations; the best validation configuration is evaluated three times on the held-out test set. We set $\omega = 0.7$ to prioritize performance while retaining cost regularization, and use a random seed of 42. Further method and evaluation details are provided in Appendices B and C.

4.2 Experimental Results and Analysis

Main Results. Table 1 shows that MASTAB achieves the highest cost-aware score on every benchmark and the best average score of 85.91. Under the matched 50-evaluation budget, it consistently surpasses both MIPRO, the strongest optimization baseline, and GPT-5.4 nano, the strongest uniform configuration, across question answering, code generation, and mathematical reasoning. This consistent advantage demonstrates that MASTAB uses limited validation feedback effectively and achieves robust sample efficiency across diverse tasks. The corresponding task-performance and inference-cost results are reported in Appendix Table 7.

Performance–Cost Trade-off. To disentangle the contributions of task performance and inference cost to the aggregate score, we analyze both dimensions separately in Figure 3. Panels (a)–(d) show that methods surpassing MASTAB on HotpotQA, DROP, and GSM8K incur substantially higher inference costs, whereas MASTAB achieves the highest performance on MBPP. Conversely, no lower-cost baseline outperforms MASTAB on any benchmark. Panel (e) shows that

Method	QA		Code	Math	Avg.
	HotpotQA	DROP	MBPP	GSM8K	
Qwen2.5 1.5B (Hui et al. 2024)	55.12±0.43	35.63±0.21	73.65±0.01	77.98±0.28	60.60
Gemma 2 2B (Team et al. 2024)	71.70±0.23	55.40±0.17	67.42±0.00	72.47±0.58	66.75
Llama 3.2 3B (Meta AI 2024)	74.35±0.27	51.79±0.09	67.03±0.25	80.61±0.14	68.45
Mistral 7B (Jiang et al. 2023)	73.65±0.20	64.24±0.33	68.97±0.28	72.17±0.24	69.76
Gemma 2 27B (Team et al. 2024)	72.33±0.19	72.22±0.17	81.98±1.61	89.11±0.20	78.91
GPT-5.4 nano (OpenAI 2026)	75.62±0.12	76.21±0.16	82.78±0.74	92.88±0.21	81.87
GPT-5.4 mini (OpenAI 2026)	73.29±0.17	74.19±0.17	83.58±0.40	88.89±0.20	79.99
o4-mini (OpenAI 2025b)	63.38±0.08	60.36±0.37	71.77±0.40	82.92±0.29	69.61
GPT-5.1 (OpenAI 2025a)	55.64±0.11	56.79±0.22	61.90±0.34	66.38±0.22	60.18
LLMSelector (Chen et al. 2025)	67.66±0.11	72.59±0.26	73.82±0.21	87.56±0.03	75.41
MIPRO (Opsahl-Ong et al. 2024)	75.68±0.14	79.74±0.27	86.78±0.39	88.76±0.35	82.74
MASTAB	**78.93**±0.41	**80.16**±0.18	**90.81**±0.42	**93.72**±0.23	**85.91**

Table 1: Cost-aware score comparison across four benchmarks under a matched budget of 50 evaluations. Results are mean (%) ± standard error over three test runs; bold denotes the best result, while underlining denotes the best uniform baseline.

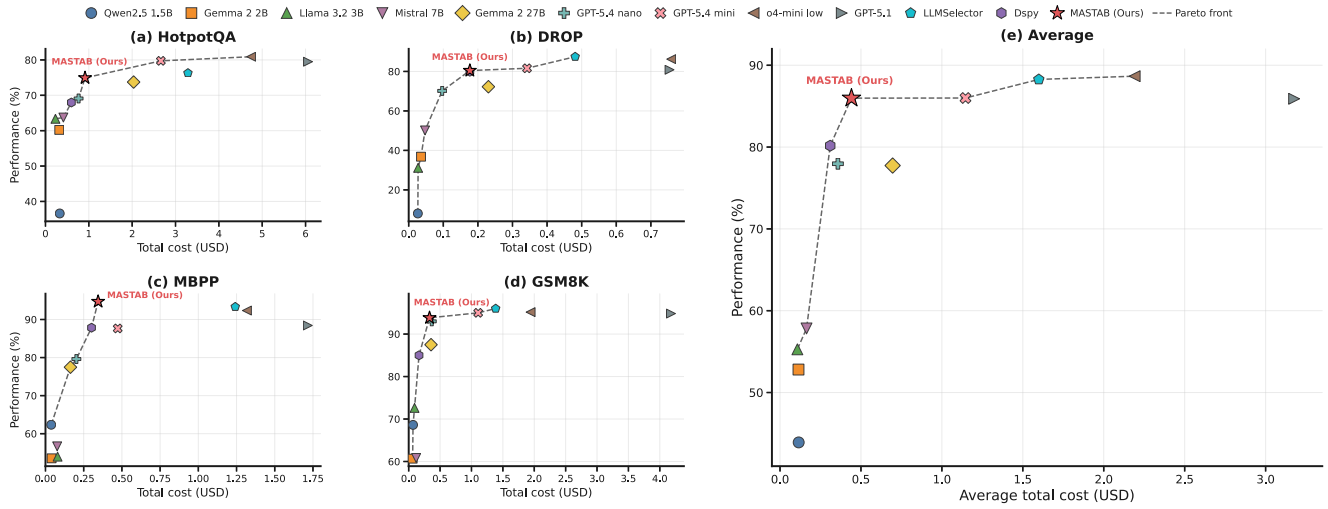


Figure 3: Performance–cost Pareto comparisons. Panels (a)–(d) report results on HotpotQA, DROP, MBPP, and GSM8K, respectively, while panel (e) reports the average across the four benchmarks. Each point represents a model selection method, with inference cost on the horizontal axis and task performance on the vertical axis. The dashed lines denote the Pareto frontiers.

this relationship persists on average, indicating a favorable performance–cost balance rather than gains driven by either dimension alone.

Effect of the Trade-off Weight. To examine how deployment preferences affect model selection, we vary $\omega \in \{0.1, 0.3, 0.5, 0.7, 0.9\}$ while keeping all other settings unchanged. As shown in Figure 4, increasing ω shifts the selected configurations toward higher task performance, generally at greater inference cost, whereas smaller values favor lower-cost operating points. The resulting trajectory demonstrates that ω enables MASTAB to adapt model assignments to application-specific quality–budget requirements.

4.3 Ablation Studies

Effectiveness of Learnable Model Embeddings. We freeze the agent-specific model embeddings at their description-based initialization while keeping the remaining procedure unchanged. This ablation reduces the average score by 1.77 points (Table 2). The improvement from learning the embeddings confirms that MASTAB effectively adapts model representations to agent-specific roles rather than relying solely on generic semantic similarities.

Effectiveness of Graph Neural Networks. Replacing the GNN surrogate with a topology-agnostic MLP decreases the average score by 2.48 points (Table 2), confirming that topology-aware message passing captures inter-agent dependencies that a topology-agnostic predictor misses. By contex-

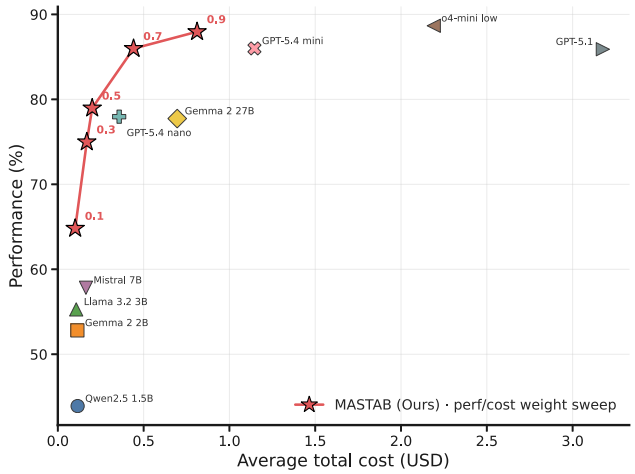


Figure 4: Average performance–cost trade-off for MASTAB across $\omega \in \{0.1, 0.3, 0.5, 0.7, 0.9\}$. Each star reports performance and cost averaged over the four benchmarks; larger ω emphasizes performance.

Method	HotpotQA	GSM8K	Avg.
GPT-5.4 nano	75.62±0.12	92.88±0.21	84.25
LLMSelector	67.66±0.11	87.56±0.03	77.61
MIPRO	75.68±0.14	88.76±0.35	82.22
MASTAB	**78.93**±0.41	**93.72**±0.23	**86.33**
Frozen Emb.	78.15±0.40	90.96±0.10	84.56
w/o GNN	76.19±0.03	91.50±0.58	83.85
Neural UCB	74.85±0.28	91.11±0.30	82.98
Δ (Embedding Gain)	+0.78	+2.76	**+1.77**
Δ (GNN Gain)	+2.74	+2.22	**+2.48**
Δ (LinUCB Gain)	+4.08	+2.61	**+3.35**

Table 2: Ablation results for learnable agent-specific LLM embeddings, the topology-aware GNN surrogate, and the choice of UCB uncertainty estimator.

tualizing each agent with its incoming neighbors, the GNN better reflects how upstream model choices affect downstream behavior.

Linear UCB vs. Neural UCB. A NeuralUCB-style confidence estimate produces the largest ablation drop (Table 2), reducing the average score by 3.35 points. Unlike NeuralUCB, LinUCB uses fixed semantic features that remain unchanged during surrogate retraining, keeping confidence updates observation-driven and stable under scarce observations and repeated coordinate-wise scoring.

Coordinate Ascent vs. Global Search. Table 3 compares coordinate ascent with global maximization of the same UCB acquisition function. Global search improves the score by only 0.02 points on HotpotQA and 0.20 on DROP, whereas coordinate ascent reduces search time by 96.3% and 77.8%, respectively. Coordinate ascent therefore preserves acquisition quality at substantially lower search cost.

Method	HotpotQA		DROP	
	Score (%)	Time (s)	Score (%)	Time (s)
Coordinate Ascent	78.93±0.41	10.30	80.16±0.18	3.29
Global Search	78.95±0.27	278.14	80.36±0.07	14.83
Δ (Coord. − Global)	-0.02	**96.3%**↓	-0.20	**77.8%**↓

Table 3: Cost-aware score and search-time comparison between coordinate ascent and exhaustive global search. All other experimental settings are fixed.

5. Related Work

LLM Model Selection. LLM model selection uses differences in model capability and cost to choose an appropriate model for each input. FrugalGPT arranges LLM calls in cascades to improve response quality under a cost constraint (Chen, Zaharia, and Zou 2024), while HybridLLM and RouteLLM learn when a query should be sent to a more capable model (Ding et al. 2024; Ong et al. 2025). Later work considers selection from larger model pools. C2MAB-V formulates online multi-LLM selection as a combinatorial bandit problem (Dai et al. 2024); GraphRouter represents tasks, queries, and candidate LLMs in a heterogeneous graph (Feng, Shen, and You 2025); and RouterDC learns query–model compatibility with dual contrastive objectives (Chen et al. 2024). These methods generally make selection decisions at the level of an individual query. Applying them independently at each agent does not account for the dependencies created by the workflow topology. The value of a model at one agent depends on the role of that agent and on the models used by connected agents. A set of favorable local decisions may therefore be suboptimal for the system as a whole. Additional related work on LLM-based multi-agent systems and workflow design is discussed in Appendix A.

6. Conclusion

We introduced MASTAB, a sample-efficient framework for agent-level LLM selection in fixed-workflow multi-agent systems. MASTAB combines a topology-aware GATv2 surrogate, LinUCB exploration, and coordinate-ascent search to optimize a cost-aware objective from limited end-to-end evaluations. Across four benchmarks under matched evaluation budgets, MASTAB consistently improves cost-aware performance over strong baselines, while ablations validate the contributions of its core components. These results demonstrate that agent-level model selection can improve the performance–cost trade-off of deployed multi-agent systems without altering their established workflows.

References

Abbasi-Yadkori, Y.; Pál, D.; and Szepesvári, C. 2011. Improved algorithms for linear stochastic bandits. *Advances in neural information processing systems*, 24.

Austin, J.; Odena, A.; Nye, M.; Bosma, M.; Michalewski, H.; Dohan, D.; Jiang, E.; Cai, C.; Terry, M.; Le, Q.; et al. 2021. Program synthesis with large language models. *arXiv preprint arXiv:2108.07732*.

Berger, A.; Hillebrand, L.; Leonhard, D.; Deußer, T.; De Oliveira, T. B. F.; Dilmaghani, T.; Khaled, M.; Kliem, B.; Loitz, R.; Bauckhage, C.; et al. 2025. Towards automated regulatory compliance verification in financial auditing with large language models. *arXiv preprint arXiv:2507.16642*.

Bodnari, A.; and Travis, J. 2025. Scaling enterprise AI in healthcare: the role of governance in risk mitigation frameworks. *npj Digital Medicine*, 8(1): 272.

Brody, S.; Alon, U.; and Yahav, E. 2021. How attentive are graph attention networks? *arXiv preprint arXiv:2105.14491*.

Brown, T.; Mann, B.; Ryder, N.; Subbiah, M.; Kaplan, J. D.; Dhariwal, P.; Neelakantan, A.; Shyam, P.; Sastry, G.; Askell, A.; et al. 2020. Language models are few-shot learners. *Advances in neural information processing systems*, 33: 1877–1901.

Cai, S.; Ning, Y.; and Liu, H. 2025. AgentBalance: Backbone-then-Topology Design for Cost-Effective Multi-Agent Systems under Budget Constraints. *arXiv preprint arXiv:2512.11426*.

Chen, J.; Saha, S.; and Bansal, M. 2024. Reconcile: Round-table conference improves reasoning via consensus among diverse llms. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 7066–7085.

Chen, L.; Davis, J. Q.; Hanin, B.; Bailis, P.; Zaharia, M.; Zou, J.; and Stoica, I. 2025. Optimizing model selection for compound ai systems. *arXiv preprint arXiv:2502.14815*.

Chen, L.; Zaharia, M.; and Zou, J. 2024. FrugalGPT: How to Use Large Language Models While Reducing Cost and Improving Performance. *Transactions on Machine Learning Research*.

Chen, M.; Tworek, J.; Jun, H.; Yuan, Q.; Pinto, H. P. D. O.; Kaplan, J.; Edwards, H.; Burda, Y.; Joseph, N.; Brockman, G.; et al. 2021. Evaluating large language models trained on code. *arXiv preprint arXiv:2107.03374*.

Chen, P.; Zhang, S.; and Han, B. 2024. Comm: Collaborative multi-agent, multi-reasoning-path prompting for complex problem solving. In *Findings of the Association for Computational Linguistics: NAACL 2024*, 1720–1738.

Chen, S.; Jiang, W.; Lin, B.; Kwok, J. T.; and Zhang, Y. 2024. RouterDC: Query-Based Router by Dual Contrastive Learning for Assembling Large Language Models. In *Advances in Neural Information Processing Systems*, volume 37, 66305–66328.

Chowdhery, A.; Narang, S.; Devlin, J.; Bosma, M.; Mishra, G.; Roberts, A.; Barham, P.; Chung, H. W.; Sutton, C.; Gehrmann, S.; et al. 2022. Palm: Scaling language modeling with pathways. *arXiv preprint arXiv:2204.02311*.

Chung, H. W.; Hou, L.; Longpre, S.; Zoph, B.; Tay, Y.; Fedus, W.; Li, Y.; Wang, X.; Dehghani, M.; Brahma, S.; et al. 2024. Scaling instruction-finetuned language models. *Journal of Machine Learning Research*, 25(70): 1–53.

Cobbe, K.; Kosaraju, V.; Bavarian, M.; Chen, M.; Jun, H.; Kaiser, L.; Plappert, M.; Tworek, J.; Hilton, J.; Nakano, R.; et al. 2021. Training verifiers to solve math word problems. *arXiv preprint arXiv:2110.14168*.

Dai, X.; Li, J.; Liu, X.; Yu, A.; and Lui, J. C. S. 2024. Cost-Effective Online Multi-LLM Selection with Versatile Reward Models. arXiv:2405.16587.

Ding, D.; Mallick, A.; Wang, C.; Sim, R.; Mukherjee, S.; Rühle, V.; Lakshmanan, L. V. S.; and Awadallah, A. H. 2024. Hybrid LLM: Cost-Efficient and Quality-Aware Query Routing. In *The Twelfth International Conference on Learning Representations*.

Du, Y.; Li, S.; Torralba, A.; Tenenbaum, J. B.; and Mordatch, I. 2024. Improving Factuality and Reasoning in Language Models through Multiagent Debate. In *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, 11733–11763. PMLR.

Dua, D.; Wang, Y.; Dasigi, P.; Stanovsky, G.; Singh, S.; and Gardner, M. 2019. DROP: A reading comprehension benchmark requiring discrete reasoning over paragraphs. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, 2368–2378.

Feng, T.; Shen, Y.; and You, J. 2025. GraphRouter: A Graph-based Router for LLM Selections. In *The Thirteenth International Conference on Learning Representations*.

Hong, S.; Zhuge, M.; Chen, J.; Zheng, X.; Cheng, Y.; Wang, J.; Zhang, C.; Wang, Z.; Yau, S. K. S.; Lin, Z.; Zhou, L.; Ran, C.; Xiao, L.; Wu, C.; and Schmidhuber, J. 2024. MetaGPT: Meta Programming for A Multi-Agent Collaborative Framework. In *The Twelfth International Conference on Learning Representations*.

Hong, Z.; Zhang, Q.; Sun, J.; Shang, Z.; Kong, M.; Wang, X.; Shu, Y.; and Dai, Z. 2026. Maspob: Bandit-based prompt optimization for multi-agent systems with graph neural networks. *arXiv preprint arXiv:2603.02630*.

Hu, S.; Lu, C.; and Clune, J. 2025. Automated Design of Agentic Systems. In *The Thirteenth International Conference on Learning Representations*.

Hui, B.; Yang, J.; Cui, Z.; Yang, J.; Liu, D.; Zhang, L.; Liu, T.; Zhang, J.; Yu, B.; Lu, K.; et al. 2024. Qwen2. 5-coder technical report. *arXiv preprint arXiv:2409.12186*.

Islam, M. A.; Ali, M. E.; and Parvez, M. R. 2024. Mapcoder: Multi-agent code generation for competitive problem solving. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 4912–4944.

Jiang, A. Q.; Sablayrolles, A.; Mensch, A.; Bamford, C.; Chaplot, D. S.; Casas, D. d. l.; Bressand, F.; Lengyel, G.; Lample, G.; Saulnier, L.; et al. 2023. Mistral 7B. *arXiv preprint arXiv:2310.06825*.

Li, G.; Hammoud, H. A. A. K.; Itani, H.; Khizbullin, D.; and Ghanem, B. 2023. Camel: Communicative agents for" mind" exploration of large language model society. *arXiv preprint arXiv:2303.17760*.

Li, S.; Hasson, H.; and Ghosh, J. 2026. OMAC: A Holistic Optimization Framework for LLM-Based Multi-Agent Collaboration. In *Forty-third International Conference on Machine Learning*.

Lin, X.; Wu, Z.; Dai, Z.; Hu, W.; Shu, Y.; Ng, S.-K.; Jaillet, P.; and Low, B. K. H. 2023. Use your instinct: Instruction optimization using neural bandits coupled with transformers. *arXiv preprint arXiv:2310.02905*.

Meta AI. 2024. Llama 3.2 3B Instruct Model Card. Hugging Face Model Card. Accessed: 2026-07-27.

Ong, I.; Almahairi, A.; Wu, V.; Chiang, W.-L.; Wu, T.; Gonzalez, J. E.; Kadous, M. W.; and Stoica, I. 2025. RouteLLM: Learning to Route LLMs from Preference Data. In *The Thirteenth International Conference on Learning Representations*.

OpenAI. 2025a. Introducing GPT-5.1 for Developers. OpenAI. Accessed: 2026-07-27.

OpenAI. 2025b. Introducing OpenAI o3 and o4-mini. OpenAI. Accessed: 2026-07-27.

OpenAI. 2026. Introducing GPT-5.4 Mini and Nano. OpenAI. Accessed: 2026-07-27.

Opsahl-Ong, K.; Ryan, M. J.; Purtell, J.; Broman, D.; Potts, C.; Zaharia, M.; and Khattab, O. 2024. Optimizing instructions and demonstrations for multi-stage language model programs. In *Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing*, 9340–9366.

Panda, P.; Magazine, R.; Devaguptapu, C.; Takemori, S.; and Sharma, V. 2025. Adaptive llm routing under budget constraints. *arXiv preprint arXiv:2508.21141*.

Poon, M.; Dai, X.; Liu, X.; Kong, F.; Lui, J. C.; and Zuo, J. 2026. Online multi-llm selection via contextual bandits under unstructured context evolution. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 40, 24855–24863.

Qian, C.; Liu, W.; Liu, H.; Chen, N.; Dang, Y.; Li, J.; Yang, C.; Chen, W.; Su, Y.; Cong, X.; et al. 2024. Chatdev: Communicative agents for software development. In *Proceedings of the 62nd annual meeting of the association for computational linguistics (volume 1: Long papers)*, 15174–15186.

Su, J.; Lan, Q.; Xia, Y.; Sun, L.; Tian, W.; Shi, T.; and He, L. 2026. Difficulty-aware agentic orchestration for query-specific multi-agent workflows. In *Proceedings of the ACM Web Conference 2026*, 2060–2070.

Team, G.; Riviere, M.; Pathak, S.; Sessa, P. G.; Hardin, C.; Bhupatiraju, S.; Hussenot, L.; Mesnard, T.; Shahriari, B.; Ramé, A.; et al. 2024. Gemma 2: Improving open language models at a practical size. *arXiv preprint arXiv:2408.00118*.

Touvron, H.; Lavril, T.; Izacard, G.; Martinet, X.; Lachaux, M.-A.; Lacroix, T.; Rozière, B.; Goyal, N.; Hambro, E.; Azhar, F.; et al. 2023. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*.

Wang, J.; Zhao, S.; Liu, J.; Wang, H.; Li, W.; Qin, B.; and Liu, T. 2026. Orchestrating Intelligence: Confidence-Aware Routing for Efficient Multi-Agent Collaboration across Multi-Scale Models. *arXiv preprint arXiv:2601.04861*.

Wang, X.; Liu, Y.; Cheng, W.; Zhao, X.; Chen, Z.; Yu, W.; Fu, Y.; and Chen, H. 2025. Mixllm: Dynamic routing in mixed large language models. In *Proceedings of the 2025 Conference of the Nations of the Americas Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, 10912–10922.

Wells, B. J.; Nguyen, H. M.; McWilliams, A.; Pallini, M.; Bovi, A.; Kuzma, A.; Kramer, J.; Chou, S.-H.; Hetherington, T.; Corn, P.; et al. 2025. A practical framework for appropriate implementation and review of artificial intelligence (FAIR-AI) in healthcare. *NPJ digital medicine*, 8(1): 514.

Wu, Q.; Bansal, G.; Zhang, J.; Wu, Y.; Li, B.; Zhu, E.; Jiang, L.; Zhang, X.; Zhang, S.; Liu, J.; et al. 2024. Autogen: Enabling next-gen LLM applications via multi-agent conversations. In *First conference on language modeling*.

Yang, Z.; Qi, P.; Zhang, S.; Bengio, Y.; Cohen, W.; Salakhutdinov, R.; and Manning, C. D. 2018. HotpotQA: A dataset for diverse, explainable multi-hop question answering. In *Proceedings of the 2018 conference on empirical methods in natural language processing*, 2369–2380.

Yue, Y.; Zhang, G.; Liu, B.; Wan, G.; Wang, K.; Cheng, D.; and Qi, Y. 2025. MasRouter: Learning to Route LLMs for Multi-Agent Systems. In *Proceedings of the 63rd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, 15549–15572. Vienna, Austria: Association for Computational Linguistics.

Zhang, G.; Yue, Y.; Sun, X.; Wan, G.; Yu, M.; Fang, J.; Wang, K.; Chen, T.; and Cheng, D. 2025a. G-Designer: Architecting Multi-agent Communication Topologies via Graph Neural Networks. In *International Conference on Machine Learning*, 76678–76692. PMLR.

Zhang, J.; Xiang, J.; Yu, Z.; Teng, F.; Chen, X.-H.; Chen, J.; Zhuge, M.; Cheng, X.; Hong, S.; Wang, J.; Zheng, B.; Liu, B.; Luo, Y.; and Wu, C. 2025b. AFlow: Automating Agentic Workflow Generation. In *The Thirteenth International Conference on Learning Representations*.

Zhang, Y.; Li, M.; Long, D.; Zhang, X.; Lin, H.; Yang, B.; Xie, P.; Yang, A.; Liu, D.; Lin, J.; et al. 2025c. Qwen3 embedding: Advancing text embedding and reranking through foundation models, 2025.

Zhao, D.; Ma, L.; Wang, S.; Wang, M.; and Kong, Y. 2026. SC-MAS: Constructing Cost-Efficient Multi-Agent Systems with Edge-Level Heterogeneous Collaboration. *arXiv preprint arXiv:2601.09434*.

Zhou, D.; Li, L.; and Gu, Q. 2020. Neural contextual bandits with ucb-based exploration. In *International conference on machine learning*, 11492–11502. PMLR.

Zhuge, M.; Wang, W.; Kirsch, L.; Faccio, F.; Khizbullin, D.; and Schmidhuber, J. 2024. Gptswarm: Language agents as optimizable graphs. In *Forty-first International Conference on Machine Learning*.

Appendix

A Additional Related Work

LLM-based Multi-Agent Systems. LLM-based multi-agent systems (MAS) divide complex tasks among agents that reason and communicate with one another. Many systems use a fixed interaction structure, including multi-agent debate (Du et al. 2024), role-specialized software-development teams (Hong et al. 2024). Other systems adapt their organization to the task. GPTSwarm treats an agent system as a graph that can be optimized (Zhuge et al. 2024), and automated agent-design methods search over prompts, tools, and control flows (Hu, Lu, and Clune 2025; Zhang et al. 2025b). This line of work shows that topology and role assignment affect both task performance and inference cost. Most existing methods focus on designing or adapting the workflow. We instead consider a workflow that has already been designed and validated, with fixed topology and agent roles, and optimize the LLM assigned to each agent.

Model Routing for Multi-Agent Systems. Recent work has begun to treat model routing as a central design problem in MAS, determining which LLM should power each agent according to the task, agent role, and collaboration context. AgentBalance jointly selects agent backbones and communication topologies, allowing heterogeneous models to be assigned across an MAS under deployment constraints (Cai, Ning, and Liu 2025). DAAO routes LLMs together with workflow operators according to query difficulty (Su et al. 2026), while SC-MAS jointly selects agent roles, LLM backbones, and edge-level collaboration strategies (Zhao et al. 2026). OI-MAS further uses confidence-aware routing to choose among models of different scales during multi-agent reasoning (Wang et al. 2026). At the broader level of compound AI systems, LLMSelector optimizes the model assigned to each system module (Chen et al. 2025). These methods demonstrate the value of matching models to different agent or module functions, but they primarily perform query-specific routing or jointly modify other workflow components. MASTAB instead isolates model routing within a fixed MAS workflow and searches for a task-level global assignment under a limited evaluation budget.

B Additional Method Details

This section provides the candidate-model information, surrogate-training details, and complete optimization procedure underlying MASTAB.

B.1 Candidate LLM Pool

All agents share the nine-model candidate pool in Table 4. The pool covers open and proprietary models with different parameter scales, access modes, capability profiles, and token prices. The index column records the identifiers used in our implementation. MASTAB may assign any candidate to any agent, allowing heterogeneous configurations within a single workflow.

B.2 Candidate LLM Descriptions

MASTAB represents each candidate using a short natural-language capability description. Qwen3-Embedding-8B (Zhang et al. 2025c) encodes these descriptions to initialize the learnable agent-specific embeddings and construct the frozen LinUCB features. The descriptions supplied to the encoder are reproduced below in the same order as the candidate pool in Table 4.

Qwen2.5 1.5B (local). (Hui et al. 2024) A compact 1.5B instruction-tuned model that represents the lowest-cost tier in the candidate pool. It is suited to short instructions and basic output formatting, but has limited capacity for multi-step reasoning, mathematics, and code generation.

Gemma 2 2B (local). (Team et al. 2024) A 2B instruction-tuned model in the low-cost local tier. It supports short-form instruction following, simple classification, and output formatting, while remaining limited on extended reasoning, mathematical problem solving, and non-trivial code.

Llama 3.2 3B (local). (Meta AI 2024) A 3B instruction-tuned model that provides a low-cost option for general language tasks and short reasoning chains. Its capacity remains constrained for complex multi-step reasoning, mathematics, and code generation.

Mistral 7B (local). (Jiang et al. 2023) A 7B instruction-tuned model and the largest local candidate in the pool. It offers stronger general instruction following and moderate reasoning ability than the smaller local models, but is less suitable for demanding mathematical reasoning and complex code generation.

Gemma 2 27B (OpenRouter). (Team et al. 2024) A remotely served 27B open model occupying the intermediate capability–cost tier. It provides stronger general knowledge, instruction following, and multi-step reasoning than the local models, while remaining less specialized for the most demanding mathematics and code tasks.

GPT-5.4 nano (OpenRouter). (OpenAI 2026) The smallest OpenAI model in the candidate pool and the lowest-cost remotely served option from this model family. It is designed for concise instruction following and lightweight language tasks, with lower capacity than the larger candidates for difficult reasoning, mathematics, and code.

GPT-5.4 mini (OpenRouter). (OpenAI 2026) A mid-tier OpenAI model that trades higher inference cost for stronger performance on multi-step tasks, mathematics, and general code generation. It provides an intermediate operating point between the lightweight candidates and the reasoning-oriented models.

o4-mini (OpenRouter). (OpenAI 2025b) A reasoning-oriented OpenAI model configured with reasoning effort set to `low`. It targets multi-step reasoning, mathematics, and code-intensive tasks while limiting the additional cost and latency associated with longer reasoning.

GPT-5.1 (OpenRouter). (OpenAI 2025a) The highest-cost and highest-capacity candidate in the pool. It is intended

Index	Model	Scale / Type	Access	Input	Output
2	Qwen2.5 1.5B	1.5B open	Local	$0.10	$0.10
4	Gemma 2 2B	2B open	Local	$0.10	$0.10
5	Llama 3.2 3B	3B open	Local	$0.05	$0.33
6	Mistral 7B	7B open	Local	$0.11	$0.19
0	Gemma 2 27B	27B open	OpenRouter	$0.65	$0.65
8	GPT-5.4 nano	Lightweight proprietary	OpenRouter	$0.20	$1.25
1	GPT-5.4 mini	General-purpose proprietary	OpenRouter	$0.75	$4.50
3	o4-mini	Reasoning proprietary	OpenRouter	$1.10	$4.40
7	GPT-5.1	Frontier proprietary	OpenRouter	$1.25	$10.00

Table 4: Shared candidate LLM pool used by MASTAB, spanning multiple model scales, capability profiles, access modes, and price levels. Input and output rates are in USD per one million tokens.

for demanding multi-step reasoning, advanced mathematics, long-context understanding, and complex code generation, and is therefore most appropriate for agents whose roles require these capabilities.

B.3 Expanded Model Representation

For completeness, stacking the agent-specific node representations row-wise yields the configuration-conditioned feature matrix

$$\mathbf{H}^{(0)}(c) = \begin{bmatrix} (\mathbf{h}_1^{(0)})^\top \\ \vdots \\ (\mathbf{h}_N^{(0)})^\top \end{bmatrix} = \begin{bmatrix} \mathbf{B}_1[c_1]^\top \\ \vdots \\ \mathbf{B}_N[c_N]^\top \end{bmatrix} \in \mathbb{R}^{N\times d}. \quad (19)$$

The pair $(\mathbf{H}^{(0)}(c), \mathbf{A}_G)$ constitutes the input to the topology-aware GATv2 encoder.

B.4 Surrogate Training Objective

Let $\mathcal{O} = \{(c^{(r)}, S_r)\}_{r=1}^{n_\mathcal{O}}$ denote the accumulated observations, where $n_\mathcal{O} = |\mathcal{O}|$ and $S_r = S(c^{(r)} \mid \mathcal{D}_{\text{val}})$ is the cost-aware score obtained from an end-to-end evaluation of configuration $c^{(r)}$. We train the surrogate to regress these observed scores by minimizing the mean squared error

$$\mathcal{L}_{\text{sur}}(\theta) = \frac{1}{n_\mathcal{O}} \sum_{r=1}^{n_\mathcal{O}} \Big(\mu_\theta(c^{(r)}; \mathbf{A}_G) - S_r\Big)^2. \quad (20)$$

The parameter set θ comprises the agent-specific embedding tables $\{\mathbf{B}_i\}_{i=1}^N$, all GATv2 parameters, and the prediction MLP. Backpropagation through Eq. 20 therefore jointly optimizes the role-specific model embeddings and the remaining surrogate parameters.

B.5 Optimization and Initialization Details

Optimization Hyperparameters. Table 5 reports the settings shared across all four benchmarks. We use linear UCB with frozen semantic features, and center the description-based model embeddings before initializing the agent-specific embedding tables. During surrogate retraining, five-fold cross-validation is used to select the stopping epoch once at least six observations are available.

The exploration coefficient, GNN depth, and maximum number of surrogate training epochs are selected at the benchmark level, as summarized in Table 6. The table also records the validation and held-out test sample counts used in the reported experiments.

Parameter	Setting
Evaluation budget (T)	50
Random warm-up budget (T_0)	5
Performance / cost weights	$0.7/0.3$
Hidden dimension	16
Dropout	0.2
Learning rate	5×10^{-3}
Weight decay	10^{-3}
UCB estimator / features	Linear / frozen
Regularization (λ)	1
Information-update scale (η)	10
Cross-validation folds	5
Minimum observations for CV	6
Test runs	3
Random seed	42

Table 5: Hyperparameters shared across all benchmarks.

Dataset	β	Layers	Epochs	Val.	Test
DROP	1.0	2	200	200	400
HotpotQA	1.0	2	250	200	400
GSM8K	1.2	3	300	100	200
MBPP	0.5	3	300	85	170

Table 6: Benchmark-specific hyperparameters and evaluation sample counts. β denotes the UCB exploration coefficient.

GNN Initialization. MASTAB initializes the GNN surrogate using a limited warm-up budget. Specifically, it uniformly samples T_0 complete model configurations, evaluates their cost-aware scores on the validation set, and fits the GATv2 predictor to the resulting observations $\mathcal{O}_{T_0} = \{(c^{(r)}, S(c^{(r)} \mid \mathcal{D}_{\text{val}}))\}_{r=1}^{T_0}$. This warm-up provides an initial estimate of the score landscape that accounts for workflow topology and interactions among model choices. The subsequent UCB-guided search then prioritizes configurations that are either promising or insufficiently explored.

Algorithm 1: MASTAB: Model Selection for MAS

Require: Workflow $G = (\mathcal{V}, \mathcal{E})$; LLM pool $\mathcal{P}$; validation set $\mathcal{D}_{\text{val}}$; budgets $0 < T_0 < T$; parameters $\omega, \beta, \lambda, \eta$
Ensure: Best observed configuration c_{best}

Encode model descriptions as $\{\bar{\mathbf{b}}(\ell) : \ell \in \mathcal{P}\}$; initialize adjacency $\mathbf{A}_G$ and agent-specific tables $\{\mathbf{B}_i\}_{i=1}^{N}$
Set $u_{\min}, u_{\max}$ using uniform anchor configurations
$\mathbf{M} \leftarrow \lambda \mathbf{I}_{Nd}$; $\mathcal{O} \leftarrow \emptyset$
$(S_{\text{best}}, c_{\text{best}}) \leftarrow (-\infty, \text{null})$
for $t = 1$ to T_0 **do**
  Sample $c^{(t)}$ uniformly; $S_t \leftarrow S(c^{(t)} \mid \mathcal{D}_{\text{val}})$
  Update $\mathcal{O}$, $\mathbf{M}$, and the incumbent using $(c^{(t)}, S_t)$
end for
Train $\mu_\theta(\cdot; \mathbf{A}_G)$ on $\mathcal{O}$
for $t = T_0 + 1$ to T **do**
  Set $c \leftarrow c^{(t-1)}$
  for $i = 1$ to N **do**
    For all $\ell \in \mathcal{P}$: $q_\ell \leftarrow (c_{-i}, \ell)$, $\mu_\ell \leftarrow \mu_\theta(q_\ell; \mathbf{A}_G)$
    $\delta_\ell \leftarrow \sqrt{\boldsymbol{\phi}(q_\ell)^\top \mathbf{M}^{-1} \boldsymbol{\phi}(q_\ell)}$ for all $\ell \in \mathcal{P}$
    $c_i \leftarrow \arg\max_{\ell \in \mathcal{P}} [\mu_\ell + \beta \delta_\ell]$
    $c \leftarrow (c_{-i}, c_i)$
  end for
  $c^{(t)} \leftarrow c$; evaluate $S_t = S(c^{(t)} \mid \mathcal{D}_{\text{val}})$
  Update $\mathcal{O}$, $\mathbf{M}$, and the incumbent using $(c^{(t)}, S_t)$
  Retrain $\mu_\theta(\cdot; \mathbf{A}_G)$ on $\mathcal{O}$
end for
return c_{best}

B.6 Complete MASTAB Procedure

Algorithm 1 presents the complete optimization procedure. Here, $\mathcal{O}$ denotes the accumulated observations, c_{-i} denotes all assignments except that of v_i, and (c_{-i}, ℓ) assigns ℓ to v_i while keeping the remaining assignments fixed.

C Additional Experimental Details

C.1 Dataset Details

We use disjoint validation and test subsets at an approximately 1:2 ratio for all benchmarks. HotpotQA contains 200 validation queries and 400 test queries, evaluated using F1. DROP likewise contains 200 validation queries and 400 test queries and uses F1. MBPP contains 85 validation problems and 170 test problems, evaluated using Pass@1. GSM8K contains 100 validation problems and 200 test problems, evaluated by exact match of the final numerical answer. The validation subsets are used only for configuration search, and the test subsets remain held out until the selected configuration is fixed.

C.2 Implementation and Evaluation Details

Model Access. Deployment sources, internal indices, and fixed token prices are reported in Table 4; o4-mini uses `low` reasoning effort. A call with n_{in} input and n_{out} output tokens costs $(n_{\text{in}} r_{\text{in}} + n_{\text{out}} r_{\text{out}})/10^6$, using the corresponding rates in the table. The same rates apply to every method and benchmark.

MIPRO Adaptation. MIPRO was developed for optimizing instructions and demonstrations in multi-stage language model programs. We retain its Bayesian optimizer but replace its variables with N categorical agent-level choices, each selecting one LLM from $\mathcal{P}$. Workflow topology, roles, prompts, tools, and control flow remain fixed. Configurations use the same cost-aware objective and evaluation budget as the other methods, and the best observation is returned. This adaptation evaluates MIPRO's search strategy for model selection rather than prompt optimization.

Task-Level Search Protocol. Task-level selection identifies one agent–LLM configuration per benchmark, shared by all its instances. MASTAB and the optimization baselines receive $T = 50$ end-to-end validation evaluations, comprising $T_0 = 5$ random warm-up configurations and 45 method-specific trials, and return the best observation. MASTAB uses single-start coordinate ascent, initializing each UCB-guided round from the preceding configuration. The global-search ablation maximizes the same learned acquisition function over all P^N configurations using only surrogate inference. Reported search time measures this maximization step (`selection_time_sec`).

Test Evaluation and Weight Sweep. The best validation configuration is fixed and run three times on the held-out test set. We report the mean and $\text{SE} = s/\sqrt{3}$. The trade-off study evaluates $\omega \in \{0.1, 0.3, 0.5, 0.7, 0.9\}$, corresponding to performance–cost weights from 0.1:0.9 through 0.9:0.1. Only the objective weights are changed; all other experimental settings remain fixed.

Cost Normalization. The inference cost $u(c \mid \mathcal{D})$ sums input and output token costs over all agent calls and averages them over $\mathcal{D}$. Validation uses fixed uniform anchors: Qwen2.5 1.5B for $u_{\min}$ and GPT-5.1 for $u_{\max}$. Because these are references rather than empirical extrema over routed configurations, the validation cost-efficiency score is not clipped to $[0, 1]$. Test reporting instead uses the minimum and maximum average costs among the nine uniform-model baselines; routed configurations do not determine these bounds.

C.3 Complete Performance, Cost, and Score Results

Table 7 complements the cost-aware score comparison in Table 1 by reporting the task score and inference cost from which each final score is computed.

Method	HotpotQA			DROP			MBPP			GSM8K		
	Perf.	Cost	Score	Perf.	Cost	Score	Perf.	Cost	Score	Perf.	Cost	Score
Qwen2.5 1.5B	36.60	0.3284	55.12	8.04	0.0264	35.63	62.35	0.0376	73.65	68.62	0.0690	77.98
Gemma 2 2B	60.22	0.3180	71.70	36.81	0.0356	55.40	53.53	0.0401	67.42	60.67	0.0628	72.47
Llama 3.2 3B	63.36	0.2296	74.35	31.17	0.0272	51.79	53.97	0.0792	67.03	72.62	0.0930	80.61
Mistral 7B	63.71	0.4128	73.65	50.11	0.0472	64.24	56.67	0.0765	68.97	60.83	0.1188	72.17
Gemma 2 27B	73.74	2.0336	72.33	72.25	0.2304	72.22	77.47	0.1634	81.98	87.50	0.3558	89.11
GPT-5.4 nano	69.10	0.7636	75.62	70.14	0.0968	76.21	79.61	0.2021	82.78	93.00	0.3676	92.88
GPT-5.4 mini	79.73	2.6624	73.29	81.60	0.3420	74.19	87.65	0.4726	83.58	95.00	1.1062	88.89
o4-mini	80.90	4.7452	63.38	86.23	0.7588	60.36	92.35	1.3178	71.77	95.17	1.9416	82.92
GPT-5.1	79.49	6.0568	55.64	80.85	0.7540	56.79	88.43	1.7163	61.90	94.83	4.1776	66.38
LLMSelector	76.28	3.2868	67.66	87.46	0.4812	72.59	93.33	1.2415	73.82	96.00	1.3852	87.56
MIPRO	67.96	0.5976	75.68	79.86	0.1768	79.74	87.84	0.3012	86.78	85.00	0.1646	88.76
MASTAB	74.92	0.9124	**78.93**	80.45	0.1768	**80.16**	**94.71**	0.3444	**90.81**	93.83	0.3318	**93.72**

Table 7: Complete main results over three independent test runs. Performance (Perf., %) denotes F1 for HotpotQA and DROP, Pass@1 for MBPP, and exact-match accuracy for GSM8K. Cost is the total test-set inference cost in USD, computed as the average per-instance cost multiplied by the test-set size. Score is the cost-aware score in Eq. 5. The table reports mean values; Table 1 provides standard errors for the score.

D Workflow Specifications and Selected Assignments

MASTAB operates on fixed MAS workflows in which agent definitions, prompt templates, control logic, and directed dependencies remain unchanged during model selection. For reproducibility, this section documents these workflow components and reports the best-observed assignments returned under the evaluation budget. The shared candidate pool and its semantic descriptions are provided in Appendix Sections B.1 and B.2.

D.1 Agent Definitions and Implementation

This subsection documents the agent operators that define the four fixed workflows. Each operator calls the LLM selected by MASTAB through a unified asynchronous API; its prompt template and control logic are part of the workflow specification.

Solve Agent

Description: Solves reading comprehension and numerical calculation tasks with step-by-step reasoning. Used in the DROP and GSM8K workflows.

```
class Solve(Operator):
    def __init__(self, llm: AsyncLLM, name: str = "
     Solve"):
        super().__init__(llm, name)
        self.prompt = SOLVE_PROMPT  # Fixed workflow
     prompt

    async def __call__(self, input: str) -> Dict[str,
      str]:
        prompt = self.prompt.format(input=input)
        response = await self._fill_node(SolveOp,
     prompt, mode="xml_fill")
        return response
```

Format Agent

Description: Extracts a short, concise final answer from a solution. Used in the DROP workflow.

```
class Format(Operator):
    def __init__(self, llm: AsyncLLM, name: str = "
     Format"):
        super().__init__(llm, name)
        self.prompt = FORMAT_PROMPT  # Fixed workflow
      prompt

    async def __call__(self, problem: str, solution:
     str) -> Dict[str, str]:
        prompt = self.prompt.format(
     problem_description=problem, solution=solution)
        response = await self._fill_node(FormatOp,
     prompt, mode="single_fill")
        return response
```

AnswerGenerate Agent

Description: Generates step-by-step answers for multi-hop question answering. Used in the HotpotQA workflow.

```
class AnswerGenerate(Operator):
    def __init__(self, llm: AsyncLLM, name: str = "
     AnswerGenerate"):
        super().__init__(llm, name)
```

```
        self.prompt = ANSWER_GENERATION_PROMPT  #
    Fixed workflow prompt

    async def __call__(self, input: str) -> Dict[str,
     str]:
        prompt = self.prompt.format(input=input)
        response = await self._fill_node(
    AnswerGenerateOp, prompt, mode="xml_fill")
        return response
```

ScEnsemble Agent

Description: Implements self-consistency ensemble voting, selecting the most frequent answer among multiple candidates. Based on *Self-Consistency Improves Chain of Thought Reasoning in Language Models*. Used in the HotpotQA, GSM8K, and MBPP workflows.

```
class ScEnsemble(Operator):
    def __init__(self, llm: AsyncLLM, name: str = "
    ScEnsemble"):
        super().__init__(llm, name)
        self.prompt = SC_ENSEMBLE_PROMPT  # Fixed
    workflow prompt

    async def __call__(self, solutions: List[str],
    problem: str):
        answer_mapping = {}
        solution_text = ""
        for index, solution in enumerate(solutions):
            answer_mapping[chr(65 + index)] = index
            solution_text += f"{chr(65 + index)}: \n{
    str(solution)}\n\n\n"

        prompt = self.prompt.format(question=problem,
     solutions=solution_text)
        response = await self._fill_node(ScEnsembleOp
    , prompt, mode="xml_fill")

        answer = response.get("solution_letter", "").
    strip().upper()
        if answer and answer in answer_mapping:
            return {"response": solutions[
    answer_mapping[answer]]}
        else:
            return {"response": solutions[0] if
    solutions else ""}
```

FormatAnswer Agent

Description: Formats the ensemble result into a concise final answer. Used in the HotpotQA workflow.

```
class FormatAnswer(Operator):
    def __init__(self, llm: AsyncLLM, name: str = "
    FormatAnswer"):
        super().__init__(llm, name)
        self.prompt = FORMAT_ANSWER_PROMPT  # Fixed
    workflow prompt

    async def __call__(self, question: str,
    best_answer: str) -> Dict[str, str]:
        input_text = f"Question: {question}\nBest
    answer: {best_answer}"
        prompt = self.prompt.format(input=input_text)
        response = await self._fill_node(
    FormatAnswerOp, prompt, mode="xml_fill")
        return {"answer": response.get("answer",
    best_answer)}
```

Programmer Agent

Description: Generates and executes Python code to verify a mathematical solution, with automatic retry on execution errors. Used in the GSM8K workflow.

```
class Programmer(Operator):
    def __init__(self, llm: AsyncLLM, name: str = "
    Programmer"):
        super().__init__(llm, name)
        self.prompt = PYTHON_CODE_VERIFIER_PROMPT  #
    Fixed workflow prompt

    async def __call__(self, problem: str, analysis:
    str = "None"):
        code, output, feedback = None, None, ""
        for i in range(3):  # Retry up to 3 times
            code_response = await self.code_generate(
                problem, analysis, feedback, mode="
    code_fill")
            code = code_response.get("code")
            if not code:
                return {"code": code, "output": "No
    code generated"}
            status, output = await self.exec_code(
    code)
            if status == "Success":
                return {"code": code, "output":
    output}
            else:
                feedback = f"\nError from previous
    attempt:\n{output}"
        return {"code": code, "output": output}
```

Extract Agent

Description: Extracts the final numerical answer from a solution, reconciling it against the Programmer's code output. Used in the GSM8K workflow.

```
class Extract(Operator):
    def __init__(self, llm: AsyncLLM, name: str = "
    Extract"):
        super().__init__(llm, name)
        self.prompt = GSM8K_EXTRACT_PROMPT  # Fixed
    workflow prompt

    async def __call__(self, input: str):
        prompt = self.prompt.format(input=input)
        response = await self._fill_node(GenerateOp,
    prompt, mode="single_fill")
        return response
```

CodeGenerate Agent

Description: Generates a Python function for a programming problem. Used in the MBPP workflow.

```
class CodeGenerate(Operator):
    def __init__(self, llm: AsyncLLM, name: str = "
    CodeGenerate"):
        super().__init__(llm, name)
```

```
        self.prompt = CODE_GENERATE_PROMPT  # Fixed
    workflow prompt

    async def __call__(self, problem: str,
    entry_point: str) -> dict:
        prompt = self.prompt.format(problem=problem,
    entry_point=entry_point)
        response = await self._fill_node(
            CodeGenerateOp, prompt, mode="code_fill",
     function_name=entry_point)
        return response
```

Test Agent

Description: Executes generated code against public test cases and iteratively refines it on failure. Used in the MBPP workflow.

```
class Test(Operator):
    def __init__(self, llm: AsyncLLM, name: str = "
    Test"):
        super().__init__(llm, name)
        self.prompt =
    REFLECTION_ON_PUBLIC_TEST_PROMPT  # Fixed
    workflow prompt

    async def __call__(self, problem, solution,
    entry_point, test_loop: int = 5):
        for _ in range(test_loop):
            result = self.exec_code(solution,
    entry_point)
            if result == "no error":
                return {"result": True, "solution":
    solution}
            # Reflect on error and generate fixed
    solution
            prompt = self.prompt.format(
                problem=problem, solution=solution,
                exec_pass="executed successfully",
    test_fail=result)
            response = await self._fill_node(
    ReflectionTestOp, prompt, mode="code_fill")
            solution = response.get("response",
    solution)
        return {"result": False, "solution": solution
    }
```

FixCode Agent

Description: Analyzes an error message and fixes the code while preserving the original function signature. Used in the MBPP workflow as a fallback when the Test agent still fails.

```
class FixCode(Operator):
    def __init__(self, llm: AsyncLLM, name: str = "
    FixCode"):
        super().__init__(llm, name)
        self.prompt = FIX_CODE_PROMPT  # Fixed
    workflow prompt

    async def __call__(self, problem: str, solution:
    str,
                       error: str, entry_point: str)
    -> dict:
        prompt = self.prompt.format(problem=problem,
    solution=solution, error=error)
        response = await self._fill_node(
            FixCodeOp, prompt, mode="code_fill",
    function_name=entry_point)
        return response
```

D.2 Workflow Specifications

For each benchmark, we report the prompt templates and execution logic. The selected assignments are consolidated in Appendix D.3.

DROP Workflow

SOLVE_PROMPT:

```
Read the passage and question carefully.
Calculate or identify the specific numerical
answer requested. Provide a clear step-by-step
solution, and ensure your final answer is a
single number or short phrase without any
additional text. For example: If asked "How
many years between 1990 and 2000?", respond
with: 1990 to 2000 is a span of: 2000 - 1990 =
10 years. 10 {input}
```

FORMAT_PROMPT:

```
For the question described as
{problem_description}, please extract a short
and concise answer contains only one word/few
words from the following solution: {solution}.
Make sure there are no additional comments or
explanations in your response.
```

Workflow Implementation:

```
async def __call__(self, problem: str) -> str:
    # Step 1: Reading comprehension + numerical
     calculation
    solve_result = await self.solve(input=problem)
    solution = solve_result.get('answer',
     solve_result.get('response', ''))

    # Step 2: Extract a concise final answer
    format_result = await self.format(problem=problem
    , solution=solution)
    return format_result.get('solution', solution)
```

The DROP workflow employs two agents in sequence. The `Solve` agent performs reading comprehension and numerical calculation, after which the `Format` agent extracts a concise final answer.

HotpotQA Workflow

ANSWER_GENERATION_PROMPT:

```
Think step by step and solve the problem. 1. In
the "thought" field, explain your thinking
process in detail. 2. In the "answer" field,
provide the final answer concisely and clearly.
The answer should be a direct response to the
question, without including explanations or
reasoning. Your task: {input}
```

SC_ENSEMBLE_PROMPT:

```
Given the question described as follows:
{question} Several solutions have been
```

generated to address the given question. They are as follows: {solutions} Carefully evaluate these solutions and identify the answer that appears most frequently across them. This consistency in answers is crucial for determining the most reliable solution. In the "thought" field, provide a detailed explanation of your thought process. In the "solution_letter" field, output only the single letter ID (A, B, C, etc.) corresponding to the most consistent solution. Do not include any additional text or explanation in the "solution_letter" field.

FORMAT_ANSWER_PROMPT:

Given the question and the best answer below, extract and format the final answer. The answer should be concise -- typically just a name, number, phrase, or short statement. Do not include explanations, reasoning, or prefixes like "The answer is". Put your formatted answer in the "answer" field. {input}

Workflow Implementation:

```
async def __call__(self, problem: str) -> str:
    # Self-consistency: generate 3 candidate answers
    solutions = []
    for _ in range(3):
        response = await self.answer_generate(input=
     problem)
        solutions.append(response.get('answer', ''))

    # Majority-voting ensemble
    ensemble = await self.sc_ensemble(solutions=
     solutions, problem=problem)
    best_answer = ensemble.get('response', '')

    # Format the final answer
    result = await self.format_answer(question=
     problem, best_answer=best_answer)
    return result.get('answer', '')
```

The HotpotQA workflow uses `AnswerGenerate` to produce three candidate answers, `ScEnsemble` to select a consistent candidate, and `FormatAnswer` to normalize the final response.

GSM8K Workflow

GSM8K_SOLVE_PROMPT:

Solve this math problem step by step. Show all your work clearly and end with a numerical answer. Break down the solution into: 1. Given information 2. Step-by-step calculations 3. Final numerical answer clearly marked with ** **. Make sure to: Include all mathematical operations, Show intermediate calculations, Double check your arithmetic, Consider all given values in the problem, Verify your answer makes logical sense. Problem: {input}

SC_ENSEMBLE_PROMPT:

Given the question described as follows: {question} Several solutions have been generated to address the given question. They are as follows: {solutions} Carefully evaluate these solutions and identify the answer that appears most frequently across them. This consistency in answers is crucial for determining the most reliable solution. In the "thought" field, provide a detailed explanation of your thought process. In the "solution_letter" field, output only the single letter ID (A, B, C, etc.) corresponding to the most consistent solution. Do not include any additional text or explanation in the "solution_letter" field.

PYTHON_CODE_VERIFIER_PROMPT:

You are a professional Python programmer. Your task is to write complete, self-contained code based on a given mathematical problem and output the answer. The code should include all necessary imports and dependencies, and be ready to run without additional setup or environment configuration. Problem description: {problem} Other analysis: {analysis} {feedback} Your code should: 1. Implement the calculation steps described in the problem. 2. Define a function named `solve` with NO PARAMETERS: `def solve():`. The function must not require any input parameters; all necessary values should be hardcoded inside the function based on the problem description. 3. The `solve` function must return the final calculation result. IMPORTANT: The function signature MUST be exactly `def solve():` with no arguments. Please ensure your code is efficient, well-commented, and follows Python best practices. The output should be limited to basic data types such as strings, integers, and floats.

GSM8K_EXTRACT_PROMPT:

Extract only the final numerical answer from the solution. Return ONLY the number, with no text or symbols. If there are multiple numbers, extract the one marked with ** **. Compare this answer with the Programmer solution provided and return the Programmer's solution if it differs significantly. Solution to extract from: {input}

Workflow Implementation:

```
async def __call__(self, problem: str) -> str:
    # Step 1: Generate 3 candidate step-by-step
     solutions
    solutions = []
    for _ in range(3):
        solution = await self.solve(input=problem)
        solutions.append(solution.get('response', '')
    )

    # Step 2: Majority voting to select the best
     solution
    if len(solutions) >= 2:
        ensemble = await self.sc_ensemble(solutions=
     solutions, problem=problem)
```

```
        best_solution = ensemble.get('response',
    solutions[0])
else:
        best_solution = solutions[0]

    # Step 3: Verify with the Programmer (code
    execution)
    prog_result = await self.programmer(problem=
    problem, analysis=best_solution)
    prog_output = prog_result.get('output', '')

    # Step 4: Extract the final numerical answer
    extract_input = best_solution + "\nProgrammer
    solution: " + prog_output
    final_result = await self.extract(input=
    extract_input)
    return final_result.get('response', '')
```

The GSM8K workflow generates three candidate solutions with `Solve`, selects one with `ScEnsemble`, verifies the calculation through code execution with `Programmer`, and obtains the final number with `Extract`.

MBPP Workflow

CODE_GENERATE_PROMPT:

```
Generate a Python function to solve the given
problem. Ensure the function name matches the
one specified in the problem. Include necessary
imports. Use clear variable names and add
comments for clarity. Problem: {problem}
Function signature: {entry_point} Generate the
complete function below:
```

SC_ENSEMBLE_PROMPT:

```
Given the question described as follows:
{question} Several solutions have been
generated to address the given question. They
are as follows: {solutions} Carefully evaluate
these solutions and identify the answer that
appears most frequently across them. This
consistency in answers is crucial for
determining the most reliable solution. In the
"thought" field, provide a detailed explanation
of your thought process. In the
"solution_letter" field, output only the single
letter ID (A, B, C, etc.) corresponding to the
most consistent solution. Do not include any
additional text or explanation in the
"solution_letter" field.
```

REFLECTION_ON_PUBLIC_TEST_PROMPT:

```
Given a code problem and a python code solution
which failed to pass test or execute, you need
to carefully analyze the reason for the failure
and propose a corrected code solution. Problem
Description: {problem} Current Code Solution:
{solution} Execution Result: {exec_pass} Failed
Test Case: {test_fail} Follow these steps to
debug and fix the code: 1. Understand the
expected behavior, paying special attention to
edge cases (negative numbers, empty inputs,
boundary conditions), the exact definition of
terms, and return type/format requirements. 2.
Analyze the test failure by comparing the
expected output with the actual output from the
failed test case. 3. Identify the root cause;
common issues include misunderstanding
requirements, off-by-one errors, incorrect
handling of negative numbers or special cases,
wrong comparison operators, and logic errors in
conditionals. 4. Fix the code with the minimal
necessary changes. Provide ONLY the corrected
Python code solution, with no explanations,
test cases, or additional text.
```

FIX_CODE_PROMPT:

```
The provided solution failed to pass the tests.
Please analyze the error and fix the code.
Ensure the function name and signature remain
unchanged. If necessary, add or modify imports,
correct logical errors, and improve the
implementation. Problem: {problem} Failed
Solution: {solution} Error Message: {error}
Provide the corrected function below:
```

Workflow Implementation:

```
async def __call__(self, problem: str, entry_point:
    str) -> str:
    # Step 1: Generate 3 candidate solutions in
    parallel
    results = await asyncio.gather(
        self.code_generate(problem=problem,
    entry_point=entry_point),
        self.code_generate(problem=problem,
    entry_point=entry_point),
        self.code_generate(problem=problem,
    entry_point=entry_point))
    candidate_codes = [r.get('code') for r in results
     if r.get('code')]

    # Step 2: Majority voting to select the best
    solution
    if len(candidate_codes) >= 2:
        ensemble = await self.sc_ensemble(solutions=
    candidate_codes, problem=problem)
        best_code = ensemble.get('response',
    candidate_codes[0])
    else:
        best_code = candidate_codes[0]

    # Step 3: Test the code against public test cases
    test_result = await self.test(
        problem=problem, solution=best_code,
    entry_point=entry_point)
    if test_result.get('result'):
        return test_result.get('solution', best_code)

    # Step 4: Fix the code if the test still fails
    fix_result = await self.fix_code(
        problem=problem, solution=best_code,
        error=str(test_result), entry_point=
    entry_point)
    return fix_result.get('code', best_code)
```

The MBPP workflow generates three candidate programs with `CodeGenerate`, selects a candidate through

Dataset	Agent	Assigned LLM
DROP	Solve	GPT-5.4 nano
	Format	GPT-5.4 mini
HotpotQA	AnswerGenerate	GPT-5.4 nano
	ScEnsemble	Qwen2.5 1.5B
	FormatAnswer	Gemma 2 27B
GSM8K	Solve	GPT-5.4 nano
	ScEnsemble	Qwen2.5 1.5B
	Programmer	Llama 3.2 3B
	Extract	Gemma 2 27B
MBPP	CodeGenerate	GPT-5.4 nano
	ScEnsemble	Mistral 7B
	Test	o4-mini
	FixCode	GPT-5.1

Table 8: Best-observed agent-level LLM assignments selected by MASTAB for each benchmark under the fixed evaluation budget. Model access modes are reported in Table 4.

`ScEnsemble`, evaluates and revises it with `Test`, and invokes `FixCode` if the revised program still fails.

D.3 Summary of MASTAB-Selected LLM Assignments

Table 8 consolidates the best-observed assignment selected by MASTAB for each benchmark. The resulting configurations are heterogeneous across all four workflows: agents responsible for reasoning, verification, aggregation, and output normalization need not use the same model. This role-dependent allocation cannot be represented by the uniform single-model baselines.