

Course Name: Networks & Communications

Course Code: CSE 205

Practice Assignments 3.2

Student's Full Name:

Student ID:


Instruction:

** Students are allowed to write their answers in a word file (Answer sheet) provided by instructor. After finishing the assignment, students must convert the word file (Answer sheet) into a PDF file. The PDF file should have name in the following format "Mã số SV_Họ và tên SV_LabX.Y.pdf". Finally, students upload the file in Moodle.*

** PDF file should have screenshot of network design, screenshot or written code of each network and device configuration (like router, switch, etc.) and screenshot of the output of every instruction.*

Propagating a Default Route in OSPFv2

Topology

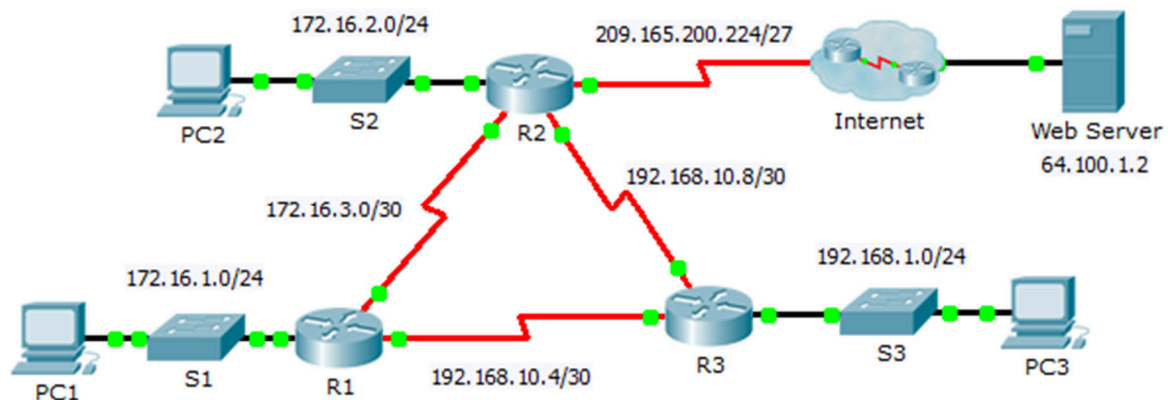

Addressing Table

Device	Interface	IPv4 Address	Subnet Mask	Default Gateway
R1	G0/0	172.16.1.1	255.255.255.0	N/A
	S0/0/0	172.16.3.1	255.255.255.252	N/A
	S0/0/1	192.168.10.5	255.255.255.252	N/A
R2	G0/0	172.16.2.1	255.255.255.0	N/A
	S0/0/0	172.16.3.2	255.255.255.252	N/A
	S0/0/1	192.168.10.9	255.255.255.252	N/A
	S0/1/0	209.165.200.225	255.255.255.224	N/A
R3	G0/0	192.168.1.1	255.255.255.0	N/A
	S0/0/0	192.168.10.6	255.255.255.252	N/A
	S0/0/1	192.168.10.10	255.255.255.252	N/A
PC1	NIC	172.16.1.2	255.255.255.0	172.16.1.1
PC2	NIC	172.16.2.2	255.255.255.0	172.16.2.1
PC3	NIC	192.168.1.2	255.255.255.0	192.168.1.1

Objectives

Part 1: Propagate a Default Route

Part 2: Verify Connectivity

Background

In this activity, you will configure an IPv4 default route to the Internet and propagate that default route to other OSPF routers. You will then verify the default route is in downstream routing tables and that hosts can now access a web server on the Internet.

Part 1: Propagate a Default Route

Step 1: Configure a default route on R2.

Configure **R2** with a directly attached default route to the Internet.

```
R2(config)# ip route 0.0.0.0 0.0.0.0 Serial0/1/0
```

Step 2: Propagate the route in OSPF.

Configure OSPF to propagate the default route in OSPF routing updates.

```
R2(config-router)# default-information originate
```

Step 3: Examine the routing tables on R1 and R3.

Examine the routing tables of **R1** and **R3** to verify that the route has been propagated.

```
R1> show ip route  
<output omitted>
```

```
O*E2 0.0.0.0/0 [110/1] via 172.16.3.2, 00:00:08, Serial0/0/0
!-----
R3> show ip route
<output omitted>
O*E2 0.0.0.0/0 [110/1] via 192.168.10.9, 00:08:15, Serial0/0/1
```

Part 2: Verify Connectivity

Verify that **PC1**, **PC2**, and **PC3** can ping the web server.