

# 60-60-86-6-beta-11.5-twist-2

November 4, 2024

```
[65]: %load_ext autoreload
      %autoreload 2
      from modules import read_and_write
      from modules import polyakov
      from modules import utility
      from modules import fourier_surface
      from modules import surface_amplitudes as sf
      from modules import globals
      import pandas as pd
      import numpy as np
      import os
      import glob
      indices = None
      surface_tension_dict = {}
```

The autoreload extension is already loaded. To reload it, use:

```
%reload_ext autoreload
```

For reference with integration method the following surface tensions were computed

$$z_1: \alpha_{o-o}/T^3(\beta = 10.85) = 1.2316804724774406$$

$$z_2: \alpha_{o-o}/T^3(\beta = 10.85) = 1.5433288477348852$$

## 1 Load data

```
[66]: folders = utility.list_all_folders(globals.data_path, "60-60-86-6")

../data/output-measure-surface/su4-60-60-86-6/beta-10.80-twist-1-60-60-86-6 ,
index: 0
../data/output-measure-surface/su4-60-60-86-6/beta-10.80-twist-2-60-60-86-6 ,
index: 1
../data/output-measure-surface/su4-60-60-86-6/beta-10.82-twist-1-60-60-86-6 ,
index: 2
../data/output-measure-surface/su4-60-60-86-6/beta-10.82-twist-2-60-60-86-6 ,
index: 3
../data/output-measure-surface/su4-60-60-86-6/beta-10.83-twist-1-60-60-86-6 ,
index: 4
../data/output-measure-surface/su4-60-60-86-6/beta-10.85-twist-1-60-60-86-6 ,
```

```

index: 5
../data/output-measure-surface/su4-60-60-86-6/beta-10.85-twist-2-60-60-86-6 ,
index: 6
../data/output-measure-surface/su4-60-60-86-6/beta-11.5-twist-1-60-60-86-6 ,
index: 7
../data/output-measure-surface/su4-60-60-86-6/beta-11.5-twist-2-60-60-86-6 ,
index: 8

```

```

[90]: choose_folder = 8
fourier_profiles = {}
folder = folders[choose_folder]
files = glob.glob(os.path.join(folder, "fourier_profile_*"))
for file in files:
    file_name = file.split("/")[-1]
    smearing_level = file_name.split("_")[-1]
    volume, modes, fourier_profile = read_and_write.
    ↪read_fourier_profile(folder, file_name=file_name)
    fourier_profiles[smearing_level] = fourier_profile
fourier_profiles = dict(sorted(fourier_profiles.items(), key=lambda item: ↪
    ↪int(item[0])))
utility.display_markdown_title(folder)

```

## 2 SU(4), $V = ['60', '60', '86', '6']$ , $\beta = 11.5$ , twist coeff = 2

### 2.1 Perform post processing

```

[91]: f_n_list = []
errors_list = []
for smearing_level, profile in fourier_profiles.items():
    if indices is not None:
        sample_size = len(profile)
        indices_set = indices[smearing_level]
        profile = np.delete(profile, list(indices_set), axis=0)
        print(f"Dropped {sample_size-len(profile)} samples")
    f_n, errors = utility.compute_with_aa_jackknife_fourier(profile, 10, ↪
    ↪thermalization=1000)
    f_n_list.append(f_n)
    errors_list.append(errors)

```

### 2.2 Plot Fourier modes for different smearing steps

```

[92]: %matplotlib widget
smearing_levels = list(fourier_profiles.keys())
show_plot = True
twist = folder.split("/")[-1].split('-')[3]
temp = folder.split("/")[-1].split('-')[1]


```

```

data = {
    "smearing": smearing_levels,
    "linear": [
        fourier_surface.compute_fourier_profile(
            modes, f_n, volume, errors=error, beta=temp, twist=twist,
            ↪fit_range=4, smearing=smear, show_plot=show_plot
            ) for f_n, error, smear in zip( f_n_list, errors_list, smearing_levels)
        ]
    # "exponential": [
    #     fourier_surface.compute_fourier_profile_exponential_fit(
    #         n_2, f_n, volume, errors=error, beta=10.85, smearing=smear,
    ↪show_plot=show_plot
    #     ) for n_2, f_n, error, smear in zip(n_2_list, f_n_list, errors_list,
    ↪smearing_levels)
    # ]
}
surface_tension_dict[folder.split("/")[-1]] = data
df = pd.DataFrame(data)
utility.print_df_as_markdown_fourier_modes(df)
fourier_surface.global_fig = None

```

smearing	Linear fit ( $\sigma/T^3$ )
10	$5.39 \pm 0.4322$
20	$5.448 \pm 0.3732$
30	$5.543 \pm 0.3137$
40	$5.678 \pm 0.2552$
50	$5.852 \pm 0.1985$
60	$6.067 \pm 0.1455$

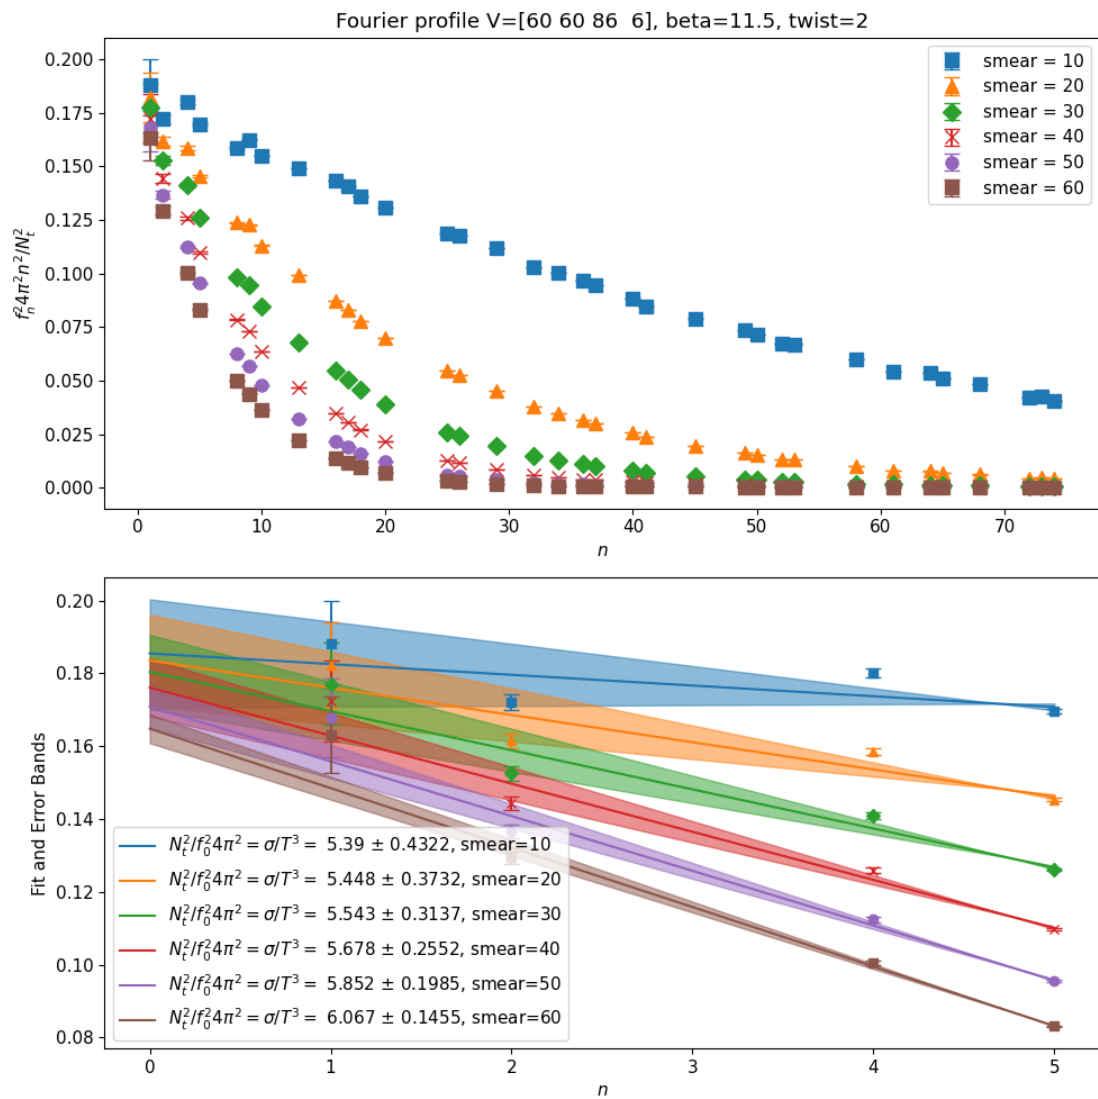

[ ]: