

44-44-44-64-6-beta-10.85-twist-1

October 30, 2024

```
[6]: %load_ext autoreload
%autoreload 2
from modules import read_and_write
from modules import polyakov
from modules import utility
from modules import fourier_surface
from modules import surface_amplitudes as sf

import pandas as pd
import numpy as np
import os
import glob
indices = None
```

The autoreload extension is already loaded. To reload it, use:

```
%reload_ext autoreload
```

For reference with integration method the following surface tensions were computed

$z_1: \alpha_{o-o}/T^3(\beta = 10.85) = 1.2316804724774406$

$z_2: \alpha_{o-o}/T^3(\beta = 10.85) = 1.5433288477348852$

## 1 Load data

```
[7]: from modules.globals import folder_names

choose_folder = 1
fourier_profiles = {}
folder = folder_names[choose_folder-1]
files = glob.glob(os.path.join(folder, "fourier_profile_*"))
for file in files:
    file_name = file.split("/")[-1]
    smearing_level = file_name.split("_")[-1]
    volume, modes, fourier_profile = read_and_write.
    ↪read_fourier_profile(folder, file_name=file_name)
    fourier_profiles[smearing_level] = fourier_profile
fourier_profiles = dict(sorted(fourier_profiles.items(), key=lambda item: ↪
    ↪int(item[0])))
```

```
utility.display_markdown_title(folder)
```

## 2 SU(4), $V = ['44', '44', '64', '6']$ , $\beta = 10.85$ , twist coeff = 1


### 2.1 Perform post processing

```
[8]: f_n_list = []
errors_list = []
for smearing_level, profile in fourier_profiles.items():
    if indices is not None:
        sample_size = len(profile)
        indices_set = indices[smearing_level]
        profile = np.delete(profile, list(indices_set), axis=0)
        print(f"Dropped {sample_size-len(profile)} samples")
    f_n, errors = utility.compute_with_aa_jackknife_fourier(profile, 10,
↳thermalization=1000)
    f_n_list.append(f_n)
    errors_list.append(errors)
```

### 2.2 Plot Fourier modes for different smearing steps

```
[9]: %matplotlib widget
smearing_levels = list(fourier_profiles.keys())
show_plot = True
data = {
    "smearing": smearing_levels,
    "linear": [
        fourier_surface.compute_fourier_profile(
            modes, f_n, volume, errors=error, beta=10.85, fit_range=3,
↳smearing=smear, show_plot=show_plot
        ) for f_n, error, smear in zip(f_n_list, errors_list, smearing_levels)
    ]
    # "exponential": [
    #     fourier_surface.compute_fourier_profile_exponential_fit(
    #         n_2, f_n, volume, errors=error, beta=10.85, smearing=smear,
↳show_plot=show_plot
    #     ) for n_2, f_n, error, smear in zip(n_2_list, f_n_list, errors_list,
↳smearing_levels)
    # ]
}
df = pd.DataFrame(data)
utility.print_df_as_markdown_fourier_modes(df)
fourier_surface.global_fig = None
```

smearing	Linear fit ( $\sigma/T^3$ )
5	$1.444 \pm 0.2001$
10	$1.118 \pm 0.09239$
20	$1.107 \pm 0.0183$
30	$1.168 \pm 0.009021$
40	$1.224 \pm 0.02271$
50	$1.28 \pm 0.03291$

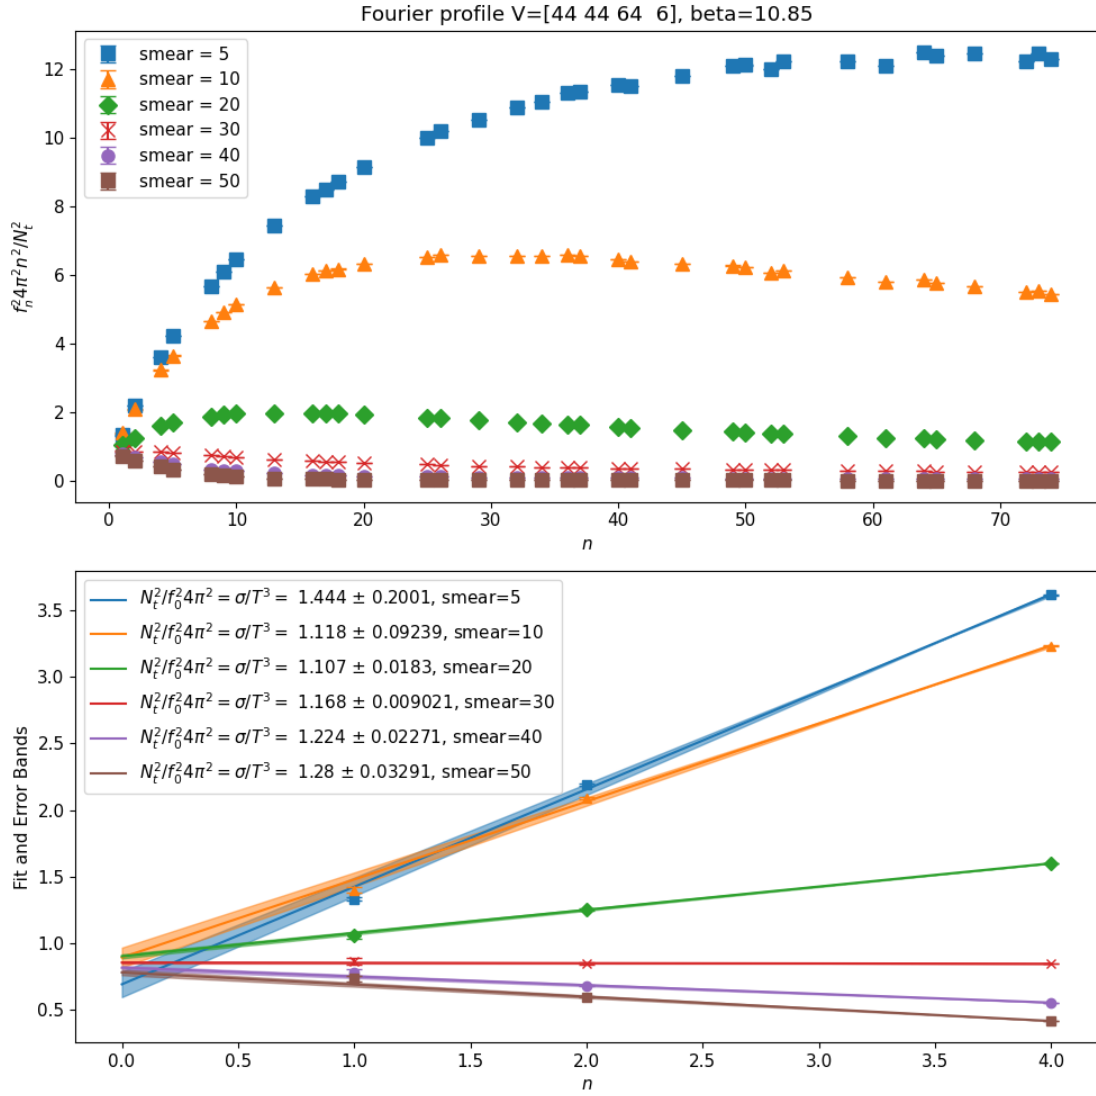

[ ]:

[ ]: