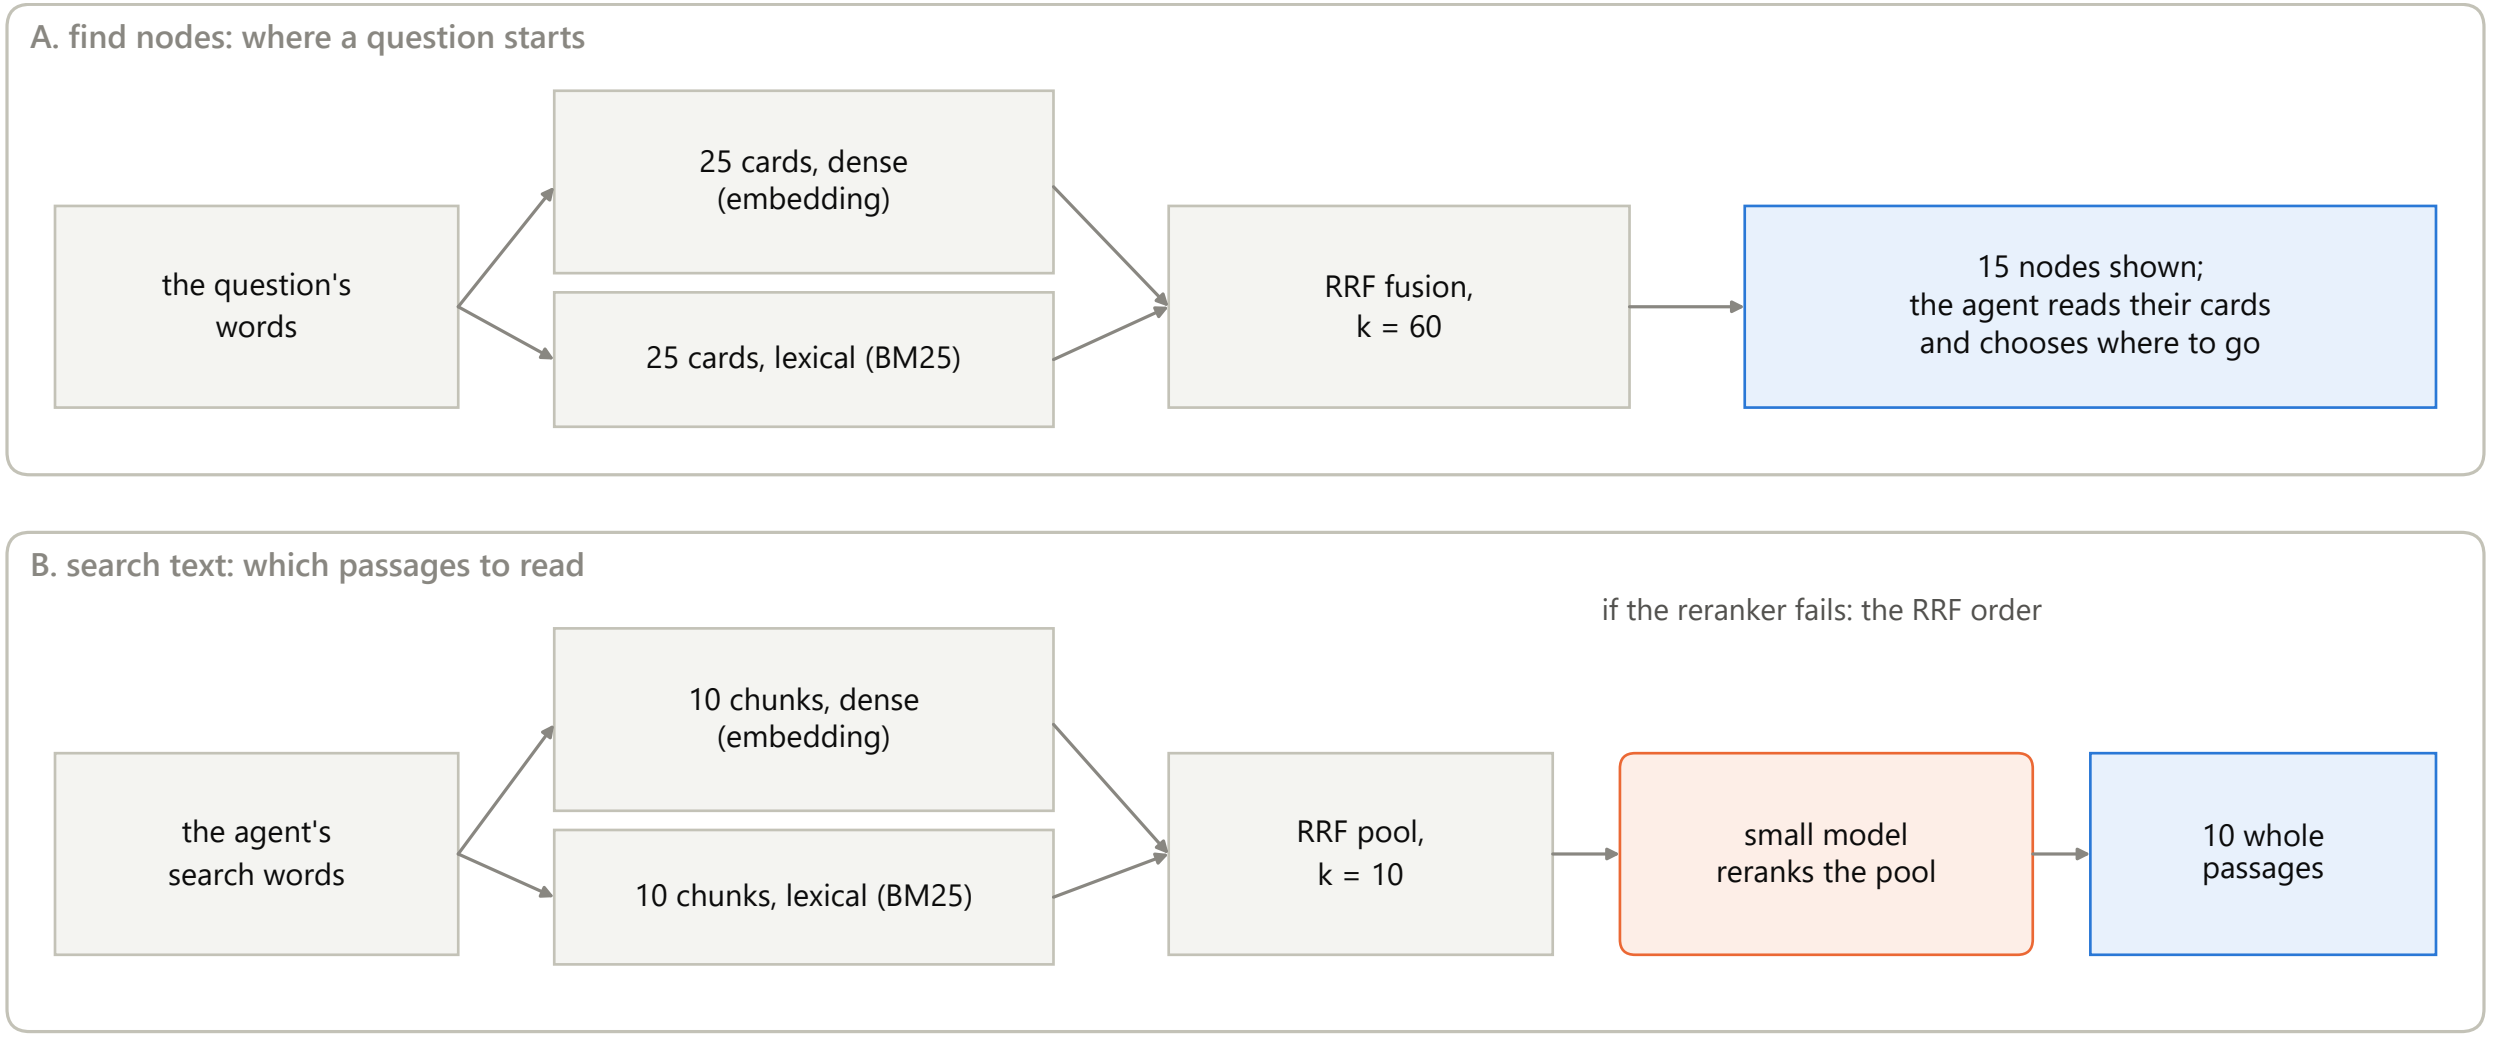
A. find nodes: where a question starts
the question's words
25 cards, dense (embedding)
25 cards, lexical (BM25)
RRF fusion, k = 60
15 nodes shown; the agent reads their cards and chooses where to go
B. search text: which passages to read
if the reranker fails: the RRF order
the agent's search words
10 chunks, dense (embedding)
10 chunks, lexical (BM25)
RRF pool, k = 10
small model reranks the pool
10 whole passages