


ERP: School Management System

~By Habibur Rahaman

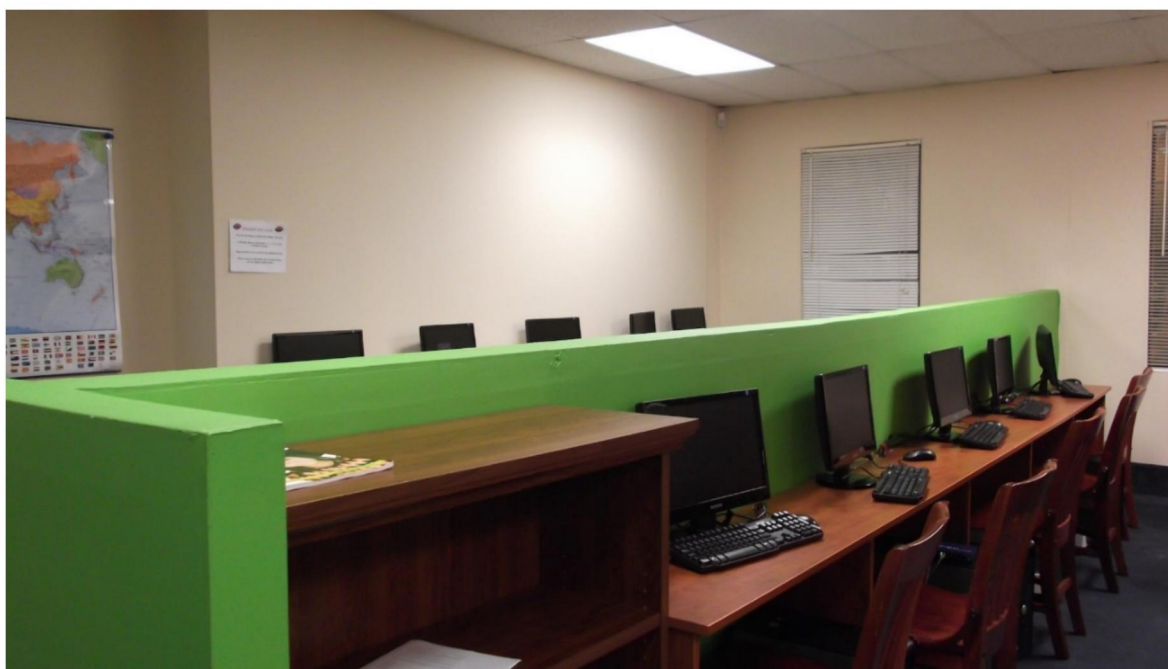

Index

1. Need and Scope of the Project.....	1
2. HTML.....	2
3. CSS.....	3
4. Javascript.....	4
5. Note by the Developer.....	5
6. Backend.....	6
7. Frontend.....	10

Need and Scope of the Project

This project has a wider scope in future and can be helpful to many. Since this project is made using HTML, CSS and Javascript as well as MySQL which helps make this project delightful and innovative and helps in clearing the concepts of web development and MySQL. It also clears the relationship between the coding platforms and helps to show how both are connected in an application.

This project helps in efficient communication with the support of technologies. Everybody is connected through mobile apps or web apps, and any info that has to be passed may quickly send using Chats/SMS. This avoids a significant number of telephone phone calls and also saves time. This system is aimed at total user-friendly as well as efficient management of varied tasks. These tasks may range from registering new students, managing fees payment, examination management to all the essential features necessary for making the administrative division of school effective.

HTML

HTML



Hypertext Markup Language (HTML) is the standard markup language for documents designed to be displayed in a web browser. It defines the content and structure of web content. It is often assisted by technologies such as Cascading Style Sheets (CSS) and scripting languages such as JavaScript, a programming language.

Web browsers receive HTML documents from a web server or from local storage and render the documents into multimedia web pages. HTML describes the structure of a web page semantically and originally included cues for its appearance.

CSS



Cascading Style Sheets (CSS) is a style sheet language used for specifying the presentation and styling of a document written in a markup language such as HTML or XML (including XML dialects such as SVG, MathML or XHTML). CSS is a cornerstone technology of the World Wide Web, alongside HTML and JavaScript.

The name cascading comes from the specified priority scheme to determine which declaration applies if more than one declaration of a property match a particular element. This cascading priority scheme is predictable.

Javascript



JavaScript often abbreviated as JS, is a programming language and core technology of the Web, alongside HTML and CSS. 99% of websites use JavaScript on the client side for webpage behavior.

Web browsers have a dedicated JavaScript engine that executes the client code. These engines are also utilized in some servers and a variety of apps. The most popular runtime system for non-browser usage is Node.js.

Note by the Developer

This system was developed using web technologies, namely HTML, CSS, and JavaScript. I've chosen a 'Frutiger Aero' theme for the entirety of this project to create a retro vibe. The backend logic is managed using XAMPP software. If you are planning to implement this project on your system, ensure that the XAMPP software is properly installed.

I've made my best effort to demonstrate the workflow of the code in this document, including the names of the files and screenshots. Feel free to make any necessary changes to the code as you see fit. Happy coding!

Backend

Database name: erp

Database tables are as follows:

Table	Rows	Type	Collation	Size	Overhead
admin_details	2	InnoDB	utf8mb4_general_ci	16.0 KiB	-
attendance_details	109	InnoDB	utf8mb4_general_ci	16.0 KiB	-
fee_submission	3	InnoDB	utf8mb4_general_ci	16.0 KiB	-
homework_details	1	InnoDB	utf8mb4_general_ci	16.0 KiB	-
login_details	10	InnoDB	utf8mb4_general_ci	16.0 KiB	-
messages	6	InnoDB	utf8mb4_general_ci	16.0 KiB	-
notices	3	InnoDB	utf8mb4_general_ci	16.0 KiB	-
parent_details	1	InnoDB	utf8mb4_general_ci	16.0 KiB	-
student_details	10	InnoDB	utf8mb4_general_ci	16.0 KiB	-
student_marks	4	InnoDB	utf8mb4_general_ci	16.0 KiB	-
teacher_details	2	InnoDB	utf8mb4_general_ci	16.0 KiB	-
11 tables	151	InnoDB	utf8mb4_general_ci	176.0 KiB	0 B

1. admin_details table:

Field	Type	Null	Key	Default	Extra
fname	varchar(255)	NO		NULL	
lname	varchar(255)	NO		NULL	
address	varchar(255)	NO		NULL	
phone	bigint(255)	NO		NULL	
gender	enum('Male','Female')	NO		NULL	
blood_group	varchar(255)	NO		NULL	

2. attendance_details table:

Field	Type	Null	Key	Default	Extra
id	int(255)	NO	PRI	NULL	auto_increment
first_name	varchar(50)	NO		NULL	
last_name	varchar(50)	NO		NULL	
class	varchar(50)	NO		NULL	
roll_number	int(225)	NO		NULL	
attendance_date	date	NO		NULL	
attendance_status	enum('Present','Absent')	NO		NULL	

3. fee_submission table:

Field	Type	Null	Key	Default	Extra
id	int(11)	NO	PRI	NULL	auto_increment
fname	varchar(255)	YES		NULL	
lname	varchar(255)	YES		NULL	
fee_type	enum('academic','transportation')	YES		NULL	
installment	enum('first','second')	YES		NULL	
amount	int(11)	YES		NULL	
payment_date	timestamp	NO		current_timestamp()	

4. homework_details table:

Field	Type	Null	Key	Default	Extra
id	int(11)	NO	PRI	NULL	auto_increment
teacher_fname	varchar(50)	YES		NULL	
teacher_lname	varchar(50)	YES		NULL	
subject_name	varchar(50)	YES		NULL	
topic_name	varchar(100)	YES		NULL	
homework_message	text	YES		NULL	
created_at	timestamp	NO		current_timestamp()	

5. login_details table:

Field	Type	Null	Key	Default	Extra
Uname	varchar(255)	NO		NULL	
pwd	varchar(255)	NO		NULL	
fname	varchar(255)	NO		NULL	
lname	varchar(255)	NO		NULL	
class	int(20)	YES		NULL	
status	enum('student','parent','teacher','admin')	NO		NULL	

6. messages table:

Field	Type	Null	Key	Default	Extra
id	int(11)	NO	PRI	NULL	auto_increment
sender_username	varchar(50)	NO		NULL	
receiver_username	varchar(50)	NO		NULL	
message_topic	varchar(100)	NO		NULL	
message_content	text	NO		NULL	
is_read	tinyint(1)	YES		0	
sent_at	timestamp	NO		current_timestamp()	

7. notices table:

Field	Type	Null	Key	Default	Extra
id	int(11)	NO	PRI	NULL	auto_increment
fname	varchar(50)	NO		NULL	
lname	varchar(50)	NO		NULL	
status	enum('Teacher','Admin')	NO		NULL	
topic	varchar(255)	NO		NULL	
content	text	NO		NULL	
date_time	datetime	NO		NULL	

8. parent_details table:

Field	Type	Null	Key	Default	Extra
fname	varchar(255)	NO		NULL	
lname	varchar(255)	NO		NULL	
stud_fname	varchar(255)	NO		NULL	
stud_lname	varchar(255)	NO		NULL	
phone	bigint(225)	NO		NULL	
gender	enum('Male','Female')	NO		NULL	

9. student_details table:

Field	Type	Null	Key	Default	Extra
fname	varchar(50)	NO		NULL	
lname	varchar(50)	NO		NULL	
phone	bigint(255)	NO		NULL	
address	varchar(255)	NO		NULL	
class	int(20)	NO		NULL	
gender	enum('Male','Female')	NO		NULL	
blood_group	varchar(50)	NO		NULL	

10. student_marks table:


Field	Type	Null	Key	Default	Extra
id	int(11)	NO	PRI	NULL	auto_increment
first_name	varchar(50)	NO		NULL	
last_name	varchar(50)	NO		NULL	
class	varchar(10)	NO		NULL	
academic_year	varchar(10)	NO		NULL	
exam_type	enum('FA1','SA1','FA2','SA2')	NO		NULL	
physics	tinyint(3) unsigned	YES		NULL	
chemistry	tinyint(3) unsigned	YES		NULL	
biology	tinyint(3) unsigned	YES		NULL	
maths	tinyint(3) unsigned	YES		NULL	
english	tinyint(3) unsigned	YES		NULL	
sst	tinyint(3) unsigned	YES		NULL	
hindi	tinyint(3) unsigned	YES		NULL	
computers	tinyint(3) unsigned	YES		NULL	
entry_date	timestamp	NO		current_timestamp()	

11. teacher_details table:

Field	Type	Null	Key	Default	Extra
fname	varchar(255)	NO		NULL	
lname	varchar(255)	NO		NULL	
address	varchar(255)	NO		NULL	
phone	bigint(255)	NO		NULL	
subject	varchar(225)	NO		NULL	
gender	enum('Male','Female')	NO		NULL	
blood_group	varchar(255)	NO		NULL	
class	int(20)	NO		NULL	

Frontend

1. Login Page:

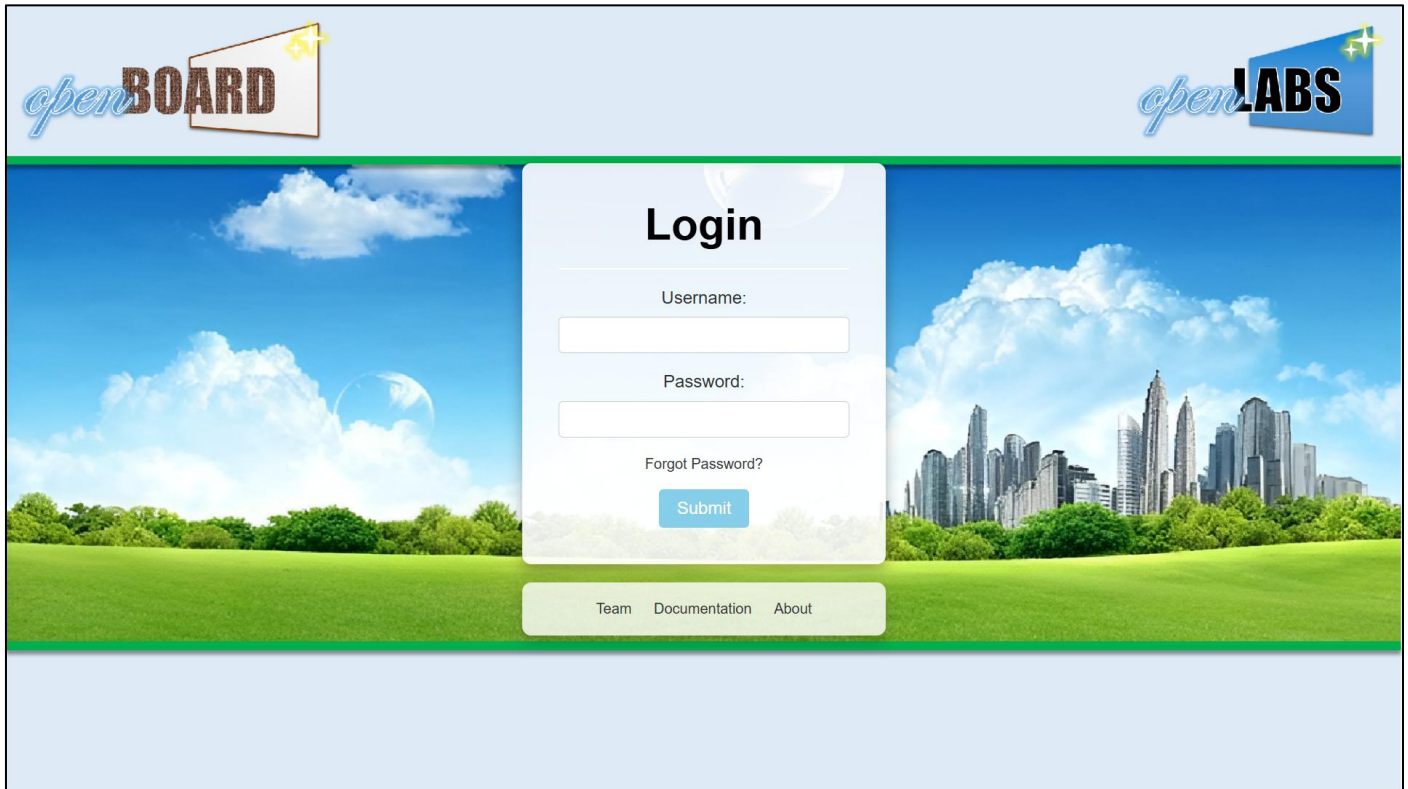

Code:

login.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-
scale=1.0">
  <title>::: openBoard ERP :::</title>
  <style>
    * {
      margin: 0;
      padding: 0;
      box-sizing: border-box;
    }
    body {
      background-size: cover;
```

```

        background-position: center;
        background-repeat: no-repeat;
        background-attachment: fixed;
        display: flex;
        flex-direction: column;
        justify-content: center;
        align-items: center;
        height: 100vh;
        font-family: Arial, sans-serif;
        transition: background-image 1s ease;
    }
    h1 {
        color: #ffffff;
        text-align: center;
        font-size: 3rem;
        margin-bottom: 20px;
    }

    hr {
        border: 1px solid #fff;
        width: 100%;
        margin-bottom: 20px;
    }

    .login-container {
        background-color: rgba(255, 255, 255, 0.9);
        padding: 40px;
        border-radius: 10px;
        box-shadow: 0 8px 16px rgba(0, 0, 0, 0.3);
        width: 400px;
        text-align: center;
    }

    .links-container {
        background-color: rgba(255, 255, 255, 0.8);
        padding: 20px;
        margin-top: 20px;
        border-radius: 10px;
        box-shadow: 0 8px 16px rgba(0, 0, 0, 0.2);
        width: 400px;
        text-align: center;
    }

    label {
        font-size: 1.2rem;
        color: #333;
    }

```



```

        margin-bottom: 10px;
        display: block;
    }

    input[type="text"], input[type="password"] {
        width: 100%;
        padding: 10px;
        margin-bottom: 20px;
        border-radius: 5px;
        border: 1px solid #ccc;
        font-size: 1rem;
    }

    input[type="submit"] {
        background-color: #87CEEB; /* Sky blue color */
        color: white;
        padding: 10px 20px;
        border: none;
        border-radius: 5px;
        cursor: pointer;
        font-size: 1.2rem;
        transition: background-color 0.3s ease, box-shadow
0.3s ease;
    }

    /* Glow effect on hover */
    input[type="submit"]:hover {
        box-shadow: 0 0 15px rgba(135, 206, 235, 0.8); /*
Sky blue glow */
        background-color: #00BFFF; /* Darker sky blue */
    }

    a {
        margin: 0 10px;
        color: #333;
        text-decoration: none;
        font-size: 1rem;
    }

    a:hover {
        color: #4CAF50;
        text-decoration: underline;
    }

    @media (max-width: 768px) {
        .login-container, .links-container {

```

```

        width: 80%;
    }
}
</style>
</head>
<body>
    <div class="login-container">
        <h1 style="color:black;">Login</h1>
        <hr>
        <form action="login.php" method="post">
            <label for="username">Username:</label>
            <input type="text" id="username" name="username"
required>

            <label for="password">Password:</label>
            <input type="password" id="password"
name="password" required>
            <a href="forgotpwd.html">Forgot Password?</a><br>
            <br>
            <input type="submit" value="Submit">
        </form>
    </div>

    <div class="links-container">
        <a href="Team.html">Team</a>
        <a href="Documentation.pdf">Documentation</a>
        <a href="About.html">About</a>
    </div>

    <script>
        const images = [
            'url("image1.png")',
            'url("image2.png")',
        ];

        let currentIndex = 0;

        function changeBackgroundImage() {
            document.body.style.backgroundImage =
images[currentIndex];
            currentIndex = (currentIndex + 1) % images.length;
        }

        setInterval(changeBackgroundImage, 2500);
    </script>
</body>

```

</html>

login.php

<?php

// login.php

session_start();

// Database connection

\$servername = "localhost";

\$username = "root"; // Default username

\$password = ""; // Default password

\$dbname = "erp";

// Create connection

\$conn = new mysqli(\$servername, \$username, \$password, \$dbname);

// Check connection

if (\$conn->connect_error) {

die("Connection failed: " . \$conn->connect_error);

}

// Get form data

\$user = \$_POST['username'];

\$pass = \$_POST['password'];

// Prepare and bind

\$stmt = \$conn->prepare("SELECT fname, lname, status FROM
login_details WHERE Uname = ? AND pwd = ?");

\$stmt->bind_param("ss", \$user, \$pass);

// Execute the query

\$stmt->execute();

\$stmt->store_result();

if (\$stmt->num_rows > 0) {

 // Bind the result to variables

 \$stmt->bind_result(\$fname, \$lname, \$status);

 \$stmt->fetch();

 // Store the fname and lname in session variables

 \$_SESSION['fname'] = \$fname;

 \$_SESSION['lname'] = \$lname;

 // Redirect based on status

 if (\$status == 'student') {

 header("Location: student.php");



```

    } elseif ($status == 'teacher') {
        header("Location: teacher.php");
    } elseif ($status == 'admin') {
        header("Location: admin.php");
    } elseif ($status == 'parent') {
        header("Location: parent.php");
    } else {
        echo "Invalid status.";
    }
    exit();
} else {
    echo "Invalid username or password.";
}

// Close the statement and connection
$stmt->close();
$conn->close();
?>

```

2. Forgot Password Page:

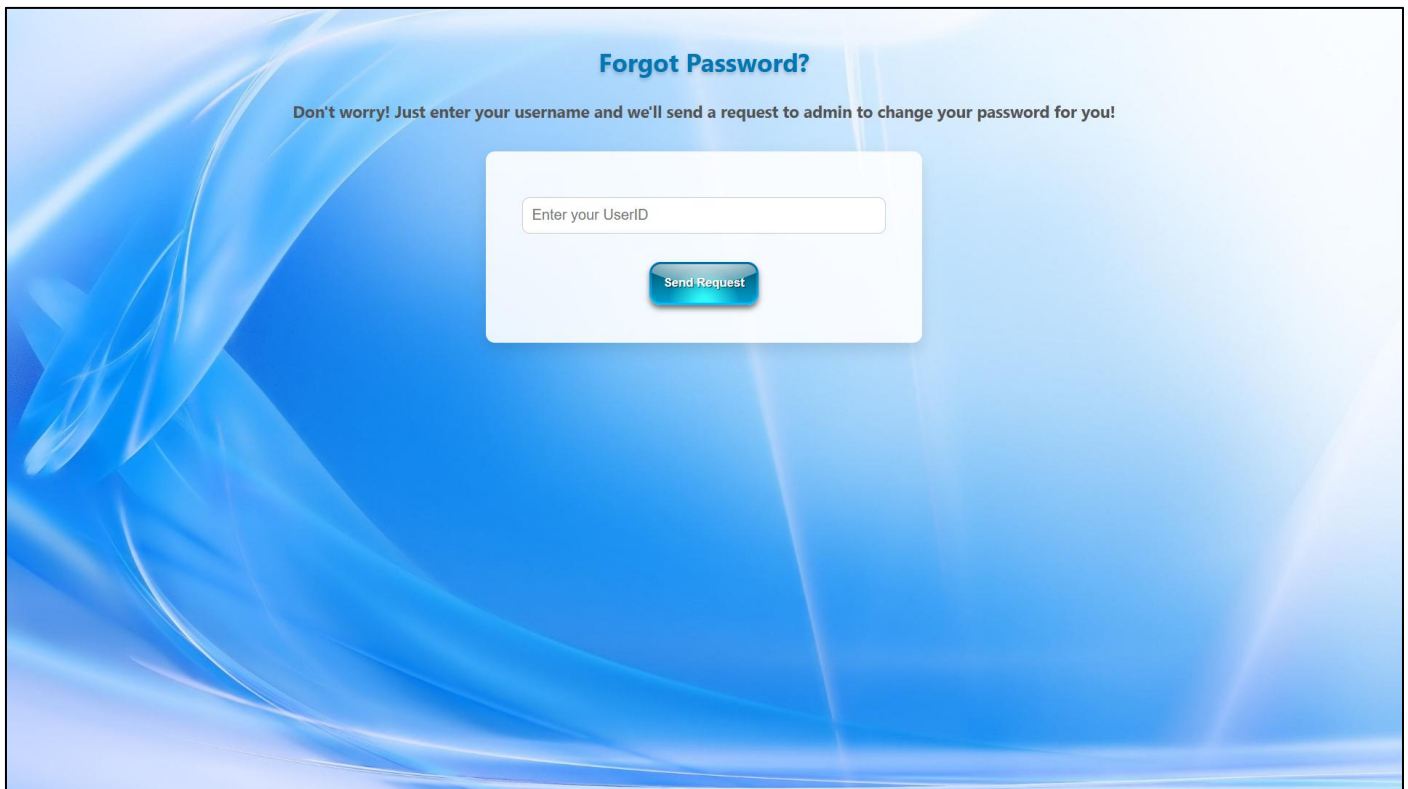

Forgot Password?

Don't worry! Just enter your username and we'll send a request to admin to change your password for you!

Enter your UserID

Send Request

Code:

```

forgotpwd.html
<!DOCTYPE html>
<html lang="en">

```

```

<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-
scale=1.0">
  <title>::: Forgot Password :::</title>
  <style>
    /* Frutiger Aero Styling */
    body {
      font-family: 'Segoe UI', Tahoma, sans-serif;
      background: url("about.jpg");
      background-size: cover;
      background-position: center;
      background-repeat: no-repeat;
      background-attachment: fixed;
      color: #333;
      margin: 0;
      padding: 0;
      text-align: center;
    }

    h2 {
      color: #0077b6;
      margin-top: 40px;
      font-size: 28px;
      text-shadow: 0 2px 4px rgba(0, 0, 0, 0.2);
    }

    h4 {
      color: #555;
      font-size: 18px;
      margin-top: 10px;
      margin-bottom: 30px;
      line-height: 1.5;
    }

    form {
      background: rgba(255, 255, 255, 0.9);
      border-radius: 10px;
      padding: 40px;
      max-width: 400px;
      margin: 0 auto;
      box-shadow: 0 8px 16px rgba(0, 0, 0, 0.1);
    }

    input[type="text"] {
      width: 100%;

```

```

        padding: 10px;
        margin: 10px 0;
        font-size: 16px;
        border: 1px solid #ccc;
        border-radius: 8px;
        box-sizing: border-box;
        transition: border-color 0.3s ease;
    }

    input[type="text"]:focus {
        border-color: #1e73be;
        outline: none;
    }

    .frutiger-button {
        cursor: pointer;
        position: relative;
        padding: 2px;
        border-radius: 12px; /* Increased border-radius for more
rounded corners */
        border: 0;
        text-shadow: 1px 1px #000a;
        background: linear-gradient(#006caa, #00c3ff);
        box-shadow: 0px 4px 6px 0px #0008;
        /* Removed transition and animation for no effects */
    }

    .frutiger-button:hover {
        box-shadow: 0px 6px 12px 0px #0009;
    }

    .frutiger-button:active {
        box-shadow: 0px 0px 0px 0px #0000;
    }

    .inner {
        position: relative;
        inset: 0px;
        padding: 1em;
        border-radius: 10px; /* Rounded corners for inner content */
        background: radial-gradient(circle at 50% 100%, #30f8f8 10%,
#30f8f800 55%),
            linear-gradient(#00526a, #009dcd);
        overflow: hidden;
        /* Removed transition */
    }

```

```

.top-white {
  position: absolute;
  border-radius: inherit;
  inset: 0 -8em;
  background: radial-gradient(
    circle at 50% -270%,
    #fff 45%,
    #fff6 60%,
    #fff0 60%
  );
}

.inner::after {
  content: "";
  position: absolute;
  inset: 0;
  border-radius: inherit;
}

.frutiger-button:active .inner::after {
  box-shadow: inset 0px 2px 8px -2px #000a;
}

.text {
  position: relative;
  z-index: 1;
  color: white;
  font-weight: 550;
}

```

```

</style>
</head>
<body>

```

```

  <h2>Forgot Password?</h2>
  <h4>Don't worry! Just enter your username and we'll send a
  request to admin to change your password for you!</h4>

```

```

  <form method="POST" action="forgotpwd.php">
    <input type="text" name="sender_username"
placeholder="Enter your UserID" required><br>
    <br>
    <button type="submit" class="frutiger-button">
      <div class="inner">
        <div class="top-white"></div>

```

```

        <span class="text">Send Request</span>
    </div>
</button>
</form>

</body>
</html>

forgotpwd.php
<?php
// Connect to the database
$servername = "localhost";
$username = "root"; // your DB username
$password = ""; // your DB password
$dbname = "erp"; // your DB name

$conn = new mysqli($servername, $username, $password, $dbname);

// Check connection
if ($conn->connect_error) {
    die("Connection failed: " . $conn->connect_error);
}

// Check if form is submitted
if ($_SERVER["REQUEST_METHOD"] == "POST") {
    $sender_username = $_POST['sender_username'];
    $receiver_username = 'admin1'; // Admin's username
    $message_topic = 'Password Change Request';
    $message_content = "The user $sender_username has forgotten
their password, please change it.";
    $is_read = 0; // Message not read by admin yet
    $sent_at = date('Y-m-d H:i:s'); // Current timestamp

    // Prepare SQL query to insert message into the database
    $sql = "INSERT INTO messages (sender_username,
receiver_username, message_topic, message_content, is_read,
sent_at)
        VALUES ('$sender_username', '$receiver_username',
'$message_topic', '$message_content', '$is_read', '$sent_at')";

    // Execute query and check if it was successful
    if ($conn->query($sql) === TRUE) {
        echo "Password change request sent successfully!";
    } else {
        echo "Error: " . $sql . "<br>" . $conn->error;
    }
}

```


```

}

// Close connection
$conn->close();
?>

```

3. Student login page:

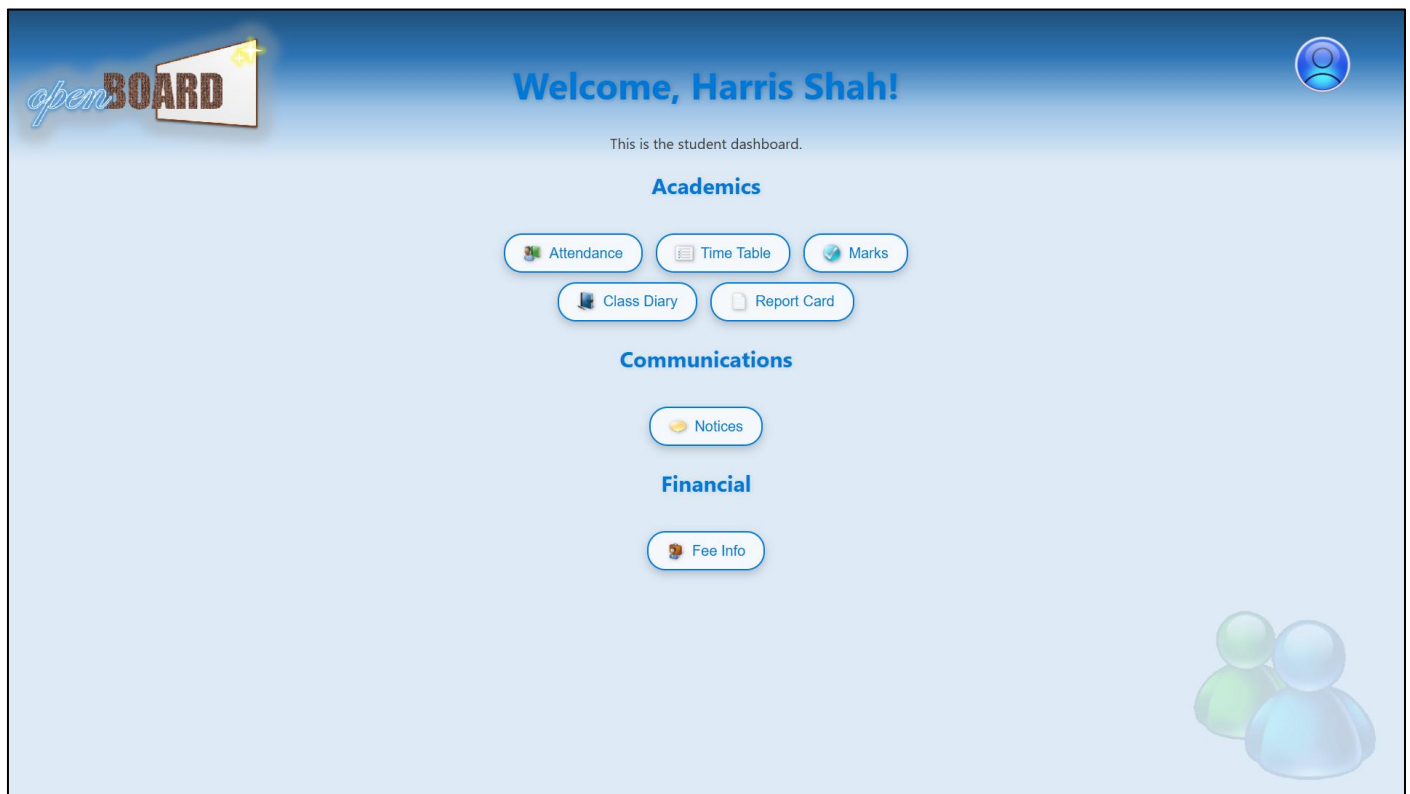

Code:

student.php

```

<?php
session_start();

// Check if fname and lname are set in the session
if (isset($_SESSION['fname']) && isset($_SESSION['lname'])) {
    $fname = $_SESSION['fname'];
    $lname = $_SESSION['lname'];
} else {
    // Redirect to login if session variables are not set
    header("Location: login.php");
    exit();
}
?>
<!DOCTYPE html>
<html lang="en">
<head>

```

```
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-
scale=1.0">
<title>::: Student :::</title>
<style>
  body {
    font-family: 'Segoe UI', Tahoma, sans-serif;
    background: url("main.png");
    background-size: cover;
    background-position: center;
    background-repeat: no-repeat;
    background-attachment: fixed;
    color: #333;
    text-align: center;
    padding: 20px;
  }
  h1 {
    color: #0078D7;
    font-size: 2.5em;
    text-shadow: 1px 1px 5px rgba(0, 0, 0, 0.2);
  }
  h4 {
    color: #0078D7;
    font-size: 1.5em;
    margin-top: 20px;
    text-shadow: 1px 1px 5px rgba(0, 0, 0, 0.1);
  }
  button {
    display: inline-flex;
    align-items: center;
    background: rgba(255, 255, 255, 0.7);
    border: 2px solid #0078D7;
    border-radius: 20px;
    padding: 10px 20px;
    margin: 5px;
    font-size: 1em;
    color: #0078D7;
    cursor: pointer;
    transition: background 0.3s ease;
    box-shadow: 0px 4px 10px rgba(0, 0, 0, 0.2);
    text-shadow: 0px 0px 5px rgba(255, 255, 255, 0.5);
  }
  button:hover {
    background: #0078D7;
    color: #fff;
    box-shadow: 0px 8px 20px rgba(0, 120, 215, 0.5);
  }

```

```

    }
    button img {
        width: 20px;
        height: 20px;
        margin-right: 8px;
        filter: drop-shadow(1px 1px 2px rgba(0, 0, 0, 0.3));
    }
    .top-right-icon {
        position: absolute;
        top: 20px;
        right: 50px;
        width: 80px;
        height: 80px;
        cursor: pointer;
    }
    .menu {
        display: none; /* Hidden by default */
        position: absolute;
        top: 95px; /* Adjust as needed to place the menu
below the icon */
        right: 20px;
        background-color: #fff;
        border: 1px solid #ddd;
        border-radius: 8px;
        box-shadow: 0 4px 8px rgba(0, 0, 0, 0.1);
        width: 150px;
        z-index: 1000;
    }
    .menu a {
        display: block;
        padding: 10px;
        text-decoration: none;
        color: #333;
        font-size: 14px;
    }
    .menu a:hover {
        background-color: #f0f0f0;
    }
</style>
</head>
<body>
    
    <div id="dropdownMenu" class="menu">
        <a href="about.php">About</a>
        <a href="chng_pwd.php">Change Password</a>

```



```

        <a href="report_problem.html">Report a Problem</a>
        <a href="logout.php">Logout</a>
    </div>
    <h1>Welcome, <?php echo htmlspecialchars($fname . ' ' .
    $lname); ?>!</h1>
    <p>This is the student dashboard.</p>

    <h4>Academics</h4>
    <button
onclick="window.location.href='student_attend.php'"> Attendance</button>
    <button
onclick="window.location.href='time_table.html'"> Time Table</button>
    <button
onclick="window.location.href='view_marks.php'"> Marks</button><br>
    <button          onclick="window.location.href='class
diary.php'"> Class Diary</button>
    <button          onclick="window.location.href='report.php'"> Report Card</button>

    <h4>Communications</h4>
    <button
onclick="window.location.href='view_notices.php'"> Notices</button>

    <h4>Financial</h4>
    <button onclick="window.location.href='fee_info.html'"> Fee Info</button>

    <script>
        // Function to toggle the visibility of the menu
        function toggleMenu() {
            var menu = document.getElementById("dropdownMenu");
            menu.style.display = (menu.style.display === "none"
|| menu.style.display === "") ? "block" : "none";
        }

        // Close the menu if clicking outside of it
        document.addEventListener("click", function(event) {
            var menu = document.getElementById("dropdownMenu");
            var icon = document.querySelector(".top-right-
icon");
            if (!menu.contains(event.target)
&& !icon.contains(event.target)) {


```

```

        menu.style.display = "none";
    }
});
</script>
</body>
</html>

```

4. Attendance Page:

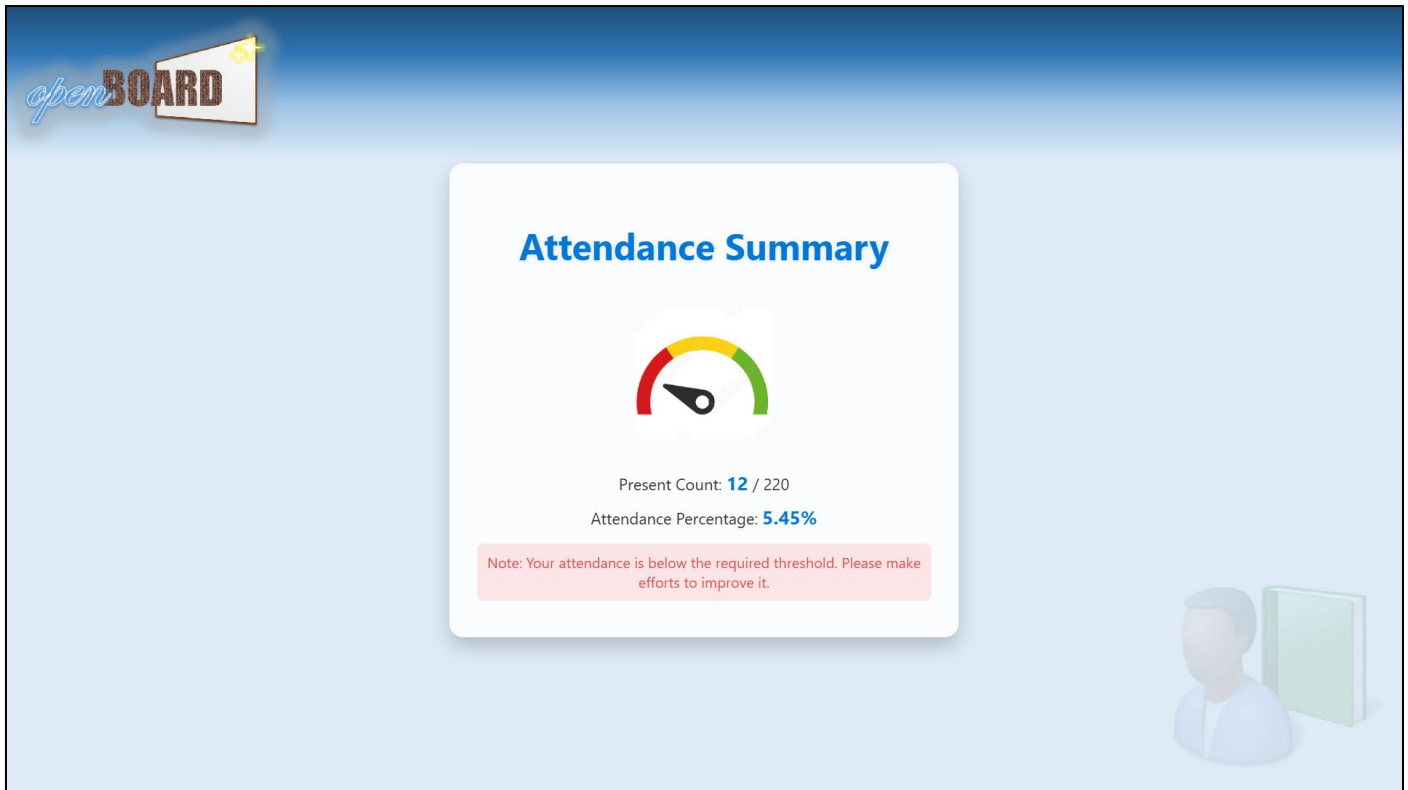

Code:

```

student_attend.php
<?php
// Start session to access session variables
session_start();

// Check if user is logged in and session variables are set
if (!isset($_SESSION['fname']) || !isset($_SESSION['lname'])) {
    echo "Please log in to view your attendance details.";
    exit;
}

// Get the user's first and last names from the session
$fname = $_SESSION['fname'];
$lname = $_SESSION['lname'];

// Database connection

```

```

$servername = "localhost";
$username = "root"; // Update with your username
$password = ""; // Update with your password
$dbname = "erp";

$conn = new mysqli($servername, $username, $password, $dbname);

// Check connection
if ($conn->connect_error) {
    die("Connection failed: " . $conn->connect_error);
}

// Determine the start and end dates for the current academic year
$currentYear = date("Y");
$start_date = date("Y-m-d", strtotime("April 1 " . ($currentYear - (date("n") < 4 ? 1 : 0))));
$end_date = date("Y-m-d", strtotime("March 31 " . ($currentYear + (date("n") >= 4 ? 1 : 0))));

// Query to count the number of times the student was marked present in the current academic year
$sql = "SELECT COUNT(*) AS present_count FROM attendance_details WHERE first_name = ? AND last_name = ? AND attendance_status = 'Present' AND attendance_date BETWEEN ? AND ?";

$stmt = $conn->prepare($sql);
$stmt->bind_param("ssss", $fname, $lname, $start_date, $end_date);
$stmt->execute();
$result = $stmt->get_result();

// Check if data was retrieved
if ($result->num_rows > 0) {
    $row = $result->fetch_assoc();
    $present_count = $row['present_count'];
} else {
    $present_count = 0; // Default to 0 if no attendance records are found
}

$total_classes = 220;
$attendance_percentage = ($present_count / $total_classes) * 100;

```

```
// Determine the image based on attendance percentage
if ($attendance_percentage < 55) {
    $image = "lvl1.png";
} elseif ($attendance_percentage == 55) {
    $image = "lvl2.png";
} else {
    $image = "lvl3.png";
}

// Close database connection
$stmt->close();
$conn->close();
?>

<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-
scale=1.0">
    <title>Attendance Summary</title>
    <style>
        /* Frutiger Aero inspired styling */
        body {
            background: url("attend.png");
            background-size: cover;
            background-position: center;
            background-repeat: no-repeat;
            background-attachment: fixed;
            font-family: 'Segoe UI', Tahoma, Geneva, sans-serif;
            color: #333;
            margin: 0;
            display: flex;
            align-items: center;
            justify-content: center;
            min-height: 100vh;
        }
        .container {
            max-width: 500px;
            background: rgba(255, 255, 255, 0.85);
            padding: 30px;
            border-radius: 15px;
            box-shadow: 0 10px 20px rgba(0, 0, 0, 0.2);
            text-align: center;
            backdrop-filter: blur(8px);
        }
    </style>
</head>
<body>
    <div class="container">
        <h1>Attendance Summary</h1>
        <table border="1">
            <thead>
                <tr>
                    <th>Name</th>
                    <th>Attendance Percentage</th>
                </tr>
            </thead>
            <tbody>
                <tr>
                    <td>John Doe</td>
                    <td>85%</td>
                </tr>
                <tr>
                    <td>Jane Smith</td>
                    <td>92%</td>
                </tr>
                <tr>
                    <td>Mike Johnson</td>
                    <td>78%</td>
                </tr>
                <tr>
                    <td>Emily White</td>
                    <td>88%</td>
                </tr>
            </tbody>
        </table>
    </div>
</body>
</html>
```

```

    }
    h2 {
        font-size: 2.5em;
        color: #0078D7;
        text-shadow: 1px 1px 5px rgba(0, 0, 0, 0.1);
        margin-bottom: 20px;
    }
    p {
        font-size: 1.1em;
        margin: 10px 0;
    }
    .highlight {
        font-size: 1.2em;
        color: #0078D7;
        font-weight: bold;
    }
    .note {
        font-size: 1em;
        margin-top: 15px;
        padding: 10px;
        border-radius: 8px;
    }
    .note.red {
        background: rgba(255, 102, 102, 0.15);
        color: #d9534f;
    }
    .note.green {
        background: rgba(102, 255, 102, 0.15);
        color: #5cb85c;
    }
    img {
        margin: 20px 0;
        width: 150px;
        height: auto;
        border-radius: 10px;
    }
</style>
</head>
<body>
    <div class="container">
        <h2>Attendance Summary</h2>

        <!-- Display dynamic image based on attendance
percentage -->
        

```


```

    <p>Present Count: <span class="highlight"><?php echo
    $present_count; ?></span> / <?php echo $total_classes; ?></p>
    <p>Attendance Percentage: <span class="highlight"><?php
    echo number_format($attendance_percentage, 2); ?>%</span></p>

    <?php if ($attendance_percentage < 55): ?>
        <p class="note red">Note: Your attendance is below
        the required threshold. Please make efforts to improve it.</p>
    <?php else: ?>
        <p class="note green">Good job! Keep up your
        attendance.</p>
    <?php endif; ?>
</div>
</body>
</html>

```

5. Time Table Page

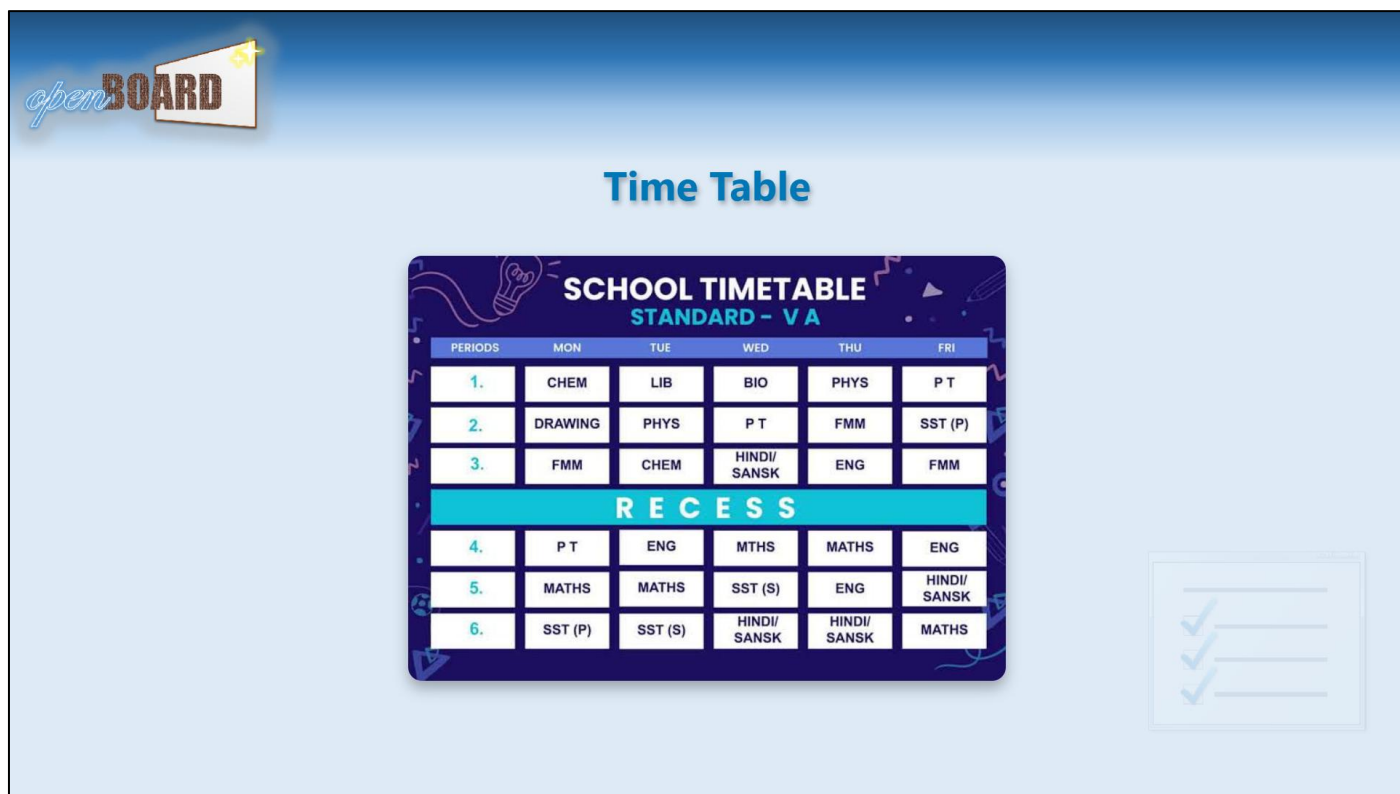

Code:

```

time_table.html
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">

```

```

<meta name="viewport" content="width=device-width, initial-
scale=1.0">
<title>::: Student :::</title>
<style>
  /* Body styling for background and font */
  body {
    background: url("tt.png");
    background-size: cover;
    background-position: center;
    background-repeat: no-repeat;
    background-attachment: fixed;
    font-family: 'Segoe UI', Tahoma, Geneva, Verdana,
sans-serif;
    margin: 0;
    padding: 0;
    display: flex;
    flex-direction: column;
    align-items: center;
    justify-content: center;
    height: 100vh;
  }

  /* Styling the header */
  h1 {
    font-size: 2.8em;
    color: #0077b6; /* Ocean blue */
    text-shadow: 2px 4px 6px rgba(0, 0, 0, 0.3);
    margin-bottom: 50px;
  }

  /* Image styling for the timetable */
  img {
    max-width: 90%;
    height: auto;
    border-radius: 15px;
    box-shadow: 0 8px 15px rgba(0, 0, 0, 0.3);
    transition: transform 0.3s ease, box-shadow 0.3s
ease;
  }

  /* Add interactive hover effect on the image */
  img:hover {
    transform: scale(1.05);
    box-shadow: 0 12px 20px rgba(0, 0, 0, 0.5);
  }
</style>


```

```

</head>
<body>
    <h1>Time Table</h1>
    
</body>
</html>

```

6. Marks Page:

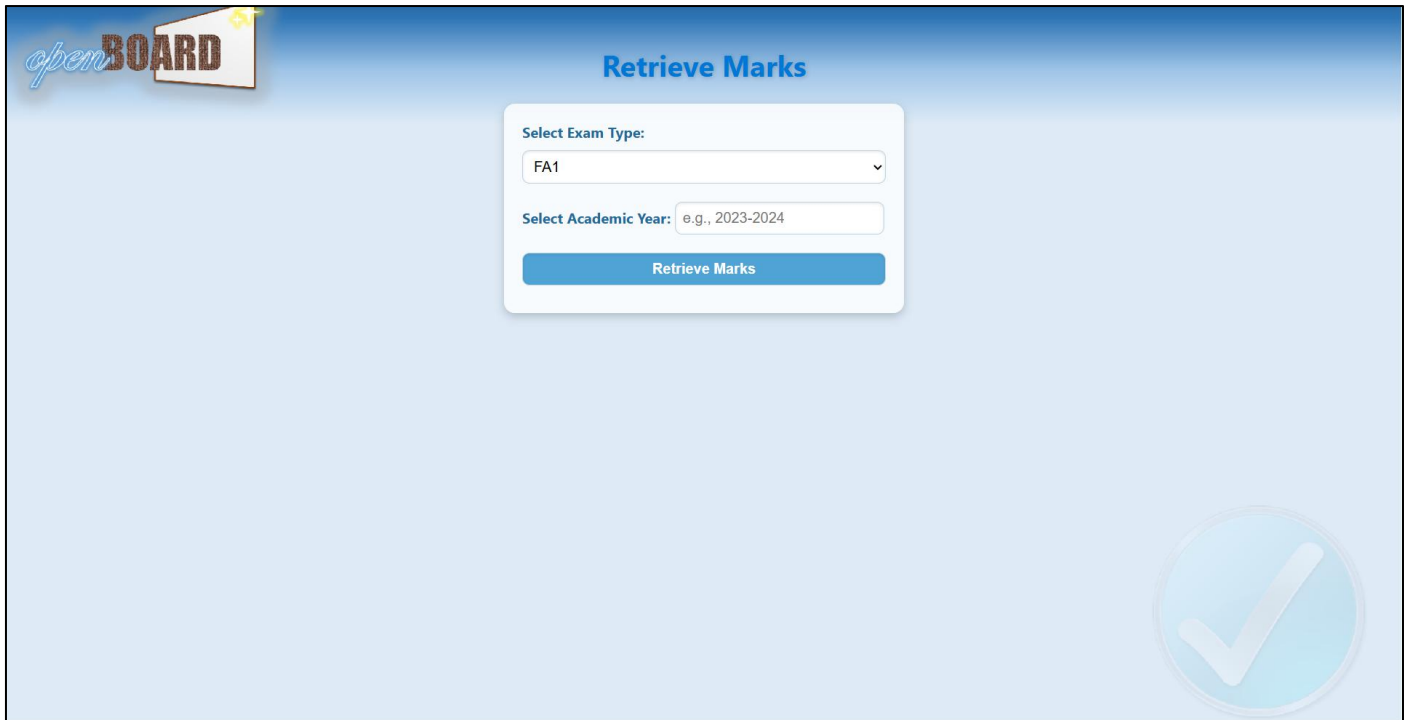

Code:

```

view_marks.php
<?php
session_start();

// Check if fname and lname are set in the session
if (isset($_SESSION['fname']) && isset($_SESSION['lname'])) {
    $fname = $_SESSION['fname'];
    $lname = $_SESSION['lname'];
} else {
    // Redirect to login if session variables are not set
    header("Location: login.php");
    exit();
}
?>

<!DOCTYPE html>
<html lang="en">
<head>

```



```
<meta charset="UTF-8">
<meta name="viewport" content="width=device-width, initial-
scale=1.0">
<title>::: Marks :::</title>
<style>
  /* Frutiger Aero Styling */
  body {
    font-family:'Segoe UI', Tahoma, sans-serif;
    background: url("marks.png");
    background-size: cover;
    background-position: center;
    background-repeat: no-repeat;
    background-attachment: fixed;
    margin: 0;
    padding: 0;
    color: #333;
  }
  h1, h2 {
    text-align: center;
    color: #0078D7;
    text-shadow: 1px 1px 5px rgba(0, 0, 0, 0.2);
  }
  form {
    background: rgba(255, 255, 255, 0.8);
    margin: 20px auto;
    padding: 20px;
    border-radius: 12px;
    box-shadow: 0 4px 10px rgba(0, 0, 0, 0.2);
    max-width: 400px;
    color: #246b9c;
  }
  form label {
    font-weight: bold;
  }
  form input, form select, form button {
    width: 100%;
    padding: 8px;
    margin: 10px 0;
    border: 1px solid #bcd4e6;
    border-radius: 8px;
    font-size: 16px;
    box-shadow: inset 0 1px 3px rgba(0, 0, 0, 0.1);
  }
  form button {
    background-color: #4fa3d5;
    color: white;
```

```

        font-weight: bold;
        cursor: pointer;
        transition: background-color 0.3s ease;
    }
    form button:hover {
        background-color: #246b9c;
    }
    table {
        margin: 20px auto;
        border-collapse: collapse;
        width: 90%;
        box-shadow: 0 4px 10px rgba(0, 0, 0, 0.1);
    }
    table th, table td {
        border: 1px solid #ccc;
        padding: 12px;
        text-align: center;
    }
    table th {
        background-color: #4fa3d5;
        color: white;
    }
    table tr:nth-child(even) {
        background-color: #f9f9f9;
    }
    table tr:hover {
        background-color: #e3f2fd;
    }
    p {
        text-align: center;
        font-size: 18px;
        color: #d9534f;
    }
</style>
</head>
<body>
    <br>
    <h1>Retrieve Marks</h1>
    <form method="POST">
        <label for="exam_type">Select Exam Type:</label>
        <select name="exam_type" id="exam_type" required>
            <option value="FA1">FA1</option>
            <option value="SA1">SA1</option>
            <option value="FA2">FA2</option>
            <option value="SA2">SA2</option>
        </select>

```

```
        <label for="academic_year">Select Academic
Year:</label>
        <input type="text" style="width: 213px;"
name="academic_year" id="academic_year" placeholder="e.g.,
2023-2024" required>
```

```
        <button type="submit" name="retrieve">Retrieve
Marks</button>
    </form>
```

```
<?php
if (isset($_POST['retrieve'])) {
    // Get the selected exam type and academic year
    $exam_type = $_POST['exam_type'];
    $academic_year = $_POST['academic_year'];

    // Database connection
    $conn = new mysqli('localhost', 'root', '', 'erp');
    if ($conn->connect_error) {
        die("Connection failed: " . $conn->connect_error);
    }

    // Query to retrieve marks
    $stmt = $conn->prepare("SELECT physics, chemistry,
biology, maths, english, sst, hindi, computers FROM
student_marks WHERE first_name = ? AND last_name = ? AND
exam_type = ? AND academic_year = ?");
    $stmt->bind_param("ssss", $fname, $lname, $exam_type,
$academic_year);
    $stmt->execute();
    $result = $stmt->get_result();

    if ($result->num_rows > 0) {
        echo "<h2>Marks for $fname $lname</h2>";
        echo "<table>
            <tr>
                <th>Physics</th>
                <th>Chemistry</th>
                <th>Biology</th>
                <th>Maths</th>
                <th>English</th>
                <th>SST</th>
                <th>Hindi</th>
                <th>Computers</th>
            </tr>";
```


```

while ($row = $result->fetch_assoc()) {
    echo "<tr>
        <td>{$row['physics']}</td>
        <td>{$row['chemistry']}</td>
        <td>{$row['biology']}</td>
        <td>{$row['maths']}</td>
        <td>{$row['english']}</td>
        <td>{$row['sst']}</td>
        <td>{$row['hindi']}</td>
        <td>{$row['computers']}</td>
    </tr>";
}
echo "</table>";
} else {
    echo "<p>No marks found for the selected exam type
and academic year.</p>";
}

$stmt->close();
$conn->close();
}
?>
</body>
</html>

```

7. Class Diary Page:

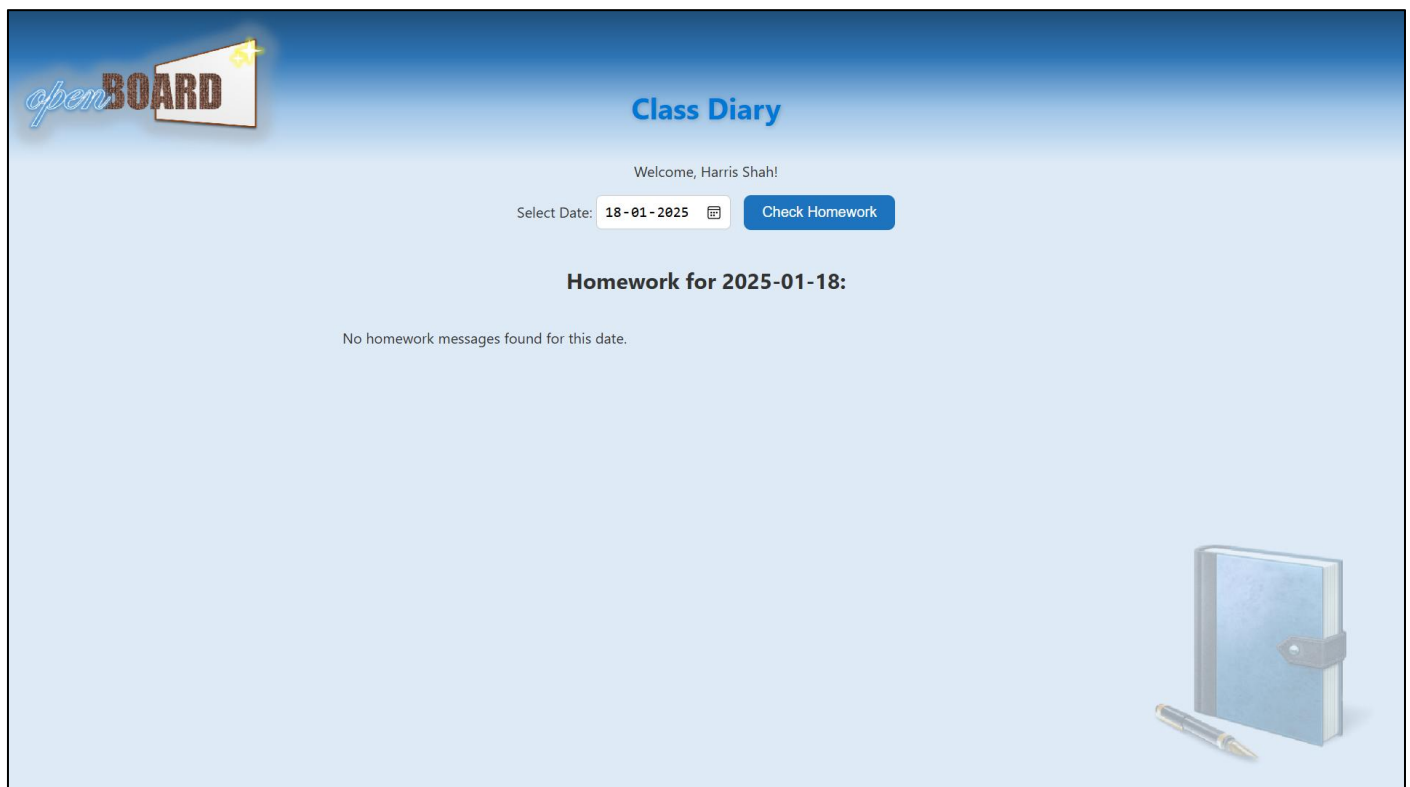

Code:

class diary.php

```
<?php
```

```
session_start();
```

```
if (isset($_SESSION['fname']) && isset($_SESSION['lname'])) {  
    $fname = $_SESSION['fname'];  
    $lname = $_SESSION['lname'];  
} else {  
    header("Location: login.php");  
    exit();  
}
```

```
$host = "localhost";
```

```
$username = "root";
```

```
$password = "";
```

```
$database = "erp";
```

```
$conn = new mysqli($host, $username, $password, $database);
```

```
if ($conn->connect_error) {  
    die("Connection failed: " . $conn->connect_error);  
}
```

```
$date = date("Y-m-d");
```

```
$homework_data = [];
```

```
if ($_SERVER["REQUEST_METHOD"] === "POST") {  
    $date = $_POST['date'];  
}
```

```
$query = "SELECT teacher_fname, teacher_lname, subject_name,  
topic_name, homework_message, created_at FROM homework_details  
WHERE DATE(created_at) = ?";  
$stmt = $conn->prepare($query);  
$stmt->bind_param("s", $date);  
$stmt->execute();  
$result = $stmt->get_result();
```

```
while ($row = $result->fetch_assoc()) {  
    $homework_data[] = $row;  
}
```

```
$stmt->close();
```

```
$conn->close();
```

```

?>
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-
scale=1.0">
  <title>::: Class Diary :::</title>
  <style>
    /* Frutiger Aero Styling */
    body {
      font-family: 'Segoe UI', Tahoma, sans-serif;
      background: url("diary.png");
      background-size: cover;
      background-position: center;
      background-repeat: no-repeat;
      background-attachment: fixed;
      margin: 0;
      padding: 0;
      color: #333;
      display: flex;
      flex-direction: column;
      align-items: center;
      padding: 20px;
    }

    h1 {
      color: #0078D7;
      text-shadow: 1px 1px 5px rgba(0, 0, 0, 0.2);
    }

    form {
      margin-bottom: 20px;
      text-align: center;
    }

    form input[type="date"] {
      padding: 8px;
      font-size: 16px;
      border: 1px solid #ccc;
      border-radius: 6px;
      transition: border-color 0.3s ease;
    }

    form input[type="date"]:focus {
      border-color: #1e73be;
    }

```

```

        outline: none;
    }

    form button {
        background-color: #1e73be;
        color: white;
        border: none;
        padding: 10px 20px;
        font-size: 16px;
        border-radius: 8px;
        cursor: pointer;
        transition: background-color 0.3s ease, transform
0.2s ease;
        margin-left: 10px;
    }

    form button:hover {
        background-color: #155b8a;
        transform: scale(1.05);
    }

    .cards-container {
        width: 100%;
        max-width: 800px;
    }

    .card {
        background: rgba(255, 255, 255, 0.95);
        border-radius: 12px;
        box-shadow: 0 4px 8px rgba(0, 0, 0, 0.1);
        padding: 20px;
        margin-bottom: 15px;
        transition: transform 0.2s ease, box-shadow 0.2s
ease;
    }

    .card:hover {
        transform: scale(1.02);
        box-shadow: 0 6px 12px rgba(0, 0, 0, 0.15);
    }

    .card-header {
        font-size: 18px;
        font-weight: bold;
        color: #1e73be;
    }

```




```

                <p><?php echo
htmlspecialchars($homework['homework_message']); ?></p>
            </div>
            <div class="card-footer">
                Assigned by: <?php echo
htmlspecialchars($homework['teacher_fname'] . " " .
$htmlspecialchars($homework['teacher_lname'])); ?><br>
                Assigned At: <?php echo
htmlspecialchars($homework['created_at']); ?>
            </div>
        </div>
        <?php endforeach; ?>
        <?php else: ?>
            <p>No homework messages found for this date.</p>
        <?php endif; ?>
    </div>
</body>
</html>

```

8. Report Card Page:

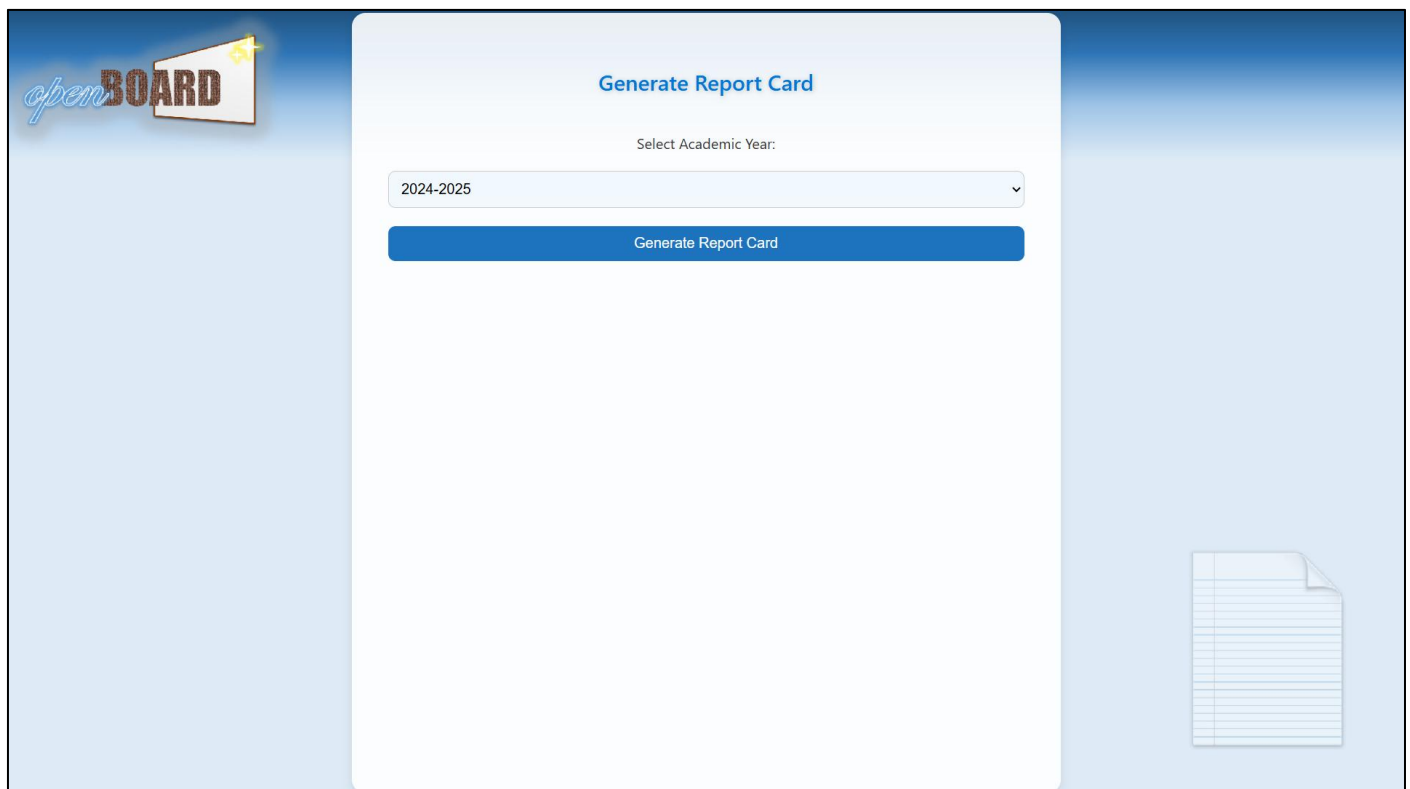

Code:

```

report.php
<?php
session_start();

```

```

// Check if fname and lname are set in the session
if (isset($_SESSION['fname']) && isset($_SESSION['lname'])) {
    $fname = $_SESSION['fname'];
    $lname = $_SESSION['lname'];
} else {
    // Redirect to login if session variables are not set
    header("Location: login.php");
    exit();
}

// Connect to the database
$servername = "localhost";
$username = "root";
$password = "";
$dbname = "erp";

$conn = new mysqli($servername, $username, $password, $dbname);

if ($conn->connect_error) {
    die("Connection failed: " . $conn->connect_error);
}

// Handle form submission to generate the report card
if ($_SERVER['REQUEST_METHOD'] == 'POST') {
    // Get the selected academic year
    $academic_year = $_POST['academic_year'];

    // Query the student marks for the selected academic year
    $sql = "SELECT * FROM student_marks WHERE first_name =
'$fname' AND last_name = '$lname' AND academic_year =
'$academic_year'";
    $result = $conn->query($sql);

    if ($result->num_rows > 0) {
        // Initialize an array to store marks for each exam
        type
        $marks_data = [];

        // Fetch the marks for each exam type and organize them
        by subject and exam type
        while ($row = $result->fetch_assoc()) {
            $marks_data[$row['exam_type']][] = [
                'physics' => $row['physics'],
                'chemistry' => $row['chemistry'],
                'biology' => $row['biology'],
                'maths' => $row['maths'],
            ];
        }
    }
}

```

```

        'english' => $row['english'],
        'sst' => $row['sst'],
        'hindi' => $row['hindi'],
        'computers' => $row['computers']
    ];
}

// Store marks data in session to access later in the
HTML
$_SESSION['marks_data'] = $marks_data;
} else {
    $_SESSION['marks_data'] = [];
}
}
?>

<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-
scale=1.0">
    <title>Student Report Card</title>
    <style>
        /* General body and background */
        body {
            font-family: 'Segoe UI', Tahoma, sans-serif;
            background: url("final_report.png");
            background-size: cover;
            background-position: center;
            background-repeat: no-repeat;
            background-attachment: fixed;
            color: #333;
            margin: 0;
            padding: 0;
            display: flex;
            justify-content: center;
            align-items: center;
            height: 100vh;
        }

        /* Card-like container */
        .container {
            background: rgba(255, 255, 255, 0.9);
            border-radius: 15px;
            box-shadow: 0 4px 12px rgba(0, 0, 0, 0.1);

```

```

padding: 40px;
width: 90%;
max-width: 700px;
text-align: center;
display: flex;
flex-direction: column;
justify-content: flex-start;
height: 90%; /* Ensures content stretches to 90% of
the viewport height */
overflow: hidden;
}

h1, h2 {
color: #0078D7;
font-weight: 600;
text-shadow: 1px 1px 5px rgba(0, 0, 0, 0.2);
}

/* Styling for the form */
form {
display: flex;
flex-direction: column;
gap: 20px;
margin-top: 20px;
flex-grow: 0; /* Prevents the form from taking too
much space */
}

select, button {
padding: 10px;
font-size: 16px;
border-radius: 8px;
border: 1px solid #ccc;
outline: none;
background-color: #f1f9ff;
transition: background-color 0.3s ease;
}

select:focus, button:focus {
background-color: #e1effb;
}

button {
cursor: pointer;
background-color: #1e73be;
color: white;

```

```

        border: none;
    }

    button:hover {
        background-color: #15679b;
    }

    /* Table styling */
    table {
        width: 100%;
        border-collapse: collapse;
        margin-top: 30px;
        max-height: 300px; /* Set max height */
        overflow-y: auto; /* Allow scrolling if the table
is too large */
        display: block; /* Make the table scrollable */
    }

    th, td {
        padding: 12px;
        border: 1px solid #ccc;
        text-align: center;
    }

    th {
        background-color: #1e73be;
        color: white;
    }

    tr:nth-child(even) {
        background-color: #f9f9f9;
    }

    tr:hover {
        background-color: #f1f9ff;
    }

    p {
        color: #388e3c;
        font-weight: 600;
        margin-top: 20px;
    }
}

</style>
</head>
<body>

```

```

<div class="container">
    <h2>Generate Report Card</h2>
    <form method="POST" action="">
        <label for="academic_year">Select Academic
Year:</label>
        <select name="academic_year" id="academic_year"
required>
            <option value="2024-2025">2024-2025</option>
            <option value="2023-2024">2023-2024</option>
            <option value="2022-2023">2022-2023</option>
            <!-- Add other academic years as needed -->
        </select>
        <button type="submit">Generate Report Card</button>
    </form>

    <?php
    // Check if marks data exists in session
    if (isset($_SESSION['marks_data'])
&& !empty($_SESSION['marks_data'])) {
        $marks_data = $_SESSION['marks_data'];

        // Display the report card in a table
        echo "<h1>Report Card for " . $fname . " " .
$name . " (" . $_POST['academic_year'] . ")</h1>";
        echo "<table>
            <tr>
                <th>Subject</th>
                <th>FA1</th>
                <th>SA1</th>
                <th>FA2</th>
                <th>SA2</th>
            </tr>";

        // Define subjects
        $subjects = ['Physics', 'Chemistry', 'Biology',
'Maths', 'English', 'SST', 'Hindi', 'Computers'];

        // Loop through subjects and display marks for each
exam type
        foreach ($subjects as $subject) {
            echo "<tr><td>$subject</td>";

            // Loop through exam types (FA1, SA1, FA2, SA2)
            and get the marks for each subject

```

```

        foreach (['FA1', 'SA1', 'FA2', 'SA2'] as
$exam_type) {
            if (isset($marks_data[$exam_type])) {
                $marks_found = false;
                foreach ($marks_data[$exam_type] as
$marks_row) {
                    // Match the subject to display its
marks
                    if
(isset($marks_row[strtolower($subject)])) {
                        echo "<td>" .
$marks_row[strtolower($subject)] . "</td>";
                        $marks_found = true;
                        break;
                    }
                }
                if (!$marks_found) {
                    echo "<td>--</td>"; // If no marks
found for that subject in the exam type
                }
                } else {
                    echo "<td>--</td>"; // If no marks found
for that exam type
                }
            }
            echo "</tr>";
        }
        echo "</table>";
    } elseif (isset($_POST['academic_year'])) {
        echo "<p>No marks found for the selected academic
year.</p>";
    }
    ?>


</div>

</body>
</html>

<?php
// Close the database connection
$conn->close();
?>

```

9. Notices Page:

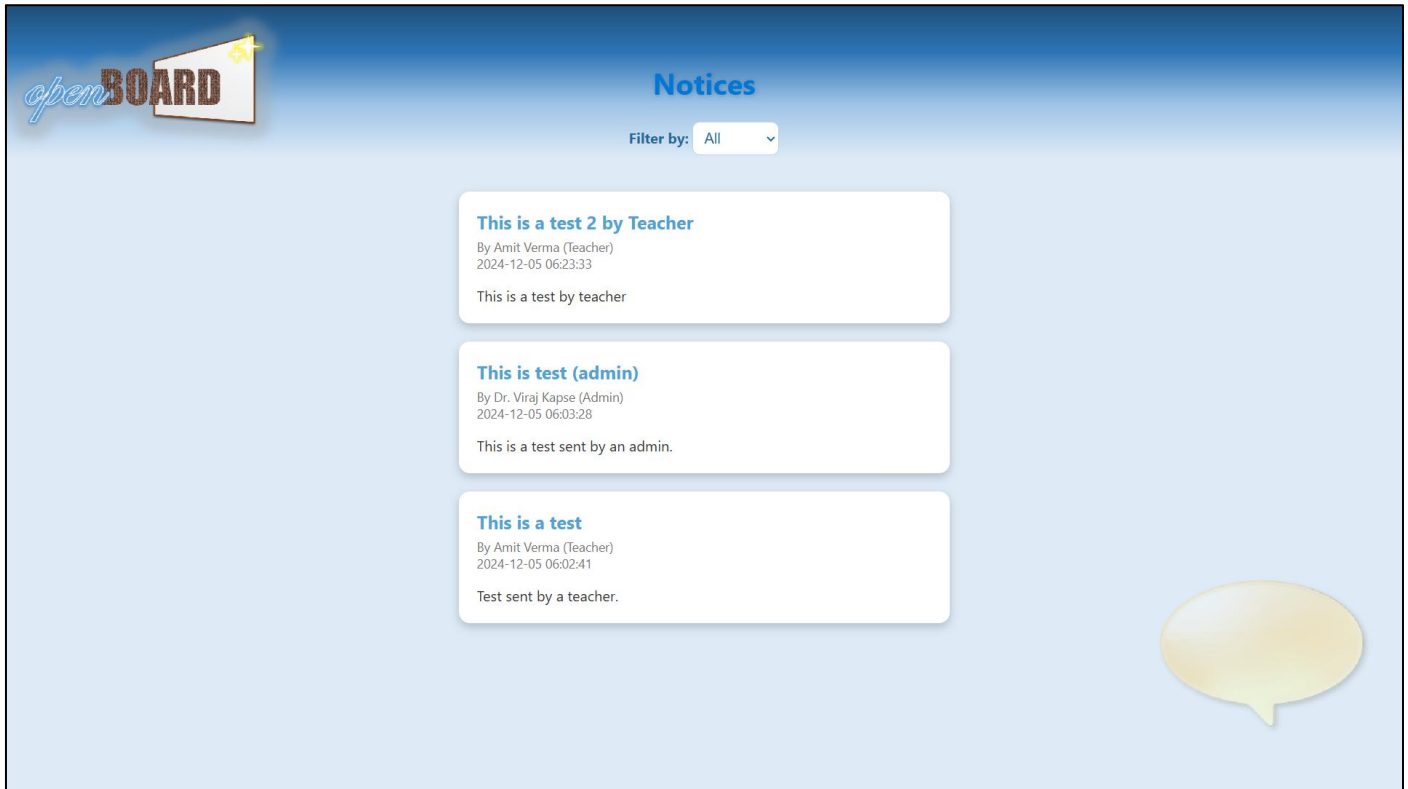

Code:

view_notices.php

```
<?php
session_start();

// Check if fname and lname are set in the session
if (!isset($_SESSION['fname']) || !isset($_SESSION['lname'])) {
    header("Location: login.php");
    exit();
}

// Database connection
$conn = new mysqli("localhost", "root", "", "erp");

// Check connection
if ($conn->connect_error) {
    die("Connection failed: " . $conn->connect_error);
}

// Filtering logic
$filter = '';
$whereClause = '';
if (isset($_GET['filter']) && ($_GET['filter'] === 'Teacher' ||
$_GET['filter'] === 'Admin')) {
```



```

$filter = $_GET['filter'];
$whereClause = "WHERE status = '$filter'";
}

// Fetch notices
$sql = "SELECT fname, lname, status, topic, content, date_time
FROM notices $whereClause ORDER BY date_time DESC";
$result = $conn->query($sql);

$conn->close();
?>

<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-
scale=1.0">
    <title>::: Notices :::</title>
    <style>
        /* Frutiger Aero Styling */
        body {
            font-family: 'Segoe UI', Tahoma, sans-serif;
            background: url("notices.png");
            background-size: cover;
            background-position: center;
            background-repeat: no-repeat;
            background-attachment: fixed;
            color: #333;
            margin: 0;
            padding: 0;
        }

        h1 {
            text-align: center;
            color: #0078D7;
            text-shadow: 1px 1px 5px rgba(0, 0, 0, 0.2);
            margin-top: 20px;
        }

        form {
            text-align: center;
            margin: 20px 0;
        }

        form label {

```

```

        font-weight: bold;
        color: #246b9c;
    }

    form select {
        padding: 8px;
        border: 1px solid #bcd4e6;
        border-radius: 8px;
        background-color: white;
        font-size: 16px;
        color: #246b9c;
        outline: none;
    }

    .notices-container {
        display: flex;
        flex-direction: column; /* Stack items vertically
*/
        align-items: center; /* Center the cards
horizontally */
        gap: 20px; /* Space between the cards */
        padding: 20px;
    }

    .notice-card {
        background: white;
        border-radius: 12px;
        box-shadow: 0 4px 10px rgba(0, 0, 0, 0.2);
        width: 90%; /* Take up most of the width for a
vertical layout */
        max-width: 500px;
        padding: 20px;
        display: flex;
        flex-direction: column;
    }

    .notice-card h3 {
        margin: 0;
        color: #4fa3d5;
        font-size: 20px;
    }

    .notice-card .meta {
        font-size: 14px;
        color: #777;
        margin: 5px 0 15px;
    }

```



```

        <p><?=
nl2br(htmlspecialchars($row['content'])) ?></p>
    </div>
    <?php endwhile; ?>
    <?php else: ?>
        <p class="no-notices">No notices found.</p>
    <?php endif; ?>
</div>
</body>
</html>

```

10. Fee Information Page



Code:

```

fee_info.html
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-
scale=1.0">
    <title>::: Fee Info :::</title>
    <style>
        /* General Styling */
        body {
            margin: 0;

```

```

padding: 0;
font-family: 'Segoe UI', Tahoma, sans-serif;
background: url("fee_info.png");
background-size: cover;
background-position: center;
background-repeat: no-repeat;
background-attachment: fixed;
color: #333;
display: flex;
justify-content: center;
align-items: center;
height: 100vh;
}

/* Centered Card Container */
.container {
background: rgba(255, 255, 255, 0.95);
box-shadow: 0 4px 12px rgba(0, 0, 0, 0.1);
border-radius: 12px;
padding: 30px;
max-width: 600px;
width: 90%;
text-align: left;
}

/* Title Styling */
h1 {
font-size: 28px;
color: #1e73be;
margin-bottom: 20px;
text-shadow: 1px 1px 2px rgba(255, 255, 255, 0.8);
}

h3 {
font-size: 22px;
color: #1e73be;
margin-top: 20px;
margin-bottom: 10px;
}

/* Fee Section Styling */
.fee-section {
margin-bottom: 20px;
}

.fee-section b {

```

```

        font-size: 18px;
        color: #555;
    }

    .fee-section p {
        font-size: 16px;
        margin-left: 10px;
        color: #333;
    }


    /* Styling for Amounts */
    .amount {
        font-weight: bold;
        font-size: 18px;
        color: #1e73be;
    }
</style>
</head>
<body>
    <div class="container">
        <h1 style="text-align:center;">Fee Information</h1>

        <div class="fee-section">
            <h3>Academics</h3>
            <p><b>First Installment</b></p>
            <p>Amount Payable: <span class="amount">Rs.
50,000/-</span></p>
            <p><b>Second Installment</b></p>
            <p>Amount Payable: <span class="amount">Rs.
50,000/-</span></p>
        </div>

        <div class="fee-section">
            <h3>Transportation</h3>
            <p><b>First Installment</b></p>
            <p>Amount Payable: <span class="amount">Rs.
15,000/-</span></p>
            <p><b>Second Installment</b></p>
            <p>Amount Payable: <span class="amount">Rs.
15,000/-</span></p>
        </div>
    </div>
</body>
</html>

```

11. Teacher Login Page

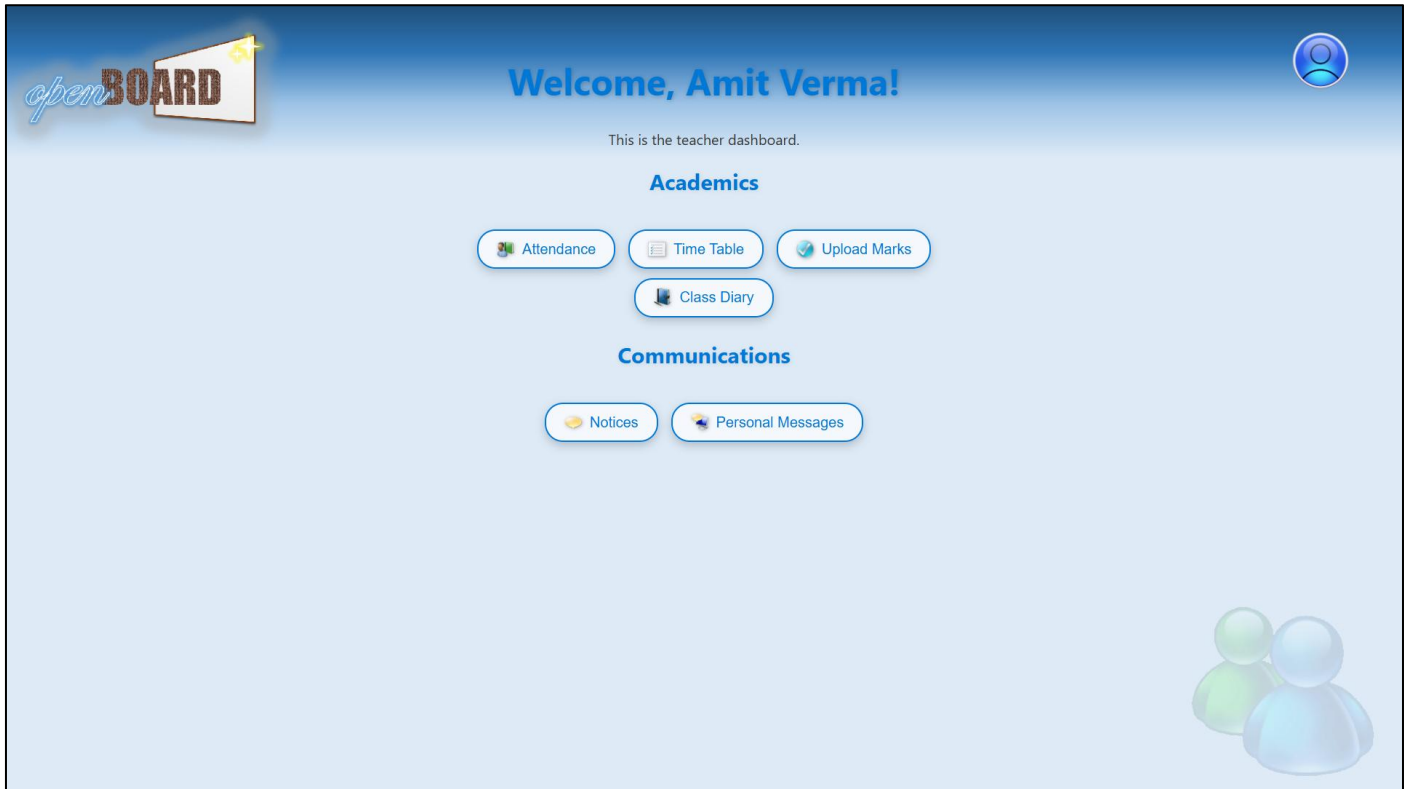

Code:

teacher.php

```
<?php
session_start();

// Check if fname and lname are set in the session
if (isset($_SESSION['fname']) && isset($_SESSION['lname'])) {
    $fname = $_SESSION['fname'];
    $lname = $_SESSION['lname'];
} else {
    // Redirect to login if session variables are not set
    header("Location: login.php");
    exit();
}
?>
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-
scale=1.0">
    <title>::: Teacher :::</title>
    <style>
        body {
```

```

    font-family: 'Segoe UI', Tahoma, sans-serif;
    background: url("main.png");
    background-size: cover;
    background-position: center;
    background-repeat: no-repeat;
    background-attachment: fixed;
    color: #333;
    text-align: center;
    padding: 20px;
}
h1 {
    color: #0078D7;
    font-size: 2.5em;
    text-shadow: 1px 1px 5px rgba(0, 0, 0, 0.2);
}
h4 {
    color: #0078D7;
    font-size: 1.5em;
    margin-top: 20px;
    text-shadow: 1px 1px 5px rgba(0, 0, 0, 0.1);
}
button {
    display: inline-flex;
    align-items: center;
    background: rgba(255, 255, 255, 0.7);
    border: 2px solid #0078D7;
    border-radius: 20px;
    padding: 10px 20px;
    margin: 5px;
    font-size: 1em;
    color: #0078D7;
    cursor: pointer;
    transition: background 0.3s ease;
    box-shadow: 0px 4px 10px rgba(0, 0, 0, 0.2);
    text-shadow: 0px 0px 5px rgba(255, 255, 255, 0.5);
}
button:hover {
    background: #0078D7;
    color: #fff;
    box-shadow: 0px 8px 20px rgba(0, 120, 215, 0.5);
}
button img {
    width: 20px;
    height: 20px;
    margin-right: 8px;
    filter: drop-shadow(1px 1px 2px rgba(0, 0, 0, 0.3));
}

```



```

    }
    .top-right-icon {
        position: absolute;
        top: 20px;
        right: 50px;
        width: 80px;
        height: 80px;
        cursor: pointer;
    }
    .menu {
        display: none; /* Hidden by default */
        position: absolute;
        top: 95px; /* Adjust as needed to place the menu
below the icon */
        right: 20px;
        background-color: #fff;
        border: 1px solid #ddd;
        border-radius: 8px;
        box-shadow: 0 4px 8px rgba(0, 0, 0, 0.1);
        width: 150px;
        z-index: 1000;
    }
    .menu a {
        display: block;
        padding: 10px;
        text-decoration: none;
        color: #333;
        font-size: 14px;
    }
    .menu a:hover {
        background-color: #f0f0f0;
    }
</style>
</head>
<body>
    
    <div id="dropdownMenu" class="menu">
        <a href="about.php">About</a>
        <a href="chng_pwd.php">Change Password</a>
        <a href="report_problem.html">Report a Problem</a>
        <a href="logout.php">Logout</a>
    </div>
    <h1>Welcome, <?php echo htmlspecialchars($fname . ' ' .
$lname); ?>!</h1>
    <p>This is the teacher dashboard.</p>

```

```

    <h4>Academics</h4>
    <button
onclick="window.location.href='attendance.php'"> Attendance</button>
    <button
onclick="window.location.href='time_table.html'"> Time Table</button>
    <button
onclick="window.location.href='upl_marks.html'"> Upload Marks</button><br>
    <button
onclick="window.location.href='upl_class_diary.php'"> Class Diary</button>


    <h4>Communications</h4>
    <button
onclick="window.location.href='send_notices.php'"> Notices</button>
    <button onclick="window.location.href='msgs.php'"> Personal Messages</button>

    <script>
        // Function to toggle the visibility of the menu
        function toggleMenu() {
            var menu = document.getElementById("dropdownMenu");
            menu.style.display = (menu.style.display === "none"
|| menu.style.display === "") ? "block" : "none";
        }

        // Close the menu if clicking outside of it
        document.addEventListener("click", function(event) {
            var menu = document.getElementById("dropdownMenu");
            var icon = document.querySelector(".top-right-
icon");
            if (!menu.contains(event.target)
&& !icon.contains(event.target)) {
                menu.style.display = "none";
            }
        });
    </script>
</body>
</html>

```

12. Mark Attendance Page

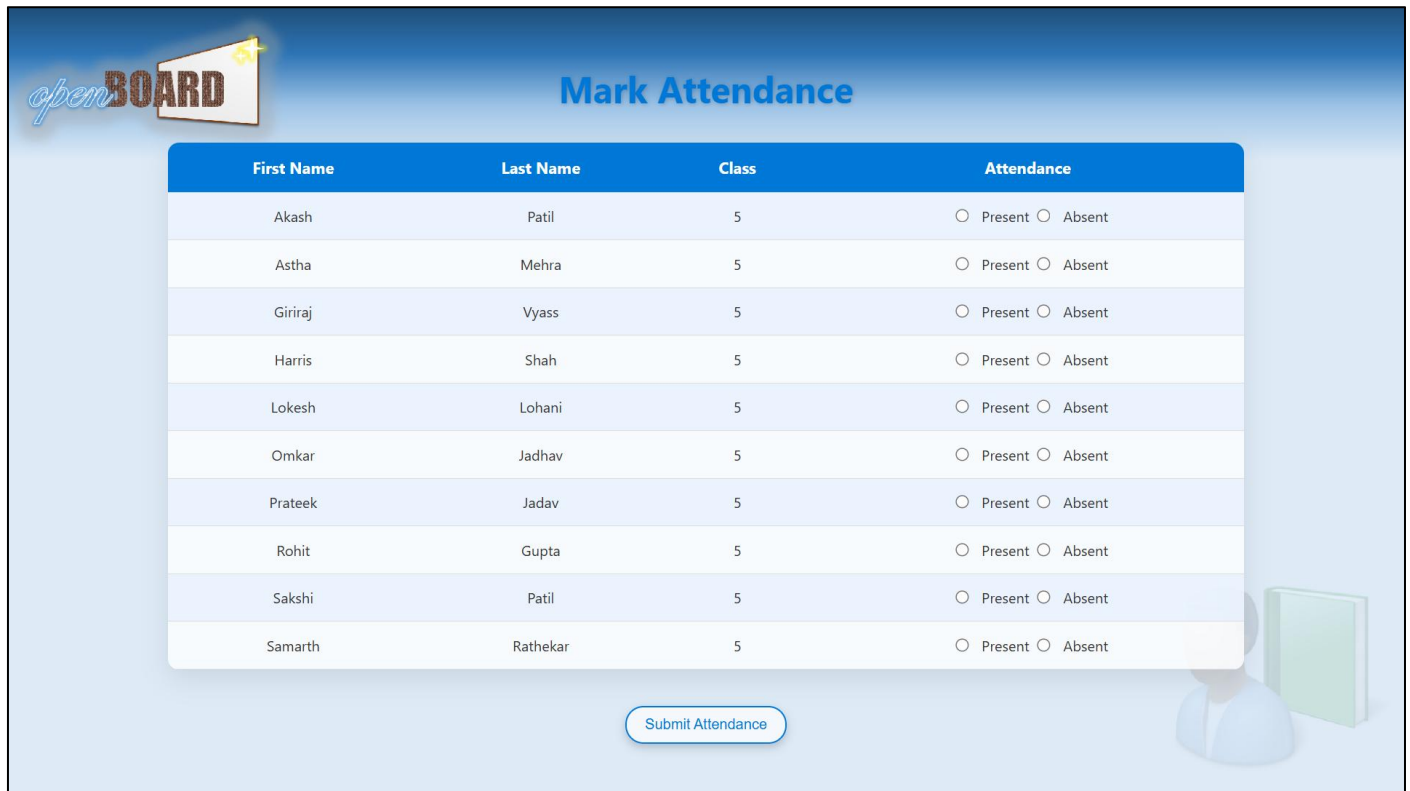

First Name	Last Name	Class	Attendance
Akash	Patil	5	<input type="radio"/> Present <input type="radio"/> Absent
Astha	Mehra	5	<input type="radio"/> Present <input type="radio"/> Absent
Giriraj	Vyass	5	<input type="radio"/> Present <input type="radio"/> Absent
Harris	Shah	5	<input type="radio"/> Present <input type="radio"/> Absent
Lokesh	Lohani	5	<input type="radio"/> Present <input type="radio"/> Absent
Omkar	Jadhav	5	<input type="radio"/> Present <input type="radio"/> Absent
Prateek	Jadav	5	<input type="radio"/> Present <input type="radio"/> Absent
Rohit	Gupta	5	<input type="radio"/> Present <input type="radio"/> Absent
Sakshi	Patil	5	<input type="radio"/> Present <input type="radio"/> Absent
Samarth	Rathekar	5	<input type="radio"/> Present <input type="radio"/> Absent

Submit Attendance

Code:

attendance.php

```
<?php
session_start();

// Check if fname and lname are set in the session
if (isset($_SESSION['fname']) && isset($_SESSION['lname'])) {
    $fname = $_SESSION['fname'];
    $lname = $_SESSION['lname'];
} else {
    // Redirect to login if session variables are not set
    header("Location: login.php");
    exit();
}

// Database connection (assuming localhost, default username,
password, and database)
$servername = "localhost";
$username = "root"; // update with your db username
$password = ""; // update with your db password
$dbname = "erp";

// Create connection
$conn = new mysqli($servername, $username, $password, $dbname);
```

```
// Check connection
if ($conn->connect_error) {
    die("Connection failed: " . $conn->connect_error);
}

// Fetch student details
$sql = "SELECT fname, lname, class FROM student_details ORDER
BY fname ASC";
$result = $conn->query($sql);
?>
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <title>Mark Attendance</title>
    <style>
        body {
            font-family: 'Segoe UI', Tahoma, Geneva, sans-serif;
            background: url("attend.png");
            background-size: cover;
            background-position: center;
            background-repeat: no-repeat;
            background-attachment: fixed;
            color: #333;
            text-align: center;
            padding: 20px;
        }
        h2 {
            color: #0078D7;
            font-size: 2.5em;
            text-shadow: 1px 1px 5px rgba(0, 0, 0, 0.2);
        }
        table {
            width: 80%;
            margin: 20px auto;
            border-collapse: collapse;
            background: rgba(255, 255, 255, 0.8);
            box-shadow: 0px 10px 30px rgba(0, 0, 0, 0.1);
            border-radius: 12px;
            overflow: hidden;
        }
        th, td {
            padding: 15px;
            text-align: center;
            border-bottom: 1px solid #ddd;
        }
    </style>
</head>
<body>
    <h2>Mark Attendance</h2>
    <table>
        <tr>
            <th>Name</th>
            <th>Class</th>
            <th>Status</th>
        </tr>
        <tr>
            <td>John Doe</td>
            <td>Grade 10</td>
            <td>Present</td>
        </tr>
        <tr>
            <td>Jane Smith</td>
            <td>Grade 11</td>
            <td>Absent</td>
        </tr>
        <tr>
            <td>Mike Johnson</td>
            <td>Grade 12</td>
            <td>Present</td>
        </tr>
    </table>
</body>
</html>
```

```

    }
    th {
        background-color: #0078D7;
        color: white;
        font-size: 1.1em;
    }
    tr:nth-child(even) {
        background-color: rgba(220, 235, 255, 0.5);
    }
    button {
        background: rgba(255, 255, 255, 0.7);
        border: 2px solid #0078D7;
        border-radius: 20px;
        padding: 10px 20px;
        margin-top: 20px;
        font-size: 1em;
        color: #0078D7;
        cursor: pointer;
        transition: background 0.3s ease;
        box-shadow: 0px 4px 10px rgba(0, 0, 0, 0.2);
        text-shadow: 0px 0px 5px rgba(255, 255, 255, 0.5);
    }
    button:hover {
        background: #0078D7;
        color: #fff;
        box-shadow: 0px 8px 20px rgba(0, 120, 215, 0.5);
    }
    input[type="radio"] {
        transform: scale(1.2);
        accent-color: #0078D7;
        margin: 0 10px;
    }
}

```

</style>

</head>

<body>

<h2>Mark Attendance</h2>

<form action="mark_attendance.php" method="POST">

<table>

<tr>

<th>First Name</th>

<th>Last Name</th>

<th>Class</th>

<th>Attendance</th>

</tr>

```


<?php
if ($result->num_rows > 0) {
    // Output data for each row
    while ($row = $result->fetch_assoc()) {
        echo "<tr>";
        echo "<td>" . htmlspecialchars($row['fname']) .
"</td>";
        echo "<td>" . htmlspecialchars($row['lname']) .
"</td>";
        echo "<td>" . htmlspecialchars($row['class']) .
"</td>";
        echo "<td>";
        echo "<label><input type='radio'
name='attendance[" . htmlspecialchars($row['fname']) . "_" .
htmlspecialchars($row['lname']) . "]" value='Present'>
Present</label>";
        echo "<label><input type='radio'
name='attendance[" . htmlspecialchars($row['fname']) . "_" .
htmlspecialchars($row['lname']) . "]" value='Absent'>
Absent</label>";
        echo "</td>";
        echo "</tr>";
    }
} else {
    echo "<tr><td colspan='4'>No students
found.</td></tr>";
}
?>

</table>
<button type="submit" name="submit">Submit
Attendance</button>
</form>

<?php
$conn->close();
?>
</body>
</html>

```

13. Upload Marks Page

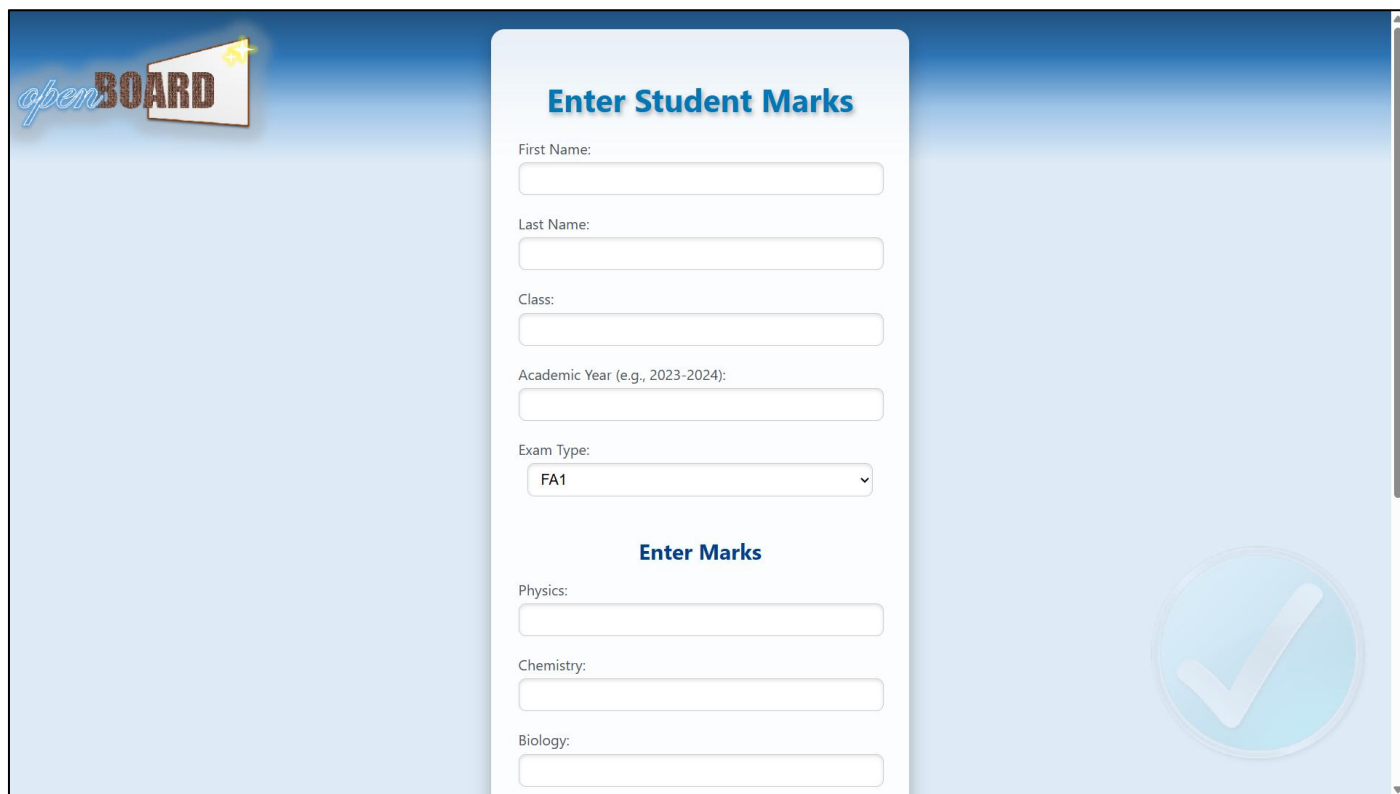

Code:

upl_marks.html

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-
scale=1.0">
  <title>::: Upload Marks :::</title>
  <style>
    /* Styling for body background */
    body {
      background: url("marks.png");
      background-size: cover;
      background-position: center;
      background-repeat: no-repeat;
      background-attachment: fixed;
      font-family: 'Segoe UI', Tahoma, Geneva, Verdana,
sans-serif;
      margin: 0;
      padding: 0;
    }

    /* Form container styling */
```

```

.form-container {
    background: rgba(255, 255, 255, 0.9);
    border-radius: 15px;
    box-shadow: 0 10px 20px rgba(0, 0, 0, 0.3);
    padding: 30px;
    width: 400px;
    margin: 20px auto; /* Center the container */
    text-align: center;
}

/* Header styling */
h1 {
    font-size: 2.2em;
    color: #0077b6; /* Ocean blue */
    margin-bottom: 20px;
    text-shadow: 2px 3px 5px rgba(0, 0, 0, 0.3);
}

h3 {
    font-size: 1.5em;
    color: #023e8a; /* Darker blue */
    margin-bottom: 15px;
}

/* Label and input field styling */
label {
    display: block;
    font-size: 1em;
    color: #495057;
    margin-bottom: 5px;
    text-align: left;
}

input, select {
    width: calc(100% - 20px);
    padding: 8px 10px;
    margin-bottom: 20px;
    border: 1px solid #ccc;
    border-radius: 8px;
    font-size: 1em;
    box-shadow: inset 0 2px 4px rgba(0, 0, 0, 0.1);
    transition: box-shadow 0.3s ease, border 0.3s ease;
}

input:focus, select:focus {
    border-color: #0077b6;
}

```



```

        box-shadow: 0 0 8px rgba(0, 119, 182, 0.5);
        outline: none;
    }

    /* Button styling */
    .frutiger-button {
        cursor: pointer;
        position: relative;
        padding: 2px;
        border-radius: 12px; /* Increased border-radius for more
rounded corners */
        border: 0;
        text-shadow: 1px 1px #000a;
        background: linear-gradient(#006caa, #00c3ff);
        box-shadow: 0px 4px 6px 0px #0008;
        /* Removed transition and animation for no effects */
    }

    .frutiger-button:hover {
        box-shadow: 0px 6px 12px 0px #0009;
    }

    .frutiger-button:active {
        box-shadow: 0px 0px 0px 0px #0000;
    }

    .inner {
        position: relative;
        inset: 0px;
        padding: 1em;
        border-radius: 10px; /* Rounded corners for inner content */
        background: radial-gradient(circle at 50% 100%, #30f8f8 10%,
#30f8f800 55%),
            linear-gradient(#00526a, #009dcd);
        overflow: hidden;
        /* Removed transition */
    }

    .top-white {
        position: absolute;
        border-radius: inherit;
        inset: 0 -8em;
        background: radial-gradient(
            circle at 50% -270%,
            #fff 45%,
            #fff6 60%,

```

```

        #fff0 60%
    );
}

.inner::after {
    content: "";
    position: absolute;
    inset: 0;
    border-radius: inherit;
}

.frutiger-button:active .inner::after {
    box-shadow: inset 0px 2px 8px -2px #000a;
}

.text {
    position: relative;
    z-index: 1;
    color: white;
    font-weight: 550;
}
</style>
</head>
<body>
    <div class="form-container">
        <h1>Enter Student Marks</h1>
        <form action="save_marks.php" method="POST">
            <label for="first_name">First Name:</label>
            <input type="text" id="first_name"
name="first_name" required>

            <label for="last_name">Last Name:</label>
            <input type="text" id="last_name" name="last_name"
required>

            <label for="class">Class:</label>
            <input type="text" id="class" name="class"
required>

            <label for="academic_year">Academic Year (e.g.,
2023-2024):</label>
            <input type="text" id="academic_year"
name="academic_year" required>

            <label for="exam_type">Exam Type:</label>
            <select id="exam_type" name="exam_type" required>

```

```

        <option value="FA1">FA1</option>
        <option value="SA1">SA1</option>
        <option value="FA2">FA2</option>
        <option value="SA2">SA2</option>
    </select>

    <h3>Enter Marks</h3>

    <label for="physics">Physics:</label>
    <input type="number" id="physics" name="physics"
min="0" max="60" required>

    <label for="chemistry">Chemistry:</label>
    <input type="number" id="chemistry"
name="chemistry" min="0" max="60" required>

    <label for="biology">Biology:</label>
    <input type="number" id="biology" name="biology"
min="0" max="60" required>

    <label for="maths">Maths:</label>
    <input type="number" id="maths" name="maths"
min="0" max="60" required>

    <label for="english">English:</label>
    <input type="number" id="english" name="english"
min="0" max="60" required>

    <label for="sst">SST:</label>
    <input type="number" id="sst" name="sst" min="0"
max="60" required>

    <label for="hindi">Hindi:</label>
    <input type="number" id="hindi" name="hindi"
min="0" max="60" required>

    <label for="computers">Computers:</label>
    <input type="number" id="computers"
name="computers" min="0" max="60" required>

    <button class="frutiger-button">
    <div class="inner">
        <div class="top-white"></div>
        <span class="text">Submit</span>
    </div>
</button>


```

```

        </form>
    </div>
</body>
</html>

```

14. Upload Class Diary Page

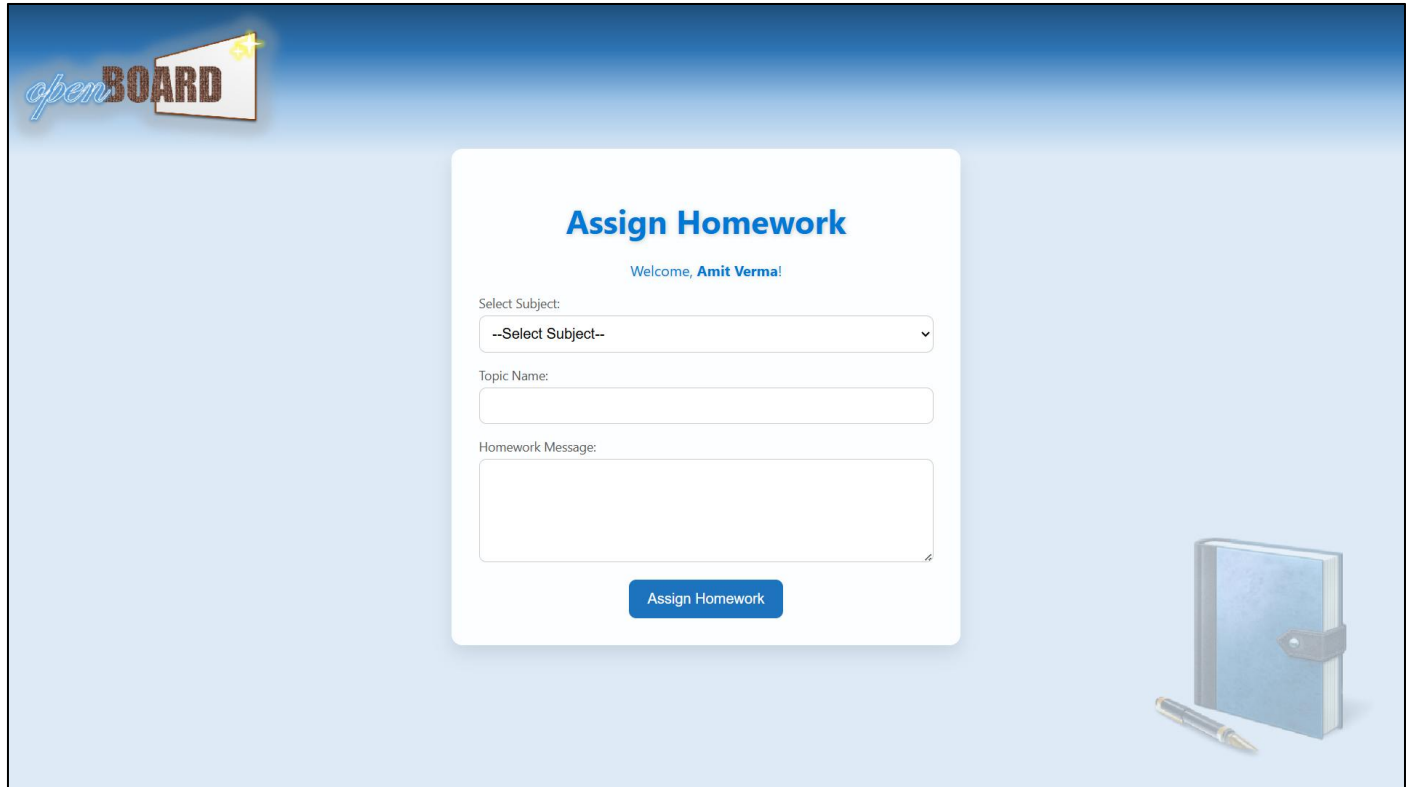

Code:

upl_class_diary.php

```

<?php
session_start();

// Check if fname and lname are set in the session
if (isset($_SESSION['fname']) && isset($_SESSION['lname'])) {
    $fname = $_SESSION['fname'];
    $lname = $_SESSION['lname'];
} else {
    header("Location: login.php");
    exit();
}

// Database connection
$host = "localhost";
$username = "root";
$password = "";
$database = "erp";

```

```

$conn = new mysqli($host, $username, $password, $database);

if ($conn->connect_error) {
    die("Connection failed: " . $conn->connect_error);
}

// Create the 'homework_details' table if it doesn't exist
$table_query = "
CREATE TABLE IF NOT EXISTS homework_details (
    id INT AUTO_INCREMENT PRIMARY KEY,
    teacher_fname VARCHAR(50),
    teacher_lname VARCHAR(50),
    subject_name VARCHAR(50),
    topic_name VARCHAR(100),
    homework_message TEXT,
    created_at TIMESTAMP DEFAULT CURRENT_TIMESTAMP
)";

if (!$conn->query($table_query)) {
    die("Error creating table: " . $conn->error);
}

// Check if form is submitted
if ($_SERVER["REQUEST_METHOD"] === "POST") {
    $subject_name = $_POST['subject_name'];
    $topic_name = $_POST['topic_name'];
    $homework_message = $_POST['homework_message'];

    // Insert the data into the database
    $stmt = $conn->prepare("INSERT INTO homework_details
(teacher_fname, teacher_lname, subject_name, topic_name,
homework_message) VALUES (?, ?, ?, ?, ?)");
    $stmt->bind_param("sssss", $fname, $lname, $subject_name,
$topic_name, $homework_message);

    if ($stmt->execute()) {
        $message = "Homework assigned successfully!";
    } else {
        $message = "Error: " . $stmt->error;
    }

    $stmt->close();
}

$conn->close();

```

```
?>
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-
scale=1.0">
  <title>Assign Homework</title>
  <style>
    /* Frutiger Aero Styling */
    body {
      font-family: 'Segoe UI', Tahoma, sans-serif;
      background: url("diary.png");
      background-size: cover;
      background-position: center;
      background-repeat: no-repeat;
      background-attachment: fixed;
      margin: 0;
      padding: 0;
      display: flex;
      justify-content: center;
      align-items: center;
      height: 100vh;
      color: #333;
    }

    h1 {
      color: #0078D7;
      text-shadow: 1px 1px 5px rgba(0, 0, 0, 0.2);
      font-size: 36px;
      margin-bottom: 20px;
    }

    form {
      background: rgba(255, 255, 255, 0.95);
      border-radius: 12px;
      padding: 30px;
      box-shadow: 0 10px 20px rgba(0, 0, 0, 0.1);
      width: 100%;
      max-width: 500px;
      text-align: center;
    }

    label {
      font-size: 14px;
      color: #555;
    }
  </style>
</head>
<body>
  <h1>Assign Homework</h1>
  <form>
    <input type="text" value="Name" />
    <input type="text" value="Email" />
    <input type="text" value="Phone" />
    <input type="text" value="Address" />
    <input type="text" value="City" />
    <input type="text" value="State" />
    <input type="text" value="Zip" />
    <input type="text" value="Country" />
    <input type="text" value="Date" />
    <input type="text" value="Time" />
    <input type="text" value="Subject" />
    <input type="text" value="Topic" />
    <input type="text" value="Question" />
    <input type="text" value="Answer" />
    <input type="text" value="Feedback" />
    <input type="text" value="Comments" />
    <input type="text" value="Notes" />
    <input type="text" value="Footer" />
  </form>
</body>
</html>
```

```

        display: block;
        margin-bottom: 5px;
        text-align: left;
    }

    input[type="text"],
    textarea,
    select {
        width: 100%;
        padding: 10px;
        font-size: 16px;
        border: 1px solid #ccc;
        border-radius: 8px;
        margin-bottom: 15px;
        box-sizing: border-box;
        transition: border-color 0.3s ease;
    }

    input[type="text"]:focus,
    textarea:focus,
    select:focus {
        border-color: #1e73be;
        outline: none;
    }

    button {
        background-color: #1e73be;
        color: white;
        border: none;
        padding: 12px 20px;
        font-size: 16px;
        border-radius: 8px;
        cursor: pointer;
        transition: background-color 0.3s ease, transform
0.2s ease;
    }

    button:hover {
        background-color: #155b8a;
        transform: scale(1.05);
    }

    p {
        color: #0078D7;
        font-size: 1.0em;
        margin-top: 10px;
    }

```

```

        text-shadow: 1px 1px 5px rgba(0, 0, 0, 0.1);
    }

    .success {
        color: #4caf50;
    }
</style>
</head>
<body>
    <form method="post">
        <h1>Assign Homework</h1>
        <p>Welcome, <strong><?php echo htmlspecialchars($fname
" " . $lname); ?></strong>!</p>

        <label for="subject_name">Select Subject:</label>
        <select id="subject_name" name="subject_name" required>
            <option value="">--Select Subject--</option>
            <option value="Physics">Physics</option>
            <option value="Chemistry">Chemistry</option>
            <option value="Biology">Biology</option>
            <option value="Maths">Maths</option>
            <option value="English">English</option>
            <option value="Hindi">Hindi</option>
            <option value="Computers">Computers</option>
            <option value="SST">SST</option>
        </select>

        <label for="topic_name">Topic Name:</label>
        <input type="text" id="topic_name" name="topic_name"
required>


        <label for="homework_message">Homework Message:</label>
        <textarea id="homework_message" name="homework_message"
rows="5" required></textarea>

        <button type="submit">Assign Homework</button>

        <?php if (isset($message)): ?>
            <p class="<?php echo strpos($message,
'success') !== false ? 'success' : ''; ?>">
                <?php echo htmlspecialchars($message); ?>
            </p>
        <?php endif; ?>
    </form>
</body>
</html>

```


15. Send Notices Page

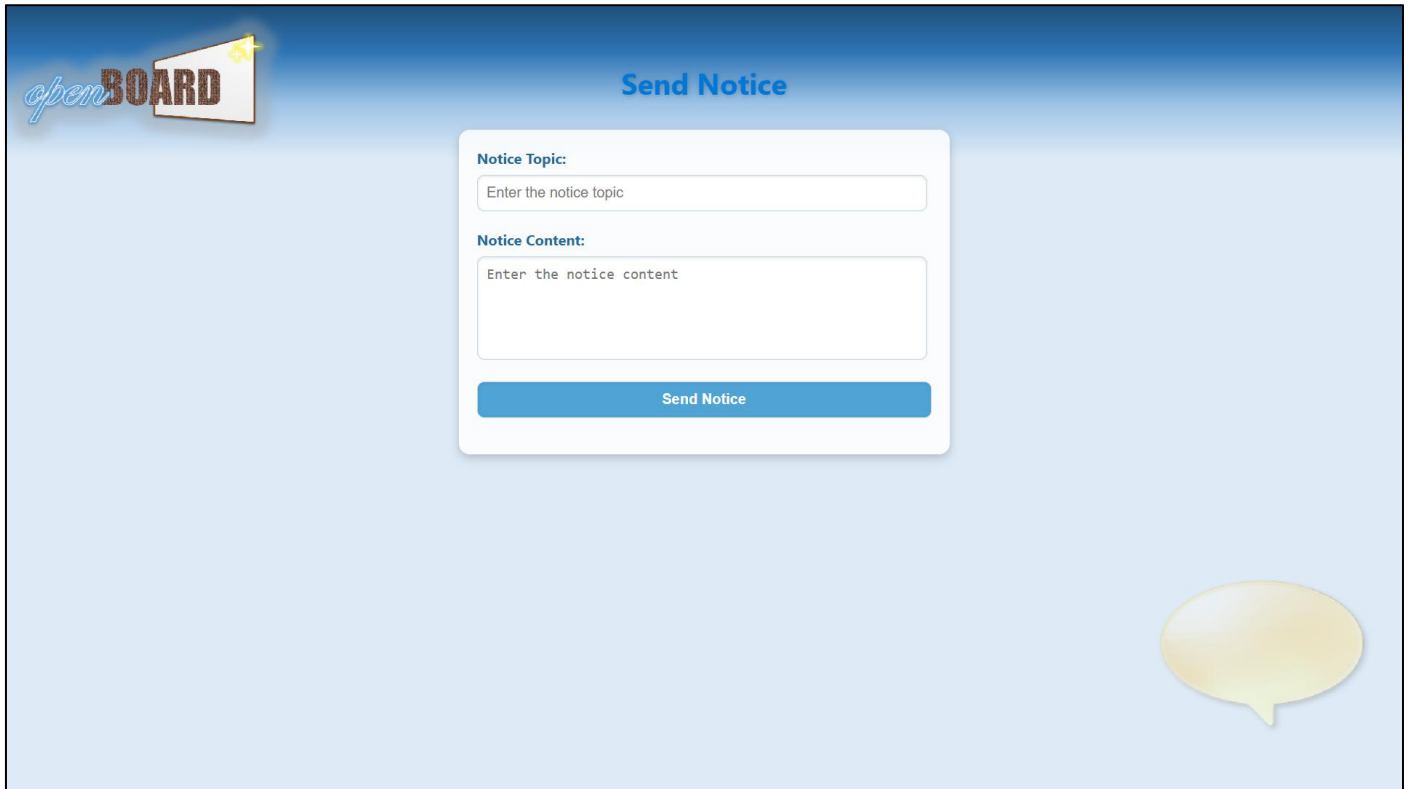

Code:

send_notices.php

```
<?php
```

```
session_start();
```

```
// Check if fname and lname are set in the session
```

```
if (isset($_SESSION['fname']) && isset($_SESSION['lname'])) {
```

```
    $fname = $_SESSION['fname'];
```

```
    $lname = $_SESSION['lname'];
```

```
} else {
```

```
    // Redirect to login if session variables are not set
```

```
    header("Location: login.php");
```

```
    exit();
```

```
}
```

```
// Database connection
```

```
$conn = new mysqli("localhost", "root", "", "erp");
```

```
// Check connection
```

```
if ($conn->connect_error) {
```

```
    die("Connection failed: " . $conn->connect_error);
```

```
}
```

```
// Verify user status
```

```

$status = '';
$sql = "SELECT status FROM login_details WHERE fname = ? AND
lname = ?";
$stmt = $conn->prepare($sql);
$stmt->bind_param("ss", $fname, $lname);
$stmt->execute();
$result = $stmt->get_result();

if ($result->num_rows > 0) {
    $row = $result->fetch_assoc();
    $status = $row['status'];
} else {
    echo "User not found.";
    exit();
}

$stmt->close();

// Handle form submission for sending notices
if ($_SERVER['REQUEST_METHOD'] === 'POST') {
    $topic = $_POST['topic'];
    $content = $_POST['content'];
    $date_time = date("Y-m-d H:i:s"); // Current date and time

    if (!empty($topic) && !empty($content)) {
        // Insert notice into the database
        $sql = "INSERT INTO notices (fname, lname, status,
topic, content, date_time) VALUES (?, ?, ?, ?, ?, ?)";
        $stmt = $conn->prepare($sql);
        $stmt->bind_param("ssssss", $fname, $lname, $status,
        $topic, $content, $date_time);

        if ($stmt->execute()) {
            echo "<p class='success'>Notice sent
successfully.</p>";
        } else {
            echo "<p class='error'>Error: " . $stmt->error .
            "</p>";
        }

        $stmt->close();
    } else {
        echo "<p class='error'>Please fill out all fields.</p>";
    }
}

```

```
// Close database connection
$conn->close();
?>

<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-
scale=1.0">
    <title>::: Send Notice :::</title>
    <style>
        /* Frutiger Aero Styling */
        body {
            font-family: 'Segoe UI', Tahoma, sans-serif;
            background: url("notices.png");
            background-size: cover;
            background-position: center;
            background-repeat: no-repeat;
            background-attachment: fixed;
            color: #333;
            margin: 0;
            padding: 0;
        }

        h1 {
            text-align: center;
            color: #0078D7;
            text-shadow: 1px 1px 5px rgba(0, 0, 0, 0.2);
            margin-top: 20px;
        }

        form {
            background: rgba(255, 255, 255, 0.85);
            margin: 30px auto;
            padding: 20px;
            border-radius: 12px;
            box-shadow: 0 4px 10px rgba(0, 0, 0, 0.2);
            max-width: 500px;
            color: #246b9c;
        }

        form label {
            font-weight: bold;
            display: block;
            margin-bottom: 8px;

```

```

}

form input, form textarea, form button {
    width: 100%;
    padding: 10px;
    margin-bottom: 20px;
    border: 1px solid #bcd4e6;
    border-radius: 8px;
    font-size: 16px;
    box-shadow: inset 0 1px 3px rgba(0, 0, 0, 0.1);
}

form textarea {
    resize: none;
}

form button {
    background-color: #4fa3d5;
    color: white;
    font-weight: bold;
    cursor: pointer;
    transition: background-color 0.3s ease;
}

form button:hover {
    background-color: #246b9c;
}

.success {
    text-align: center;
    color: #28a745;
    font-weight: bold;
}

.error {
    text-align: center;
    color: #dc3545;
    font-weight: bold;
}

```

```

</style>

```

```

</head>

```

```

<body>

```

```

<br>

```

```

<br>

```

```

    <h1>Send Notice</h1>

```

```

    <form method="POST" action="">

```

```


        <label for="topic">Notice Topic:</label>
        <input type="text" style="width: 474px;" id="topic"
name="topic" placeholder="Enter the notice topic" required>

        <label for="content">Notice Content:</label>
        <textarea id="content" style="width: 474px;"
name="content" rows="5" placeholder="Enter the notice content"
required></textarea>

        <button type="submit">Send Notice</button>
    </form>
</body>
</html>

```

16. Messages Page

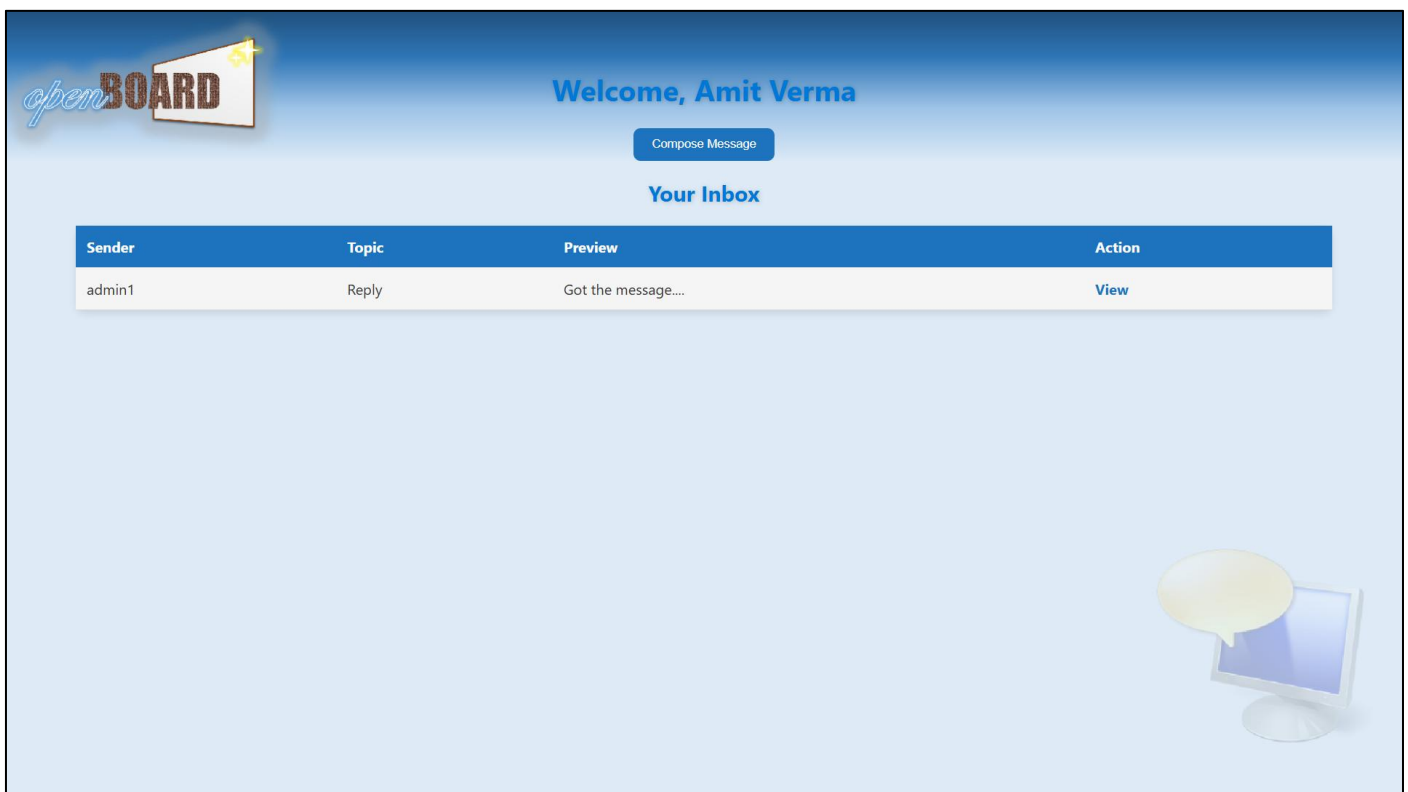

Code:

```

msgs.php
<?php
session_start();

// Check if fname and lname are set in the session
if (isset($_SESSION['fname']) && isset($_SESSION['lname'])) {
    $fname = $_SESSION['fname'];
    $lname = $_SESSION['lname'];
} else {

```

```

    // Redirect to login if session variables are not set
    header("Location: login.php");
    exit();
}

// Database connection
$conn = new mysqli('localhost', 'root', '', 'erp');
if ($conn->connect_error) {
    die("Connection failed: " . $conn->connect_error);
}

// Get username from login_details table
$sql = "SELECT Uname FROM login_details WHERE fname = ? AND lname = ?";
$stmt = $conn->prepare($sql);
$stmt->bind_param("ss", $fname, $lname);
$stmt->execute();
$result = $stmt->get_result();

if ($result->num_rows > 0) {
    $row = $result->fetch_assoc();
    $username = $row['Uname'];
} else {
    echo "User not found.";
    exit();
}

// Create table for messages if not exists
$sql_create_table = "
CREATE TABLE IF NOT EXISTS messages (
    id INT AUTO_INCREMENT PRIMARY KEY,
    sender_username VARCHAR(50) NOT NULL,
    receiver_username VARCHAR(50) NOT NULL,
    message_topic VARCHAR(100) NOT NULL,
    message_content TEXT NOT NULL,
    is_read TINYINT(1) DEFAULT 0,
    sent_at TIMESTAMP DEFAULT CURRENT_TIMESTAMP
)";
$conn->query($sql_create_table);

// Handle form submission to send messages
if ($_SERVER['REQUEST_METHOD'] == 'POST' && isset($_POST['send_message'])) {
    $receiver_username = $_POST['receiver_username'];
    $message_topic = $_POST['message_topic'];
    $message_content = $_POST['message_content'];
}

```

```

    $sql_insert_message = "INSERT INTO messages
(sender_username, receiver_username, message_topic,
message_content) VALUES (?, ?, ?, ?)";
    $stmt = $conn->prepare($sql_insert_message);
    $stmt->bind_param("ssss", $username, $receiver_username,
$message_topic, $message_content);

    if ($stmt->execute()) {
        echo "Message sent successfully!";
    } else {
        echo "Error: " . $stmt->error;
    }
}

// Fetch messages for the user
$sql_fetch_messages = "SELECT id, sender_username,
message_topic, message_content, is_read FROM messages WHERE
receiver_username = ? ORDER BY sent_at DESC";
$stmt = $conn->prepare($sql_fetch_messages);
$stmt->bind_param("s", $username);
$stmt->execute();
$messages = $stmt->get_result();
?>

<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-
scale=1.0">
    <title>Messaging System</title>
    <style>
        /* Frutiger Aero Styling */
        body {
            font-family: 'Segoe UI', Tahoma, sans-serif;
            background: url("msgs.png");
            background-size: cover;
            background-position: center;
            background-repeat: no-repeat;
            background-attachment: fixed;
            color: #333;
            margin: 0;
            padding: 0;
        }

```

```

h1, h2 {
    text-align: center;
    color: #0078D7;
    text-shadow: 1px 1px 5px rgba(0, 0, 0, 0.2);
}

.button-container {
    text-align: center;
    margin-top: 20px;
}

.compose-btn {
    padding: 10px 20px;
    background-color: #1e73be;
    color: white;
    border: none;
    border-radius: 8px;
    cursor: pointer;
    transition: background-color 0.3s ease;
}

.compose-btn:hover {
    background-color: #155b8a;
}

/* Modal Styles */
.modal {
    display: none;
    position: fixed;
    z-index: 1;
    left: 0;
    top: 0;
    width: 100%;
    height: 100%;
    overflow: auto;
    background-color: rgba(0,0,0,0.4);
    padding-top: 60px;
}

.modal-content {
    background-color: #fff;
    margin: 5% auto;
    padding: 20px;
    border: 1px solid #888;
    width: 80%;
    max-width: 600px;
}

```



```
        border-radius: 8px;
        box-shadow: 0 4px 8px rgba(0, 0, 0, 0.1);
    }

    .close {
        color: #aaa;
        font-size: 28px;
        font-weight: bold;
        position: absolute;
        top: 10px;
        right: 25px;
    }

    .close:hover,
    .close:focus {
        color: black;
        text-decoration: none;
        cursor: pointer;
    }

    form {
        display: flex;
        flex-direction: column;
        align-items: center;
    }

    label {
        margin: 10px 0 5px;
        color: #555;
    }

    input, textarea {
        width: 100%;
        padding: 12px;
        margin-bottom: 20px;
        border: 1px solid #ccc;
        border-radius: 8px;
        background-color: #f9f9f9;
        font-size: 16px;
        color: #333;
        box-sizing: border-box;
    }

    button {
        padding: 10px 20px;
        background-color: #1e73be;
```

```

        color: white;
        border: none;
        border-radius: 8px;
        cursor: pointer;
        transition: background-color 0.3s ease;
    }

    button:hover {
        background-color: #155b8a;
    }

    table {
        width: 90%;
        margin: 20px auto;
        border-collapse: collapse;
        background-color: rgba(255, 255, 255, 0.8);
        border-radius: 10px;
        box-shadow: 0 4px 8px rgba(0, 0, 0, 0.1);
    }

    th, td {
        padding: 12px;
        text-align: left;
        border-bottom: 1px solid #ddd;
    }

    th {
        background-color: #1e73be;
        color: white;
    }

    .unread {
        font-weight: bold;
        background-color: #e7f1fb;
    }

    .read {
        background-color: #f5f5f5;
    }

    .message-link {
        color: #1e73be;
        text-decoration: none;
        font-weight: bold;
    }

```

```

        .message-link:hover {
            text-decoration: underline;
        }
    </style>
</head>
<body>
<br>
<br>
    <h1>Welcome, <?php echo htmlspecialchars($fname . " " .
    $lname); ?></h1>

    <div class="button-container">
        <button class="compose-btn" id="composeBtn">Compose
Message</button>
    </div>

    <!-- Modal for composing a message -->
    <div id="composeModal" class="modal">
        <div class="modal-content">
            <span class="close" id="closeModal">&times;</span>
            <h2>Send a Message</h2>
            <form method="post" action="">
                <label for="receiver_username">Receiver
Username:</label>
                <input type="text" name="receiver_username"
id="receiver_username" required><br>

                <label for="message_topic">Message
Topic:</label>
                <input type="text" name="message_topic"
id="message_topic" required><br>

                <label for="message_content">Message
Content:</label><br>
                <textarea name="message_content"
id="message_content" rows="5" cols="40"
required></textarea><br>

                <button type="submit" name="send_message">Send
Message</button>
            </form>
        </div>
    </div>

    <h2>Your Inbox</h2>
    <table>

```

```

<tr>
    <th>Sender</th>
    <th>Topic</th>
    <th>Preview</th>
    <th>Action</th>
</tr>
<?php while ($row = $messages->fetch_assoc()): ?>
    <tr class="<?php echo $row['is_read'] ? 'read' :
'unread'; ?>">
        <td><?php echo
htmlspecialchars($row['sender_username']); ?></td>
        <td><?php echo
htmlspecialchars($row['message_topic']); ?></td>
        <td><?php echo
htmlspecialchars(substr($row['message_content'], 0, 50)) .
'...'; ?></td>
        <td>
            <a class="message-link"
href="view_message.php?id=<?php echo $row['id']; ?>">View</a>
        </td>
    </tr>
<?php endwhile; ?>
</table>

<script>
    // Modal functionality
    var modal = document.getElementById("composeModal");
    var btn = document.getElementById("composeBtn");
    var span = document.getElementById("closeModal");

    // Open the modal
    btn.onclick = function() {
        modal.style.display = "block";
    }

    // Close the modal
    span.onclick = function() {
        modal.style.display = "none";
    }

    // Close the modal if clicked outside of the modal
    window.onclick = function(event) {
        if (event.target == modal) {
            modal.style.display = "none";
        }
    }
}


```

</script>

</body>

</html>

17. Parent Login Page

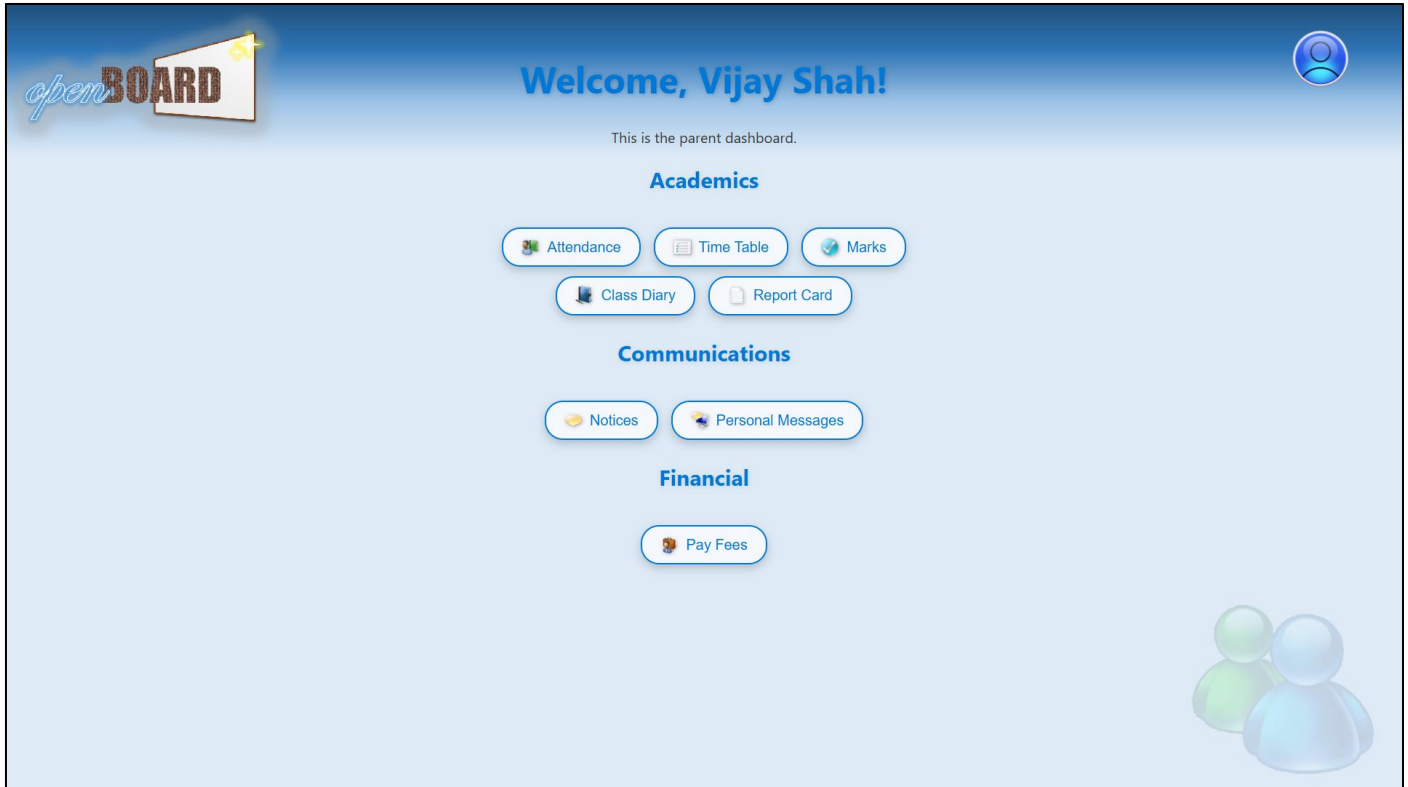

Code:

parent.php

```
<?php
```

```
session_start();
```

```
// Check if fname and lname are set in the session
```

```
if (isset($_SESSION['fname']) && isset($_SESSION['lname'])) {
```

```
    $fname = $_SESSION['fname'];
```

```
    $lname = $_SESSION['lname'];
```

```
} else {
```

```
    // Redirect to login if session variables are not set
```

```
    header("Location: login.php");
```

```
    exit();
```

```
}
```

```
?>
```

```
<!DOCTYPE html>
```

```
<html lang="en">
```

```
<head>
```

```
    <meta charset="UTF-8">
```

```

<meta name="viewport" content="width=device-width, initial-
scale=1.0">
<title>::: Parent :::</title>
<style>
  body {
    font-family: 'Segoe UI', Tahoma, sans-serif;
    background: url("main.png");
    background-size: cover;
    background-position: center;
    background-repeat: no-repeat;
    background-attachment: fixed;
    color: #333;
    text-align: center;
    padding: 20px;
  }
  h1 {
    color: #0078D7;
    font-size: 2.5em;
    text-shadow: 1px 1px 5px rgba(0, 0, 0, 0.2);
  }
  h4 {
    color: #0078D7;
    font-size: 1.5em;
    margin-top: 20px;
    text-shadow: 1px 1px 5px rgba(0, 0, 0, 0.1);
  }
  button {
    display: inline-flex;
    align-items: center;
    background: rgba(255, 255, 255, 0.7);
    border: 2px solid #0078D7;
    border-radius: 20px;
    padding: 10px 20px;
    margin: 5px;
    font-size: 1em;
    color: #0078D7;
    cursor: pointer;
    transition: background 0.3s ease;
    box-shadow: 0px 4px 10px rgba(0, 0, 0, 0.2);
    text-shadow: 0px 0px 5px rgba(255, 255, 255, 0.5);
  }
  button:hover {
    background: #0078D7;
    color: #fff;
    box-shadow: 0px 8px 20px rgba(0, 120, 215, 0.5);
  }
}

```

```

    button img {
        width: 20px;
        height: 20px;
        margin-right: 8px;
        filter: drop-shadow(1px 1px 2px rgba(0, 0, 0, 0.3));
    }
    .top-right-icon {
        position: absolute;
        top: 20px;
        right: 50px;
        width: 80px;
        height: 80px;
        cursor: pointer;
    }
    .menu {
        display: none; /* Hidden by default */
        position: absolute;
        top: 95px; /* Adjust as needed to place the menu
below the icon */
        right: 20px;
        background-color: #fff;
        border: 1px solid #ddd;
        border-radius: 8px;
        box-shadow: 0 4px 8px rgba(0, 0, 0, 0.1);
        width: 150px;
        z-index: 1000;
    }
    .menu a {
        display: block;
        padding: 10px;
        text-decoration: none;
        color: #333;
        font-size: 14px;
    }
    .menu a:hover {
        background-color: #f0f0f0;
    }
</style>
</head>
<body>

    <div id="dropdownMenu" class="menu">
        <a href="about.php">About</a>
        <a href="chng_pwd.php">Change Password</a>
        <a href="report_problem.html">Report a Problem</a>

```

```

        <a href="logout.php">Logout</a>
    </div>
    <h1>Welcome, <?php echo htmlspecialchars($fname . ' ' .
    $lname); ?>!</h1>
    <p>This is the parent dashboard.</p>

    <h4>Academics</h4>
    <button
onclick="window.location.href='student_attend.php'"> Attendance</button>
    <button
onclick="window.location.href='time_table.html'"> Time Table</button>
    <button
onclick="window.location.href='view_marks.php'"> Marks</button><br>
    <button onclick="window.location.href='class
diary.php'"> Class Diary</button>
    <button onclick="window.location.href='report.php'"> Report Card</button>

    <h4>Communications</h4>
    <button
onclick="window.location.href='view_notices.php'"> Notices</button>
    <button onclick="window.location.href='msgs.php'"> Personal Messages</button>

    <h4>Financial</h4>
    <button onclick="window.location.href='pay_fees.php'"> Pay Fees</button>

    <script>
        // Function to toggle the visibility of the menu
        function toggleMenu() {
            var menu = document.getElementById("dropdownMenu");
            menu.style.display = (menu.style.display === "none"
|| menu.style.display === "") ? "block" : "none";
        }

        // Close the menu if clicking outside of it
        document.addEventListener("click", function(event) {
            var menu = document.getElementById("dropdownMenu");
            var icon = document.querySelector(".top-right-
icon");

```




```

        if (!menu.contains(event.target)
        && !icon.contains(event.target)) {
            menu.style.display = "none";
        }
    });
</script>
</body>
</html>

```

18. Pay Fees Page

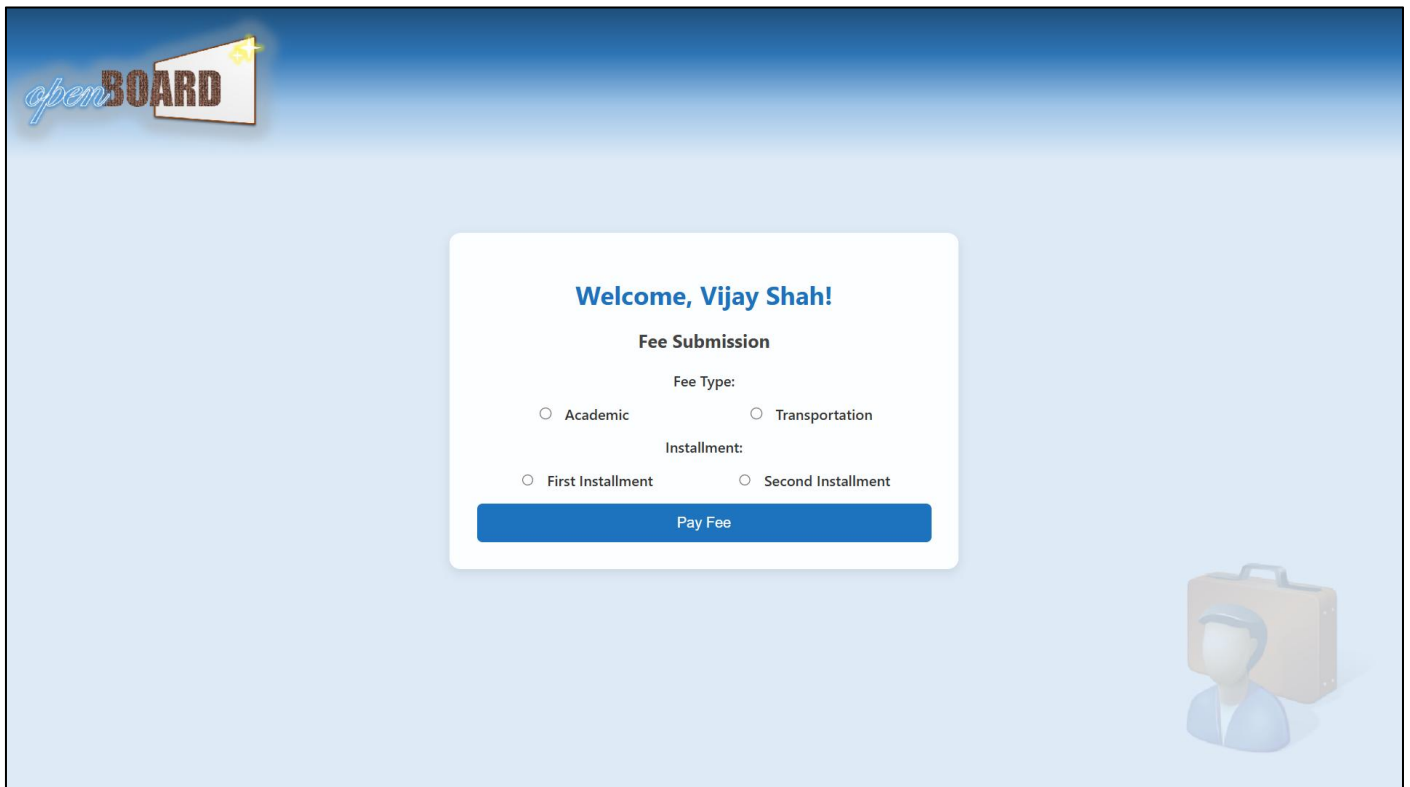

Code:

```

pay_fees.php
<?php
session_start();

// Check if fname and lname are set in the session
if (isset($_SESSION['fname']) && isset($_SESSION['lname'])) {
    $fname = $_SESSION['fname'];
    $lname = $_SESSION['lname'];
} else {
    // Redirect to login if session variables are not set
    header("Location: login.php");
    exit();
}

```

```

// Database connection (adjust your username and password
accordingly)
$servername = "localhost";
$username = "root";
$password = "";
$dbname = "erp";

// Create connection
$conn = new mysqli($servername, $username, $password, $dbname);

// Check connection
if ($conn->connect_error) {
    die("Connection failed: " . $conn->connect_error);
}

// Handle form submission
if ($_SERVER['REQUEST_METHOD'] == 'POST') {
    // Get the fee details
    $fee_type = $_POST['fee_type'];
    $installment = $_POST['installment'];
    $amount = 0;

    // Determine the amount based on fee type and installment
    if ($fee_type == 'academic') {
        if ($installment == 'first') {
            $amount = 50000;
        } elseif ($installment == 'second') {
            $amount = 50000;
        }
    } elseif ($fee_type == 'transportation') {
        if ($installment == 'first') {
            $amount = 15000;
        } elseif ($installment == 'second') {
            $amount = 15000;
        }
    }
}

// Store the fee payment in the database
$sql = "INSERT INTO fee_submission (fname, lname, fee_type,
installment, amount, payment_date)
VALUES ('$fname', '$lname', '$fee_type',
'$installment', '$amount', NOW())";

if ($conn->query($sql) === TRUE) {

```

```

        $confirmation_message = "Fee for $fee_type
($installment) installment of Rs. $amount has been successfully
paid!";
    } else {
        $confirmation_message = "Error: " . $sql . "<br>" .
$conn->error;
    }

    $conn->close();
}

?>

<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-
scale=1.0">
    <title>Fee Submission</title>
    <style>
        /* General Styles */
        body {
            font-family: 'Segoe UI', Tahoma, sans-serif;
            background: url("fee_info.png");
            background-size: cover;
            background-position: center;
            background-repeat: no-repeat;
            background-attachment: fixed;
            color: #333;
            margin: 0;
            display: flex;
            justify-content: center;
            align-items: center;
            height: 100vh;
        }

        /* Card Container */
        .container {
            background: rgba(255, 255, 255, 0.95);
            box-shadow: 0 4px 12px rgba(0, 0, 0, 0.1);
            border-radius: 12px;
            padding: 30px;
            max-width: 500px;
            width: 90%;
            text-align: center;

```

```

}

/* Title Styling */
h1 {
    color: #1e73be;
    font-size: 28px;
    text-shadow: 1px 1px 3px rgba(255, 255, 255, 0.8);
}

h2 {
    font-size: 20px;
    color: #444;
    margin-bottom: 20px;
}

/* Form Styling */
form {
    display: flex;
    flex-direction: column;
    gap: 15px;
}

label {
    font-size: 16px;
    font-weight: 600;
    color: #333;
}

/* Adjusting the radio buttons to be side by side */
.radio-group {
    display: flex;
    justify-content: space-around;
}

.radio-group input[type="radio"] {
    margin-right: 10px;
}

input[type="submit"] {
    background-color: #1e73be;
    color: white;
    border: none;
    padding: 12px;
    font-size: 16px;
    cursor: pointer;
    border-radius: 6px;
}

```

```

        transition: background-color 0.3s ease;
    }

    input[type="submit"]:hover {
        background-color: #15679b;
    }

    /* Confirmation Message Styling */
    p {
        color: #388e3c;
        font-weight: 600;
        margin-top: 20px;
    }
</style>
</head>
<body>
    <div class="container">
        <h1>Welcome, <?php echo $fname . " " . $lname; ?>!</h1>
        <h2>Fee Submission</h2>

        <?php
        if (isset($confirmation_message)) {
            echo "<p>$confirmation_message</p>";
        }
        ?>

        <form method="POST" action="">
            <label for="fee_type">Fee Type:</label>
            <div class="radio-group">
                <label>
                    <input type="radio" name="fee_type"
value="academic" required> Academic
                </label>
                <label>
                    <input type="radio" name="fee_type"
value="transportation" required> Transportation
                </label>
            </div>

            <label for="installment">Installment:</label>
            <div class="radio-group">
                <label>
                    <input type="radio" name="installment"
value="first" required> First Installment
                </label>
                <label>

```

```

                <input type="radio" name="installment"
value="second" required> Second Installment
            </label>
        </div>

        <input type="submit" value="Pay Fee">
    </form>
</div>
</body>
</html>

```

19. Admin Login Page



Code:

```

admin.php
<?php
session_start();

// Check if fname and lname are set in the session
if (isset($_SESSION['fname']) && isset($_SESSION['lname'])) {
    $fname = $_SESSION['fname'];
    $lname = $_SESSION['lname'];
} else {
    // Redirect to login if session variables are not set
    header("Location: login.php");
    exit();
}

```

```

}
?>
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-
scale=1.0">
  <title>::: Admin :::</title>
  <style>
    body {
      font-family: 'Segoe UI', Tahoma, sans-serif;
      background: url("main.png");
      background-size: cover;
      background-position: center;
      background-repeat: no-repeat;
      background-attachment: fixed;
      color: #333;
      text-align: center;
      padding: 20px;
    }
    h1 {
      color: #0078D7;
      font-size: 2.5em;
      text-shadow: 1px 1px 5px rgba(0, 0, 0, 0.2);
    }
    h4 {
      color: #0078D7;
      font-size: 1.5em;
      margin-top: 20px;
      text-shadow: 1px 1px 5px rgba(0, 0, 0, 0.1);
    }
    button {
      display: inline-flex;
      align-items: center;
      background: rgba(255, 255, 255, 0.7);
      border: 2px solid #0078D7;
      border-radius: 20px;
      padding: 10px 20px;
      margin: 5px;
      font-size: 1em;
      color: #0078D7;
      cursor: pointer;
      transition: background 0.3s ease;
      box-shadow: 0px 4px 10px rgba(0, 0, 0, 0.2);
      text-shadow: 0px 0px 5px rgba(255, 255, 255, 0.5);
    }
  
```

```

    }
    button:hover {
        background: #0078D7;
        color: #fff;
        box-shadow: 0px 8px 20px rgba(0, 120, 215, 0.5);
    }
    button img {
        width: 20px;
        height: 20px;
        margin-right: 8px;
        filter: drop-shadow(1px 1px 2px rgba(0, 0, 0, 0.3));
    }
    .top-right-icon {
        position: absolute;
        top: 20px;
        right: 50px;
        width: 80px;
        height: 80px;
        cursor: pointer;
    }
    .menu {
        display: none; /* Hidden by default */
        position: absolute;
        top: 95px; /* Adjust as needed to place the menu
below the icon */
        right: 20px;
        background-color: #fff;
        border: 1px solid #ddd;
        border-radius: 8px;
        box-shadow: 0 4px 8px rgba(0, 0, 0, 0.1);
        width: 150px;
        z-index: 1000;
    }
    .menu a {
        display: block;
        padding: 10px;
        text-decoration: none;
        color: #333;
        font-size: 14px;
    }
    .menu a:hover {
        background-color: #f0f0f0;
    }
</style>
</head>
<body>

```



```


    <div id="dropdownMenu" class="menu">
        <a href="about.php">About</a>
        <a href="chng_pwd.php">Change Password</a>
        <a href="report_problem.html">Report a Problem</a>
        <a href="logout.php">Logout</a>
    </div>
    <h1>Welcome, <?php echo htmlspecialchars($fname . ' ' .
    $lname); ?>!</h1>
    <p>This is the admin dashboard.</p>

    <h4>Accounts Management</h4>
    <button onclick="window.location.href='add_user.php'"> Add User</button>
    <button onclick="window.location.href='del_user.html'"> Delete User</button>
    <button
onclick="window.location.href='admin_chng_pwd.php'"> Change Password</button><br>

    <h4>Communications</h4>
    <button
onclick="window.location.href='send_notices.php'"> Send Notices</button>
    <button onclick="window.location.href='msgs.php'"> Personal Messages</button>

    <h4>Financial</h4>
    <button
onclick="window.location.href='fee_payments.php'"> Fee Payments</button>

    <script>
        // Function to toggle the visibility of the menu
        function toggleMenu() {
            var menu = document.getElementById("dropdownMenu");
            menu.style.display = (menu.style.display === "none"
|| menu.style.display === "") ? "block" : "none";
        }

        // Close the menu if clicking outside of it
        document.addEventListener("click", function(event) {
            var menu = document.getElementById("dropdownMenu");
            var icon = document.querySelector(".top-right-
icon");

```

```

        if (!menu.contains(event.target)
        && !icon.contains(event.target)) {
            menu.style.display = "none";
        }
    });
</script>
</body>
</html>

```

20. Add User Page

Code:

```

add_user.php
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-
scale=1.0">
    <title>::: Add User :::</title>
    <style>
        body {
            font-family: 'Segoe UI', Tahoma, sans-serif;
            background: url("add_usr.png");
            background-size: cover;
            background-position: center;

```

```

        background-repeat: no-repeat;
        background-attachment: fixed;
        color: #fff;
        margin: 0;
        padding: 0;
        display: flex;
        justify-content: center;
        align-items: center;
        height: 100%;
        min-height: 100vh; /* Ensure the body takes the
full height */
        overflow-y: auto; /* Make page scrollable if
content overflows */
    }

    /* Center aligned container for Add User */
    .container {
        width: 60%; /* Adjust width of the container */
        background-color: rgba(255, 255, 255, 0.8); /*
White semi-transparent background */
        padding: 20px;
        border-radius: 8px;
        box-shadow: 0px 4px 8px rgba(0, 0, 0, 0.1);
        color: black; /* Black text color */
        overflow-y: auto; /* Ensure the container is
scrollable */
    }

    h2 {
        text-align: center; /* Center-align the 'Add User'
heading */
        margin-bottom: 20px;
        color: #333;
    }

    /* Style for the tab links */
    .tab {
        overflow: hidden;
        border-bottom: 1px solid #ccc;
        text-align: center;
        margin-bottom: 20px;
    }

    .tab button {
        background-color: #f1f1f1;
        border: none;

```

```

padding: 12px 24px;
cursor: pointer;
font-size: 18px;
color: #333;
margin: 0 5px;
border-radius: 8px;
transition: background-color 0.3s ease, box-shadow
0.3s ease;
}

/* Glow effect on hover */
.tab button:hover {
    background-color: #add8e6;
    box-shadow: 0 0 10px #add8e6;
}

/* Active tab button styling */
.tab button.active {
    background-color: #add8e6;
    color: #fff;
    box-shadow: 0 0 10px #add8e6;
}

/* Style for the tab content */
.tabcontent {
    display: none;
    padding: 20px;
    border-top: none;
    background-color: rgba(255, 255, 255, 0.9);
    border-radius: 10px;
    margin-top: 20px;
}

/* Style for the form inputs */
input[type="text"], input[type="number"]{
    width: 100%;
    padding: 10px;
    margin: 10px 0;
    border-radius: 5px;
    border: 1px solid #ccc;
    font-size: 16px;
}

/* Narrower submit button */
input[type="submit"] {
    cursor: pointer;

```

```

padding: 12px 24px; /* Added padding to make the button
larger */
border-radius: 12px; /* Rounded corners */
border: 0;
text-shadow: 1px 1px #000a;
background: linear-gradient(#006caa, #00c3ff);
box-shadow: 0px 4px 6px 0px #0008;
font-weight: 550;
color: white;
font-size: 16px;
outline: none; /* Remove the default outline */
transition: box-shadow 0.3s ease; /* Smooth transition for
glow effect */
}

input[type="submit"]:hover {
    box-shadow: 0px 6px 12px 0px #0009, /* Standard shadow */
               0 0 12px 4px #00c3ff; /* Glow effect */
}

input[type="submit"]:active {
    box-shadow: 0px 0px 0px 0px #0000; /* Remove shadow on active
*/
}

    /* Add some margin to the form */
    form {
        padding: 20px;
    }
</style>
</head>
<body>

<?php
// Database connection
$servername = "localhost";
$username = "root"; // Default username for XAMPP
$password = ""; // Default password for XAMPP
$dbname = "erp";

// Create connection
$conn = new mysqli($servername, $username, $password, $dbname);

// Check connection
if ($conn->connect_error) {
    die("Connection failed: " . $conn->connect_error);
}

```

```

}

// Function to insert data into tables
function insertData($table, $data) {
    global $conn;
    $columns = implode(", ", array_keys($data));
    $values = implode("'", array_values($data));
    $sql = "INSERT INTO $table ($columns) VALUES ('$values')";
    if ($conn->query($sql) === TRUE) {
        echo "<script>alert('Data submitted successfully!');</script>";
    } else {
        echo "Error: " . $sql . "<br>" . $conn->error;
    }
}

// Handle form submission
if ($_SERVER["REQUEST_METHOD"] == "POST") {
    $formType = $_POST['form_type'];
    $loginData = [
        'uname' => $_POST['username'],
        'pwd' => $_POST['password'],
        'fname' => $_POST['login_fname'],
        'lname' => $_POST['login_lname'],
        'status' => $_POST['status']
    ];

    // Insert into login_details table
    insertData('login_details', $loginData);

    switch ($formType) {
        case 'student':
            $studentData = [
                'fname' => $_POST['student_fname'],
                'lname' => $_POST['student_lname'],
                'phone' => $_POST['student_phone'],
                'address' => $_POST['student_address'],
                'class' => $_POST['student_class'],
                'gender' => $_POST['student_gender'],
                'blood_group' => $_POST['student_blood_group']
            ];
            insertData('student_details', $studentData);
            break;

        case 'parent':
            $parentData = [

```

```

        'fname' => $_POST['parent_fname'],
        'lname' => $_POST['parent_lname'],
        'stud_fname' => $_POST['student_fname'],
        'stud_lname' => $_POST['student_lname'],
        'phone' => $_POST['parent_phone'],
        'gender' => $_POST['parent_gender']
    ];
    insertData('parent_details', $parentData);
    break;

```

```

case 'teacher':
    $teacherData = [
        'fname' => $_POST['teacher_fname'],
        'lname' => $_POST['teacher_lname'],
        'address' => $_POST['teacher_address'],
        'phone' => $_POST['teacher_phone'],
        'subject' => $_POST['teacher_subject'],
        'gender' => $_POST['teacher_gender'],
        'blood_group' => $_POST['teacher_blood_group'],
        'class' => $_POST['teacher_class']
    ];
    insertData('teacher_details', $teacherData);
    break;

```

```

case 'admin':
    $adminData = [
        'fname' => $_POST['admin_fname'],
        'lname' => $_POST['admin_lname'],
        'address' => $_POST['admin_address'],
        'phone' => $_POST['admin_phone'],
        'gender' => $_POST['admin_gender'],
        'blood_group' => $_POST['admin_blood_group']
    ];
    insertData('admin_details', $adminData);
    break;

```

```

}

```

```

}
?>

```

```

<div class="container">

```

```

    <h2>Add User</h2>

```

```

    <div class="tab">

```

```

        <button class="tablinks" onclick="openTab(event,
        'Tab1')">Add Student</button>

```

```

        <button class="tablinks" onclick="openTab(event,
'Tab2')">Add Parent</button>
        <button class="tablinks" onclick="openTab(event,
'Tab3')">Add Teacher</button>
        <button class="tablinks" onclick="openTab(event,
'Tab4')">Add Admin</button>
    </div>

    <!-- Add Student -->
    <div id="Tab1" class="tabcontent">
        <h3>Add Student Details</h3>
        <form method="post">
            <input type="hidden" name="form_type"
value="student">
            <p><b>Login Details</b></p>
            Username: <input type="text" name="username"><br>
            Password: <input type="text" name="password"><br>
            First Name: <input type="text"
name="login_fname"><br>
            Last Name: <input type="text"
name="login_lname"><br>
            Status: <input type="text" name="status"
value="Student" readonly><br>
            <p><b>Student Details</b></p>
            First Name: <input type="text"
name="student_fname"><br>
            Last Name: <input type="text"
name="student_lname"><br>
            Phone: <input type="text" name="student_phone"><br>
            Address: <input type="text"
name="student_address"><br>
            Class: <input type="number"
name="student_class"><br>
            Gender: <input type="text"
name="student_gender"><br>
            Blood Group: <input type="text"
name="student_blood_group"><br>
            <input type="submit" value="Submit" style="display:
block; margin: 0 auto; padding: 12px 24px; border-radius: 12px;
border: 0; background: linear-gradient(#006caa, #00c3ff); color:
white; font-weight: 550; font-size: 16px; cursor: pointer;">

        </form>
    </div>

    <!-- Add Parent -->

```



```

<div id="Tab2" class="tabcontent">
  <h3>Add Parent Details</h3>
  <form method="post">
    <input type="hidden" name="form_type"
value="parent">
    <p><b>Login Details</b></p>
    Username: <input type="text" name="username"><br>
    Password: <input type="text" name="password"><br>
    First Name: <input type="text"
name="login_fname"><br>
    Last Name: <input type="text"
name="login_lname"><br>
    Status: <input type="text" name="status"
value="Parent" readonly><br>
    <p><b>Parent Details</b></p>
    First Name: <input type="text"
name="parent_fname"><br>
    Last Name: <input type="text"
name="parent_lname"><br>
    Student First Name: <input type="text"
name="student_fname"><br>
    Student Last Name: <input type="text"
name="student_lname"><br>
    Phone: <input type="text" name="parent_phone"><br>
    Gender: <input type="text"
name="parent_gender"><br>
    <input type="submit" value="Submit" style="display:
block; margin: 0 auto; padding: 12px 24px; border-radius: 12px;
border: 0; background: linear-gradient(#006caa, #00c3ff); color:
white; font-weight: 550; font-size: 16px; cursor: pointer;">
  </form>
</div>

```

```

<!-- Add Teacher -->
<div id="Tab3" class="tabcontent">
  <h3>Add Teacher Details</h3>
  <form method="post">
    <input type="hidden" name="form_type"
value="teacher">
    <p><b>Login Details</b></p>
    Username: <input type="text" name="username"><br>
    Password: <input type="text" name="password"><br>
    First Name: <input type="text"
name="login_fname"><br>
    Last Name: <input type="text"
name="login_lname"><br>

```

```

        Status: <input type="text" name="status"
value="Teacher" readonly><br>
        <p><b>Teacher Details</b></p>
        First Name: <input type="text"
name="teacher_fname"><br>
        Last Name: <input type="text"
name="teacher_lname"><br>
        Address: <input type="text"
name="teacher_address"><br>
        Phone: <input type="text" name="teacher_phone"><br>
        Subject: <input type="text"
name="teacher_subject"><br>
        Gender: <input type="text"
name="teacher_gender"><br>
        Blood Group: <input type="text"
name="teacher_blood_group"><br>
        Class: <input type="number"
name="teacher_class"><br>
        <input type="submit" value="Submit" style="display:
block; margin: 0 auto; padding: 12px 24px; border-radius: 12px;
border: 0; background: linear-gradient(#006caa, #00c3ff); color:
white; font-weight: 550; font-size: 16px; cursor: pointer;">
    </form>
    </div>

    <!-- Add Admin -->
    <div id="Tab4" class="tabcontent">
        <h3>Add Admin Details</h3>
        <form method="post">
            <input type="hidden" name="form_type"
value="admin">
            <p><b>Login Details</b></p>
            Username: <input type="text" name="username"><br>
            Password: <input type="text" name="password"><br>
            First Name: <input type="text"
name="login_fname"><br>
            Last Name: <input type="text"
name="login_lname"><br>
            Status: <input type="text" name="status"
value="Admin" readonly><br>
            <p><b>Admin Details</b></p>
            First Name: <input type="text"
name="admin_fname"><br>
            Last Name: <input type="text"
name="admin_lname"><br>
            Phone: <input type="text" name="admin_phone"><br>

```

```

        Gender: <input type="text" name="admin_gender"><br>
        Blood Group: <input type="text"
name="admin_blood_group"><br>
        <input type="submit" value="Submit" style="display:
block; margin: 0 auto; padding: 12px 24px; border-radius: 12px;
border: 0; background: linear-gradient(#006caa, #00c3ff); color:
white; font-weight: 550; font-size: 16px; cursor: pointer;">
    </form>
    </div>

</div>


<script>
    function openTab(evt, tabName) {
        var i, tabcontent, tablinks;
        tabcontent =
document.getElementsByTagName("tabcontent");
        for (i = 0; i < tabcontent.length; i++) {
            tabcontent[i].style.display = "none";
        }
        tablinks = document.getElementsByTagName("tablinks");
        for (i = 0; i < tablinks.length; i++) {
            tablinks[i].className =
tablinks[i].className.replace(" active", "");
        }
        document.getElementById(tabName).style.display =
"block";
        evt.currentTarget.className += " active";
    }

    // Set default active tab
    document.getElementsByTagName("tablinks")[0].click();
</script>

</body>
</html>
<?php $conn->close(); ?>

```

21. Delete User Page

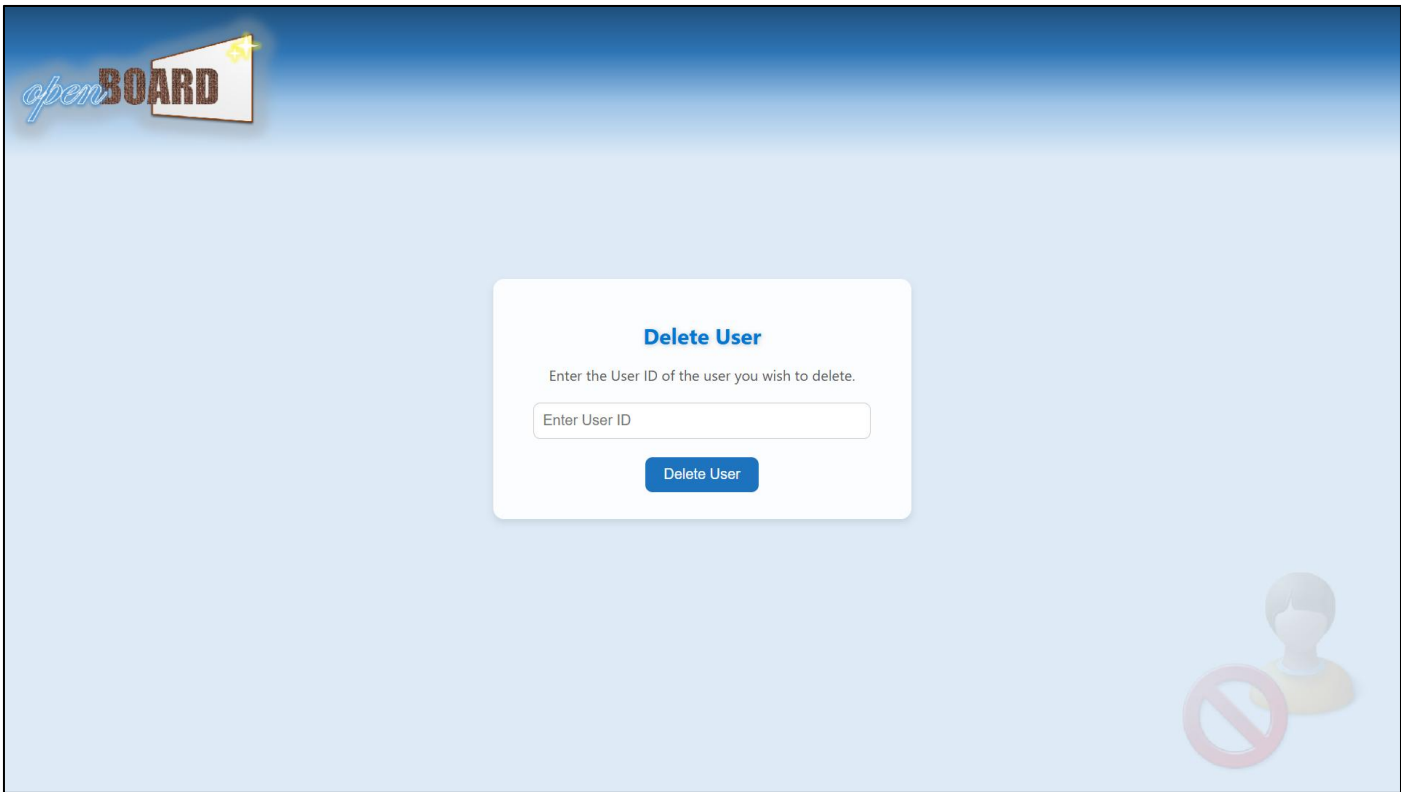

Code:

```
del_user.html
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="UTF-8">
  <meta name="viewport" content="width=device-width, initial-
scale=1.0">
  <title>::: Admin - Delete User :::</title>
  <style>
    /* General Body Styling */
    body {
      font-family: 'Segoe UI', Tahoma, sans-serif;
      background: url("del_user.png");
      background-size: cover;
      background-position: center;
      background-repeat: no-repeat;
      background-attachment: fixed;
      color: #333;
      margin: 0;
      padding: 0;
      display: flex;
      justify-content: center;
      align-items: center;
      height: 100vh;
    }
  </style>
</head>
<body>
  <div class="container">
    <div class="row">
      <div class="col">
        <div class="card">
          <div class="card-header">
            <h3>Delete User</h3>
          </div>
          <div class="card-body">
            <div class="text">
              <p>Are you sure you want to delete this user?</p>
            </div>
            <div class="form">
              <input type="button" value="Yes" />
              <input type="button" value="No" />
            </div>
          </div>
        </div>
      </div>
    </div>
  </div>
</body>
</html>
```

```

/* Centered Container */
.container {
    background: rgba(255, 255, 255, 0.9);
    box-shadow: 0 4px 8px rgba(0, 0, 0, 0.1);
    border-radius: 12px;
    padding: 30px;
    text-align: center;
    max-width: 400px;
    width: 100%;
}

/* Title Styling */
h1 {
    font-size: 24px;
    color: #0078D7;
    margin-bottom: 10px;
    text-shadow: 1px 1px 5px rgba(0, 0, 0, 0.2);
}

/* Description Styling */
p {
    font-size: 16px;
    color: #555;
    margin-bottom: 20px;
}

/* Form Styling */
form input[type="text"] {
    width: 100%;
    padding: 10px;
    margin-bottom: 20px;
    font-size: 16px;
    border: 1px solid #ccc;
    border-radius: 8px;
    transition: border-color 0.3s ease, box-shadow 0.3s
ease;
}

form input[type="text"]:focus {
    border-color: #1e73be;
    box-shadow: 0 0 5px rgba(30, 115, 190, 0.5);
    outline: none;
}

form button {

```

```

        background-color: #1e73be;
        color: #fff;
        border: none;
        padding: 10px 20px;
        font-size: 16px;
        border-radius: 8px;
        cursor: pointer;
        transition: background-color 0.3s ease, transform
0.2s ease;
    }

    form button:hover {
        background-color: #155b8a;
        transform: scale(1.05);
    }
</style>
</head>
<body>
    <div class="container">
        <h1>Delete User</h1>
        <p>Enter the User ID of the user you wish to
delete.</p>
        <form method="POST" action="del_user.php">
            <input type="text" style="width:350px;"
name="user_id" placeholder="Enter User ID" required>
            <button type="submit">Delete User</button>
        </form>
    </div>
</body>
</html>

del_user.php
<?php
// Connect to the database
$servername = "localhost";
$username = "root"; // your DB username
$password = ""; // your DB password
$dbname = "erp"; // your database name

$conn = new mysqli($servername, $username, $password, $dbname);

// Check connection
if ($conn->connect_error) {
    die("Connection failed: " . $conn->connect_error);
}

```

```
// Check if form is submitted
if ($_SERVER["REQUEST_METHOD"] == "POST") {
    $user_id = $_POST['user_id'];


    // Check if the user exists
    $check_sql = "SELECT * FROM login_details WHERE Uname = '$user_id'";
    $result = $conn->query($check_sql);

    if ($result->num_rows > 0) {
        // Delete the user
        $delete_sql = "DELETE FROM login_details WHERE Uname = '$user_id'";

        if ($conn->query($delete_sql) === TRUE) {
            echo "User deleted successfully!";
        } else {
            echo "Error deleting user: " . $conn->error;
        }
    } else {
        echo "User ID not found!";
    }
}

// Close the connection
$conn->close();
?>
```

22. Admin Change Password Page

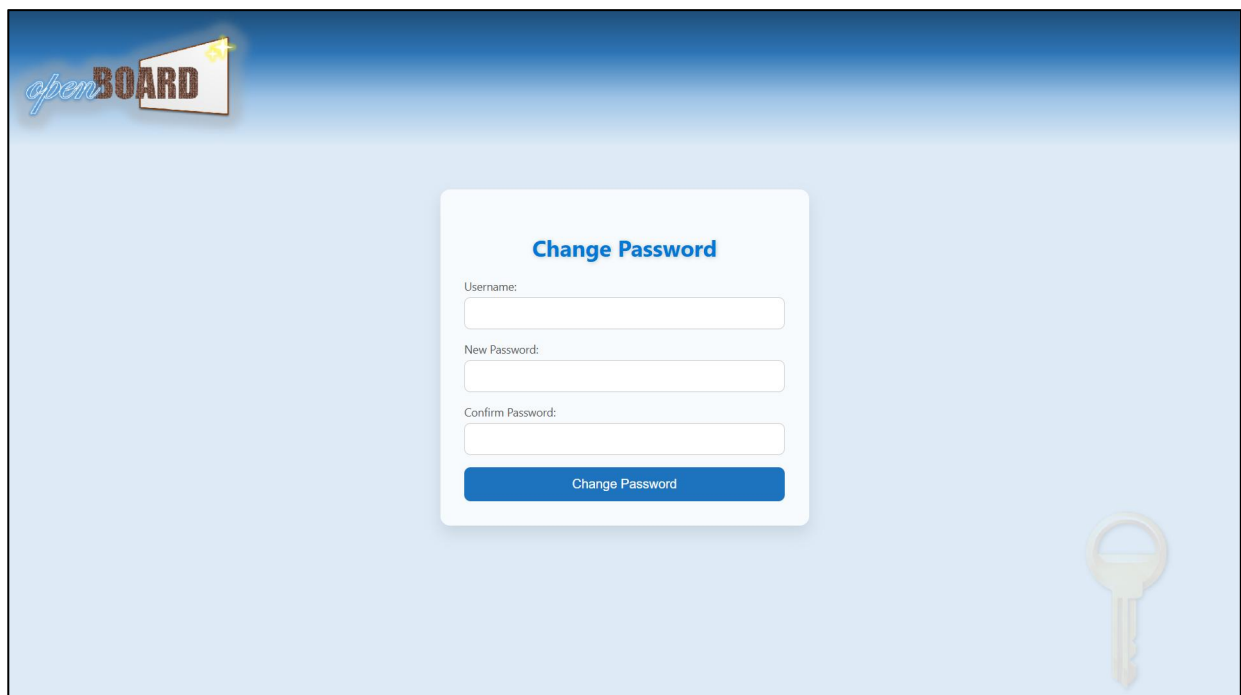

Code:

admin_chng_pwd

```
<?php
// PHP code remains unchanged for server-side logic
$servername = "localhost";
$username = "root";
$password = "";
$dbname = "erp";

$conn = new mysqli($servername, $username, $password, $dbname);

if ($conn->connect_error) {
    die("Connection failed: " . $conn->connect_error);
}

if ($_SERVER['REQUEST_METHOD'] == 'POST') {
    $uname = $_POST['username'];
    $new_password = $_POST['password'];
    $confirm_password = $_POST['confirm_password'];

    if ($new_password === $confirm_password) {
        $stmt = $conn->prepare("SELECT * FROM login_details
WHERE Uname = ?");
        $stmt->bind_param("s", $uname);
        $stmt->execute();
        $result = $stmt->get_result();

        if ($result->num_rows > 0) {
            $stmt = $conn->prepare("UPDATE login_details SET
pwd = ? WHERE Uname = ?");
            $stmt->bind_param("ss", $new_password, $uname);

            if ($stmt->execute()) {
                $message = "Password successfully updated.";
            } else {
                $message = "Error updating password.";
            }
        } else {
            $message = "Username not found.";
        }
    } else {
        $message = "Passwords do not match.";
    }
    $stmt->close();
}
```



```

$conn->close();
?>
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-
scale=1.0">
    <title>Change Password</title>
    <style>
        /* Frutiger Aero Styling */
        body {
            font-family: 'Segoe UI', Tahoma, sans-serif;
            background: url("pwd.png");
            background-size: cover;
            background-position: center;
            background-repeat: no-repeat;
            background-attachment: fixed;
            margin: 0;
            padding: 0;
            display: flex;
            justify-content: center;
            align-items: center;
            height: 100vh;
            color: #333;
        }

        h2 {
            color: #0078D7;
            text-shadow: 1px 1px 5px rgba(0, 0, 0, 0.2);
            font-size: 28px;
            margin-bottom: 20px;
        }

        form {
            background: rgba(255, 255, 255, 0.8);
            border-radius: 12px;
            padding: 30px;
            box-shadow: 0 10px 20px rgba(0, 0, 0, 0.1);
            width: 100%;
            max-width: 400px;
            text-align: center;
        }

        label {

```

```

        font-size: 14px;
        color: #555;
        display: block;
        margin-bottom: 5px;
        text-align: left;
    }

    input[type="text"],
    input[type="password"] {
        width: 100%;
        padding: 10px;
        font-size: 16px;
        border: 1px solid #ccc;
        border-radius: 8px;
        margin-bottom: 15px;
        box-sizing: border-box;
        transition: border-color 0.3s ease;
    }

    input[type="text"]:focus,
    input[type="password"]:focus {
        border-color: #1e73be;
        outline: none;
    }

    button {
        background-color: #1e73be;
        color: white;
        border: none;
        padding: 12px 20px;
        font-size: 16px;
        border-radius: 8px;
        cursor: pointer;
        transition: background-color 0.3s ease;
        width: 100%;
    }

    button:hover {
        background-color: #155b8a;
    }

    p {
        font-size: 14px;
        color: #d32f2f;
        margin-top: 10px;
    }

```

```

</style>
</head>
<body>
    <form method="POST" action="">
        <h2>Change Password</h2>
        <label for="username">Username:</label>
        <input type="text" id="username" name="username"
required>

        <label for="password">New Password:</label>
        <input type="password" id="password" name="password"
required>

        <label for="confirm_password">Confirm Password:</label>
        <input type="password" id="confirm_password"
name="confirm_password" required>

        <button type="submit">Change Password</button>

        <?php if (isset($message)): ?>
            <p><?php echo htmlspecialchars($message); ?></p>
        <?php endif; ?>
    </form>
</body>
</html>

```

23. Fee Payment Details Page



Fee Submission Records

Welcome, Dr. Viraj Kapse!

Parent Name	Fee Type	Installment	Amount (Rs.)	Payment Date
Vijay Shah	Academic	First	50000	2024-12-05 18:21:02
Vijay Shah	Transportation	Second	15000	2024-12-05 18:21:42
Vijay Shah	Transportation	First	15000	2024-12-05 18:22:01

Code:

fee_payments.php

```
<?php
session_start();

// Check if the user is logged in
if (!isset($_SESSION['fname']) || !isset($_SESSION['lname'])) {
    // Redirect to login if session variables are not set
    header("Location: login.php");
    exit();
}

// Database connection (adjust your username and password
accordingly)
$servername = "localhost";
$username = "root";
$password = "";
$dbname = "erp";

// Create connection
$conn = new mysqli($servername, $username, $password, $dbname);

// Check connection
if ($conn->connect_error) {
    die("Connection failed: " . $conn->connect_error);
}

// Retrieve fee submission data
$sql = "SELECT * FROM fee_submission";
$result = $conn->query($sql);

$conn->close();
?>

<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-
scale=1.0">
    <title>Fee Submission Records</title>
    <style>
        /* General Styling */
        body {
            font-family: 'Segoe UI', Tahoma, sans-serif;
```

```

        background: url("fee_info.png");
        background-size: cover;
        background-position: center;
        background-repeat: no-repeat;
        background-attachment: fixed;
        color: #333;
        display: flex;
        justify-content: center;
        align-items: center;
        height: 100vh;
        margin: 0;
    }

    /* Card Container */
    .container {
        background: rgba(255, 255, 255, 0.95);
        box-shadow: 0 4px 12px rgba(0, 0, 0, 0.1);
        border-radius: 12px;
        padding: 30px;
        max-width: 800px;
        width: 90%;
        text-align: left;
    }

    /* Title Styling */
    h1 {
        font-size: 30px;
        color: #1e73be;
        text-align: center;
        margin-bottom: 20px;
        text-shadow: 1px 1px 3px rgba(255, 255, 255, 0.8);
    }

    h2 {
        font-size: 22px;
        color: #444;
        margin-bottom: 20px;
        text-align: center;
    }

    /* Table Styling */
    table {
        width: 100%;
        border-collapse: collapse;
        margin-top: 20px;
    }

```

```

    table, th, td {
        border: 1px solid #ccc;
        border-radius: 8px;
    }

    th, td {
        padding: 12px;
        text-align: left;
    }

    th {
        background-color: #f0f8ff;
        color: #1e73be;
        font-weight: bold;
    }

    td {
        background-color: #fafafa;
        color: #333;
    }

    tr:nth-child(even) td {
        background-color: #f9f9f9;
    }

    tr:hover td {
        background-color: #e3f2fd;
        cursor: pointer;
    }

    /* Empty Data Styling */
    .no-data {
        text-align: center;
        color: #777;
    }
</style>
</head>
<body>
    <div class="container">
        <h1>Fee Submission Records</h1>
        <h2>Welcome, <?php echo $_SESSION['fname'] . " " .
$_SESSION['lname']; ?>!</h2>

        <table>
            <thead>


```

```


        <tr>
            <th>Parent Name</th>
            <th>Fee Type</th>
            <th>Installment</th>
            <th>Amount (Rs.)</th>
            <th>Payment Date</th>
        </tr>
    </thead>
    <tbody>
        <?php
            // Check if there are any records
            if ($result->num_rows > 0) {
                // Output data for each row
                while($row = $result->fetch_assoc()) {
                    echo "<tr>
                        <td>" . $row['fname'] . " " .
$row['lname'] . "</td>
                        <td>" .
ucfirst($row['fee_type']) . "</td>
                        <td>" .
ucfirst($row['installment']) . "</td>
                        <td>" . $row['amount'] . "</td>
                        <td>" . $row['payment_date'] .
"</td>
                        </tr>";
                }
            } else {
                echo "<tr class='no-data'><td
colspan='5'>No fee submissions found.</td></tr>";
            }
        <?>
    </tbody>
</table>
</div>
</body>
</html>

```

Common Accounts Action Menu

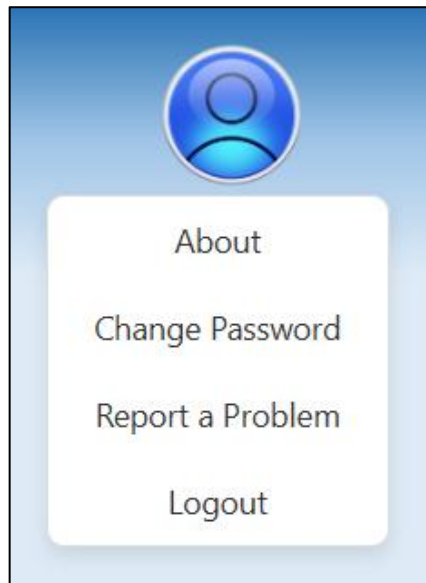

1. About Page

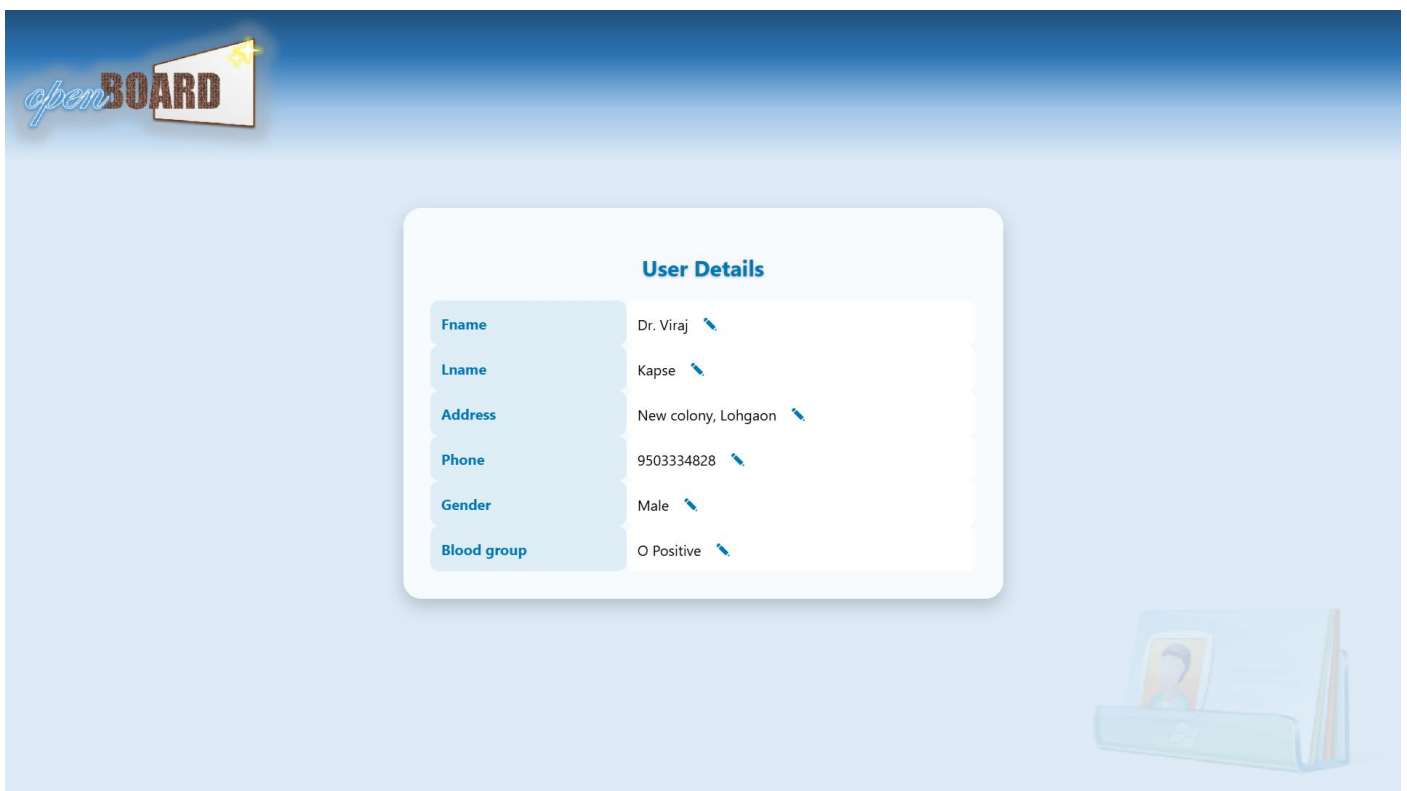

Code:

about.php

```
<?php
```

```
session_start();
```

```
// Check if fname and lname are set in the session
```

```
if (isset($_SESSION['fname']) && isset($_SESSION['lname'])) {  
    $fname = $_SESSION['fname'];
```



```

    $lname = $_SESSION['lname'];
} else {
    // Redirect to login if session variables are not set
    header("Location: login.php");
    exit();
}

// Database connection
$conn = new mysqli("localhost", "root", "", "erp");

// Check the connection
if ($conn->connect_error) {
    die("Connection failed: " . $conn->connect_error);
}

// Retrieve the status associated with the logged-in user
$query = "SELECT status FROM login_details WHERE fname = ? AND
lname = ?";
$stmt = $conn->prepare($query);
$stmt->bind_param("ss", $fname, $lname);
$stmt->execute();
$result = $stmt->get_result();

if ($result->num_rows > 0) {
    $row = $result->fetch_assoc();
    $status = $row['status'];

    // Initialize an empty array for user details
    $userDetails = [];

    // Determine the table to query based on the status
    switch ($status) {
        case 'student':
            $query = "SELECT fname, lname, phone, address,
class, gender, blood_group FROM student_details WHERE fname = ?
AND lname = ?";
            break;
        case 'teacher':
            $query = "SELECT fname, lname, address, phone,
subject, gender, blood_group, class FROM teacher_details WHERE
fname = ? AND lname = ?";
            break;
        case 'admin':
            $query = "SELECT fname, lname, address, phone,
gender, blood_group FROM admin_details WHERE fname = ? AND
lname = ?";

```

```

        break;
    case 'parent':
        $query = "SELECT fname, lname, stud_fname,
stud_lname, phone, gender FROM parent_details WHERE fname = ?
AND lname = ?";
        break;
    default:
        echo "Invalid user status.";
        exit();
}

// Prepare and execute the query to fetch user details
$stmt = $conn->prepare($query);
$stmt->bind_param("ss", $fname, $lname);
$stmt->execute();
$result = $stmt->get_result();

if ($result->num_rows > 0) {
    $userDetails = $result->fetch_assoc();
} else {
    echo "No details found for the user.";
    exit();
}
} else {
    echo "User status not found.";
    exit();
}

$stmt->close();
$conn->close();
?>

<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-
scale=1.0">
    <title>User Details</title>
    <style>
        body {
            background: url("about.png");
            background-size: cover;
            background-position: center;
            background-repeat: no-repeat;
            background-attachment: fixed;

```

```

        font-family: 'Segoe UI', Tahoma, Geneva, Verdana,
sans-serif;
        margin: 0;
        padding: 0;
        display: flex;
        justify-content: center;
        align-items: center;
        height: 100vh;
    }
    .container {
        background: rgba(255, 255, 255, 0.8); /* Frosted
glass effect */
        backdrop-filter: blur(10px);
        border-radius: 20px;
        padding: 30px;
        box-shadow: 0 8px 20px rgba(0, 0, 0, 0.2);
        max-width: 600px;
        width: 100%;
    }
    h2 {
        text-align: center;
        color: #0077b6; /* Ocean blue */
        text-shadow: 0 1px 3px rgba(0, 0, 0, 0.3);
    }
    table {
        width: 100%;
        border-collapse: collapse;
        margin-top: 20px;
    }
    td, th {
        padding: 12px;
        text-align: left;
        border: none;
    }
    th {
        background: rgba(0, 119, 182, 0.1); /* Light ocean
blue tint */
        color: #0077b6;
        border-radius: 10px;
    }
    td {
        background: white; /* Clean white boxes */
        border-radius: 10px;
        transition: transform 0.2s ease, box-shadow 0.3s
ease;
    }

```




```

// Optionally, send the new value to the server
via AJAX
};

spanElement.style.display = "none";
spanElement.parentElement.appendChild(input);
input.focus();
}
</script>
</body>
</html>

```

2. Change Password Page

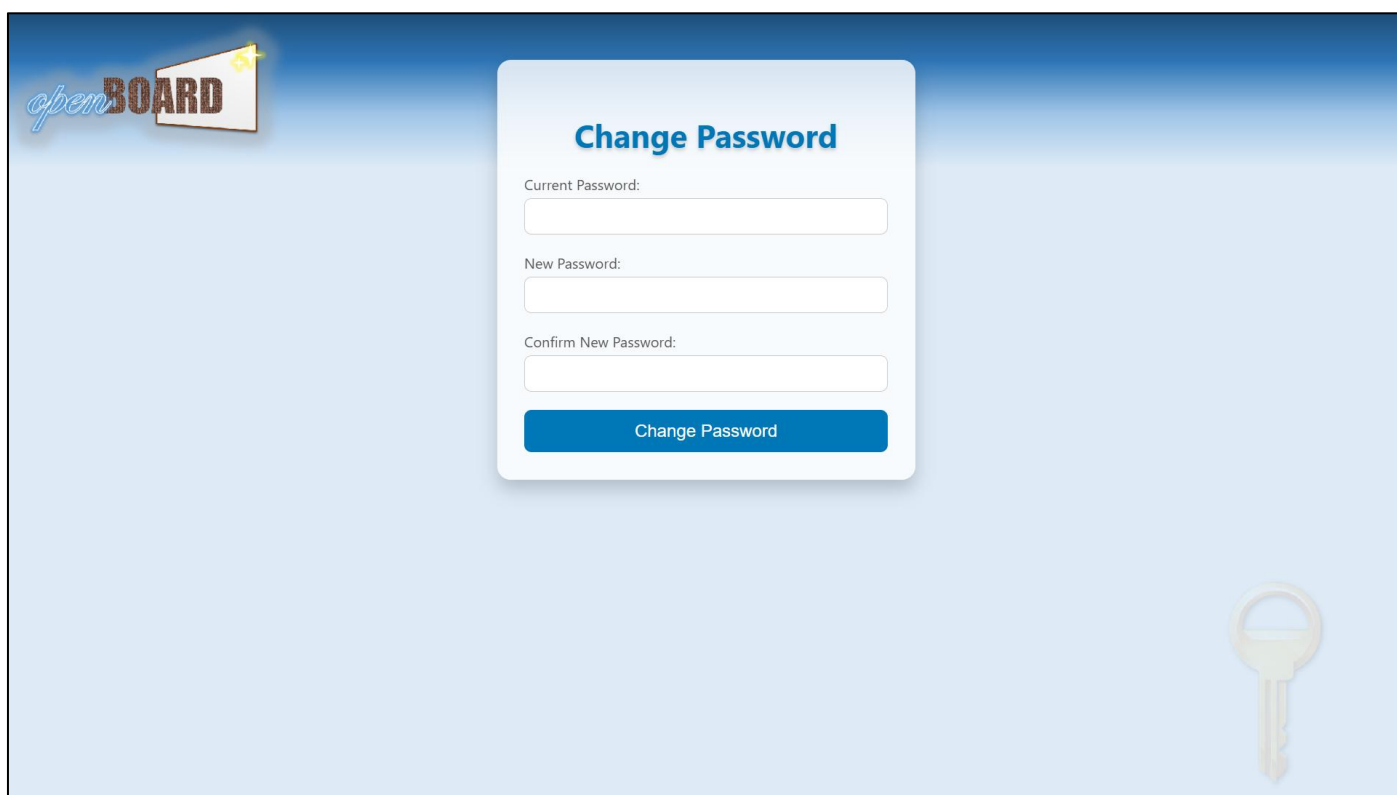

Code:

```

chng_pwd.php
<?php
session_start();

// Check if fname and lname are set in the session
if (isset($_SESSION['fname']) && isset($_SESSION['lname'])) {
    $fname = $_SESSION['fname'];
    $lname = $_SESSION['lname'];
} else {
    // Redirect to login if session variables are not set

```

```

    header("Location: login.php");
    exit();
}
?>
<!DOCTYPE html>
<html lang="en">
<head>
    <meta charset="UTF-8">
    <meta name="viewport" content="width=device-width, initial-
scale=1.0">
    <title>::: Change Password :::</title>
    <style>
        body {
            background: url("pwd.png");
            background-size: cover;
            background-position: center;
            background-repeat: no-repeat;
            background-attachment: fixed;
            font-family: 'Segoe UI', Tahoma, Geneva, Verdana,
sans-serif;
            margin: 0;
            padding: 0;
        }
        .container {
            background: rgba(255, 255, 255, 0.8); /* Glass
effect */
            backdrop-filter: blur(10px);
            max-width: 400px;
            margin: 50px auto;
            padding: 30px;
            border-radius: 15px;
            box-shadow: 0 10px 20px rgba(0, 0, 0, 0.2);
            text-align: center;
        }
        h2 {
            font-size: 2.2em;
            color: #0077b6; /* Ocean blue */
            text-shadow: 0 2px 4px rgba(0, 0, 0, 0.2);
            margin-bottom: 20px;
        }
        form {
            display: flex;
            flex-direction: column;
            align-items: stretch;
        }
        label {

```

```

        font-size: 1em;
        color: #555;
        margin-bottom: 5px;
        text-align: left;
    }
    input[type="password"] {
        padding: 10px;
        font-size: 1em;
        border: 1px solid #ccc;
        border-radius: 8px;
        margin-bottom: 20px;
        transition: box-shadow 0.3s ease;
    }
    input[type="password"]:focus {
        box-shadow: 0 0 8px #0077b6;
        outline: none;
    }
    button[type="submit"] {
        padding: 12px;
        font-size: 1.2em;
        color: #fff;
        background-color: #0077b6;
        border: none;
        border-radius: 8px;
        cursor: pointer;
        transition: background-color 0.3s ease, transform
0.2s ease;
    }
    button[type="submit"]:hover {
        background-color: #0096c7;
        transform: scale(1.05);
    }
    p {
        font-size: 1em;
        margin-top: 10px;
    }
    p[style*="color:green"] {
        color: #28a745;
        font-weight: bold;
    }
    p[style*="color:red"] {
        color: #e63946;
        font-weight: bold;
    }
}
</style>
</head>

```

```

<body>
  <div class="container">
    <h2>Change Password</h2>
    <form method="POST">
      <label for="current_pwd">Current Password:</label>
      <input type="password" id="current_pwd"
name="current_pwd" required>

      <label for="new_pwd">New Password:</label>
      <input type="password" id="new_pwd" name="new_pwd"
required>

      <label for="confirm_new_pwd">Confirm New
Password:</label>
      <input type="password" id="confirm_new_pwd"
name="confirm_new_pwd" required>

      <button type="submit" name="submit">Change
Password</button>
    </form>
    <?php
    if (isset($_POST['submit'])) {
      $conn = new mysqli('localhost', 'root', '', 'erp');

      if ($conn->connect_error) {
        die("Connection failed: " . $conn-
>connect_error);
      }

      $current_pwd = $_POST['current_pwd'];
      $new_pwd = $_POST['new_pwd'];
      $confirm_new_pwd = $_POST['confirm_new_pwd'];

      $stmt = $conn->prepare("SELECT pwd FROM
login_details WHERE fname = ? AND lname = ?");
      $stmt->bind_param("ss", $fname, $lname);
      $stmt->execute();
      $result = $stmt->get_result();

      if ($result->num_rows > 0) {
        $row = $result->fetch_assoc();
        if ($row['pwd'] === $current_pwd) {
          if ($new_pwd === $confirm_new_pwd) {
            $update_stmt = $conn->prepare("UPDATE
login_details SET pwd = ? WHERE fname = ? AND lname = ?");

```




```

        $update_stmt->bind_param("sss",
$new_pwd, $fname, $lname);
        if ($update_stmt->execute()) {
            echo "<p
style='color:green;'>Password updated successfully.</p>";
        } else {
            echo "<p style='color:red;'>Error
updating password. Please try again.</p>";
        }
        $update_stmt->close();
    } else {
        echo "<p style='color:red;'>New
passwords do not match. Please try again.</p>";
    }
    } else {
        echo "<p style='color:red;'>Current
password is incorrect. Please try again.</p>";
    }
    } else {
        echo "<p style='color:red;'>User not found.
Please contact support.</p>";
    }

    $stmt->close();
    $conn->close();
}
?>
</div>
</body>
</html>

```

3. Report a Problem Page

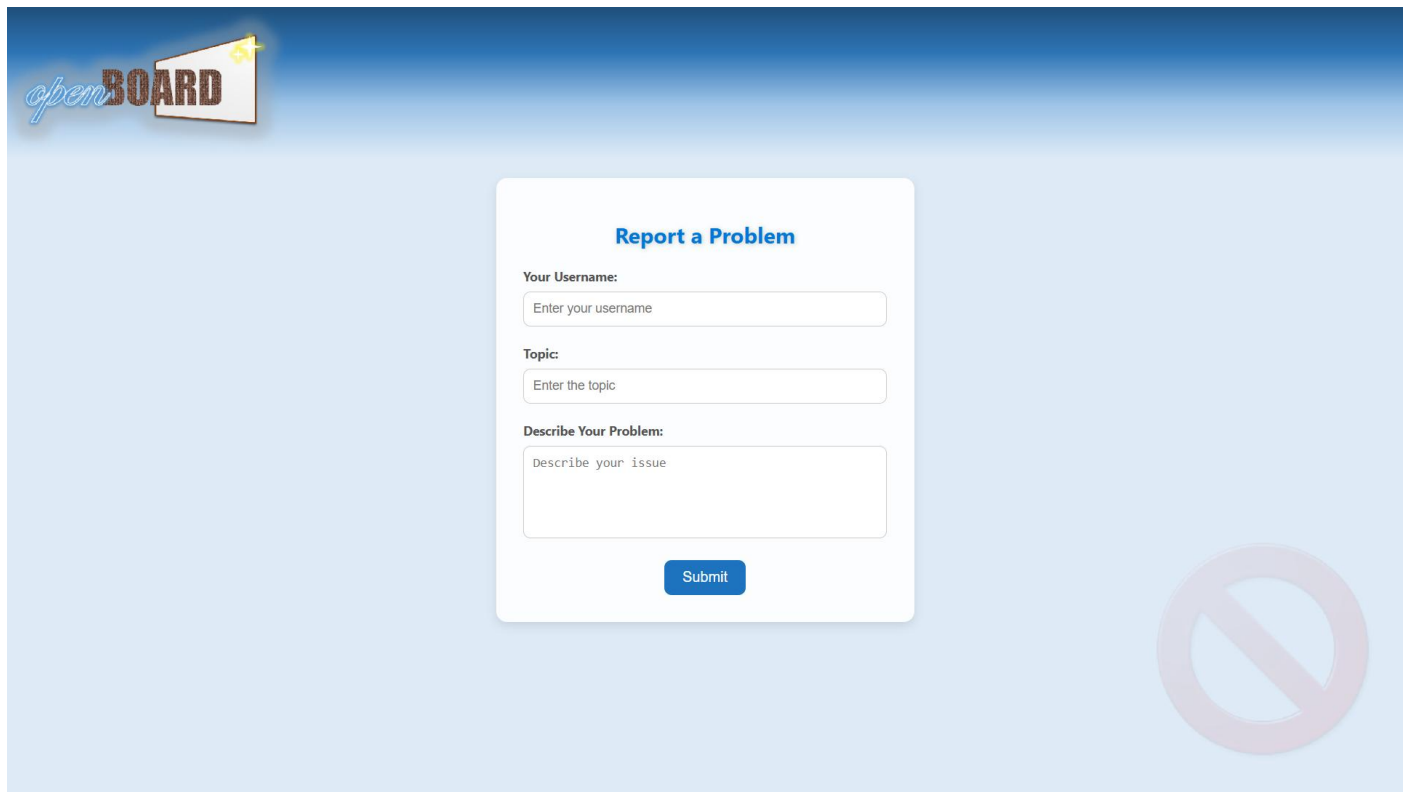

Code:

Your Username:

Topic:

Describe Your Problem:

Submit

Code:

```

/* Centered Card Container */
.container {
    background: rgba(255, 255, 255, 0.9);
    box-shadow: 0 4px 10px rgba(0, 0, 0, 0.1);
    border-radius: 12px;
    padding: 30px;
    max-width: 400px;
    width: 100%;
    text-align: center;
}

/* Title Styling */
h1 {
    font-size: 24px;
    color: #0078D7;
    margin-bottom: 20px;
    text-shadow: 1px 1px 5px rgba(0, 0, 0, 0.2);
}

/* Form Elements Styling */
form label {
    font-size: 14px;
    color: #555;
    margin-bottom: 8px;
    display: block;
    text-align: left;
}

form input[type="text"],
form textarea {
    width: 100%;
    padding: 10px;
    margin-bottom: 20px;
    font-size: 14px;
    border: 1px solid #ccc;
    border-radius: 8px;
    box-sizing: border-box;
    transition: border-color 0.3s ease, box-shadow 0.3s
ease;
}

form input:focus,
form textarea:focus {
    border-color: #1e73be;
    box-shadow: 0 0 5px rgba(30, 115, 190, 0.5);
}

```

```

        outline: none;
    }

    form textarea {
        resize: none;
    }

    form button {
        background-color: #1e73be;
        color: #fff;
        border: none;
        padding: 10px 20px;
        font-size: 16px;
        border-radius: 8px;
        cursor: pointer;
        transition: background-color 0.3s ease, transform
0.2s ease;
    }

    form button:hover {
        background-color: #155b8a;
        transform: scale(1.05);
    }
</style>
</head>
<body>
    <div class="container">
        <h1>Report a Problem</h1>
        <form method="POST" action="report_problem.php">
            <label for="sender_username"><b>Your
Username:</b></label>
            <input type="text" id="sender_username"
name="sender_username" placeholder="Enter your username"
required>

            <label for="message_topic"><b>Topic:</b></label>
            <input type="text" id="message_topic"
name="message_topic" placeholder="Enter the topic" required>

            <label for="message_content"><b>Describe Your
Problem:</b></label>
            <textarea id="message_content"
name="message_content" rows="5" placeholder="Describe your
issue" required></textarea>

            <button type="submit">Submit</button>

```

```

        </form>
    </div>
</body>
</html>

```

report_problem.php

```

<?php
// Connect to the database
$servername = "localhost";
$username = "root"; // Replace with your database username
$password = ""; // Replace with your database password
$dbname = "erp"; // Your database name

$conn = new mysqli($servername, $username, $password, $dbname);

// Check connection
if ($conn->connect_error) {
    die("Connection failed: " . $conn->connect_error);
}

// Check if form is submitted
if ($_SERVER["REQUEST_METHOD"] == "POST") {
    $sender_username = $_POST['sender_username'];
    $receiver_username = "admin1"; // Admin's username
    $message_topic = $_POST['message_topic'];
    $message_content = $_POST['message_content'];
    $is_read = 0; // Message not read yet
    $sent_at = date('Y-m-d H:i:s'); // Current timestamp

    // Prepare SQL query to insert the message
    $sql = "INSERT INTO messages (sender_username,
receiver_username, message_topic, message_content, is_read,
sent_at)
VALUES ('$sender_username', '$receiver_username',
'$message_topic', '$message_content', $is_read, '$sent_at')";

    if ($conn->query($sql) === TRUE) {
        echo "Your problem has been reported successfully!";
    } else {
        echo "Error: " . $sql . "<br>" . $conn->error;
    }
}

// Close the connection
$conn->close();
?>

```

4. Logout Button

Code:

```
logout.php
<?php
session_start(); // Start the session

// Unset all session variables
session_unset();

// Destroy the session
session_destroy();

// Redirect the user to the login page
header("Location: login.html");
exit();
?>
```

END