






Performance

Values are estimated and may vary. The <u>performance score is calculated</u> directly from these metrics. <u>See calculator.</u>

▲ 0–49 50–89 90–100



METRICS Expand view

First Contentful Paint

0.3 s

Largest Contentful Paint

0.3 s

Total Blocking Time

Cumulative Layout Shift

40 ms

0

Speed Index

0.5 s





Later this year, insights will replace performance audits. <u>Learn more and provide feedback</u> here.

Try insights

Show audits relevant to: All FCP LCP TBT CLS

DIAGNOSTICS

Minify JavaScript — Est savings of 16 KiB

Minifying JavaScript files can reduce payload sizes and script parse time. Learn how to minify JavaScript. FCP LCP

URL	Transfer Size	Est Savings
<pre>chrome-extension://mlomiejdfkolichcflejclcbmpeaniij/content_scripts/autoconsent.js</pre>	41.5 KiB	10.1 KiB
<pre>chrome- extension://mlomiejdfkolichcflejclcbmpeaniij/content_scripts/adblocker/index.js</pre>	11.8 KiB	6.0 KiB

Reduce unused JavaScript — Est savings of 28 KiB

Reduce unused JavaScript and defer loading scripts until they are required to decrease bytes consumed by network activity. <u>Learn how to reduce unused JavaScript</u>. FCP LCP

URL	Transfer Size	Est Savings
<pre>chrome-extension://mlomiejdfkolichcflejclcbmpeaniij/content_scripts/autoconsent.js</pre>	41.5 KiB	28.0 KiB

O Avoid long main-thread tasks — 1 long task found

Lists the longest tasks on the main thread, useful for identifying worst contributors to input delay. <u>Learn how to avoid long main-thread tasks</u> (TBT)

URL	Start Time	Duration
localhost 1st Party		108 ms
http://localhost:4321	312 ms	108 ms

O Avoid non-composited animations — 10 animated elements found

Animations which are not composited can be janky and increase CLS. Learn how to avoid non-composited animations CLS

Element	Name
img.lazy-load	
Unsupported CSS Properties: background-position-x, background-position-y	loading-shimmer
img.lazy-load	
Unsupported CSS Properties: background-position-x, background-position-y	loading-shimmer
img.lazy-load	
Unsupported CSS Properties: background-position-x, background-position-y	loading-shimmer
img.lazy-load	
Unsupported CSS Properties: background-position-x, background-position-y	loading-shimmer
img.lazy-load	
Unsupported CSS Properties: background-position-x, background-position-y	loading-shimmer

Element	Name
img.lazy-load	
Unsupported CSS Properties: background-position-x, background-position-y	loading-shimmer
img.lazy-load	
Unsupported CSS Properties: background-position-x, background-position-y	loading-shimmer
img.lazy-load	
Unsupported CSS Properties: background-position-x, background-position-y	loading-shimmer
img.lazy-load	
Unsupported CSS Properties: background-position-x, background-position-y	loading-shimmer
img.lazy-load	
Unsupported CSS Properties: background-position-x, background-position-y	loading-shimmer

Avoid chaining critical requests — 1 chain found

The Critical Request Chains below show you what resources are loaded with a high priority. Consider reducing the length of chains, reducing the download size of resources, or deferring the download of unnecessary resources to improve page load. Learn how to avoid chaining critical requests.

Maximum critical path latency: 254.716 ms

Initial Navigation

http://localhost:4321

/_astro/Gallery.astro_ast....CXKVKzb9.js (localhost) - 48.033 ms, 1.32 KiB

Largest Contentful Paint element — 330 ms

This is the largest contentful element painted within the viewport. <u>Learn more about the Largest Contentful Paint element</u> [LCP]

Element	
	h1.hero-title.text-gradient.text-glow

Element		

Phase	% of LCP	Timing
TTFB	37%	120 ms
Load Delay	0%	0 ms
Load Time	0%	0 ms
Render Delay	63%	210 ms

More information about the performance of your application. These numbers don't <u>directly affect</u> the Performance score.

PASSED AUDITS (32)	Hide
Eliminate render-blocking resources	^
Resources are blocking the first paint of your page. Consider delivering critical JS/CSS inline and deferring all non-crit JS/styles. Learn how to eliminate render-blocking resources. FCP LCP	ical
Properly size images	^
Serve images that are appropriately-sized to save cellular data and improve load time. Learn how to size images. FCP	LCP
Defer offscreen images	^
Consider lazy-loading offscreen and hidden images after all critical resources have finished loading to lower time to interactive. Learn how to defer offscreen images. FCP LCP	
Minify CSS	^
Minifying CSS files can reduce network payload sizes. <u>Learn how to minify CSS</u> . FCP <u>LCP</u>	
Reduce unused CSS	^

Reduce unused rules from stylesheets and defer CSS not used for above-the-fold content to decrease bytes consumed by

http://localhost:4321 10 ms

Avoid multiple page redirects

Redirects introduce additional delays before the page can be loaded. Learn how to avoid page redirects. LCP FCP

Use HTTP/2	^
HTTP/2 offers many benefits over HTTP/1.1, including binary headers and multiplexing. Learn more about HTTP/FCP	2. LCP
Use video formats for animated content	^
Large GIFs are inefficient for delivering animated content. Consider using MPEG4/WebM videos for animations a PNG/WebP for static images instead of GIF to save network bytes. Learn more about efficient video formats (FCP)	
Remove duplicate modules in JavaScript bundles	^
Remove large, duplicate JavaScript modules from bundles to reduce unnecessary bytes consumed by network ac LCP	tivity. FCP
Avoid serving legacy JavaScript to modern browsers	^
Polyfills and transforms enable legacy browsers to use new JavaScript features. However, many aren't necessary f browsers. Consider modifying your JavaScript build process to not transpile <u>Baseline</u> features, unless you know y support legacy browsers. <u>Learn why most sites can deploy ES6+ code without transpiling FCP LCP</u>	
O Preload Largest Contentful Paint image	^
If the LCP element is dynamically added to the page, you should preload the image in order to improve LCP. <u>Lea about preloading LCP elements</u> . <u>LCP</u>	rn more
Avoids enormous network payloads — Total size was 34 KiB	^
Large network payloads cost users real money and are highly correlated with long load times. <u>Learn how to redusizes</u> .	<u>ce payload</u>
URL	Transfer Size
localhost (1st Party)	34.3 KiB
http://localhost:4321	18.5 KiB
/favicon.ico (localhost)	9.7 KiB
/images/placeholder-gallery.svg (localhost)	1.4 KiB


URL	Transfer Size
/_astro/Gallery.astro_astCXKVKzb9.js (localhost)	1.3 KiB
/images/techhub.webp (localhost)	1.2 KiB
/images/glug.webp (localhost)	1.1 KiB
/logo.webp (localhost)	1.0 KiB

Uses efficient cache policy on static assets $\,$ — $\,$ 0 resources found

A long cache lifetime can speed up repeat visits to your page. <u>Learn more about efficient cache policies</u>.

Avoids an excessive DOM size — 627 elements

A large DOM will increase memory usage, cause longer <u>style calculations</u>, and produce costly <u>layout reflows</u>. <u>Learn how to avoid an excessive DOM size</u>. <u>TBT</u>

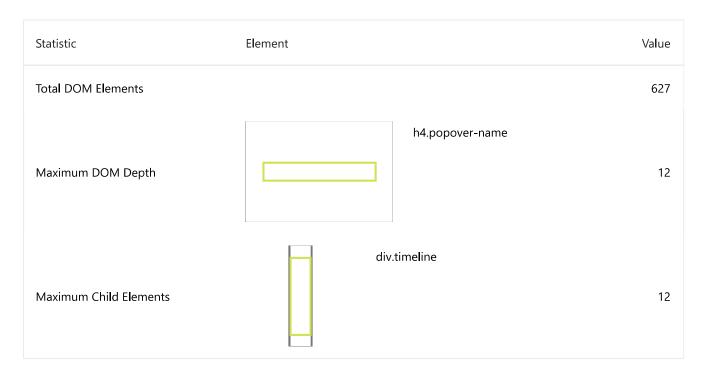

User Timing marks and measures

Consider instrumenting your app with the User Timing API to measure your app's real-world performance during key user experiences. <u>Learn more about User Timing marks</u>.

 $\overline{}$

Consider reducing the time spent parsing, compiling, and executing JS. You may find delivering smaller JS payloads helps with this. Learn how to reduce Javascript execution time. (TBT)

URL	Total CPU Time	Script Evaluation	Script Parse
localhost 1st Party	546 ms	16 ms	14 ms
http://localhost:4321	546 ms	16 ms	14 ms
Unattributable	167 ms	0 ms	0 ms
Unattributable	167 ms	0 ms	0 ms

Minimizes main-thread work — 0.7 s

Consider reducing the time spent parsing, compiling and executing JS. You may find delivering smaller JS payloads helps with this. Learn how to minimize main-thread work (TBT)

Category	Time Spent
Other	310 ms
Style & Layout	275 ms
Rendering	89 ms
Parse HTML & CSS	29 ms
Script Evaluation	26 ms
Script Parsing & Compilation	14 ms

All text remains visible during webfont loads

Leverage the font-display CSS feature to ensure text is user-visible while webfonts are loading. <u>Learn more about font-display</u>.

	^
Third-party code can significantly impact load performance. Limit the number of redundant third-party providers and try load third-party code after your page has primarily finished loading. Learn how to minimize third-party impact. TBT	to
Lazy load third-party resources with facades	^
Some third-party embeds can be lazy loaded. Consider replacing them with a facade until they are required. <u>Learn how to defer third-parties with a facade</u> . TBT	2
Largest Contentful Paint image was not lazily loaded	^
Above-the-fold images that are lazily loaded render later in the page lifecycle, which can delay the largest contentful pain Learn more about optimal lazy loading. LCP	ıt.
O Avoid large layout shifts	^
These are the largest layout shifts observed on the page. Each table item represents a single layout shift, and shows the element that shifted the most. Below each item are possible root causes that led to the layout shift. Some of these layout shifts may not be included in the CLS metric value due to windowing . Learn how to improve CLS CLS)	
Uses passive listeners to improve scrolling performance	^
Consider marking your touch and wheel event listeners as passive to improve your page's scroll performance. <u>Learn monabout adopting passive event listeners</u> .	<u>re</u>
Avoids document.write()	^
For users on slow connections, external scripts dynamically injected via document.write() can delay page load by tens of seconds. Learn how to avoid document.write().	of
Image elements have explicit width and height	^
Image elements have explicit width and height Set an explicit width and height on image elements to reduce layout shifts and improve CLS. Learn how to set image dimensions (CLS)	^
Set an explicit width and height on image elements to reduce layout shifts and improve CLS. <u>Learn how to set image</u>	^

Many navigations are performed by going back to a previous page, or forwards again. The back/forward cache (bfcache) can speed up these return navigations. <u>Learn more about the bfcache</u>



Accessibility

These checks highlight opportunities to <u>improve the accessibility of your web app</u>. Automatic detection can only detect a subset of issues and does not guarantee the accessibility of your web app, so <u>manual testing</u> is also encouraged.

ADDITIONAL ITEMS TO MANUALLY CHECK (10)	Hide
Interactive controls are keyboard focusable	^
Custom interactive controls are keyboard focusable and display a focus indicator. <u>Learn how to make custom controls focusable</u> .	
Interactive elements indicate their purpose and state	^
Interactive elements, such as links and buttons, should indicate their state and be distinguishable from non-interactive elements. <u>Learn how to decorate interactive elements with affordance hints</u> .	
The page has a logical tab order	^
Tabbing through the page follows the visual layout. Users cannot focus elements that are offscreen. <u>Learn more about log</u> <u>tab ordering</u> .	g <u>ical</u>
Visual order on the page follows DOM order	^
DOM order matches the visual order, improving navigation for assistive technology. <u>Learn more about DOM and visual ordering.</u>	
User focus is not accidentally trapped in a region	^
A user can tab into and out of any control or region without accidentally trapping their focus. <u>Learn how to avoid focus traps</u> .	

The user's focus is directed to new content added to the page	^
If new content, such as a dialog, is added to the page, the user's focus is directed to it. Learn how to direct focus to new content.	
HTML5 landmark elements are used to improve navigation	^
Landmark elements (<main>, <nav>, etc.) are used to improve the keyboard navigation of the page for assistive technology. Learn more about landmark elements.</nav></main>	ogy.
Offscreen content is hidden from assistive technology	^
Offscreen content is hidden with display: none or aria-hidden=true. <u>Learn how to properly hide offscreen content</u> .	
O Custom controls have associated labels	^
Custom interactive controls have associated labels, provided by aria-label or aria-labelledby. <u>Learn more about custom controls and labels</u> .	
Custom controls have ARIA roles	^
Custom interactive controls have appropriate ARIA roles. <u>Learn how to add roles to custom controls</u> .	
These items address areas which an automated testing tool cannot cover. Learn more in our guide on <u>conducting an accessib</u> review.	<u>oility</u>
PASSED AUDITS (27)	Hide
[aria-*] attributes match their roles	^
Each ARIA role supports a specific subset of aria-* attributes. Mismatching these invalidates the aria-* attributes. Le how to match ARIA attributes to their roles.	<u>earn</u>
[aria-hidden="true"] is not present on the document <body></body>	^
Assistive technologies, like screen readers, work inconsistently when aria-hidden="true" is set on the document <box a="" be="" beginning="" body.<="" document="" of="" set="" td="" the="" to=""><td>dy>.</td></box>	dy>.
[role]s have all required [aria-*] attributes	^

Some ARIA roles have required attributes that describe the state of the element to screen readers. <u>Learn more about roles</u>

[aria-*] attributes have valid values

Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid values. <u>Learn more about valid values</u> for ARIA attributes.

[aria-*] attributes are valid and not misspelled

Assistive technologies, like screen readers, can't interpret ARIA attributes with invalid names. <u>Learn more about valid ARIA attributes</u>.

Buttons have an accessible name

When a button doesn't have an accessible name, screen readers announce it as "button", making it unusable for users who rely on screen readers. <u>Learn how to make buttons more accessible</u>.

Image elements have [alt] attributes

Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. Learn more about the alt attribute.

[user-scalable="no"] is not used in the <meta name="viewport"> element and the [maximum-scale] attribute is not less than 5.

Disabling zooming is problematic for users with low vision who rely on screen magnification to properly see the contents of a web page. Learn more about the viewport meta tag.

ARIA attributes are used as specified for the element's role

Some ARIA attributes are only allowed on an element under certain conditions. <u>Learn more about conditional ARIA attributes</u>.

[aria-hidden="true"] elements do not contain focusable descendents

Focusable descendents within an [aria-hidden="true"] element prevent those interactive elements from being available to users of assistive technologies like screen readers. <u>Learn how aria-hidden affects focusable elements</u>.

Elements use only permitted ARIA attributes

Using ARIA attributes in roles where they are prohibited can mean that important information is not communicated to users of assistive technologies. <u>Learn more about prohibited ARIA roles</u>.

[role] values are valid	^
ARIA roles must have valid values in order to perform their intended accessibility functions. <u>Learn more about valid ARIA roles.</u>	
Background and foreground colors have a sufficient contrast ratio	^
Low-contrast text is difficult or impossible for many users to read. <u>Learn how to provide sufficient color contrast</u> .	
Document has a <title> element</td><td>^</td></tr><tr><td>The title gives screen reader users an overview of the page, and search engine users rely on it heavily to determine if a pair is relevant to their search. <u>Learn more about document titles</u>.</td><td>ge</td></tr><tr><td><frame> Or <iframe> elements have a title</td><td>^</td></tr><tr><td>Screen reader users rely on frame titles to describe the contents of frames. <u>Learn more about frame titles</u>.</td><td></td></tr><tr><td><html> element has a [lang] attribute</td><td>^</td></tr><tr><td>If a page describe a serifical lang attribute a series reader assumes that the many is in the default language that the</td><td></td></tr><tr><td>If a page doesn't specify a lang attribute, a screen reader assumes that the page is in the default language that the user chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might rannounce the page's text correctly. Learn more about the lang attribute.</td><td>not</td></tr><tr><td>chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might r</td><td>not</td></tr><tr><td>chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might rannounce the page's text correctly. <u>Learn more about the lang attribute</u>.</td><td></td></tr><tr><td>chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might reannounce the page's text correctly. Learn more about the lang attribute. html> element has a valid value for its [lang] attribute</td><td></td></tr><tr><td>chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might reannounce the page's text correctly. Learn more about the lang attribute. httml> element has a valid value for its [lang] attribute Specifying a valid BCP 47 language helps screen readers announce text properly. Learn how to use the lang attribute.</td><td>^</td></tr><tr><td>chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might reannounce the page's text correctly. Learn more about the lang attribute.</td><td>^</td></tr><tr><td>chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might reannounce the page's text correctly. Learn more about the lang attribute. <a href="https://doi.org/10.1001/j.com/reader-street-str</td><td>^ ^</td></tr><tr><td>chose when setting up the screen reader. If the page isn't actually in the default language, then the screen reader might reannounce the page's text correctly. Learn more about the lang attribute.</td><td>^ ^</td></tr></tbody></table></title>	

Link text (and alternate text for images, when used as links) that is discernible, unique, and focusable improves the navigation experience for screen reader users. <u>Learn how to make links accessible</u>.

	No element has a [tabindex] value greater than 0	^
	A value greater than 0 implies an explicit navigation ordering. Although technically valid, this often creates frustrating experiences for users who rely on assistive technologies. <u>Learn more about the tabindex attribute</u> .	
	Touch targets have sufficient size and spacing.	^
	Touch targets with sufficient size and spacing help users who may have difficulty targeting small controls to activate the targets. <u>Learn more about touch targets</u> .	
	Heading elements appear in a sequentially-descending order	^
	Properly ordered headings that do not skip levels convey the semantic structure of the page, making it easier to navigate and understand when using assistive technologies. <u>Learn more about heading order</u> .	
	Skip links are focusable.	^
I	Including a skip link can help users skip to the main content to save time. <u>Learn more about skip links</u> .	
	Uses ARIA roles only on compatible elements	^
	Many HTML elements can only be assigned certain ARIA roles. Using ARIA roles where they are not allowed can interfere with the accessibility of the web page. <u>Learn more about ARIA roles</u> .	
	Deprecated ARIA roles were not used	^
	Deprecated ARIA roles may not be processed correctly by assistive technology. <u>Learn more about deprecated ARIA roles</u> .	
	Image elements do not have [alt] attributes that are redundant text.	^
ć	Informative elements should aim for short, descriptive alternative text. Alternative text that is exactly the same as the text adjacent to the link or image is potentially confusing for screen reader users, because the text will be read twice. Learn most about the alt attribute.	<u>ore</u>
NOT	APPLICABLE (30)	Hide

[accesskey] values are unique

<u>about access keys</u> .	
button, link, and menuitem elements have accessible names	^
When an element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable fo users who rely on screen readers. <u>Learn how to make command elements more accessible</u> .	r
Elements with role="dialog" or role="alertdialog" have accessible names.	^
ARIA dialog elements without accessible names may prevent screen readers users from discerning the purpose of these elements. Learn how to make ARIA dialog elements more accessible.	
ARIA input fields have accessible names	^
When an input field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <u>Learn more about input field labels</u> .	
ARIA meter elements have accessible names	^
When a meter element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <u>Learn how to name meter elements</u> .	
ARIA progressbar elements have accessible names	^
When a progressbar element doesn't have an accessible name, screen readers announce it with a generic name, making i unusable for users who rely on screen readers. <u>Learn how to label progressbar elements</u> .	t
Elements with an ARIA [role] that require children to contain a specific [role] have all required children.	^
Some ARIA parent roles must contain specific child roles to perform their intended accessibility functions. <u>Learn more about</u> roles and required children elements.	<u>ıt</u>
[role]s are contained by their required parent element	^
Some ARIA child roles must be contained by specific parent roles to properly perform their intended accessibility functions Learn more about ARIA roles and required parent element.	
Elements with the role=text attribute do not have focusable descendents.	^

Adding role=text around a text node split by markup enables VoiceOver to treat it as one phrase, but the element's

Access keys let users quickly focus a part of the page. For proper navigation, each access key must be unique. <u>Learn more</u>

focusable descendents will not be announced. <u>Learn more about the role=text attribute</u>.

ARIA toggle fields have accessible names	^
When a toggle field doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <u>Learn more about toggle fields</u> .	3
O ARIA tooltip elements have accessible names	^
When a tooltip element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <u>Learn how to name tooltip elements</u> .	
O ARIA treeitem elements have accessible names	^
When a treeitem element doesn't have an accessible name, screen readers announce it with a generic name, making it unusable for users who rely on screen readers. <u>Learn more about labeling treeitem elements</u> .	
The page contains a heading, skip link, or landmark region	^
Adding ways to bypass repetitive content lets keyboard users navigate the page more efficiently. <u>Learn more about bypas blocks</u> .	<u>is</u>
O <dl>'s contain only properly-ordered <dt> and <dd> groups, <script>, <template> or <div> elements.</td><td>^</td></tr><tr><td>When definition lists are not properly marked up, screen readers may produce confusing or inaccurate output. <u>Learn how structure definition lists correctly</u>.</td><td><u>to</u></td></tr><tr><td>O Definition list items are wrapped in <d1> elements</td><td>^</td></tr><tr><td>Definition list items (<dt> and <dd>) must be wrapped in a parent <dl> element to ensure that screen readers can proper announce them. Learn how to structure definition lists correctly.</td><td>·ly</td></tr><tr><td>O ARIA IDs are unique</td><td>^</td></tr><tr><td>The value of an ARIA ID must be unique to prevent other instances from being overlooked by assistive technologies. <u>Learn how to fix duplicate ARIA IDs</u>.</td><td><u>n</u></td></tr><tr><td>O No form fields have multiple labels</td><td>^</td></tr><tr><td>Form fields with multiple labels can be confusingly announced by assistive technologies like screen readers which use eith the first, the last, or all of the labels. <u>Learn how to use form labels</u>.</td><td>ıer</td></tr></tbody></table></script></dd></dt></dl>	

<html> element has an [xml:lang] attribute with the same base language as the [lang] attribute.</html>	^
If the webpage does not specify a consistent language, then the screen reader might not announce the page's text correct Learn more about the lang attribute.	ctly.
O Input buttons have discernible text.	^
Adding discernable and accessible text to input buttons may help screen reader users understand the purpose of the input button. Learn more about input buttons.	ut
<pre>O <input type="image"/> elements have [alt] text</pre>	^
When an image is being used as an <input/> button, providing alternative text can help screen reader users understand to purpose of the button. Learn about input image alt text.	the
 Lists contain only elements and script supporting elements (<script> and <template>). </td><td>^</td></tr><tr><td>Screen readers have a specific way of announcing lists. Ensuring proper list structure aids screen reader output. <u>Learn mo</u> <u>about proper list structure</u>.</td><td><u>ore</u></td></tr><tr><td>O List items (<1i>) are contained within , or <menu> parent elements</td><td>^</td></tr><tr><td>Screen readers require list items () to be contained within a parent , or <menu> to be announced properly Learn more about proper list structure.</td><td></td></tr><tr><td>The document does not use <meta http-equiv="refresh"></td><td>^</td></tr><tr><td>Users do not expect a page to refresh automatically, and doing so will move focus back to the top of the page. This may create a frustrating or confusing experience. <u>Learn more about the refresh meta tag</u>.</td><td></td></tr><tr><td>O <object> elements have alternate text</td><td>^</td></tr><tr><td>Screen readers cannot translate non-text content. Adding alternate text to <object> elements helps screen readers convening to users. Learn more about alt text for object elements.</td><td>⁄ey</td></tr><tr><td>Select elements have associated label elements.</td><td>^</td></tr><tr><td>Form elements without effective labels can create frustrating experiences for screen reader users. <u>Learn more about the select element</u>.</td><td></td></tr><tr><td>Tables have different content in the summary attribute and <caption>.</td><td>^</td></tr></tbody></table></script>	

The summary attribute should describe the table structure, while <caption> should have the onscreen title. Accurate table mark-up helps users of screen readers. Learn more about summary and caption.

O Cells in a element that use the [headers] attribute refer to table cells within the same table.

Screen readers have features to make navigating tables easier. Ensuring cells using the [headers] attribute only refer to other cells in the same table may improve the experience for screen reader users. <u>Learn more about the headers</u> attribute.

elements and elements with [role="columnheader"/"rowheader"] have data cells they describe.

Screen readers have features to make navigating tables easier. Ensuring table headers always refer to some set of cells may improve the experience for screen reader users. <u>Learn more about table headers</u>.

[lang] attributes have a valid value

Specifying a valid <u>BCP 47 language</u> on elements helps ensure that text is pronounced correctly by a screen reader. <u>Learn how to use the lang attribute</u>.

<video> elements contain a <track> element with [kind="captions"]

When a video provides a caption it is easier for deaf and hearing impaired users to access its information. <u>Learn more about video captions</u>.



Best Practices

TRUST AND SAFETY

Ensure CSP is effective against XSS attacks

A strong Content Security Policy (CSP) significantly reduces the risk of cross-site scripting (XSS) attacks. <u>Learn how to use a CSP to prevent XSS</u>

Description	Directive	Severity
No CSP found in enforcement mod	de	High
Use a strong HSTS policy		
- · ·	ificantly reduces the risk of downgrading HT value of the secon was a second of the secon was a secon mane about the secon was a second or was a secon was a secon was a secon was a second or was a second or was a secon was a second or was a secon	• • •
Description	Directive	Severity
No HSTS header found		High
Ensure proper origin isolation with	COOP	
The Cross-Origin-Opener-Policy (COC ups. Learn more about deploying the	OP) can be used to isolate the top-level windon COOP header.	ow from other documents such as pop-
		ow from other documents such as pop-
ups. <u>Learn more about deploying the</u>	COOP header.	
ups. <u>Learn more about deploying the</u> Description	COOP header. Directive	Severity
ups. <u>Learn more about deploying the</u> Description No COOP header found Mitigate clickjacking with XFO or Co	COOP header. Directive	Severity High
ups. Learn more about deploying the Description No COOP header found Mitigate clickjacking with XFO or Co	Directive SP or the frame-ancestors directive in the Colled. These can mitigate clickjacking attacks by	Severity High ntent-Security-Policy (CSP) header
ups. Learn more about deploying the Description No COOP header found Mitigate clickjacking with XFO or Country (XFO) header control where a page can be embedded.	Directive SP or the frame-ancestors directive in the Colled. These can mitigate clickjacking attacks by	Severity High ntent-Security-Policy (CSP) header
Description No COOP header found Mitigate clickjacking with XFO or Country and the control where a page can be embedd embedding the page. Learn more about the control where a page.	Directive SP or the frame-ancestors directive in the Colled. These can mitigate clickjacking attacks by	Severity High ntent-Security-Policy (CSP) header y blocking some or all sites from

All sites should be protected with HTTPS, even ones that don't handle sensitive data. This includes avoiding <u>mixed content</u>, where some resources are loaded over HTTP despite the initial request being served over HTTPS. HTTPS prevents intruders

Uses HTTPS

Avoids deprecated APIs	^
Deprecated APIs will eventually be removed from the browser. <u>Learn more about deprecated APIs</u> .	
Avoids third-party cookies	^
Third-party cookies may be blocked in some contexts. <u>Learn more about preparing for third-party cookie restrictions</u> .	
Allows users to paste into input fields	^
Preventing input pasting is a bad practice for the UX, and weakens security by blocking password managers. <u>Learn more about user-friendly input fields</u> .	
Avoids requesting the geolocation permission on page load	^
Users are mistrustful of or confused by sites that request their location without context. Consider tying the request to a user action instead. <u>Learn more about the geolocation permission</u> .	ser
Avoids requesting the notification permission on page load	^
Users are mistrustful of or confused by sites that request to send notifications without context. Consider tying the request user gestures instead. <u>Learn more about responsibly getting permission for notifications</u> .	t to
Displays images with correct aspect ratio	^
Image display dimensions should match natural aspect ratio. <u>Learn more about image aspect ratio</u> .	
Serves images with appropriate resolution	^
Image natural dimensions should be proportional to the display size and the pixel ratio to maximize image clarity. <u>Learn I to provide responsive images</u> .	<u>how</u>
Has a <meta name="viewport"/> tag with width or initial-scale	^
A <meta name="viewport"/> not only optimizes your app for mobile screen sizes, but also prevents <u>a 300 millisecond de to user input</u> . <u>Learn more about using the viewport meta tag.</u>	e <mark>l</mark> ay
Page has the HTML doctype	^

from tampering with or passively listening in on the communications between your app and your users, and is a prerequisite

for HTTP/2 and many new web platform APIs. Learn more about HTTPS.

	Specifying a doctype prevents the browser from switching to quirks-mode. <u>Learn more about the doctype declaration</u> .	
	Properly defines charset	^
	A character encoding declaration is required. It can be done with a <meta/> tag in the first 1024 bytes of the HTML or in t Content-Type HTTP response header. Learn more about declaring the character encoding.	he
	No browser errors logged to the console	^
	Errors logged to the console indicate unresolved problems. They can come from network request failures and other brow concerns. Learn more about this errors in console diagnostic audit	/ser
	No issues in the Issues panel in Chrome Devtools	^
	Issues logged to the Issues panel in Chrome Devtools indicate unresolved problems. They can come from network required failures, insufficient security controls, and other browser concerns. Open up the Issues panel in Chrome DevTools for more details on each issue.	
	Page has valid source maps	^
	Source maps translate minified code to the original source code. This helps developers debug in production. In addition, Lighthouse is able to provide further insights. Consider deploying source maps to take advantage of these benefits. Learn more about source maps.	
NO [.]	T APPLICABLE (3)	Hide
C	Redirects HTTP traffic to HTTPS	^
	Make sure that you redirect all HTTP traffic to HTTPS in order to enable secure web features for all your users. <u>Learn mor</u>	<u>e</u> .
C	Document uses legible font sizes	^
	Font sizes less than 12px are too small to be legible and require mobile visitors to "pinch to zoom" in order to read. Strive have >60% of page text ≥12px. Learn more about legible font sizes.	e to
C	Detected JavaScript libraries	^
	All front-end JavaScript libraries detected on the page. <u>Learn more about this JavaScript library detection diagnostic audi</u>	<u>it</u> .



SEO

These checks ensure that your page is following basic search engine optimization advice. There are many additional factors Lighthouse does not score here that may affect your search ranking, including performance on Core Web Vitals. Learn more about Google Search Essentials.

ADDITIONAL ITEMS TO MANUALLY CHECK (1)	Hide
O Structured data is valid	^
Run the <u>Structured Data Testing Tool</u> and the <u>Structured Data Linter</u> to validate structured data. <u>Learn mo</u> <u>Data</u> .	re about Structured
Run these additional validators on your site to check additional SEO best practices.	
PASSED AUDITS (10)	Hide
Page isn't blocked from indexing	^
Search engines are unable to include your pages in search results if they don't have permission to crawl the about crawler directives.	nem. <u>Learn more</u>
Document has a <title> element</td><td>^</td></tr><tr><td>The title gives screen reader users an overview of the page, and search engine users rely on it heavily to d is relevant to their search. <u>Learn more about document titles</u>.</td><td>etermine if a page</td></tr><tr><td>Document has a meta description</td><td>^</td></tr><tr><td>Meta descriptions may be included in search results to concisely summarize page content. <u>Learn more abdescription</u>.</td><td>out the meta</td></tr><tr><td>Page has successful HTTP status code</td><td>^</td></tr><tr><td>Pages with unsuccessful HTTP status codes may not be indexed properly. <u>Learn more about HTTP status o</u></td><td><u>codes</u>.</td></tr><tr><td>Links have descriptive text</td><td>^</td></tr></tbody></table></title>	

Descriptive link text helps search engines understand your content. Learn how to make links more accessible. Links are crawlable Search engines may use href attributes on links to crawl websites. Ensure that the href attribute of anchor elements links to an appropriate destination, so more pages of the site can be discovered. Learn how to make links crawlable robots.txt is valid If your robots.txt file is malformed, crawlers may not be able to understand how you want your website to be crawled or indexed. Learn more about robots.txt. Image elements have [alt] attributes Informative elements should aim for short, descriptive alternate text. Decorative elements can be ignored with an empty alt attribute. Learn more about the alt attribute. Document has a valid hreflang hreflang links tell search engines what version of a page they should list in search results for a given language or region. Learn more about hreflang. Document has a valid rel=canonical Canonical links suggest which URL to show in search results. Learn more about canonical links. Captured at Jul 26, 2025, 6:01 Emulated Desktop with Single page session

Generated by **Lighthouse** 12.6.0 | File an issue

Using Chromium 138.0.0.0 with

devtools

Lighthouse 12.6.0

Custom throttling

PM GMT+5:30

Initial page load