
05

“

The open *door.*

HOW ONE CLOUD MISCONFIGURATION BECOMES A BREACH

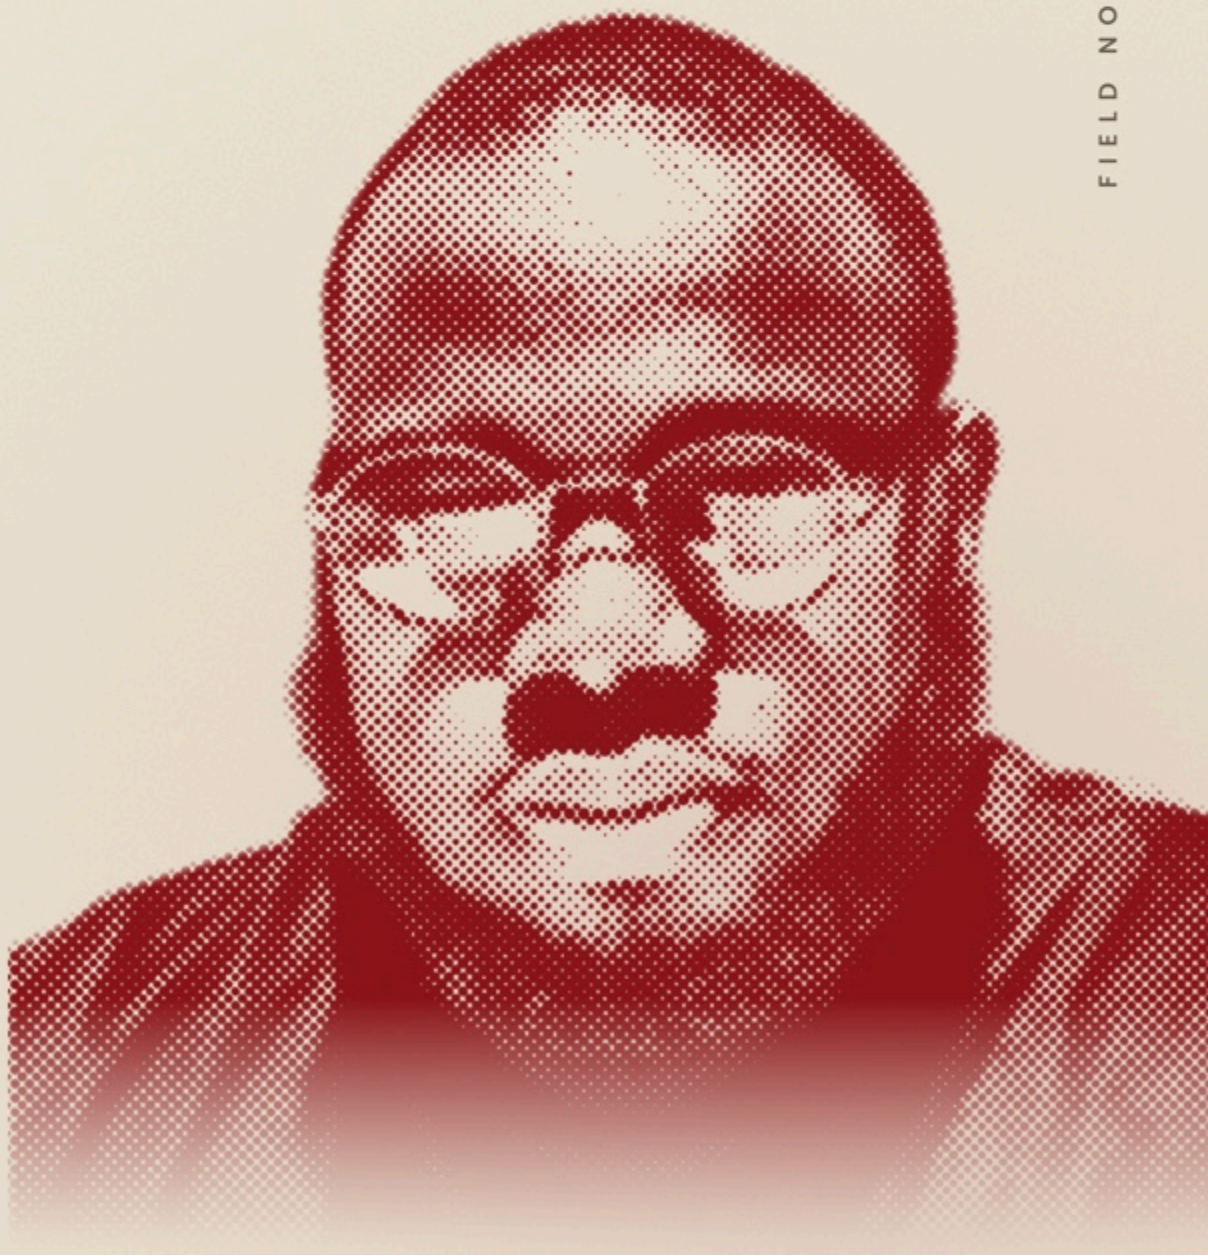

This is a composite of patterns that show up again and again, **not one company’s story.**

SWIPE →

MICHAEL ADEYANJU
michaeladeyanju.com



Each step looks *small on its own.*

How one cloud misconfiguration becomes a breach.

This is a composite of patterns that show up again and again, not one company's story.

MICHAEL ADEYANJU

michaeladeyanju.com

SWIPE →

01

A quick test. *It stays open.*

A developer opens a database port to the internet for a quick test. It stays open.

MICHAEL ADEYANJU

michaeladeyanju.com

SWIPE →

02

A password that *also lives in a config file.*

The database uses a password that also lives in a config file in an old repository.

MICHAEL ADEYANJU

michaeladeyanju.com

SWIPE →

03

Public for a week, *two years ago.*

That repository was public for a week, two years ago. Automated scanners copied it.

MICHAEL ADEYANJU

michaeladeyanju.com

SWIPE →

04

Nobody was *alerted.*

Nobody was alerted, because logging for that account was switched off to save money.

MICHAEL ADEYANJU

michaeladeyanju.com

SWIPE →

“

No zero-day.
No genius attacker.

The fix is ordinary too: block public access by default, keep secrets out of code, scan for exposed ports, and keep logging on.

Which of the four would your team catch first?

TELL ME IN THE COMMENTS

MICHAEL ADEYANJU

michaeladeyanju.com