

Tejas Wani CSE(DS) RollNo:65 DL Exp 3

Code:

```
import numpy as np
import pandas as pd
from sklearn.datasets import load_iris
from sklearn.model_selection import train_test_split
import matplotlib.pyplot as plt

# Load dataset
data = load_iris()

# Get features and target
X=data.data
y=data.target
# Get dummy variable
y = pd.get_dummies(y).values

y[:3]
#Split data into train and test data
X_train, X_test, y_train, y_test = train_test_split(X, y, test_size=20,
random_state=4)
# Initialize variables
learning_rate = 0.1
iterations = 5000
N = y_train.size

# number of input features
input_size = 4

# number of hidden layers neurons
hidden_size = 2

# number of neurons at the output layer
output_size = 3

results = pd.DataFrame(columns=["mse", "accuracy"])
# Initialize weights
np.random.seed(10)

# initializing weight for the hidden layer
```

```

W1 = np.random.normal(scale=0.5, size=(input_size, hidden_size))

# initializing weight for the output layer
W2 = np.random.normal(scale=0.5, size=(hidden_size , output_size))
def sigmoid(x):
    return 1 / (1 + np.exp(-x))

def mean_squared_error(y_pred, y_true):
    return ((y_pred - y_true)**2).sum() / (2*y_pred.size)

def accuracy(y_pred, y_true):
    acc = y_pred.argmax(axis=1) == y_true.argmax(axis=1)
    return acc.mean()
#backpropagation neural network
for itr in range(iterations):

    # feedforward propagation
    # on hidden layer
    Z1 = np.dot(X_train, W1)
    A1 = sigmoid(Z1)

    # on output layer
    Z2 = np.dot(A1, W2)
    A2 = sigmoid(Z2)

    # Calculating error
    mse = mean_squared_error(A2, y_train)
    acc = accuracy(A2, y_train)
    results=results.append({"mse":mse, "accuracy":acc},ignore_index=True )

    # backpropagation
    E1 = A2 - y_train
    dW1 = E1 * A2 * (1 - A2)

    E2 = np.dot(dW1, W2.T)
    dW2 = E2 * A1 * (1 - A1)

    # weight updates

```

```
W2_update = np.dot(A1.T, dW1) / N
W1_update = np.dot(X_train.T, dW2) / N


W2 = W2 - learning_rate * W2_update
W1 = W1 - learning_rate * W1_update
results.mse.plot(title="Mean Squared Error")
results.accuracy.plot(title="Accuracy")
# feedforward
Z1 = np.dot(X_test, W1)
A1 = sigmoid(Z1)

Z2 = np.dot(A1, W2)
A2 = sigmoid(Z2)


acc = accuracy(A2, y_test)
print("Accuracy: {}".format(acc))
```

Output:

```
<Axes: title={'center': 'Mean Squared Error'}>
```

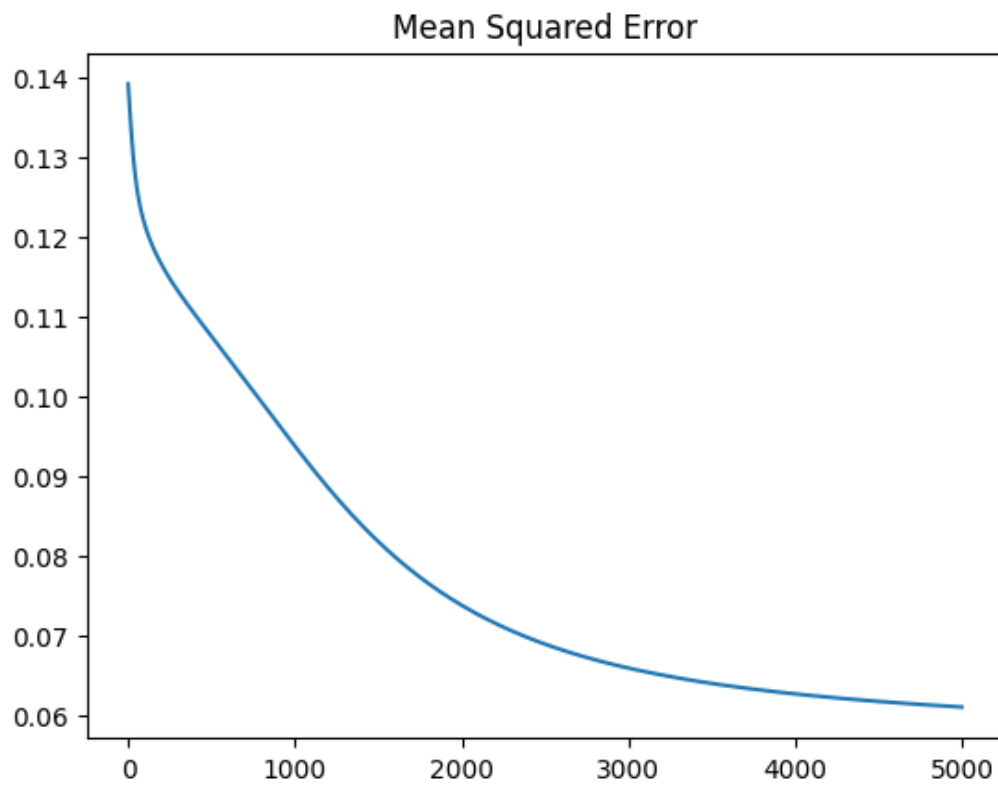

<Axes: title={'center': 'Accuracy'}>

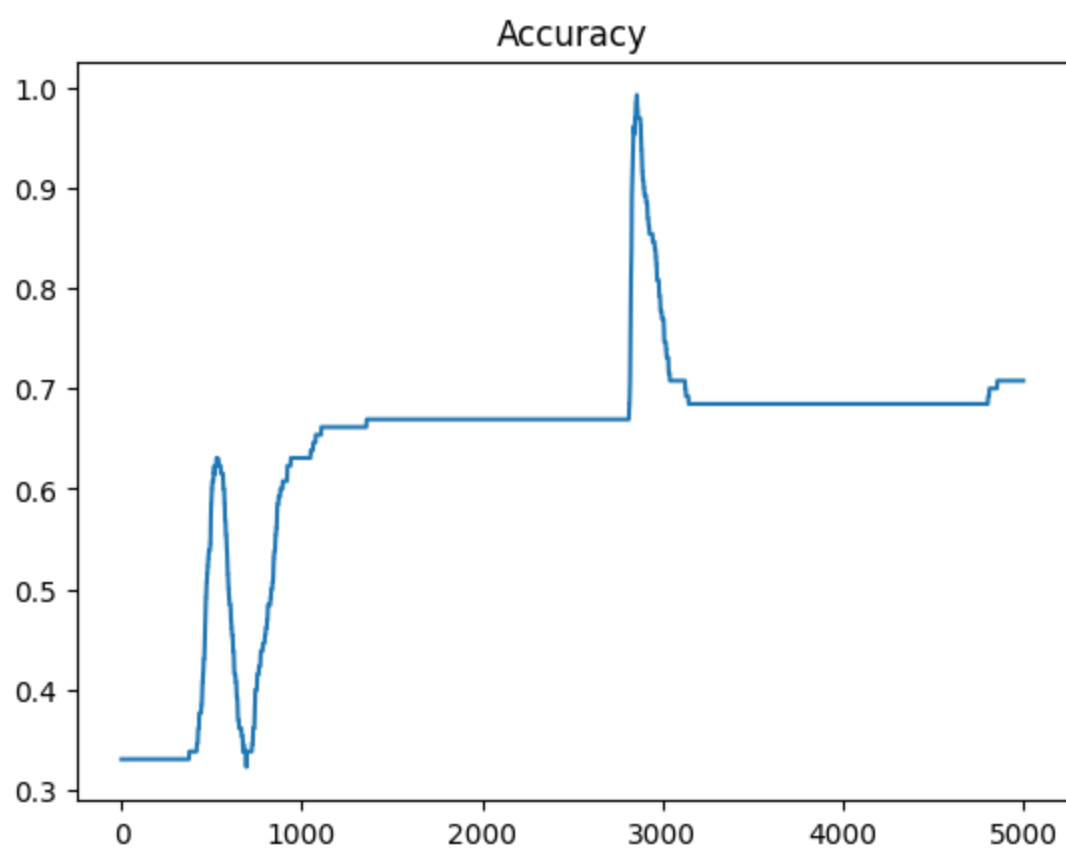

Accuracy: 0.8