


B.M.S. College of Engineering

(Autonomous College Affiliated to Visvesvaraya Technological University, Belgaum)
Bull Temple Road, Basavanagudi, Bengaluru – 560019

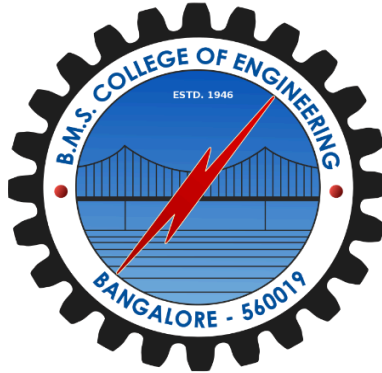

**Department of
Computer Science & Engineering (CSE)**

Lab Programs Report

**Course Title: Object Oriented Java
Programming**

Course Code: 23CS3PCOOJ


BY

Hadia Fathima (1BM22CS106)

B.M.S. College of Engineering

(Autonomous College Affiliated to Visvesvaraya Technological University, Belgaum)

Bull Temple Road, Basavanagudi, Bengaluru – 560019

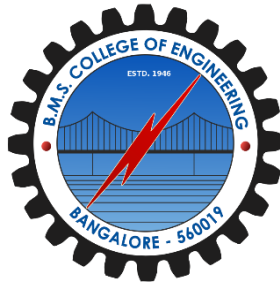

**Department of
Computer Science & Engineering (CSE)**

CERTIFICATE

This is to certify that the report on “**Java Lab Programs**” has been carried out by **Hadia Fathima** bearing USN **1BM22CS106** as a part of AAT for the course **Object Oriented Java Programming** with course code **23CS3PCOOJ**, Computer Science and Engineering from Visvesvaraya Technological University, Belgaum during the year 2023–24. It is certified that all corrections/suggestions indicated for Internal Assessments have been incorporated in the report.

Hadia Fathima
1BM22CS106

Shravya AR
Assistant Professor
Department of CSE
BMSCE, Bengaluru-19

Table of contents

S. No.	Title	Pg No.
1.	Lab Program 1	3-4
2.	Lab Program 2	4-7
3.	Lab Program 3	8-10
4.	Lab Program 4	11-12
5.	Lab Program 5	13-15
6.	Lab Program 6	16-18
7.	Lab Program 7	19-20
8.	Lab Program 8	21-22

LAB PROGRAM 1

Develop a Java program that prints all real solutions to the quadratic equation $ax^2+bx+c = 0$. Read in a, b, c and use the quadratic formula. If the discriminate b^2-4ac is negative, display a message stating that there are no real solutions.

CODE

```
import java.util.Scanner;
import java.lang.Math;
class quadratic
{public static void main(String XX[])
{ System.out.println("Hadia Fathima 1BM22CS106");
  int a,b,c;
  System.out.println("enter the values of a,b,c respectively\n");
  Scanner s1= new Scanner(System.in);
  a = s1.nextInt();
  b = s1.nextInt();
  c = s1.nextInt();
  double d= b*b - 4*a*c ;
  System.out.println("a = " + a +" b = " + b +" c = " + c);
  if(a==0) {System.out.println("not a quadratic equation");}
  else if( d>0)
  {
    System.out.println("the equation has two real and different solutions");
    double r1=(-b + Math.sqrt(d))/(2*a);
    double r2=(-b - Math.sqrt(d))/(2*a);
    System.out.println("r1 = " + r1);
    System.out.println("r2 = " + r2);
  }

  else if(d==0)
  {
    System.out.println("the equation has real and equal solutions");
    double r1= -b/(2*a);
    double r2= -b/(2*a);
    System.out.println("r1 = " + r1);
    System.out.println("r2 = " + r2);
  }

  else if(d<0)
  {
    System.out.println("the equation has unreal solutions");
```

```
}  
}  
  
}
```

OUTPUT

```
Command Prompt  
Microsoft Windows [Version 10.0.22631.2861]  
(c) Microsoft Corporation. All rights reserved.  
  
C:\Users\hadia>cd OneDrive  
  
C:\Users\hadia\OneDrive>cd Desktop  
  
C:\Users\hadia\OneDrive\Desktop>javac quadratic.java  
  
C:\Users\hadia\OneDrive\Desktop>java quadratic  
Hadia Fathima 1BM22CS106  
enter the values of a,b,c respectively  
  
1  
2  
3  
a = 1 b = 2 c = 3  
the equation has unreal solutions  
  
C:\Users\hadia\OneDrive\Desktop>java quadratic  
Hadia Fathima 1BM22CS106  
enter the values of a,b,c respectively  
  
4  
1  
1  
a = 4 b = 1 c = 1  
the equation has unreal solutions  
  
C:\Users\hadia\OneDrive\Desktop>java quadratic  
Hadia Fathima 1BM22CS106  
enter the values of a,b,c respectively  
  
1  
4  
1  
a = 1 b = 4 c = 1  
the equation has two real and different solutions  
r1 = -0.2679491924311228  
r2 = -3.732050807568877
```

Lab program 2

Develop a Java program to create a class Student with members usn, name, an array credits and an array marks. Include methods to accept and display details and a method to calculate percentage of a student.

CODE

```
import java.util.Scanner;  
class Student{  
    String usn;
```

```

String name;
int marks[]= new int[6];

void Details()
{
Scanner s=new Scanner(System.in);
System.out.println("Enter USN");
usn=s.next();
System.out.println("Enter Name");
name=s.next();
System.out.println("Enter marks for 6 subjects:");
for(int i = 0; i < 6; i++)
{
System.out.print("Subject " + (i + 1) + ": ");
marks[i]=s.nextInt();
}
}
double percentage()
{
int total=0;
for(int i=0;i<6;i++)
{
total+=marks[i];
}
double p=total/6;
return p;
}
void display()
{
System.out.println("\nStudent Details:");
System.out.println("USN: " + usn);
System.out.println("Name: " + name);
System.out.println("Marks:");
for(int i = 0; i < 6; i++)
{
System.out.println("Subject " + (i + 1) + ": " + marks[i]);
}
System.out.println("Percentage: "+ percentage() + "%");
}
}
class studpercent
{
public static void main(String args[]){
Scanner s = new Scanner(System.in);

```


```

System.out.println("Hadia Fathima 1BM22CS106");

System.out.print("Enter the number of students: ");
int n = s.nextInt();
Student[] students = new Student[n];
for (int i = 0; i < n; i++)
{
    students[i] = new Student();
    System.out.println("\nEnter details for Student " + (i + 1) + ":");
    students[i].Details();
}
for (Student student : students)
{
    student.display();
}
}
}
}

```

OUTPUT

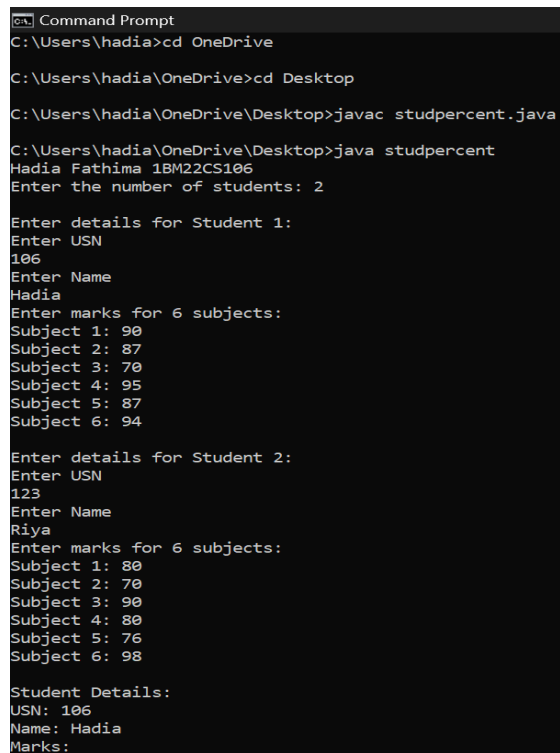

```

C:\Users\hadia>cd OneDrive
C:\Users\hadia\OneDrive>cd Desktop
C:\Users\hadia\OneDrive\Desktop>javac studpercent.java
C:\Users\hadia\OneDrive\Desktop>java studpercent
Hadia Fathima 1BM22CS106
Enter the number of students: 2

Enter details for Student 1:
Enter USN
106
Enter Name
Hadia
Enter marks for 6 subjects:
Subject 1: 90
Subject 2: 87
Subject 3: 70
Subject 4: 95
Subject 5: 87
Subject 6: 94

Enter details for Student 2:
Enter USN
123
Enter Name
Riya
Enter marks for 6 subjects:
Subject 1: 80
Subject 2: 70
Subject 3: 90
Subject 4: 80
Subject 5: 76
Subject 6: 98

Student Details:
USN: 106
Name: Hadia
Marks:

```

```
Command Prompt
Enter USN
123
Enter Name
Riya
Enter marks for 6 subjects:
Subject 1: 80
Subject 2: 70
Subject 3: 90
Subject 4: 80
Subject 5: 76
Subject 6: 98

Student Details:
USN: 106
Name: Hadia
Marks:
Subject 1: 90
Subject 2: 87
Subject 3: 70
Subject 4: 95
Subject 5: 87
Subject 6: 94
Percentage: 87.0%

Student Details:
USN: 123
Name: Riya
Marks:
Subject 1: 80
Subject 2: 70
Subject 3: 90
Subject 4: 80
Subject 5: 76
Subject 6: 98
Percentage: 82.0%

C:\Users\hadia\OneDrive\Desktop>
```


Lab program 3

Create a class Book which contains four members: name, author, price, num_pages. Include a constructor to set the values for the members. Include methods to set and get the details of the objects. Include a toString() method that could display the complete details of the book. Develop a Java program to create n book objects

CODE

```
import java.util.Scanner;

class Books
{
    String name;
    String author;
    int price;
    int numpages;

    Books(){}
    Books(String name,String author,int price,int numpages)
    {
        this.name=name;
        this.author=author;
        this.price=price;
        this.numpages=numpages;
    }
    public String toString()
    {
        String name,author;
        String price,numpages;
        name="BOOK NAME :"+this.name+"\n";
        author="AUTHOR NAME:"+this.author+"\n";
        price="PRICE :"+this.price+"\n";
        numpages="NUMBER OF PAGES :"+this.numpages+"\n";
        return name+author+price+numpages;
    }
}

class bookdb
{
    public static void main(String args[])
    {
        System.out.println("Hadia Fathima 1BM22CS106");
        Scanner s=new Scanner(System.in);
        int n;
        String name;
        String author;
```

```

int price;
int numpages;
System.out.println("enter the number of books:");
n=s.nextInt();
Books b[];
b= new Books[n];
for (int i=0;i<n;i++)
{
System.out.println("Book "+(i+1)+":");
System.out.println("Enter name of Book :");
name =s.next();
System.out.println("Enter AUTHOR NAME :");
author =s.next();
System.out.println("Enter price :");
price =s.nextInt();
System.out.println("Enter no of pages :");
numpages =s.nextInt();
b[i]=new Books(name,author,price,numpages);
}
for(int i=0;i<n;i++)
System.out.println("Book :"+(i+1)+" :\n"+b[i]);
}
}

```

OUTPUT

```
Command Prompt
C:\Users\hadia>cd OneDrive

C:\Users\hadia\OneDrive>cd Desktop

C:\Users\hadia\OneDrive\Desktop>javac bookdb.java

C:\Users\hadia\OneDrive\Desktop>java bookdb
Hadia Fathima 1BM22CS106
enter the number of books:
2
Book 1:
Enter name of Book :
HarryPotter
Enter AUTHOR NAME :
JKRowling
Enter price :
300
Enter no of pages :
390
Book 2:
Enter name of Book :
PercyJackson
Enter AUTHOR NAME :
RickRiordan
Enter price :
240
Enter no of pages :
400
Book :1:
BOOK NAME :HarryPotter
AUTHOR NAME:JKRowling
PRICE :300
NUMBER OF PAGES :390

Book :2:
BOOK NAME :PercyJackson
AUTHOR NAME:RickRiordan
PRICE :240
NUMBER OF PAGES :400
```

Lab program 4


Develop a Java program to create an abstract class named Shape that contains two integers and an empty method named printArea(). Provide three classes named Rectangle, Triangle and Circle such that each one of the classes extends the class Shape. Each one of the classes contain only the method printArea() that prints the area of the given shape

CODE

```
abstract class Shape {
    protected int dimension1;
    protected int dimension2;
    public Shape(int dimension1, int dimension2) {
        this.dimension1 = dimension1;
        this.dimension2 = dimension2;
    }
    public abstract void printArea();
}
class Rectangle extends Shape {
    public Rectangle(int length, int width) {
        super(length, width);
    }
    public void printArea() {
        int area = dimension1 * dimension2;
        System.out.println("Area of Rectangle: " + area);
    }
}
class Triangle extends Shape {
    public Triangle(int base, int height) {
        super(base, height);
    }
    public void printArea() {
        double area = 0.5 * dimension1 * dimension2;
        System.out.println("Area of Triangle: "+ area);
    }
}
class Circle extends Shape {
    public Circle(int radius) {
        super(radius, 0);
    }
    public void printArea() {
        double area = Math.PI * dimension1 * dimension1;
        System.out.println("Area of Circle: " + area);
    }
}
```

```
public class shapes {  
    public static void main(String[] args) {  
        System.out.println("Hadia Fathima 1BM22CS106");  
        Rectangle rectangle = new Rectangle(4, 5);  
        rectangle.printArea();  
        Triangle triangle = new Triangle(3, 6);  
        triangle.printArea();  
        Circle circle = new Circle(7);  
        circle.printArea();  
    }  
}
```

OUTPUT

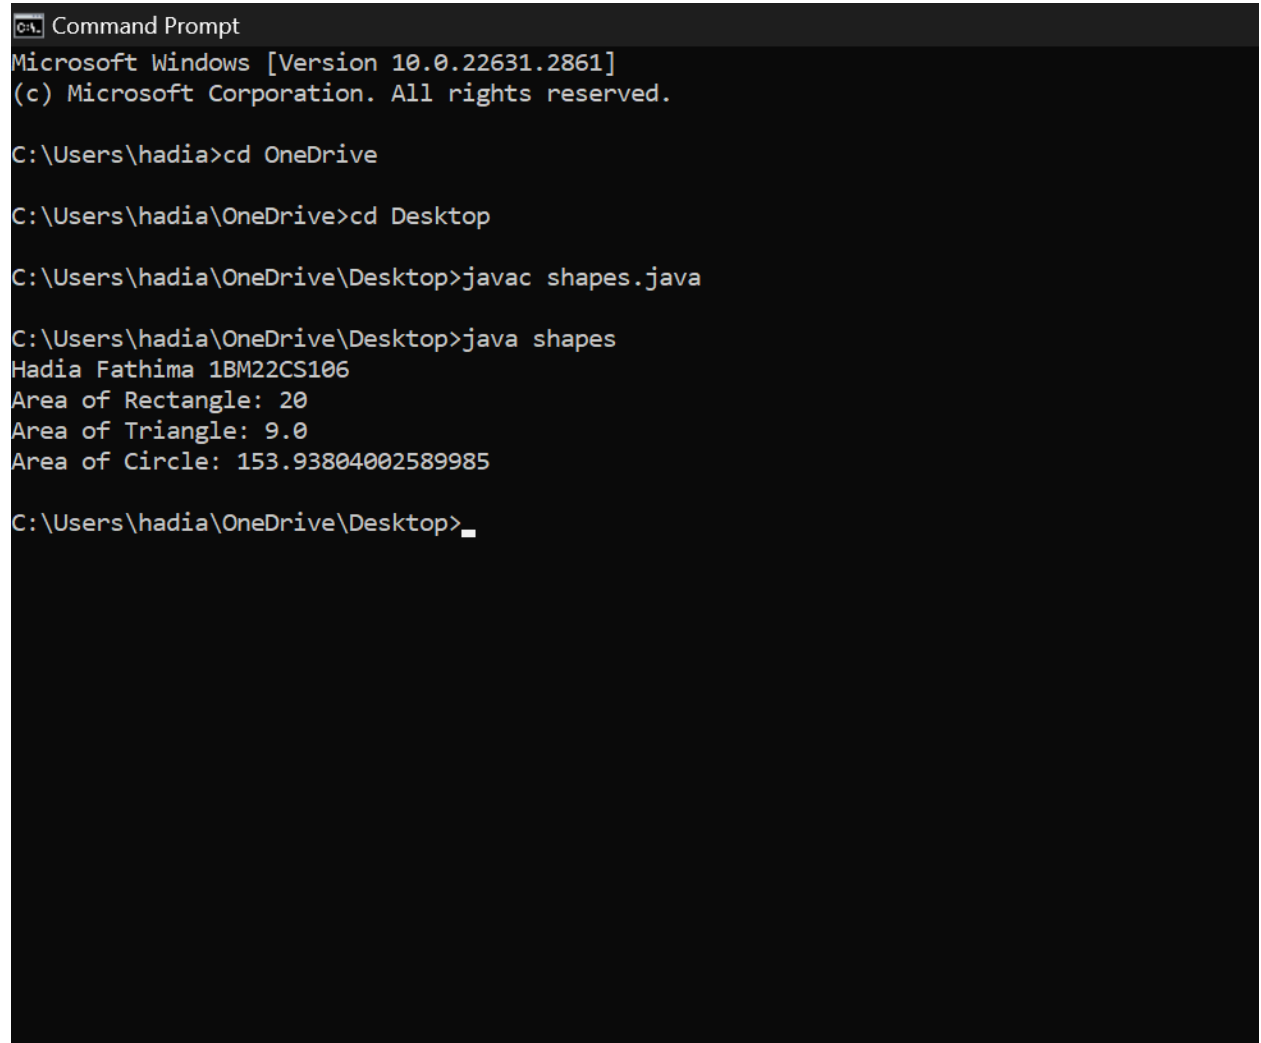

```
C:\> Command Prompt  
Microsoft Windows [Version 10.0.22631.2861]  
(c) Microsoft Corporation. All rights reserved.  
  
C:\Users\hadia>cd OneDrive  
  
C:\Users\hadia\OneDrive>cd Desktop  
  
C:\Users\hadia\OneDrive\Desktop>javac shapes.java  
  
C:\Users\hadia\OneDrive\Desktop>java shapes  
Hadia Fathima 1BM22CS106  
Area of Rectangle: 20  
Area of Triangle: 9.0  
Area of Circle: 153.93804002589985  
  
C:\Users\hadia\OneDrive\Desktop>_
```

Lab program 5

Develop a Java program to create a class Bank that maintains two kinds of account for its customers, one called savings account and the other current account. The savings account provides compound interest and withdrawal facilities but no cheque book facility. The current account provides cheque book facility but no interest. Current account holders should also maintain a minimum balance and if the balance falls below this level, a service charge is imposed. Create a class Account that stores customer name, account number and type of account. From this derive the classes Cur-acct and Sav-acct to make them more specific to their requirements. Include the necessary methods in order to achieve the following tasks: a) Accept deposit from customer and update the balance. b) Display the balance. c) Compute and deposit interest d) Permit withdrawal and update the balance Check for the minimum balance, impose penalty if necessary and update the balance.

CODE

```
class Bank {
    public static void main(String[] args) {
        System.out.println("Hadia Fathima 1BM22CS106");
        SavingsAccount savingsAccount = new SavingsAccount("Hadia", "SA1001");
        CurrentAccount currentAccount = new CurrentAccount("Diksha", "CA2002");

        savingsAccount.deposit(5000);
        savingsAccount.displayBalance();
        savingsAccount.computeInterest();
        savingsAccount.displayBalance();
        savingsAccount.withdraw(2000);
        savingsAccount.displayBalance();

        currentAccount.deposit(8000);
        currentAccount.displayBalance();

        currentAccount.withdraw(5000);
        currentAccount.displayBalance();
    }
}

class Account {
    protected String customerName;
    protected String accountNumber;
    protected double balance;
    public Account(String customerName, String accountNumber) {
        this.customerName = customerName;
        this.accountNumber = accountNumber;
        this.balance = 0;
    }
    public void deposit(double amount) {
```


```

balance += amount;
System.out.println("Deposit of " + amount + " successful.");
}
public void displayBalance() {
System.out.println("Account Number:" + accountNumber + "\nBalance: " + balance);
}
}
class SavingsAccount extends Account {
public SavingsAccount(String customerName, String accountNumber) {
super(customerName, accountNumber);
}
public void computeInterest() {
double interestRate = 0.05; // Assuming a 5% interest rate
double interest = balance * interestRate;
balance += interest;
System.out.println("Interest of " + interest + "computed and added to the balance.");
}
public void withdraw(double amount) {
if (balance >= amount) {
balance -= amount;
System.out.println("Withdrawal of " + amount + "successful.");
} else {
System.out.println("Insufficient funds for withdrawal.");
}
}
}
class CurrentAccount extends Account {
private double minimumBalance = 1000; // Assuming a minimum balance requirement
public CurrentAccount(String customerName, String accountNumber) {
super(customerName, accountNumber);
}
public void withdraw(double amount) {
if (balance - amount >= minimumBalance) {
balance -= amount;
System.out.println("Withdrawal of $" + amount + "successful.");
} else {
System.out.println("Insufficient funds. Service charge applied.");
imposeServiceCharge();
}
}
private void imposeServiceCharge() {
double serviceCharge = 20; // Assuming a service charge of $20
balance -= serviceCharge;
}
}

```

```
System.out.println("Service charge of $" + serviceCharge + " imposed.");  
}  
}
```

OUTPUT

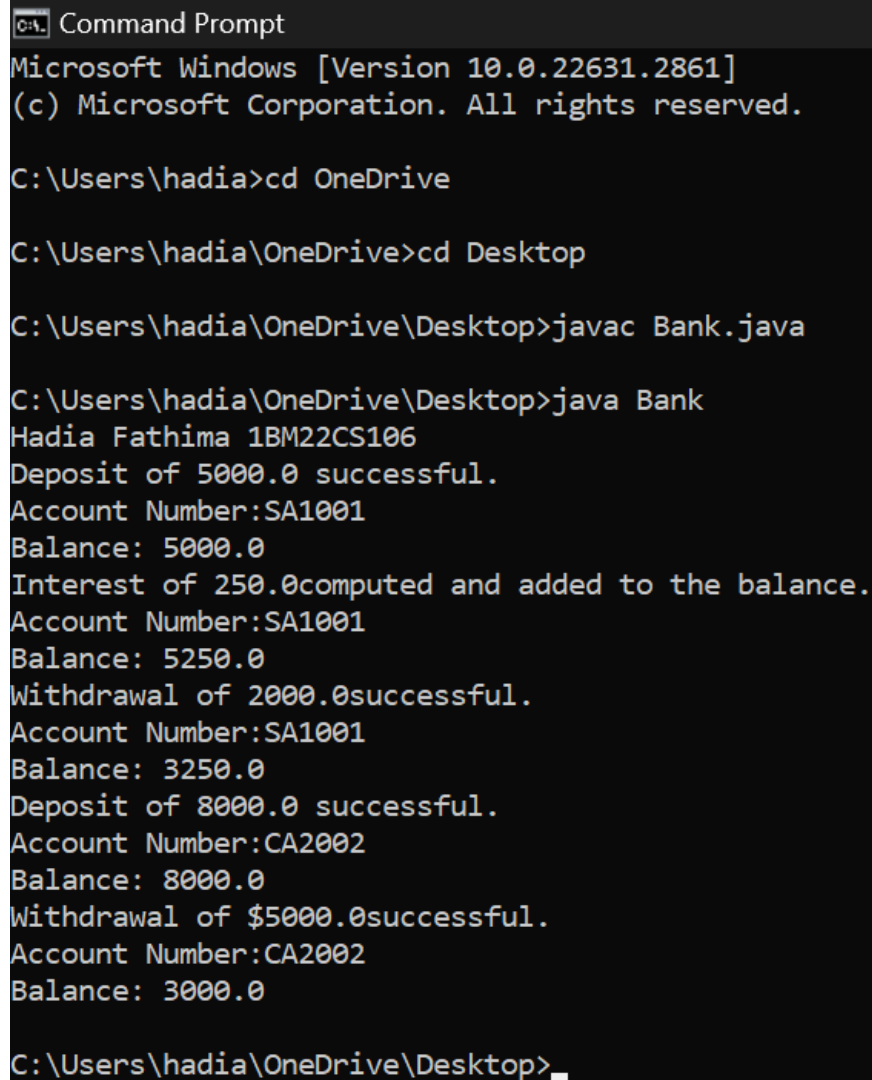

```
Command Prompt  
Microsoft Windows [Version 10.0.22631.2861]  
(c) Microsoft Corporation. All rights reserved.  
  
C:\Users\hadia>cd OneDrive  
  
C:\Users\hadia\OneDrive>cd Desktop  
  
C:\Users\hadia\OneDrive\Desktop>javac Bank.java  
  
C:\Users\hadia\OneDrive\Desktop>java Bank  
Hadia Fathima 1BM22CS106  
Deposit of 5000.0 successful.  
Account Number:SA1001  
Balance: 5000.0  
Interest of 250.0computed and added to the balance.  
Account Number:SA1001  
Balance: 5250.0  
Withdrawal of 2000.0successful.  
Account Number:SA1001  
Balance: 3250.0  
Deposit of 8000.0 successful.  
Account Number:CA2002  
Balance: 8000.0  
Withdrawal of $5000.0successful.  
Account Number:CA2002  
Balance: 3000.0  
  
C:\Users\hadia\OneDrive\Desktop>_
```


Lab program 6

Create a package CIE which has two classes- Student and Internals. The class Personal has members like usn, name, sem. The class internals has an array that stores the internal marks scored in five courses of the current semester of the student. Create another package SEE which has the class External which is a derived class of Student. This class has an array that stores the SEE marks scored in five courses of the current semester of the student. Import the two packages in a file that declares the final marks of n students in all five courses.

CODE

Internals.java

```
package cie;
public class Internals extend
s Student{
public int[] marks=new int[5];
```

External.java

```
package see;
import cie.Student;
public class External extends Student{
public int[] seemarks=new int[5];
}
```

Student.java

```
package cie;
public class Student{
public String name;
public String usn;
public int sem;
}
```

Main.java

```
import cie.Internals;
import see.External;
import java.util.Scanner;

public class Main {
    public static void main(String[] args) {
        System.out.println("Hadia Fathima 1BM22CS106");
        System.out.println("Enter the number of students");
        Scanner input = new Scanner(System.in);
```

```

int n = input.nextInt();

Internals[] s1 = new Internals[n];
External[] s2 = new External[n];
int[] finalcie = new int[n];
int[] finalsee = new int[n];

for (int i = 0; i < n; i++) {
    s1[i] = new Internals();
    System.out.println("Enter the name");
    s1[i].name = input.next();
    System.out.println("Enter the usn");
    s1[i].usn = input.next();
    System.out.println("Enter the sem");
    s1[i].sem = input.nextInt();
    System.out.println("Enter the internal (cie) marks of 5 subjects");
    for (int j = 0; j < 5; j++) {
        s1[i].marks[j] = input.nextInt();
        finalcie[i] += s1[i].marks[j];
    }
}

for (int i = 0; i < n; i++) {
    s2[i] = new External();
    System.out.println("Enter the name");
    s2[i].name = input.next();
    System.out.println("Enter the usn");
    s2[i].usn = input.next();
    System.out.println("Enter the sem");
    s2[i].sem = input.nextInt();
    System.out.println("Enter the external(see) marks of 5 subjects");
    for (int j = 0; j < 5; j++) {
        s2[i].seemarks[j] = input.nextInt();
        finalsee[i] += s2[i].seemarks[j];
    }
}

System.out.println("Final marks:");
for (int i = 0; i < n; i++) {
    System.out.println("Name: " + s1[i].name + " USN: " + s1[i].usn + " Sem: " + s1[i].sem);
    System.out.println("Internal marks: " + finalcie[i]);
    System.out.println("External marks: " + finalsee[i]);
    System.out.println("Total marks: " + (finalcie[i] + finalsee[i]));
}

```

```
}  
}
```

OUTPUT

```
Command Prompt  
C:\Users\hadia>cd OneDrive  
  
C:\Users\hadia\OneDrive>cd Desktop  
  
C:\Users\hadia\OneDrive\Desktop>javac Main.java  
  
C:\Users\hadia\OneDrive\Desktop>java Main  
Hadia Fathima 1BM22CS106  
Enter the number of students  
1  
Enter the name  
priya  
Enter the usn  
123  
Enter the sem  
3  
Enter the internal (cie) marks of 5 subjects  
40  
46  
38  
48  
42  
Enter the name  
priya  
Enter the usn  
123  
Enter the sem  
3  
Enter the external(see) marks of 5 subjects  
40  
50  
45  
43  
39  
Final marks:  
Name: priya USN: 123 Sem: 3  
Internal marks: 214  
External marks: 217  
Total marks: 431
```

Lab program 7

Write a program that demonstrates handling of exceptions in inheritance tree. Create a base class called "Father" and derived class called "Son" which extends the base class. In Father class, implement a constructor which takes the age and throws the exception WrongAge() when the input age<0. In Son class, implement a constructor that cases both father and son's age and throws an exception if son's age is >=father's age.

CODE

```
class WrongAge extends Exception {
    public WrongAge(String message) {
        super(message);
    }
}
class Father {
    int age;

    public Father(int age) throws WrongAge {
        if (age < 0) {
            throw new WrongAge("Age cannot be negative");
        }
        this.age = age;
    }

    public int getAge() {
        return age;
    }
}
class Son extends Father {
    int sonAge;

    public Son(int fatherAge, int sonAge) throws WrongAge {
        super(fatherAge);
        if (sonAge >= fatherAge) {
            throw new WrongAge("Son's age cannot be greater than or equal to father's age");
        }
        this.sonAge = sonAge;
    }

    public int getSonAge() {
        return sonAge;
    }
}

public class checkAge {
    public static void main(String[] args) {
```


```

System.out.println("Hadia 1BM22CS106");
try {
    Father father = new Father(45);
    System.out.println("Father's age: " + father.getAge());

    Son son = new Son(45, 20);
    System.out.println("Son's age: " + son.getSonAge());
} catch (WrongAge e) {
    System.out.println("Exception caught: " + e.getMessage());
}
}
}

```

OUTPUT

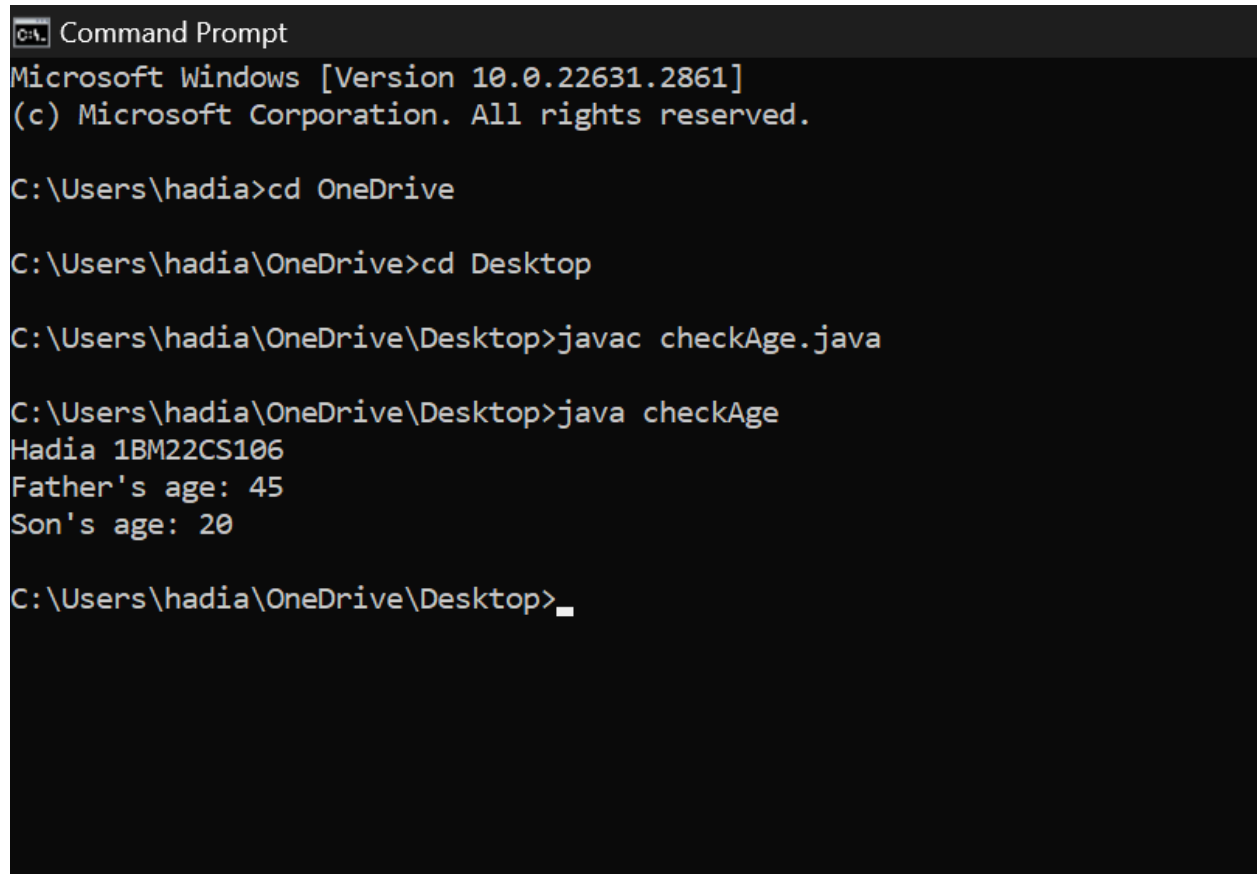

```

C:\> Command Prompt
Microsoft Windows [Version 10.0.22631.2861]
(c) Microsoft Corporation. All rights reserved.

C:\Users\hadia>cd OneDrive

C:\Users\hadia\OneDrive>cd Desktop

C:\Users\hadia\OneDrive\Desktop>javac checkAge.java

C:\Users\hadia\OneDrive\Desktop>java checkAge
Hadia 1BM22CS106
Father's age: 45
Son's age: 20

C:\Users\hadia\OneDrive\Desktop>_

```

Lab program 8

Write a program which creates two threads, one thread displaying “BMS College of Engineering” once every ten seconds and another displaying “CSE” once every two seconds.

CODE

```
class DispMessage extends Thread {
    String message;
    int interval;

    public DispMessage(String message, int interval) {
        this.message = message;
        this.interval = interval;
    }

    public void run() {
        while (true) {
            System.out.println(message);
            try {
                Thread.sleep(interval); // Sleep for the specified interval
            } catch (InterruptedException e) {
                e.printStackTrace();
            }
        }
    }
}

public class Example{
    public static void main(String[] args) {
        System.out.println("Hadia Fathima 1BM22CS106");
        DispMessage bmsThread = new DispMessage("BMS College of Engineering", 10000);
        DispMessage cseThread = new DispMessage("CSE", 2000);

        bmsThread.start();
        cseThread.start();
    }
}
```

OUTPUT

```
C:\> Command Prompt - java Example
Microsoft Windows [Version 10.0.22631.2861]
(c) Microsoft Corporation. All rights reserved.

C:\Users\hadia>cd OneDrive

C:\Users\hadia\OneDrive>cd Desktop

C:\Users\hadia\OneDrive\Desktop>javac Example.java

C:\Users\hadia\OneDrive\Desktop>java Example
Hadia Fathima 1BM22CS106
BMS College of Engineering
CSE
CSE
CSE
CSE
CSE
BMS College of Engineering
CSE
CSE
CSE
CSE
CSE
BMS College of Engineering
CSE
CSE
CSE
CSE
CSE
BMS College of Engineering
CSE
CSE
CSE
CSE
CSE
BMS College of Engineering
CSE
```

THANK YOU