

Algorithm

Hadi Asemi

[Book](#)

[Lecture Video for the Book](#)

Recursion :

Recursion is the process of defining a problem (or the solution to a problem) in terms of (a simpler version) itself.

Law of Recursive:

- A recursive algorithm must have a base case (when to stop)
- A recursive algorithm must move toward the base case
- A recursive algorithm must call itself recursively

Code:

Example 1:

```
def count_down(n):  
    print(n,end=' ')  
    if n>0:  
        count_down(n-1)
```

Example 2:

```
def sum_list(list):  
    if len(list)==0:  
        return 0  
    return list[0]+sum_list(list[1:])
```

Example 3:

Convert decimal to different base

```
def tostr(n,base):  
    digits='0123456789ABCDEF'  
    if n<base:  
        return digits[n]  
    return tostr(n // base,base) + digits[n % base]
```

Example 4:

Check Palindrome

```

def reverseDigits(num) :

    rev_num = 0;
    while (num > 0) :
        rev_num = rev_num * 10 + num % 10
        num = num // 10

    return rev_num

# Function to check if n is Palindrome
def isPalindrome(n) :

    # get the reverse of n
    rev_n = reverseDigits(n);

    # Check if rev_n and n are same or not.
    if (rev_n == n) :
        return 1
    else :
        return 0

def pallidnrome(num):
    s=str(num)
    if len(s) < 1:
        return True
    else:
        if s[0] == s[-1]:
            return pallidnrome(s[1:-1])
        else:
            return False

```

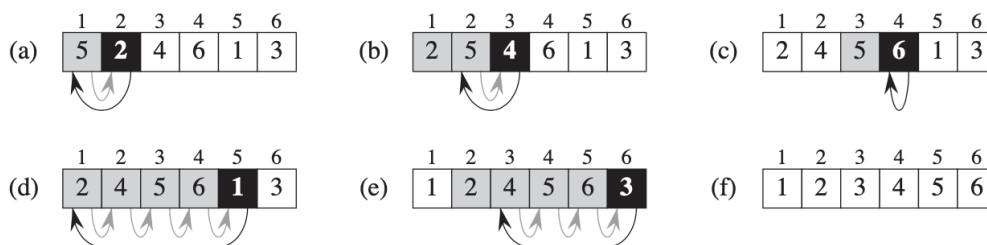
Insertion Sort

Figure 1: Insertion Sort

Code:

```

def insertion_sort(A):
    for j in range(2, len(A)):

```

```

key=A[j]
i=j-1
while i>0 and A[i]>key:
    A[i+1]=A[i]
    i=i-1
A[i+1]=key
return A

```

The $\theta(n)$ steps. Each steps have $\theta(n)$ swaps.

Merge Sort:

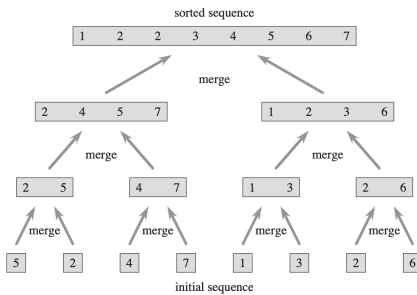


Figure 2: Merge Sort

Code:

```

def mergeSort(myList):
    if len(myList) > 1:
        mid = len(myList) // 2
        left = myList[:mid]
        right = myList[mid:]

        # Recursive call on each half
        mergeSort(left)
        mergeSort(right)

        # Two iterators for traversing the two halves
        i = 0
        j = 0

        # Iterator for the main list
        k = 0

        while i < len(left) and j < len(right):
            if left[i] < right[j]:
                # The value from the left half has been used
                myList[k] = left[i]
                # Move the iterator forward
                i += 1
            else:
                myList[k] = right[j]
                j += 1
            # Move to the next slot
            k += 1

```

```

        k += 1

        # For all the remaining values
        while i < len(left):
            myList[k] = left[i]
            i += 1
            k += 1

        while j < len(right):
            myList[k]=right[j]
            j += 1
            k += 1

myList = [54,26,93,17,77,31,44,55,20]
mergeSort(myList)
print(myList)

```

The complexity $\theta(n)$.

$$T(n) = c_1 + 2T\left(\frac{n}{2}\right) + c.n$$

Selection Sort:

Code:

```

def selection_sort(A):
    # Traverse through all array elements
    for i in range(len(A)):

        # Find the minimum element in remaining
        # unsorted array
        min_idx = i
        for j in range(i+1, len(A)):
            if A[min_idx] > A[j]:
                min_idx = j

        # Swap the found minimum element with
        # the first element
        A[i], A[min_idx] = A[min_idx], A[i]
    return A

```