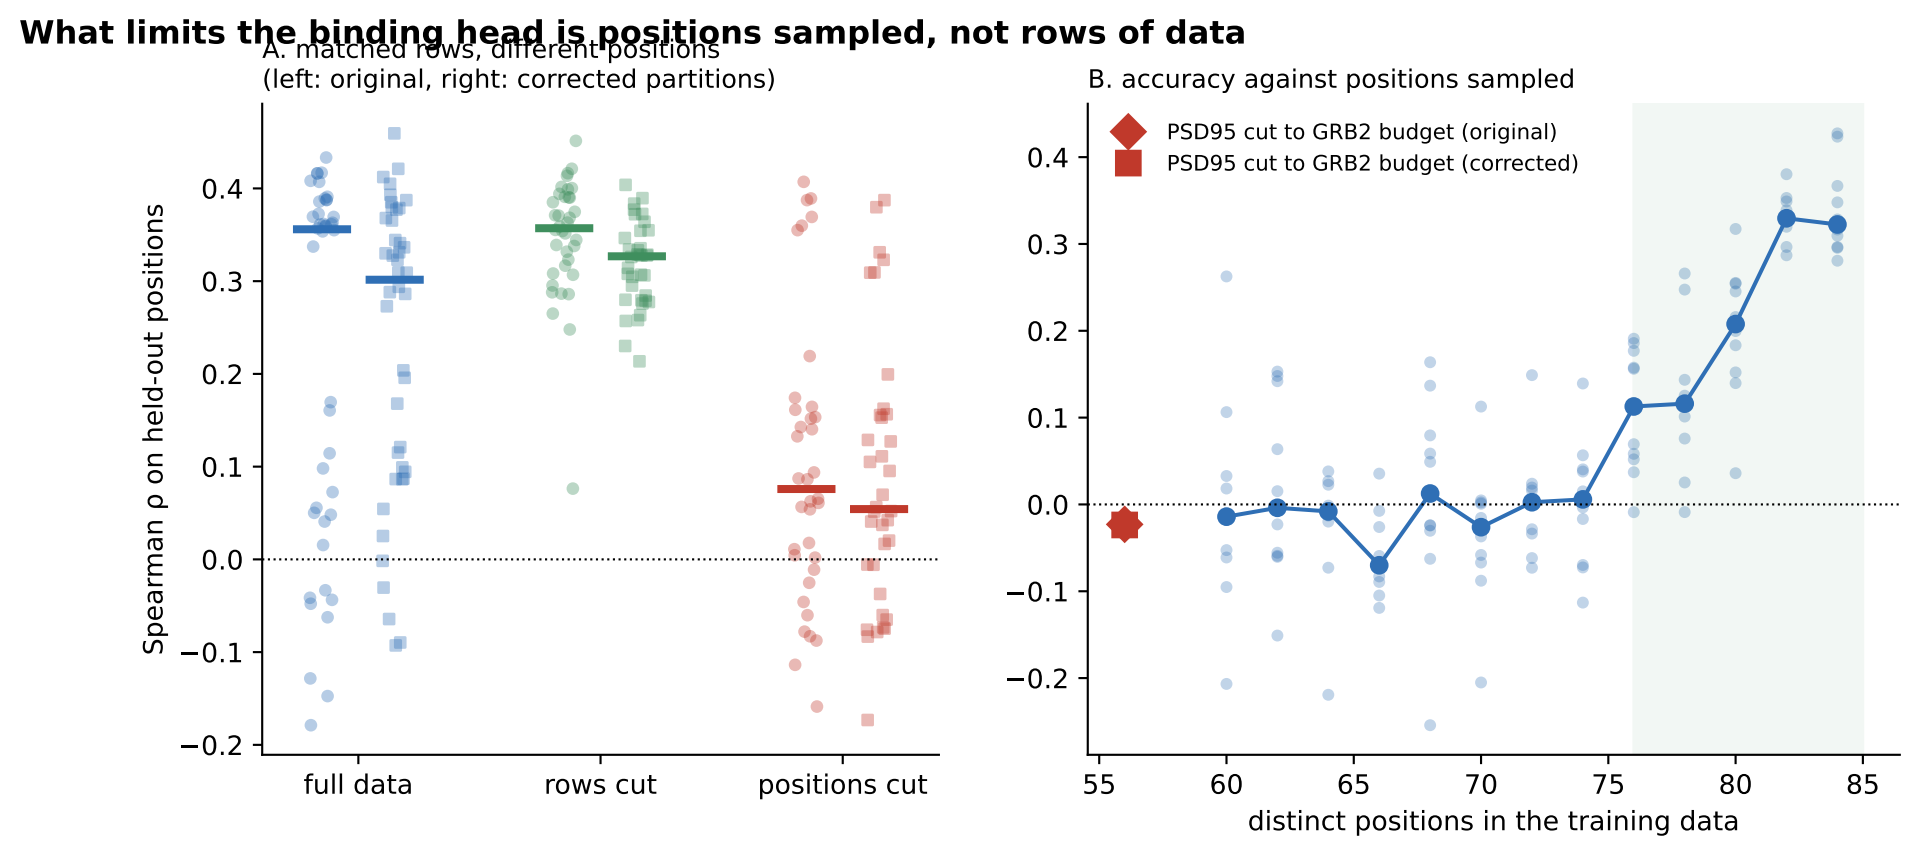
What limits the binding head is positions sampled, not rows of data
A. matched rows, different positions
(left: original, right: corrected partitions)
Spearman ρ on held-out positions
0.4
0.3
0.2
0.1
0.0
−0.1
−0.2
full data
rows cut
positions cut
B. accuracy against positions sampled
PSD95 cut to GRB2 budget (original)
PSD95 cut to GRB2 budget (corrected)
0.4
0.3
0.2
0.1
0.0
−0.1
−0.2
55
60
65
70
75
80
85
distinct positions in the training data