


CSS HACKS

 @coding.batch
ig- coding.batch



@coding.batch
coding.batch

link hover border

```
<a href="#" class="nav__link">Home</a>
```

```
.nav__link::before {  
  content: "";  
  display: block;  
  position: absolute;  
  bottom: 3px;  
  left: 0;  
  height: 3px;  
  width: 100%;  
  background-color: #fff;  
  transform-origin: right top;  
  transform: scale(0, 1);  
  transition: color 0.1s, transform 0.2s ease-out;  
}  
  
.nav__link:hover::before,  
.nav__link:focus::before {  
  transform-origin: left top;  
  transform: scale(1, 1);  
}
```

```
.nav__link {  
  color: inherit;  
  text-decoration: none;  
  margin-right: 50px;  
  position: relative;  
  font-family: "Raleway", sans-serif;  
  padding: 16px 0;  
  margin: 0 12px;  
  letter-spacing: 1px;  
  line-height: 16px;  
  font-weight: 700;  
  transition: color 0.1s, background-color 0.1s,  
    padding 0.2s ease-in;  
  color: #fff;  
}
```

Home

valid invalid pseudo-class

```
<input type="text" pattern="[a-z]*">
```

```
input:invalid {
  border: 1px solid red;
  animation: shake 300ms;
}
```

```
input:valid {
  border: 1px solid yellow;
}
```

```
@keyframes shake {
  25% {
    transform: translateX(4px);
  }

  50% {
    transform: translateX(-4px);
  }

  75% {
    transform: translateX(4px);
  }
}
```

dfdfdf

Change Autocomplete Styles

```
<input type="text" name="fullname">
```


```
input:-webkit-autofill,  
input:-webkit-autofill:hover,  
input:-webkit-autofill:focus {  
  -webkit-text-fill-color: #fff;  
  transition: background-color 5000s ease-in-out 0s;  
}
```

Without css autofill

coding batch

With css autofill

coding batch



👉 **Swipe**




Scroll Snap

```
<div class="container">
  <div class="item">1</div>
  <div class="item">2</div>
  <div class="item">3</div>
  <div class="item">4</div>
</div>
```

```
.container {
  display: flex;
  overflow-x: auto;
  scroll-snap-type: x mandatory;
  width: 100%;
  gap: 20px;
}

.container>.item {
  min-width: 100%;
  scroll-snap-align: start;
  height: 50px;
  text-align: center;
  scroll-snap-align: center;
}
```

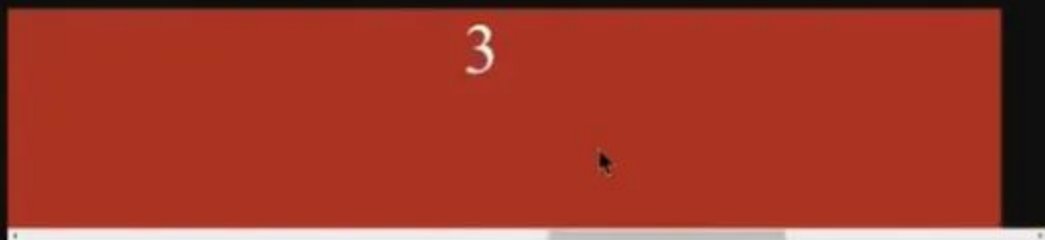


change the color of cursor



```
<input type="text" class="example1">
```



```
.example1 {  
  caret-color: yellow;  
}
```



max content

```
<button>ALL</button>
<button>BEGINNER</button>
<button>INTERMEDIATE</button>
```

```
button {
  background-color: #d7d4ec;
  border: none;
  border-radius: 5px;
  color: #7c6fc9;
  font-family: Roboto Condensed, sans-serif;
  font-size: 1rem;
  font-weight: 600;
  margin: 11px;
  outline: none;
  padding: 10px;
  text-transform: uppercase;
  width: max-content;
  min-width: 25%;
}
```

ALL

BEGINNER

INTERMEDIATE

```

def init():
    background-color: #ffffff;
    border: 1px solid #ccc;
    border-radius: 5px;
    color: #000000;
    font-family: Helvetica, sans-serif;
    font-size: 16px;
    font-weight: bold;
    height: 100px;
    margin: 10px;
    padding: 10px;
    text-align: center;
    width: 300px;
}

```



```
@coding.batch
iq: coding.batch
```



👉 *Swipe*

