


Due to some maintenance issues, this service has been switched in read-only mode, more information can be found [here](#)

Ironmq Notifier

Created by Unknown User (mikecaspar), last modified on Jan 06, 2018

Plugin Information

View IronMQ-notifier on the plugin site for more information.

 **This plugin is up for adoption.** The maintainer is looking for a co-maintainer. Click [here](#) to learn more!

This plugin uses the IronMQ messaging service to send status updates of build information into an enterprise level cloud based message queue.

Important Warning

Caution - Messages added into queues are not set to remain there forever and expire !!

- Messages are not intended to be in this queue for long-term storage.
- Default expiry if not provided is 604,800 (7 days).

The messages have FIFO (first-in first-out) ordering so ensure continuity and can be dealt with by different clients as needed.

The current build status is :

build

passing

1.0.18 - will use a minimum version of 2.7.2 version of jenkins, tested to 2.29

- removed dependency on older dependency for testing
- change jenkins plugin to newer version to ensure best compatibility

1.0.17 - test and set to allow install on 1.651.3 version of jenkins

1.0.16 - Initial pre-release v2 pipeline

- Regression on alternate queue name for push queue
- Code adjustments to prepare for v2 (pipeline) (not yet completed).

1.0.15-Not released - Deployment issues

1.0.14 - tested with 1.651.2 LTS

1.0.13 - nothing special

WARNING: You will need to change the hosts you send messages to, and the message format has changed in this release. (1.0.12 and above)

Note: 1.0.12 has major changes to support for the new Version 3 ironmq api. The version 2 api has been deprecated by Iron.io.

One of the biggest change in the new ironmq API is the removal of the ability to put expiry seconds on individual messages to a queue.

The following change will occur from version 1.0.12 forward.

- The message version of the message will change from "1" to "3.0".
- You will need to prepare to use only Version 3 iron.io servers . The default server will be changed to **mq-aws-us-east-1-1.iron.io**
- To prepare for the upgrade, the following will change.. Default Config Server name... and then within in job definition.
- The expirySeconds field will remain for several versions to allow easier reversion to pre-1.0.12 versions without errors but will be removed by version 1.0.15 unless a very compelling reason to put this field back exists before then. For now, the data will be accepted but the default for the Queue on Iron.IO will be used. As an alternative, consider using the iron.io API to set the default for the entire Queue if setting queue expiry time is important to you. Otherwise, messages will expire based on default queue settings.
- The Expires Date field will also be removed as it may provide misleading information. Expiry will inherit from the queue settings and are therefore inappropriate as part of the message properties.


Note: 1.0.11 - enhancement - defaults settings simplify adding post-build actions.

Setup Instructions for Iron.io

At the time of the creation of this document, no setup or accounts are needed at Rackspace or Amazon. It is all handled nicely through the one interface at Iron.io

- Go to <http://www.iron.io/mq> for more info.
- Create an account
- Create a Project (you can have one project for your Jenkins instance or several projects depending on your needs).
- After the project is setup, go to the "HUD" at <https://hud.iron.io>

Sample Jenkins Project (not the Settings Icon) which will provide authentication token for your Project (Jenkins in this example).

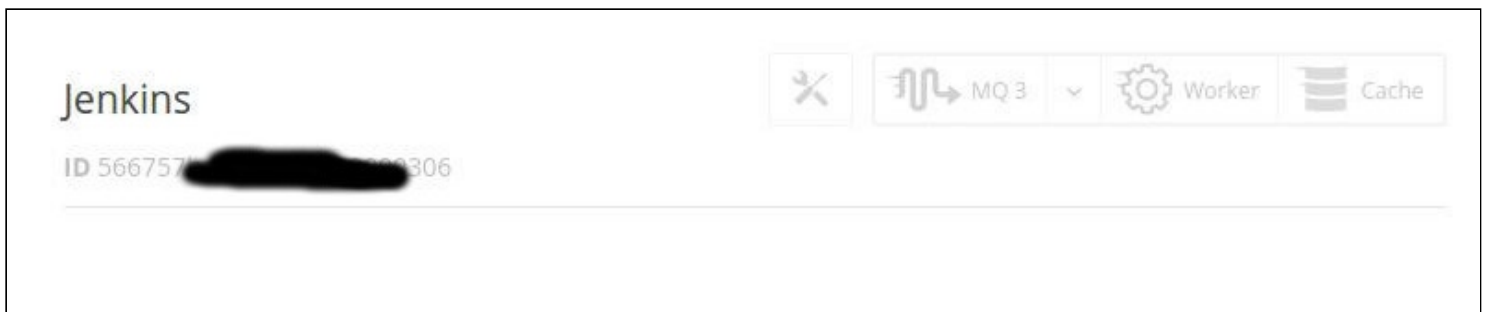

Credentials
Share
Settings
Integrations

Authentication / Configuration

Token
Mr*****

Project ID
566757be4*****

IronMQ
IronWorker
IronCache

IronMQ API URL
mq-aws-us-east-1-1.iron.io

Download JSON file

*Each client will use these differently, but all for the same purpose.
See the client docs for how to use it.*

You will need the following information:

- ProjectId (provided by the HUD)
- Token for this Project (provided by the HUD under authentication)
- QueueName (A-Z upper and lower) (I have not tested other alternatives)
- Preferred Server Name (there are several servers available for this service. This plugin is designed so that if there are new ones, no coding changes are needed.. Just replace the name of the server as they add/remove servers from their available list.

Current options for Server Names are..

- mq-aws-us-east-1-1.iron.io**
- mq-aws-us-east-1-2.iron.io**
- mq-aws-eu-west-1-1.iron.io**

Starting from version **1.0.11**, configure default settings in the Configure Jenkins Server Defaults as follows;

IronMQ Notifier	
Default Preferred Server Name	mq-rackspace-ord.iron.io
Default Project Id	511111250733efcc871000d000032
Default Token	lx2G4RdOFsJgrxddad12451mX1W6uvT8DuKc
Default Queue Name	Jenkins
Default Expiry in Seconds	8500

These settings will be used by default when adding a Post-Build action to new jobs.

After downloading the plugin into your Jenkins server, when creating a job, go to Post-Build Action and add a Step called "Send message to IronMQ".

You will then see the following options. (please note, these are not valid #s and are for presentation only).

Post-build Actions

Send Message to IronMQ

Project Id: 5250733efcc87103331000032

Token: Ix2G4RdOfgabcodefr1W6uvT8DuKc

Queue Name: ironmq

Preferred Server: mq-rackspace-ord.iron.io

Expiry in Seconds: 86400

Send on Success: ☒

Send on Failure: ☒

Send on Unstable: ☒

The next time your build executes, it will send the results to your ironMQ mesasge queue.

As of Version 1.0.5, when a message is transmitted to the queue, it is in JSON format to allow for applications to be created with intelligence based on the data in the Queue.

```
{
  "messageVersion": "1",
  "jobName": "messagebroadcasterTest #214",
  "buildResult": "succeeded",
  "expirySeconds": 3000,
  "submissionDate": "Oct 9, 2013 9:46:34 AM",
  "expiresDate": "Oct 9, 2013 10:36:34 AM"
}
```

Current To-Do list

- Modify the documentation to show new version 3 API screens and information.
- Get unstable build to work in the event of an error of some sort during transmission
- Consider starting work on languages.
- Consider adding a "backup-server" as part of the input.
- Consider having the next version extend the Credentials Plugin for keys

Change Log

Version 1.0.13 (Dec 16, 2015)

- Set Base Version to 1.625.3 (instead of .2) to ensure works with LTS with security advisory 2015-12-09

Version 1.0.12 (Dec 9, 2015)

- Version 3 API due to deprecation of Version 2 API at iron.io

Version 1.0.11 (Oct 16, 2015)

- Added Default configuration Settings to Jenkins Server Configuration Page
 - This allows easier adding as a post-build action.
- Test with 1.625.1 LTS
- Added Automated Tests

Version 1.0.10 (Mar 27, 2015)

- Confirm working with 1.592 LTS (March, 2015 Security Advisory)
- Start working on localization ability

Version 1.0.6 (Oct 21, 2013)

- Fixed some Descriptor Implementation (this version should work on 1.532).

Version 1.0.5 (Oct 8, 2013)

- Messages switched to JSON format to allow a large amount of information as well as easy future API upgrades.

Version 1.0.4 (Oct 7, 2013)

- Add ability to set expiry timeout on messages
- set default preferredServer to mq-rackspace-ord.iron.io
- set default queueName to Jenkins
- some field validation warnings

Version 1.0.3 (Oct 5, 2013)

- First field validation on forms (queueName)
- change default message expiry to 806400 seconds (7 days)

Version 1.0.2 (Oct 3, 2013) (minimum recommended version)

- First successfully deployed version (start here).
- Ensured that queue name would be transferred (no longer in test mode)

Version 1.0.1 (Oct 3, 2013)

- Fixed a missing dependency from iron.io library

Version 1.0 (Oct 2, 2013)

- Initial Release. (Avoid this initial release. it installed OK but would not run due to a dependency problem).

[plugin-notifier](#)[adopt-this-plugin](#)

Powered by a free **Atlassian Confluence Open Source Project License**
granted to Jenkins. Evaluate Confluence today.