

## CustomExecutionListener

+ testRunStarted(Description) : void

+ testRunFinished(Description) : void

+ testStarted(Description) : void

+ testFinished(Description) : void

+ testFailure(Failure) : void

+ testAssumption(Failure) : void

+ testIgnored(Description) : void

1..\*

## <<Customer>>


\_ist<String>

erType : String

List<String>

atus : String

dOrder : Boolean

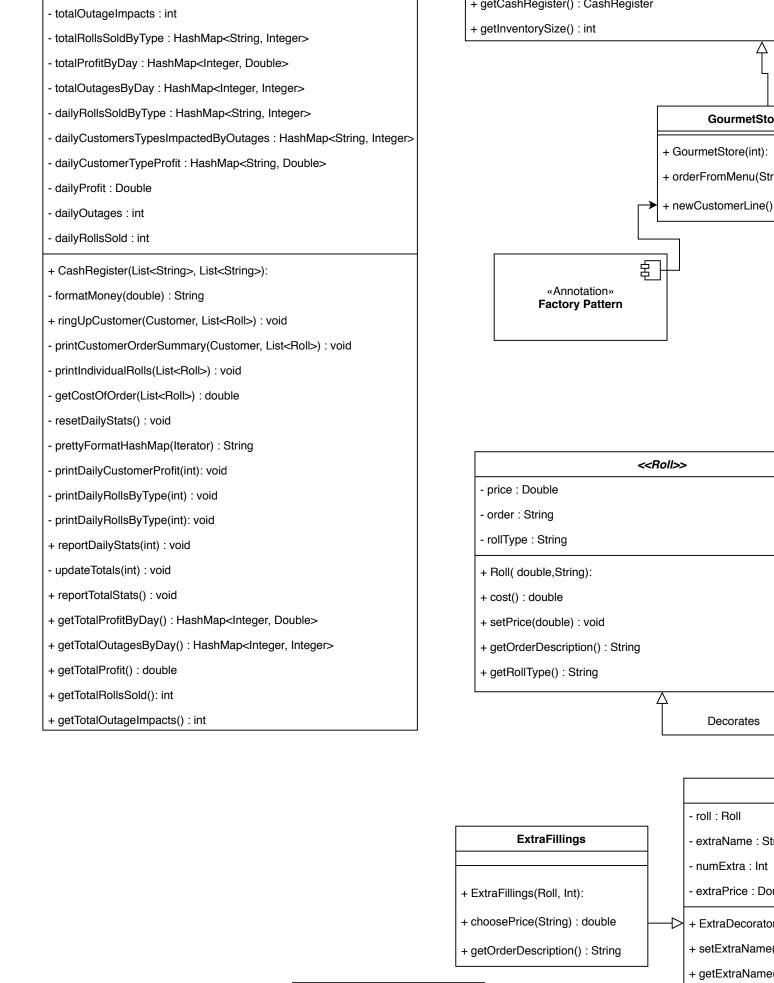

ExtraToppings

+ ExtraToppings(Roll, Int):

+ choosePrice(String) : double


+ getOrderDescription(): String

+ getNumExtra()

+ getRollType() : + getRoll() : Roll

+ choosePrice(S

+ getExtraPrice()

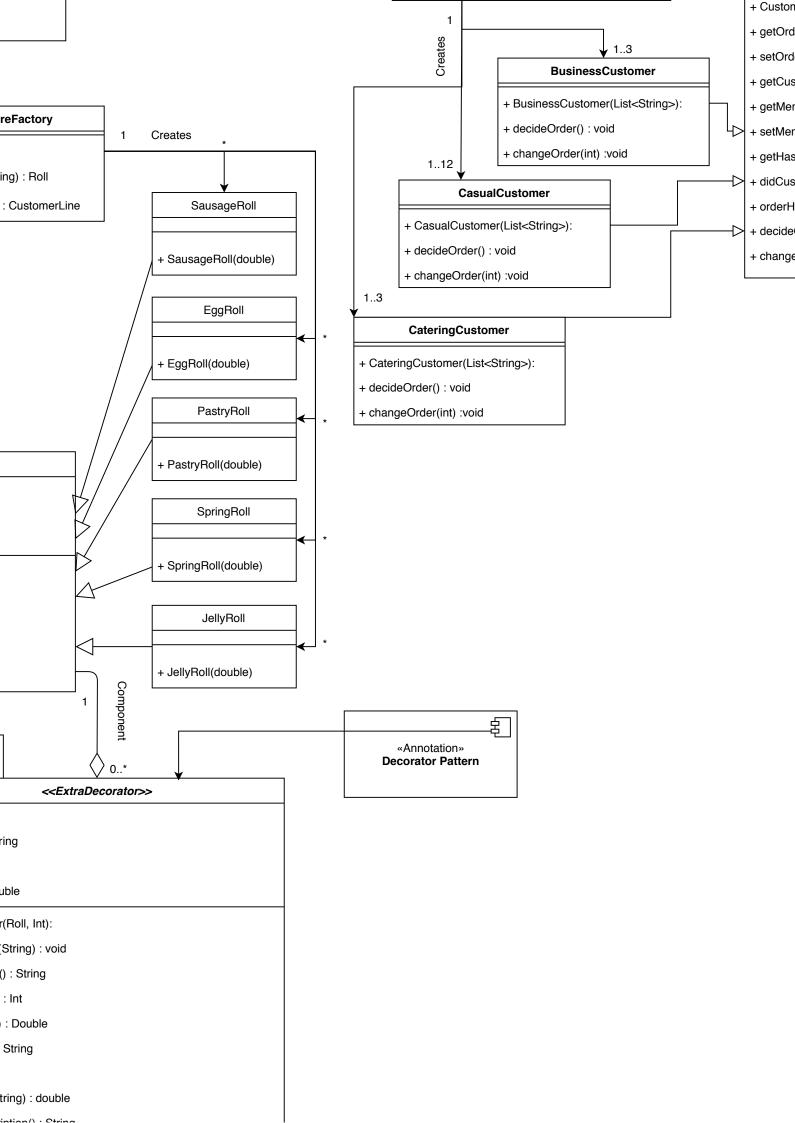

ner(String, List<String>):
er(): List<String>
er(List<String>): void
stomerType(): String
nu(): List<String>
nu(): List<String>
nu(List<string>): void
shMapOrder(): HashMap<String, Integer>
tomerChangeOrder(): boolean
asChanged(): void
Order(): void
eOrder(int): void

ExtraSauces

+ cost() : double

+ ExtraSauces(Roll, Int):

+ choosePrice(String) : double

+ getOrderDescription() : String

