COMP 3920 Database Systems 1

Filess.IO

Introduction:
The goal of this document is to serve as a walkthrough of creating an account with Filess.io.

Filess.io provides a small to medium-sized (<10MB) MySQL databases for free for use in development and testing environments. This is perfect for us if we just need a quick and easy database that can be accessed freely on the internet. Remember, if we were to just use a database on our localhost, only we could see it (no one else can access our localhost).

Step 1: Create a Filess.io account.

Go to https://filess.io/ and register for a new account (if you don't already have one).

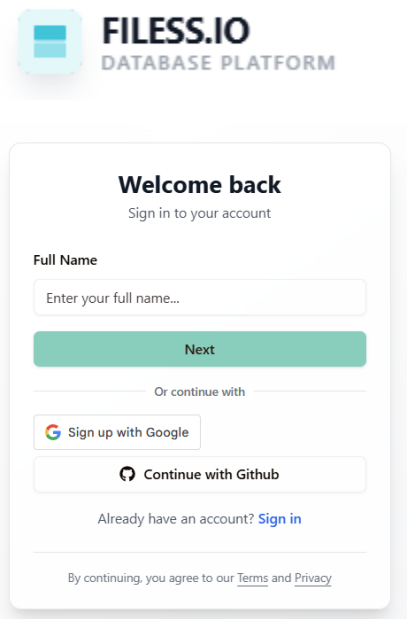

Complete the standard register information and verify your email.

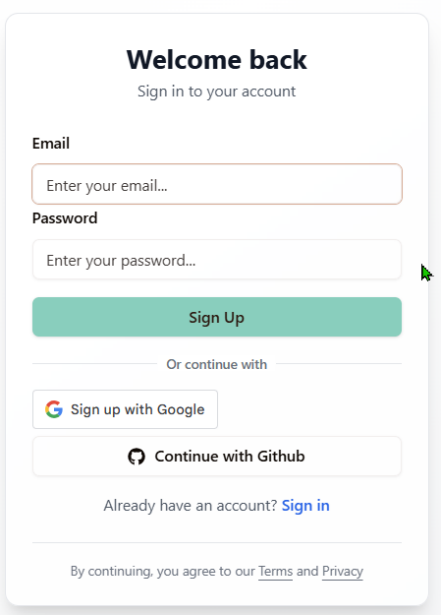

Step 2: Create a new MySQL database.

Once you are logged in to your new Filess.io account, you should see a dashboard panel like this:

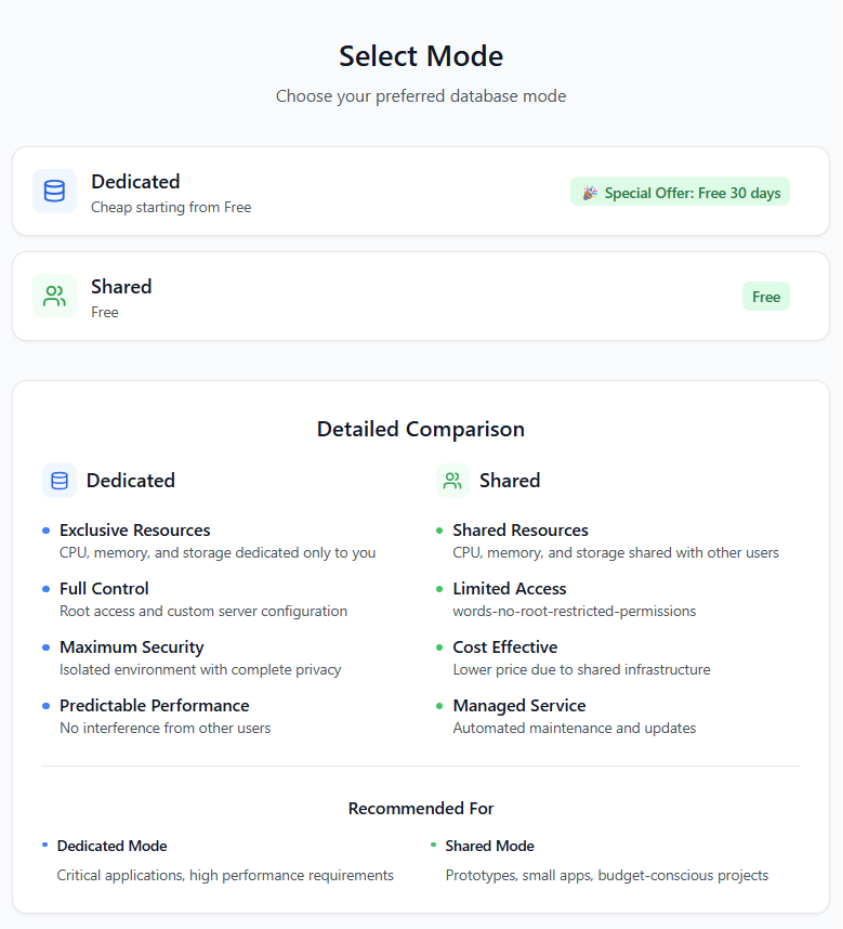

Click on "Shared" to show your free databases.

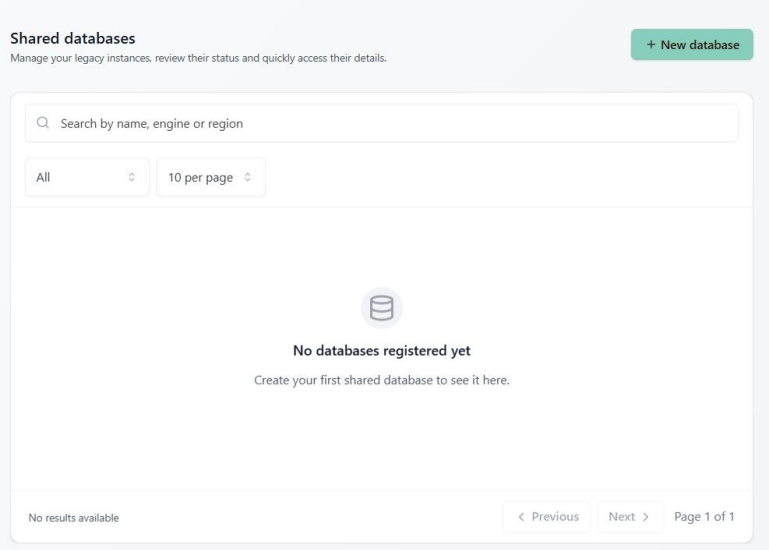

Since you do not have any databases yet, this list should be empty.

Click here to create a new database: + New database

Pick a database of your choice, in this case we want MySQL. I suggest picking the latest database (in my case this is version 8.0.29).

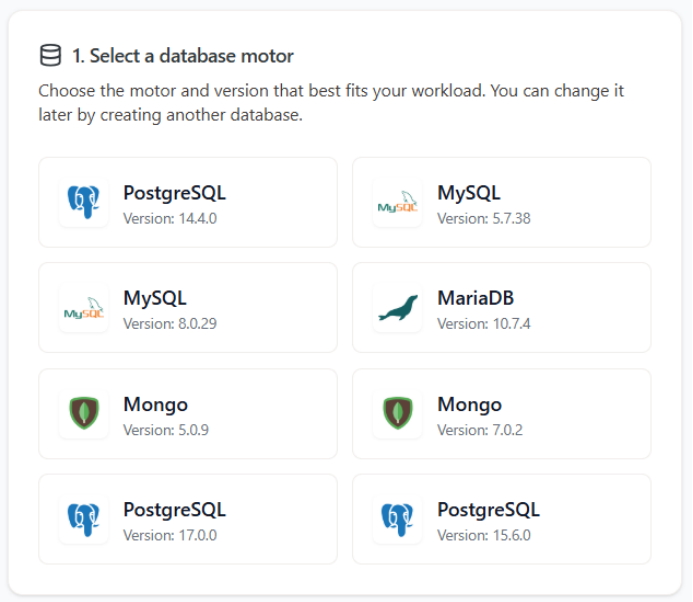

Give your database a name.

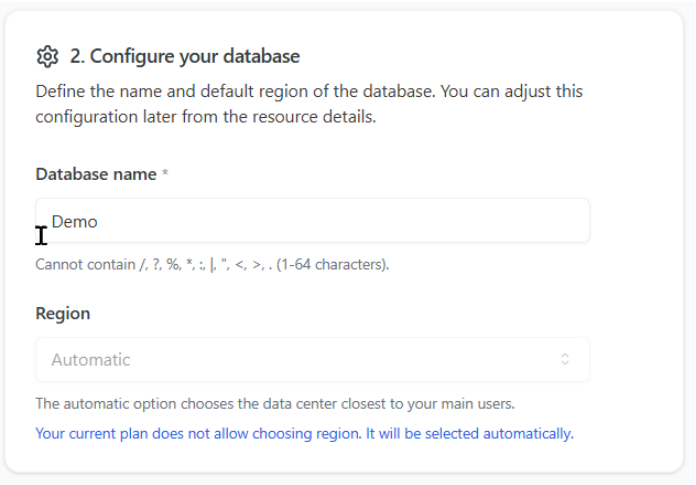

You shouldn't need to change the character set or collation so you can keep the defaults.

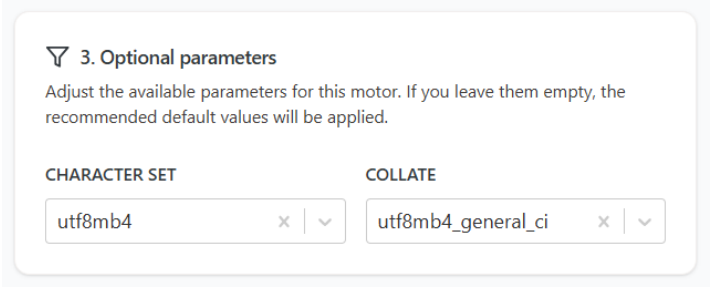

Click "Create Database" to finish.



You should see your new database in the list:

Click on Open to view the details about the new database you created.



You should now have the details to connect to your database.

- Host
- Port
- Database Name
- User
- Password

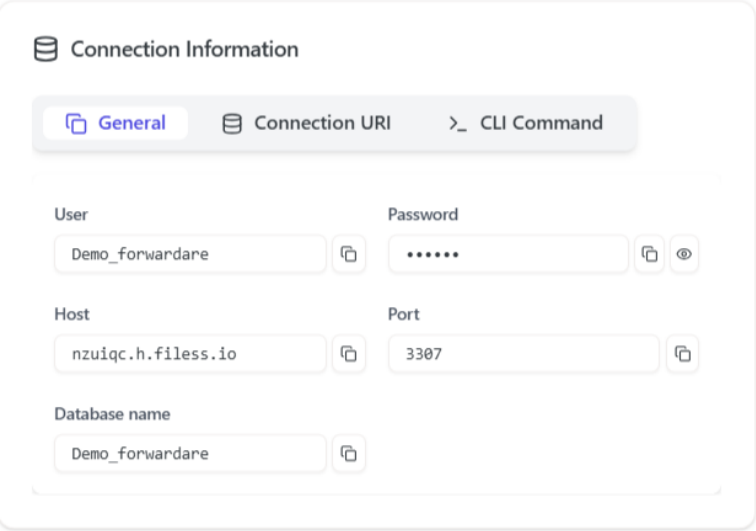

Write these down somewhere so you don't forget them!!

NOTE: Your port may not be the standard port for MySQL! The standard port for MySQL is typically 3306.

Pro Tip:

Although Filess.io is nice and provides us with the host, port, user, password and database name for us, many other MySQL providers will provide us with a connection URL such as this:

```
mysql://Demo_forwardare:f32582eab4900a1f9f8b5b4c257bfd902c27dbbd@nzuiqc.h.filess.io:3307/Demo_forwardare
```

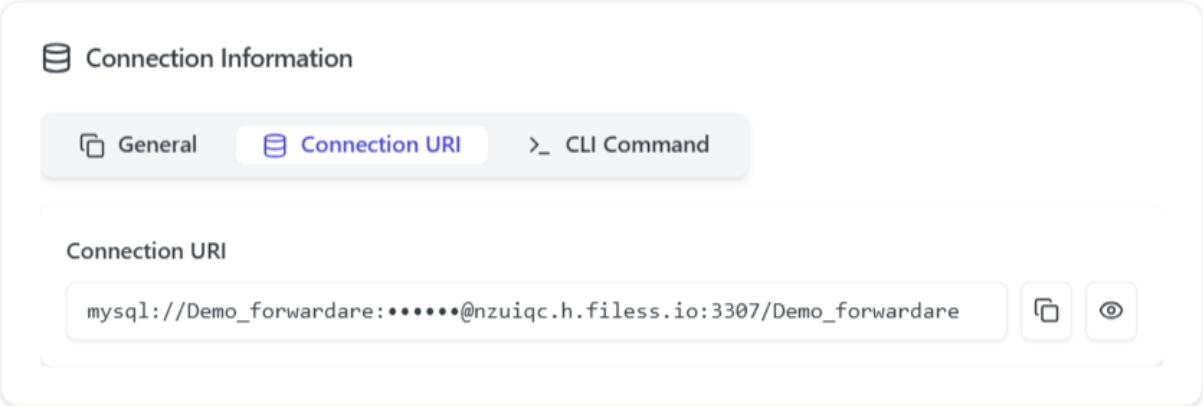

It is important to know how to parse this connection URL into the individual parts.

Below is the same connection URL color coded and labelled to distinguish the key parts of the URL.

```
mysql://Demo_forwardare:f32582eab4900a1f9f8b5b4c257bfd902c27dbbd@
nzuiqc.h.filess.io:3307/
Demo_forwardare
```

Protocol:	**mysql**
User:	**Demo_forwardare**
Password:	**f32582eab4900a1f9f8b5b4c257bfd902c27dbbd**
Host:	**nzuiqc.h.filess.io**
Port:	**3307**
Database:	**Demo_forwardare**