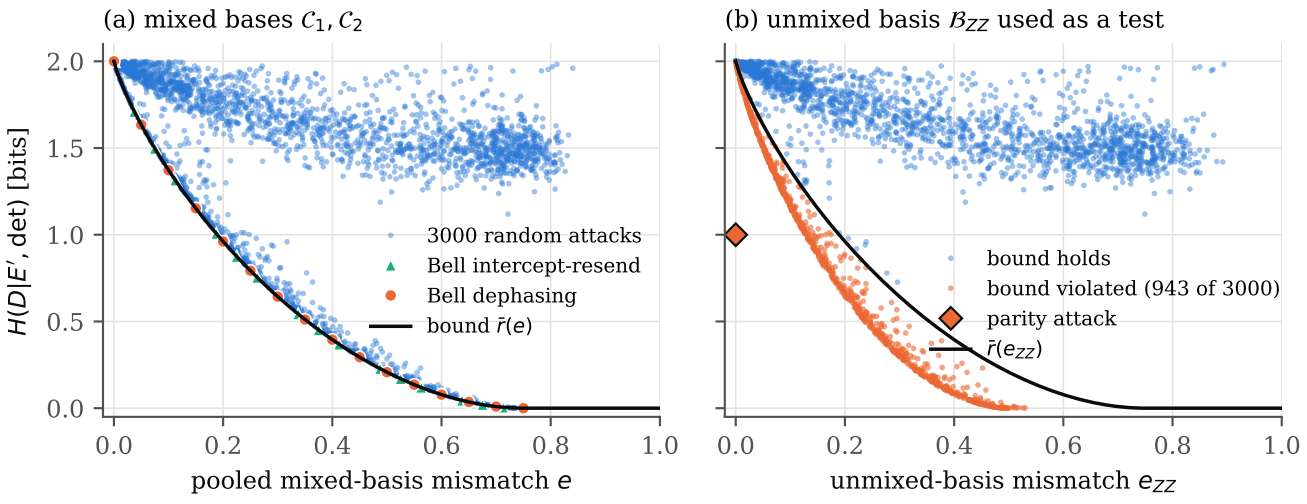

(a) mixed bases $\mathcal{C}_1, \mathcal{C}_2$
(b) unmixed basis $\mathcal{B}_{ZZ}$ used as a test
$H(D|E', \mathrm{det})$ [bits]
2.0
1.5
1.0
0.5
0.0
0.0
0.2
0.4
0.6
0.8
1.0
pooled mixed-basis mismatch e
unmixed-basis mismatch e_{ZZ}
3000 random attacks
Bell intercept-resend
Bell dephasing
bound $\bar{r}(e)$
bound holds
bound violated (943 of 3000)
parity attack
$\bar{r}(e_{ZZ})$